


Swipe



Loops in JS

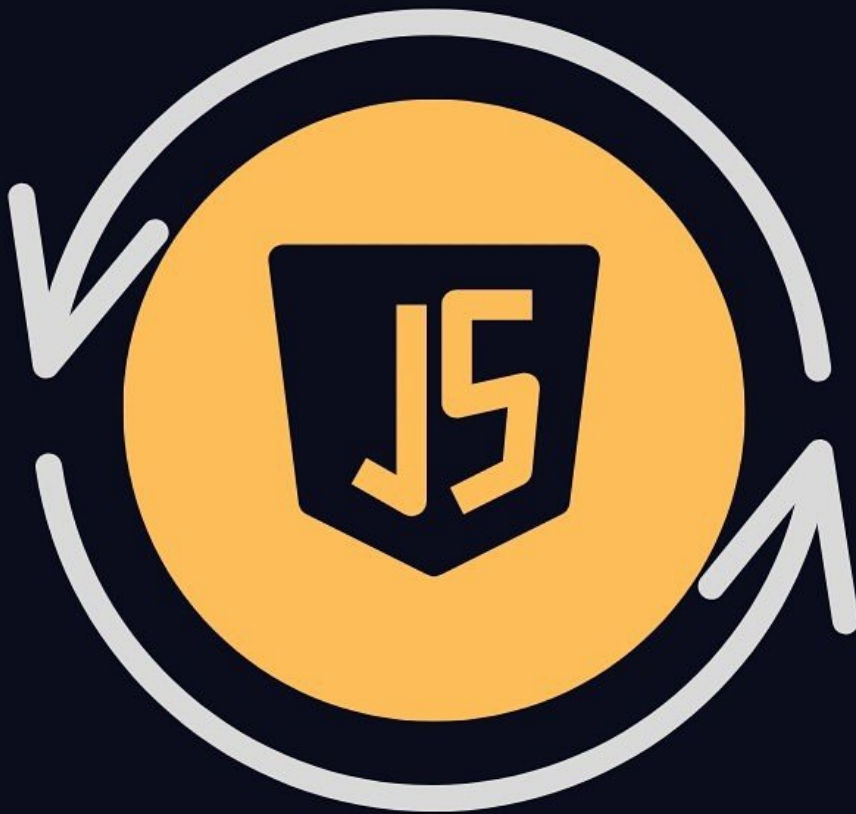

1. for loop

The **for loop** repeats a block of code as long as a specified condition is true. It's great for iterating over arrays or executing code a specific number of times.

Syntax:

```
for (initialization; condition; increment) {  
    // code to execute  
}
```

Example:

```
for (let i = 0; i < 5; i++) {  
    console.log(i); // Output: 0, 1, 2, 3, 4  
}
```

2. while loop

The **while loop** repeats code while a specified condition is true. It checks the condition before executing the code block.

Syntax:

```
while (condition) {  
    // code to execute  
}
```

Example:

```
let i = 0;  
while (i < 5) {  
    console.log(i);  
    i++; // Output: 0, 1, 2, 3, 4  
}
```

3. do...while loop

The **do...while** loop is similar to the while loop, but it ensures that the code inside the loop is executed at least once before the condition is checked.

Syntax:

```
do {  
    // code to execute  
} while (condition);
```

Example:

```
let i = 0;  
do {  
    console.log(i);  
    i++;  
} while (i < 5); // Output: 0, 1, 2, 3, 4
```

4. for...in loop

The **for...in loop** is used to iterate over the properties of an object. It goes through all enumerable properties of the object.

Syntax :

```
for (key in object) {  
    // code to execute  
}
```

Example :

```
const person = { name: "John", age: 30 };  
for (let key in person) {  
    console.log(key + ": " + person[key]);  
    // Output: name: John, age: 30  
}
```


5. for...of loop

The **for...of** loop is used to iterate over **iterable objects** like arrays, strings, or sets.

Syntax:

```
for (variable of iterable) {  
  // code to execute  
}
```

Example:

```
const arr = [1, 2, 3];  
for (let value of arr) {  
  console.log(value); // Output: 1, 2, 3  
}
```

6. break statement

The **break** statement is used to exit a loop immediately, even if the condition hasn't been met.

Example :

```
for (let i = 0; i < 10; i++) {  
  if (i === 5) break;  
  console.log(i); // Output: 0, 1, 2, 3, 4  
}
```

7. continue statement

The **continue** statement skips the current iteration and proceeds to the next one.

Example :

```
for (let i = 0; i < 5; i++) {  
  if (i === 2) continue;  
  console.log(i); // Output: 0, 1, 3, 4  
}
```


Was It Helpful ?



Join Telegram for Free Coding
Resources and Notes

Link in bio !

Follow For More



TechTalks_with_Ajay