

CS450 Computer Networks

The slides used in class are derived from the slides available on our text book companion website:

http://wps.pearsoned.com/ecs_kurose_compnetw_6/

copyright 1996-2012 J.F Kurose and K.W. Ross

© 2012 Maharishi University of Management

All additional course materials are copyright protected by international copyright laws and remain the property of the Maharishi University of Management. The materials are accessible only for the personal use of students enrolled in this course and only for the duration of the course. Any copying and distributing are not allowed and subject to legal action.


CS450 - Lesson 5: Application layer

– FTP and Email

Our goals:

- ❖ Understand the FTP protocol
 - ❖ FTP – stateful, control and data on separate connections
- ❖ Understand key Email application concepts and protocols:
 - Multiple options for application development
 - SMTP
 - POP3
 - IMAP
 - Web-based email


FTP: the file transfer protocol

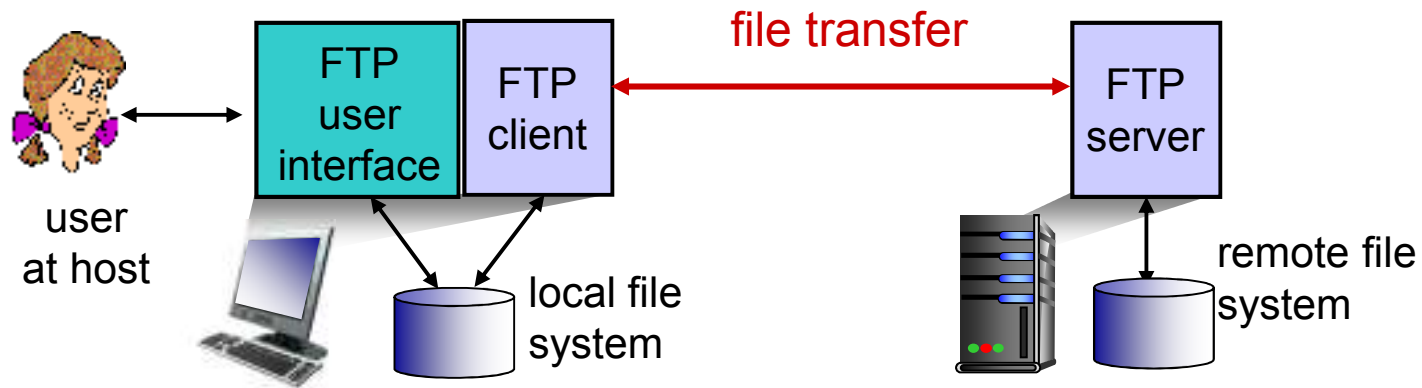

- ❖ transfer file to/from remote host
- ❖ client/server model
 - *client*: side that initiates transfer (either to/from remote)
 - *server*: remote host
- ❖ ftp: RFC 959
- ❖ ftp server: port 21

FTP: separate control, data connections

- ❖ FTP client contacts FTP server at port 21, using TCP
- ❖ client authorized over control connection
- ❖ client browses remote directory, sends commands over control connection
- ❖ when server receives file transfer command, *server* opens 2nd TCP data connection (for file) to client
- ❖ after transferring one file, server closes data connection

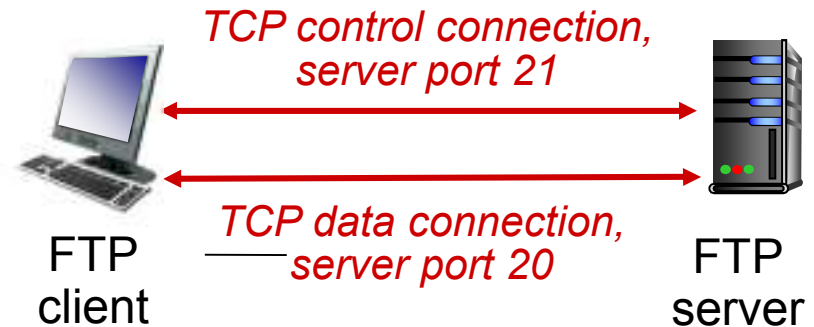

- ❖ server opens another TCP data connection to transfer another file
- ❖ control connection: *“out of band”*
- ❖ FTP server maintains “state”: current directory, earlier authentication

FTP commands, responses

sample commands:

- ❖ sent as ASCII text over control channel
- ❖ **USER *username***
- ❖ **PASS *password***
- ❖ **LIST** return list of file in current directory
- ❖ **RETR *filename*** retrieves (gets) file
- ❖ **STOR *filename*** stores (puts) file onto remote host

sample return codes

- ❖ status code and phrase (as in HTTP)
- ❖ **331 Username OK, password required**
- ❖ **125 data connection already open; transfer starting**
- ❖ **425 Can't open data connection**
- ❖ **452 Error writing file**


Electronic Mail

Three major components:

- ❖ user agents
- ❖ mail servers
- ❖ simple mail transfer protocol: SMTP

User Agent


- ❖ a.k.a. “mail reader”
- ❖ composing, editing, reading mail messages
- ❖ e.g., Outlook, Thunderbird, iPhone mail client
- ❖ outgoing, incoming messages stored on server

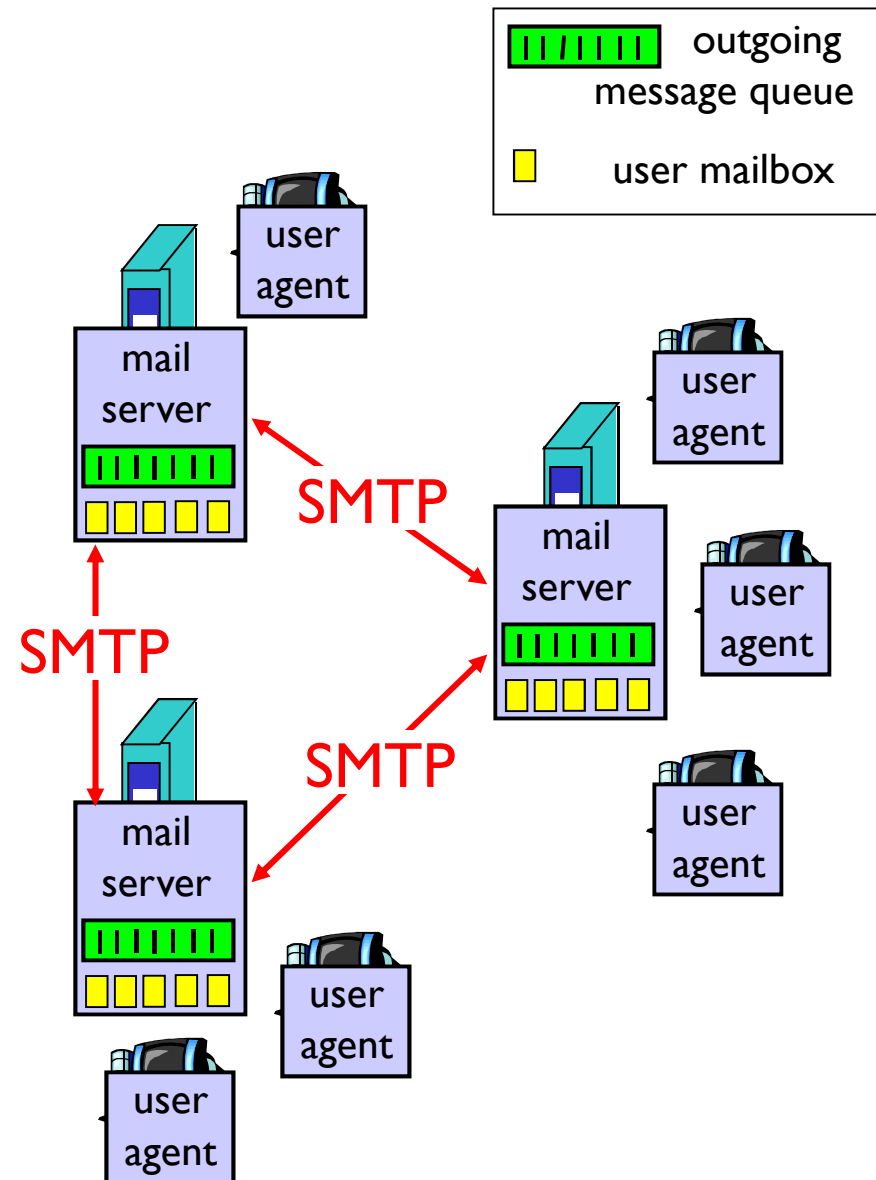

Electronic Mail: mail servers

Mail Servers

- ❖ **mailbox** contains incoming messages for user
- ❖ **message queue** of outgoing (to be sent) mail messages
- ❖ **SMTP protocol** between mail servers to send email messages
 - client: sending mail server
 - “server”: receiving mail server

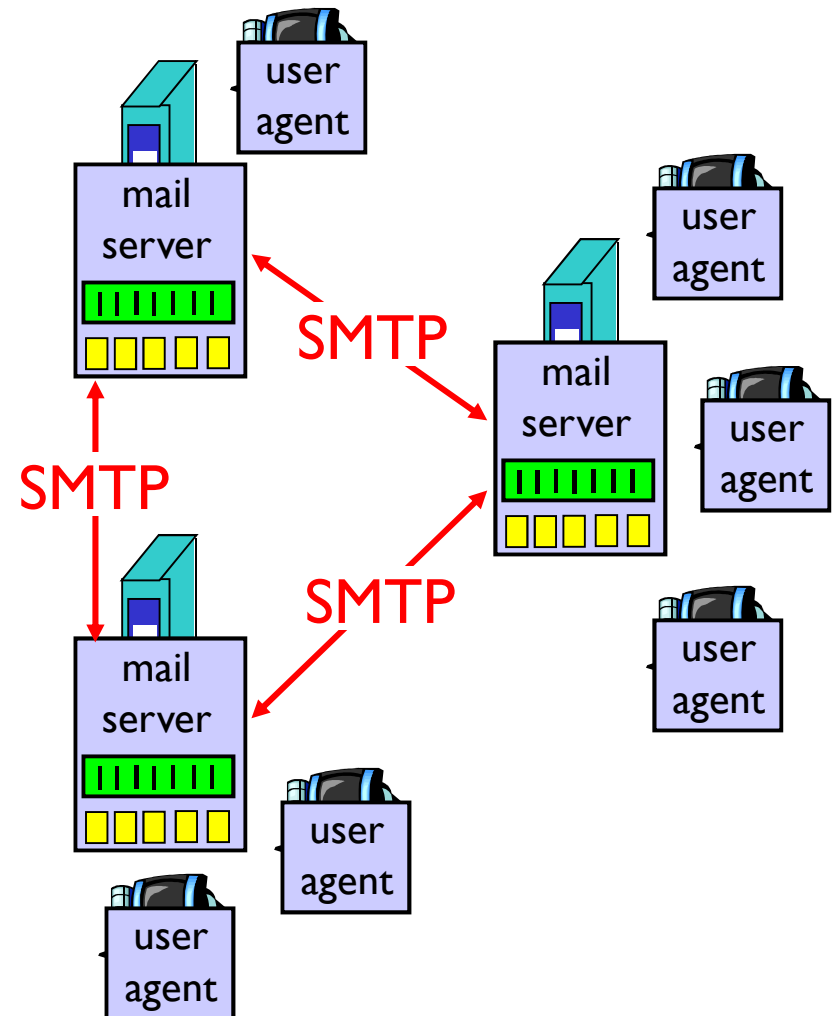


Electronic Mail: SMTP [RFC 2821]

- ❖ uses TCP to reliably transfer email message from client to server, port 25
- ❖ direct transfer: sending server to receiving server
- ❖ three phases of transfer
 - handshaking (greeting)
 - transfer of messages
 - closure
- ❖ command/response interaction
 - **commands:** ASCII text
 - **response:** status code and phrase
- ❖ messages must be in 7-bit ASCII

Scenario: Alice sends message to Bob

- 1) Alice uses UA to compose message and “to”
`bob@someschool.edu`
- 2) Alice’s UA sends message to her mail server; message placed in message queue
- 3) Client side of SMTP opens TCP connection with Bob’s mail server
- 4) SMTP client sends Alice’s message over the TCP connection
- 5) Bob’s mail server places the message in Bob’s mailbox
- 6) Bob invokes his user agent to read message

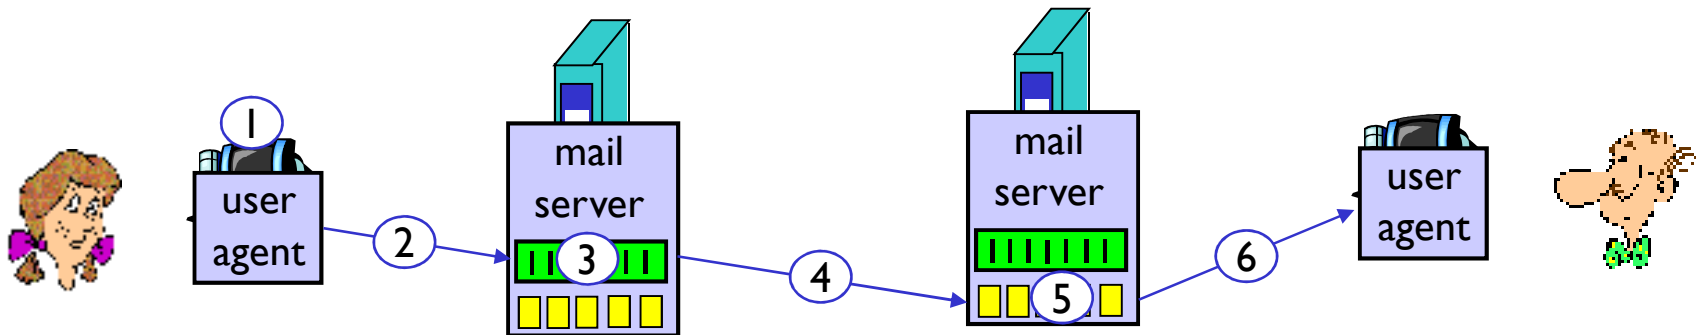

Sample SMTP interaction

```
S: 220 hamburger.edu
C: HELO crepes.fr
S: 250 Hello crepes.fr, pleased to meet you
C: MAIL FROM: <alice@crepes.fr>
S: 250 alice@crepes.fr... Sender ok
C: RCPT TO: <bob@hamburger.edu>
S: 250 bob@hamburger.edu ... Recipient ok
C: DATA
S: 354 Enter mail, end with "." on a line by itself
C: Do you like ketchup?
C: How about pickles?
C: .
S: 250 Message accepted for delivery
C: QUIT
S: 221 hamburger.edu closing connection
```

Try SMTP interaction for yourself:

- ❖ `telnet smtp.mum.edu 25`
- ❖ see 220 reply from server
- ❖ enter HELO, MAIL FROM, RCPT TO, DATA, QUIT commands

above lets you send email without using email client (reader)

SMTP: final words

- ❖ SMTP uses persistent connections
- ❖ SMTP requires message (header & body) to be in 7-bit ASCII
- ❖ SMTP server uses `CRLF.CRLF` to determine end of message

comparison with HTTP:

- ❖ HTTP: pull
- ❖ SMTP: push
- ❖ both have ASCII command/response interaction, status codes
- ❖ HTTP: each object encapsulated in its own response msg
- ❖ SMTP: multiple objects sent in multipart msg

Mail message format

SMTP: protocol for exchanging email msgs

RFC 822: standard for text message format:


❖ header lines, e.g.,

- To:
- From:
- Subject:


different from SMTP MAIL FROM, RCPT TO: *commands*!

❖ body

- the “message”, ASCII characters only

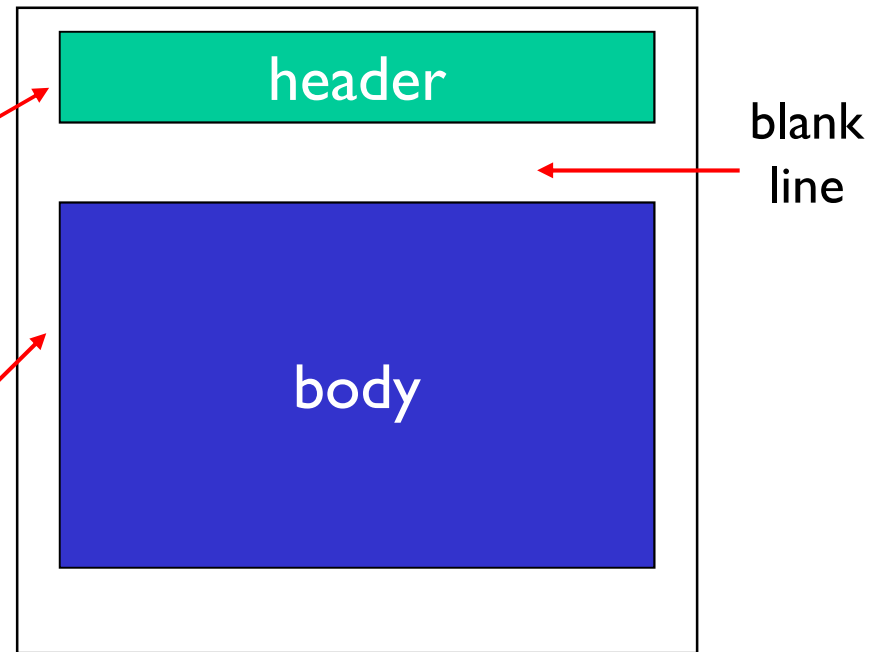

Mail access protocols

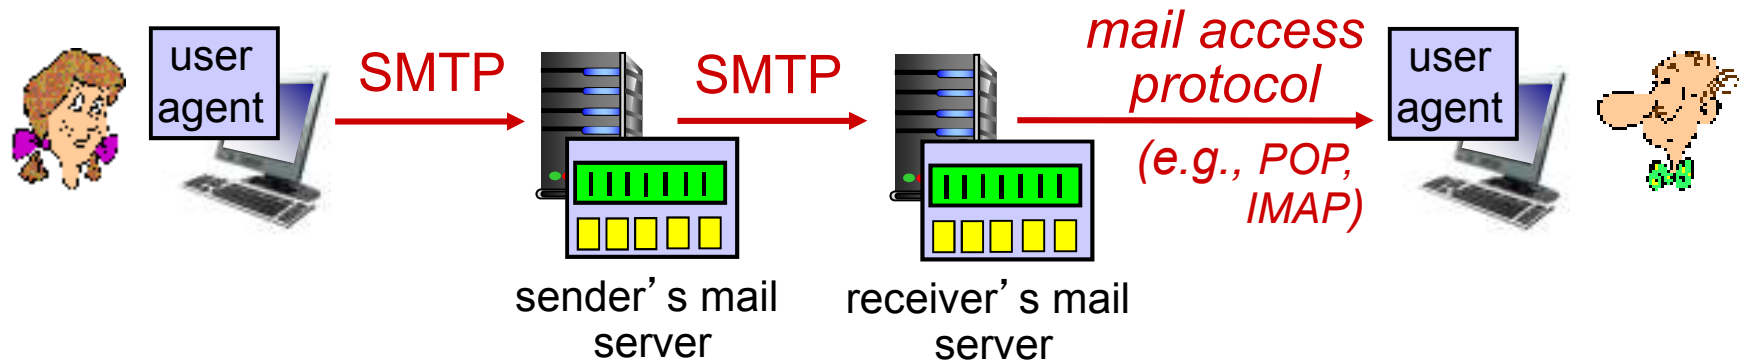

- ❖ **SMTP:** delivery/storage to receiver's server
- ❖ mail access protocol: retrieval from server
 - **POP:** Post Office Protocol [RFC 1939]: authorization, download
 - **IMAP:** Internet Mail Access Protocol [RFC 1730]: more features, including manipulation of stored msgs on server
 - **HTTP:** gmail, Hotmail, Yahoo! Mail, etc.

POP3 protocol

authorization phase

- ❖ client commands:
 - **user**: declare username
 - **pass**: password
- ❖ server responses
 - **+OK**
 - **-ERR**

transaction phase, client:

- ❖ **list**: list message numbers
- ❖ **retr**: retrieve message by number
- ❖ **dele**: delete
- ❖ **quit**

```
S: +OK POP3 server ready
C: user bob
S: +OK
C: pass hungry
S: +OK user successfully logged on

C: list
S: 1 498
S: 2 912
S: .
C: retr 1
S: <message 1 contents>
S: .
C: dele 1
C: retr 2
S: <message 1 contents>
S: .
C: dele 2
C: quit
S: +OK POP3 server signing off
```

POP3 (more) and IMAP


more about POP3

- ❖ previous example uses “download and delete” mode.
- ❖ Bob cannot re-read e-mail if he changes client
- ❖ “download-and-keep”: copies of messages on different clients
- ❖ POP3 is stateless across sessions

IMAP

- ❖ keeps all messages in one place: at server
- ❖ allows user to organize messages in folders
- ❖ keeps user state across sessions:
 - names of folders and mappings between message IDs and folder name

Mail access protocols

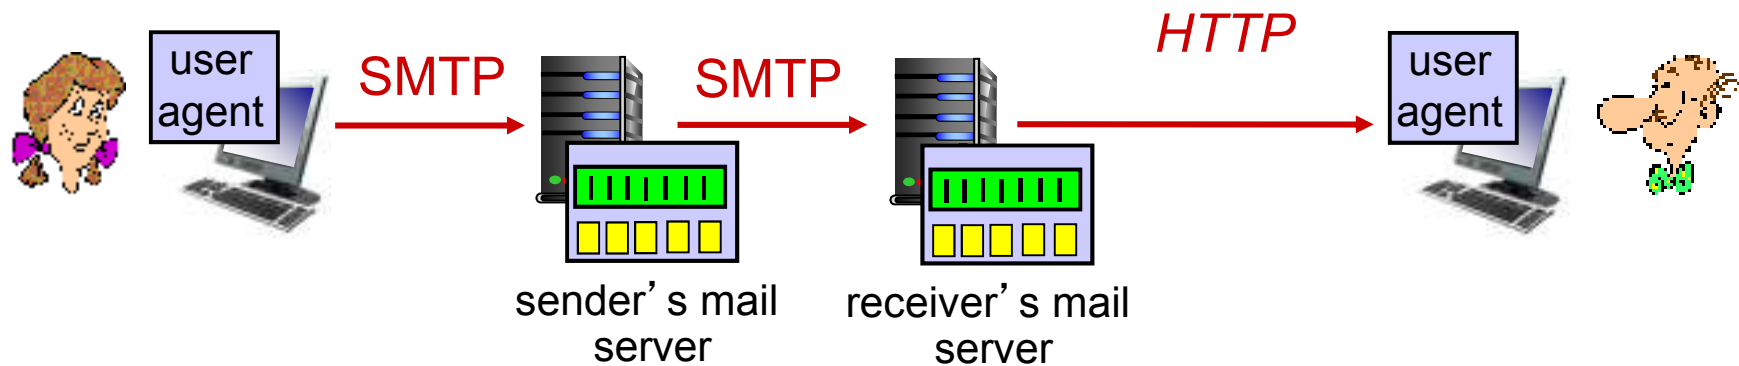

- ❖ SMTP: communication between server
- ❖ HTTP: between servers and browsers
 - A \$400M idea for Hotmail creators in 1997
 - first-mover advantage
 - Viral marketing

Lesson 5: Summary

The evolution of email is an excellent example of the power of a layered architecture that allows applications to move from simple to more powerful.

FTP – a application layer protocol that contrasts with HTTP:

- Stateful
- Control and Data on separate connections