


Hyperlink Dash Report — User Manual (Windows Executable)

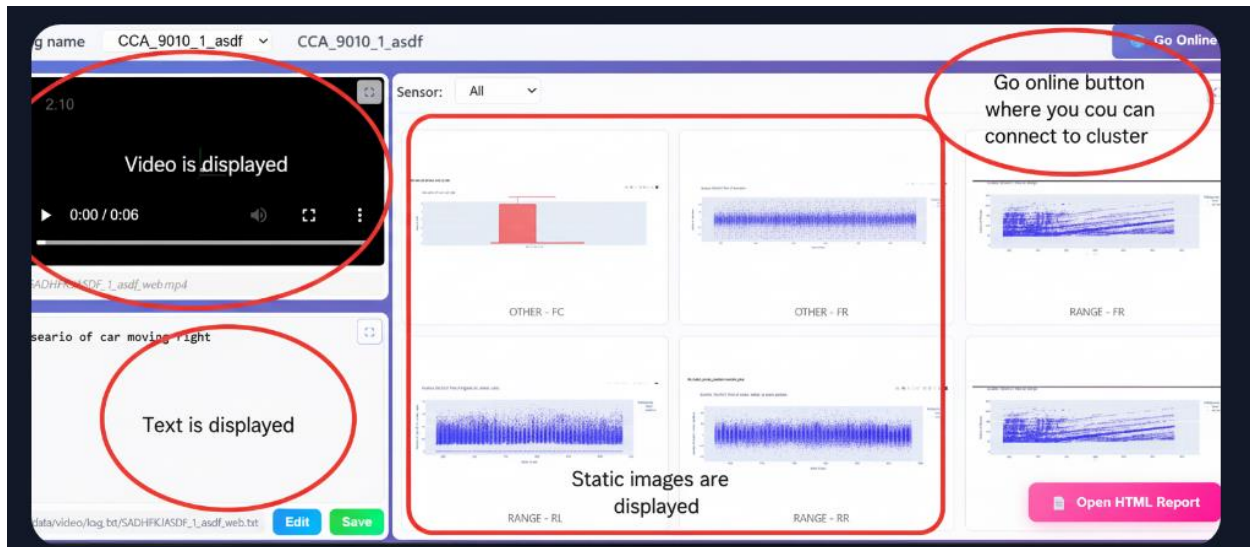

Applies to:

- Online Mode (log_viewer_online.exe) — starts a local web server to view logs in a browser.
- Offline Mode (log_viewer_offline.exe) — generates an HTML output from given input folders (no web server).

1) OVERVIEW

- Purpose: View and analyze HTML/video logs. Online Mode serves a browser UI from a local server. Offline Mode produces a report from inputs.
- Static UI is NOT bundled inside the .exe. You MUST provide a folder named "static" beside the .exe.
- User data (downloaded/imported HTML & video) is stored in ".cache_html" inside the current working directory (CWD) you launch the .exe from.
- If "static" is missing, the console prints "HTML root: Not found" and "/" returns 404.

2) REQUIREMENTS

- Windows 10/11 (x64).
- The correct .exe:
 - Online: log_viewer_online.exe
 - Offline: log_viewer_offline.exe

- A complete "static" folder placed BESIDE the .exe (same directory).
- Optional: sample HTML/video inputs if you want to pre-seed the cache.

3) RECOMMENDED FOLDER LAYOUT

Create:

C:\Tools\LogViewer\

Place files:

C:\Tools\LogViewer\log_viewer_online.exe

C:\Tools\LogViewer\static\index.html

C:\Tools\LogViewer\static\assets\css\...

C:\Tools\LogViewer\static\assets\js\...

C:\Tools\LogViewer\static\assets\img\...

4) RUNNING THE EXECUTABLES

4.1 ONLINE MODE (log_viewer_online.exe)

Steps:

- 1) Open Command Prompt or PowerShell.
- 2) Change directory to the folder that contains the .exe and static:

```
cd /d C:\Tools\LogViewer
```

- 3) Run:

```
log_viewer_online.exe --serve
```

- 4) On success, expect:

HTML root: C:\Tools\LogViewer\static

Running on http://127.0.0.1:5000

- 5) Open the printed address in your browser.

Under the hood:

- The app resolves "static" relative to the current working directory (CWD).

- The app uses/creates ".cache_html" in the SAME CWD.

4.2 OFFLINE MODE (log_viewer_offline.exe)

Command format:

```
log_viewer_offline.exe "<html_input_folder>" "<video_input_folder>" "<output_html_file>"
```

Example:

```
cd /d C:\Tools\LogViewer
```

```
log_viewer_offline.exe "C:\Data\logs_html" "C:\Data\logs_video" "C:\Reports\viewer.html"
```

Notes:

- "static" must still be beside the .exe because the generated HTML may reference UI assets (images/styles/scripts).

5) STATIC FOLDER — PLACEMENT AND IMAGES

Rules:

- Folder name must be "static" (lowercase).
- It must sit BESIDE the .exe (same directory).
- It must contain your UI entry (index.html) and any images used by the UI (e.g., static\assets\img\...).

Example layout:

```
static\  
  index.html  
  assets\  
    css\*.css  
    js\*.js  
    img\  
      logo.png  
      play.svg  
      spinner.gif  
      thumbnails\  
        *.jpg/*.png
```

Validation checklist:

- C:\Tools\LogViewer\static\index.html exists.
- UI images under static\assets\img\... exist.
- You launched the .exe from the folder that contains "static".

Common error if static is wrong:

- Console prints: "HTML root: Not found"
- Browser shows 404 at "/"

Fix:

- Put "static" beside the .exe and re-run from that folder.

6) CACHE BEHAVIOR (.cache_html)

- Created/used in the CURRENT WORKING DIRECTORY (CWD) from which you launch the .exe.
- Stores user-provided or downloaded HTML/video.
- Launching via a shortcut? Check the shortcut's "Start in" — that becomes the CWD. If it points elsewhere, ".cache_html" will be created there.

Optional pre-seed:

```
C:\Tools\LogViewer\.cache_html\  
html\  
video\
```

7) IF PORT 5000 IS NOT FREE (ONLINE MODE)

Symptoms:

- The server fails to bind to 127.0.0.1:5000 or prints "Address already in use".

Option A — Run on a different port (preferred):

```
log_viewer_online.exe --serve --port 5100
```

Then open:

`http://127.0.0.1:5100`

If "--port" is NOT supported, try environment variable:

`set PORT=5100`

`log_viewer_online.exe --serve`

Option B — Free port 5000 and retry:

`netstat -ano | findstr :5000`

`taskkill /PID <PID> /F`

`log_viewer_online.exe --serve`

8) TROUBLESHOOTING

- "HTML root: Not found" on startup
 - Ensure `static\index.html` exists beside the `.exe`.
 - Ensure you launched the `.exe` FROM THAT FOLDER (CWD matters).
- Server runs but browser returns 404 at "/"
 - Check console logs; confirm the printed "HTML root" path points to your static folder.
 - Ensure `static\index.html` exists and routes match.
- `".cache_html"` never created
 - The app creates the folder when needed (e.g., on importing/downloading data).
 - Try adding data via the UI or create `".cache_html"` manually.
- Images not visible in the UI
 - Confirm images physically exist under `static\assets\img\...` and your HTML paths are correct.
- Running via a shortcut
 - Ensure the shortcut "Start in" points to the `.exe` folder; otherwise `".cache_html"` may be created elsewhere.

9) COPY-ALL COMMANDS (ONE BLOCK)

`:: ===== Set working folder =====`

```
cd /d C:\Tools\LogViewer
```

```
:: ===== Run Online (default port) =====
```

```
log_viewer_online.exe --serve
```

```
:: ===== Run Online (custom port 5100) =====
```

```
log_viewer_online.exe --serve --port 5100
```

```
:: or
```

```
set PORT=5100
```

```
log_viewer_online.exe --serve
```

```
:: ===== Check who uses port 5000 =====
```

```
netstat -ano | findstr :5000
```

```
:: ===== Kill by PID (replace <PID>) =====
```

```
taskkill /PID <PID> /F
```

```
:: ===== Run Offline (example) =====
```

```
log_viewer_offline.exe "C:\Data\logs_html" "C:\Data\logs_video" "C:\Reports\viewer.html"
```

10) SUPPORT

- Jira: HZP (e.g., HZP-764)
- Owner: Krishnakumar Bhat (GET | Radar Simulations)
- Email: krishnakumar.balachandra.bhat@aptiv.com