

Azure Data Factory

Pipeline Triggers, Scheduling & Event-Based Automation

Step-by-Step Screenshot Guide

This guide explains each Azure Data Factory screenshot in sequence, covering Execute Pipeline, Delete activity, Schedule Trigger, publishing, trigger monitoring, Blob Event Trigger, Tumbling Window Trigger, and Azure Storage verification.

Purpose

Provide a clear reference for understanding how pipeline execution, trigger configuration, deployment, monitoring and storage-based events are configured and verified in Azure Data Factory.


Contents

1. Execute Pipeline configuration and validation
2. Delete activity configuration and validation
3. Schedule trigger configuration
4. Publishing ADF changes
5. Trigger run monitoring
6. Blob Event Trigger configuration
7. Tumbling Window Trigger configuration
8. Azure Storage file verification

Prepared from the supplied Azure Data Factory screenshots

1. Execute Pipeline — Verify a Successful Pipeline Run

Screenshot 1 — Detailed explanation

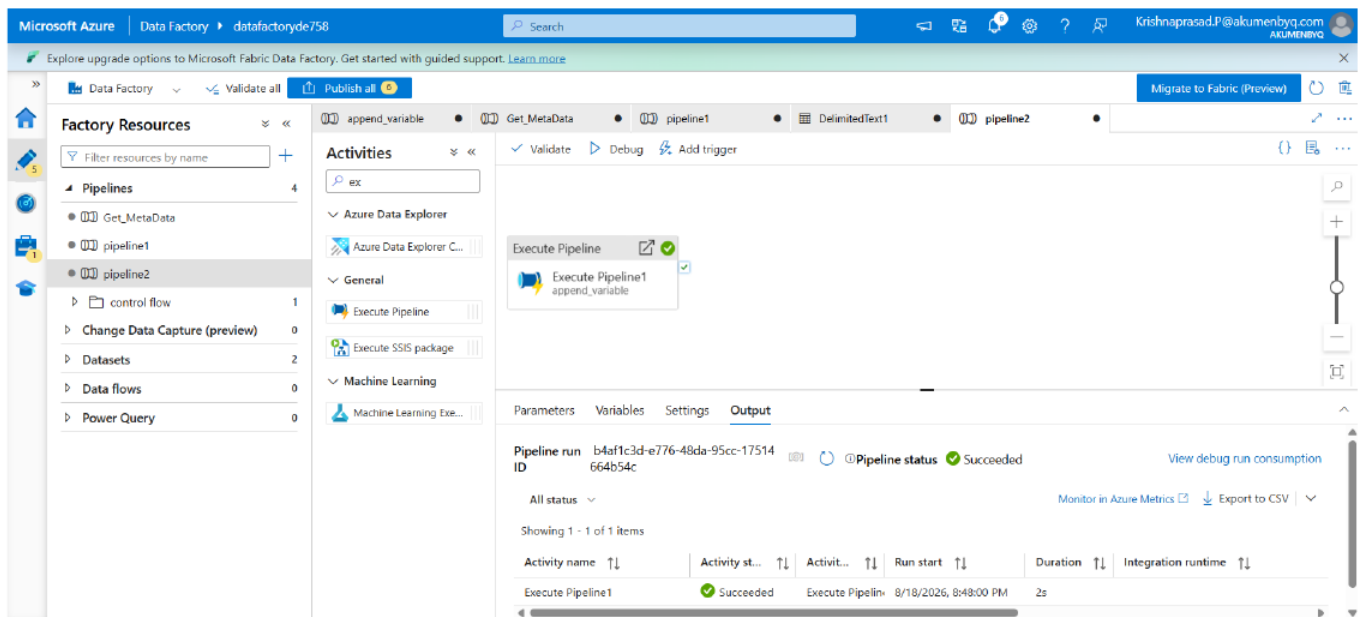


Step-by-step explanation

1. Open the required pipeline in Azure Data Factory Studio and locate the **Execute Pipeline** activity.
2. The activity invokes the selected child pipeline; in the screenshot the invoked pipeline is shown inside the activity.
3. Open the **Output** tab to inspect the execution result.
4. The output shows **Pipeline status: Succeeded**, confirming that the pipeline execution completed successfully.
5. Use the run information and activity status shown in Output to verify that the activity actually executed rather than only being configured.

2. Execute Pipeline — Configure the Invoked Pipeline

Screenshot 2 — Detailed explanation

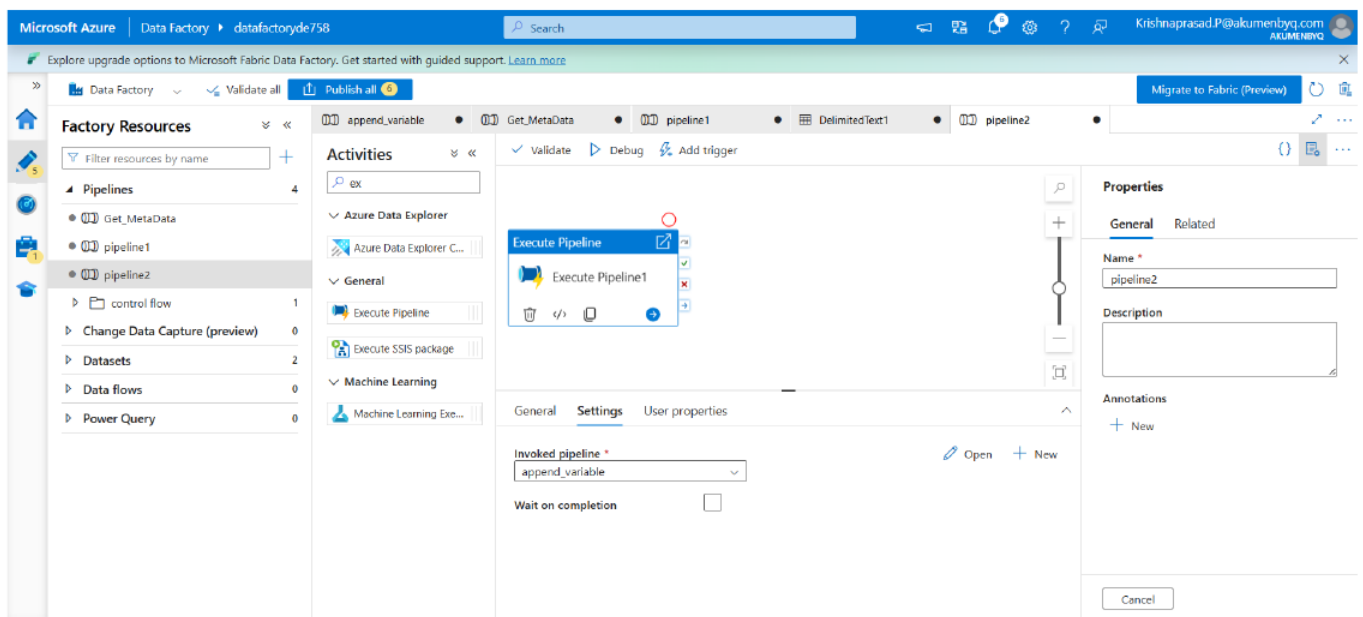


Step-by-step explanation

1. Select the **Execute Pipeline** activity on the pipeline canvas.
2. In the activity properties, open the **General** or **Settings** section.
3. Choose the pipeline that should be invoked from the **Invoked pipeline** field.
4. The screenshot shows an invoked pipeline selected and the **Wait on completion** option available.
5. Enable **Wait on completion** when the parent pipeline must wait for the child pipeline to finish before continuing.

3. Delete Activity — Configure the Source Dataset

Screenshot 3 — Detailed explanation

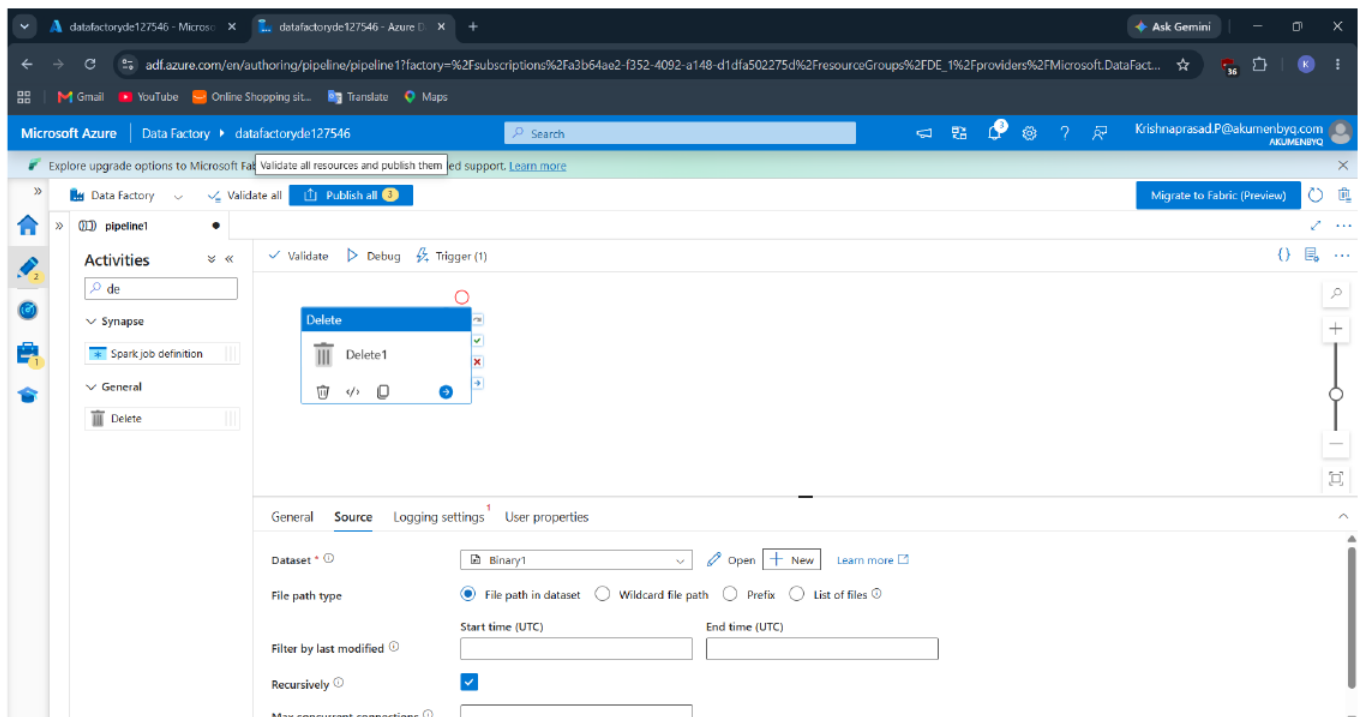

Step-by-step explanation

1. Add a **Delete** activity to the pipeline.
2. Open the **Source** tab of the Delete activity.
3. Select the dataset that points to the files or folder that should be removed; the screenshot shows **Binary1**.
4. Choose the required file path option. The screenshot uses **File path in dataset**.
5. If required, configure **Recursively** and other source options according to the folder/file structure.
6. This configuration prepares the Delete activity to remove the targeted data before or after another pipeline operation.

4. Delete Activity — Verify Execution

Screenshot 4 — Detailed explanation

The screenshot displays the Microsoft Azure Data Factory portal interface. The top navigation bar shows the user is logged in as 'Krishnaprasad.P@ekumenbyq.com'. The main content area is titled 'Data Factory' and shows a pipeline named 'pipeline1' with a 'Binary1' trigger. The 'Activities' section on the left lists 'Delete' under the 'General' category. The 'Delete' activity is shown in the center, with a green checkmark indicating successful execution. Below the activity, the 'Output' tab is selected, showing the 'Pipeline run ID' as 'c21998bc-1020-4f03-a668-9682f36bae8a' and the 'Pipeline status' as 'Succeeded'. A table below the status shows the execution details for the 'Delete' activity.


Activity name	Activity status	Activity name	Run start	Duration	Integration runtime	User properties	Activity run ID
Delete1	Succeeded	Delete	8/17/2026, 8:16:11 PM	15s	AutoResolveIntegrationRuntime (East US)		bad9751a-ee14

Step-by-step explanation

1. Run the pipeline after configuring the Delete activity.
2. Open the **Output** tab after the run finishes.
3. Check the activity status for **Delete1**.
4. The screenshot shows a green check mark and **Succeeded** status.
5. Use this output to confirm that the Delete activity completed without an execution error.

5. Schedule Trigger — Configure a Recurring Pipeline Trigger

Screenshot 5 — Detailed explanation

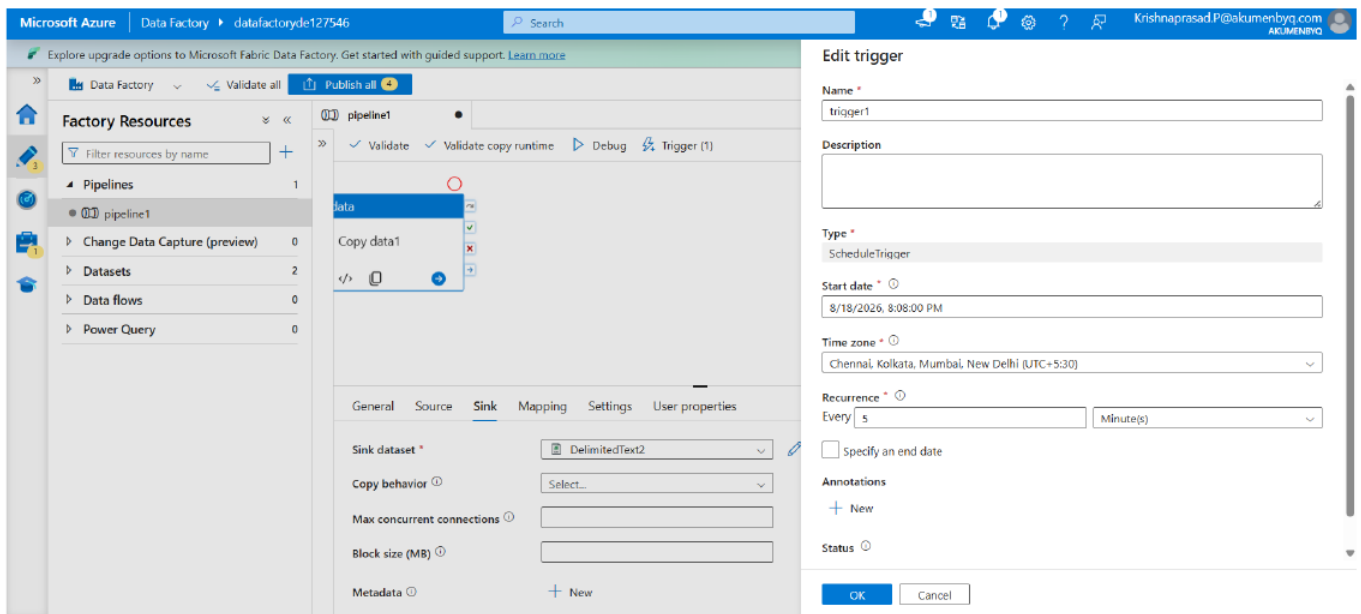


Step-by-step explanation

1. Open the pipeline's **Trigger** menu and create or edit a trigger.
2. Enter a trigger name; the screenshot uses **trigger1**.
3. Set the trigger **Type** to **ScheduleTrigger**.
4. Choose the **Start date** and the appropriate **Time zone**.
5. Configure the recurrence using the **Every** field and the selected time unit.
6. The screenshot shows a recurrence configured in minutes; keep the exact interval appropriate for the intended workload.

6. Publish — Deploy Pending ADF Changes

Screenshot 6 — Detailed explanation

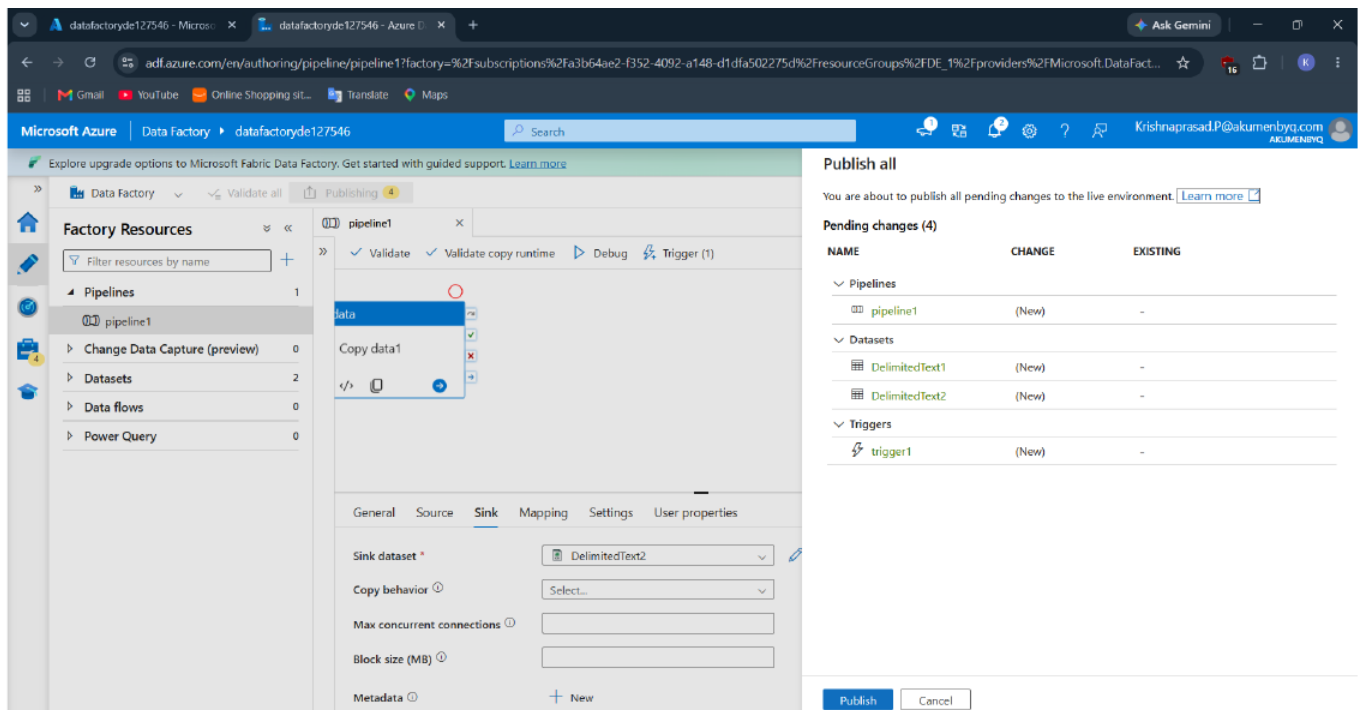


Step-by-step explanation

1. After creating or modifying the pipeline, dataset and trigger, select **Publish all**.
2. Review the list of pending changes before publishing.
3. The screenshot shows pending changes under **Pipelines**, **Datasets** and **Triggers**.
4. Confirm that the intended objects are included and then select **Publish**.
5. Publishing moves the authoring changes into the live Data Factory environment so the configured trigger can execute.

7. Monitor — Check Trigger Run History

Screenshot 7 — Detailed explanation

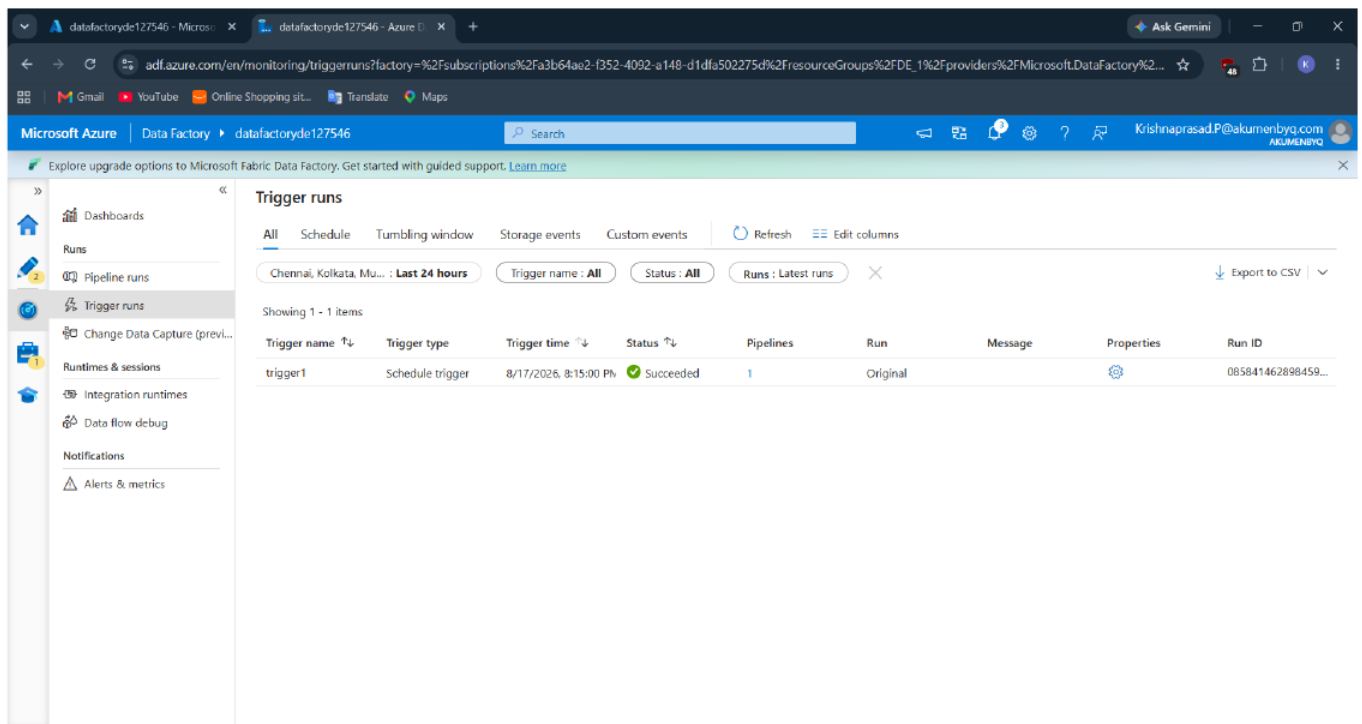


Step-by-step explanation

1. Open the Azure Data Factory **Monitor** section.
2. Select **Trigger runs** to view trigger execution history.
3. Use the available filters such as trigger name and status to narrow the results.
4. The screenshot shows **trigger1** with trigger type **Schedule trigger**.
5. The run has a green **Succeeded** status, confirming that the trigger fired successfully.
6. The run ID can be used to trace the specific trigger execution for troubleshooting or auditing.

8. Blob Event Trigger — Configure Storage-Based Execution

Screenshot 8 — Detailed explanation

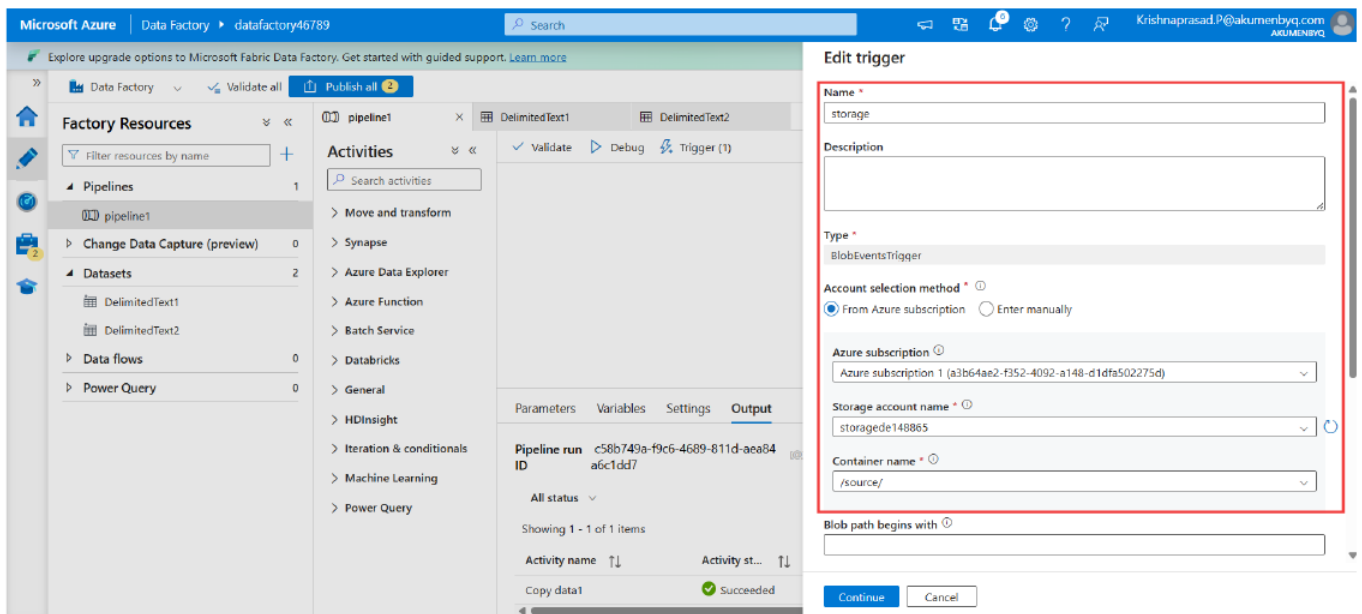


Step-by-step explanation

1. Create or edit a trigger and select **BlobEventsTrigger** as the trigger type.
2. Enter a trigger name and select the Azure subscription and storage account.
3. Specify the **Container name**; the screenshot shows **/source/**.
4. Configure the blob path filter if the pipeline should react only to files matching a particular path.
5. This trigger type is intended to start the pipeline when the configured storage event occurs.

9. Tumbling Window Trigger — Configure Time-Windowed Execution

Screenshot 9 — Detailed explanation

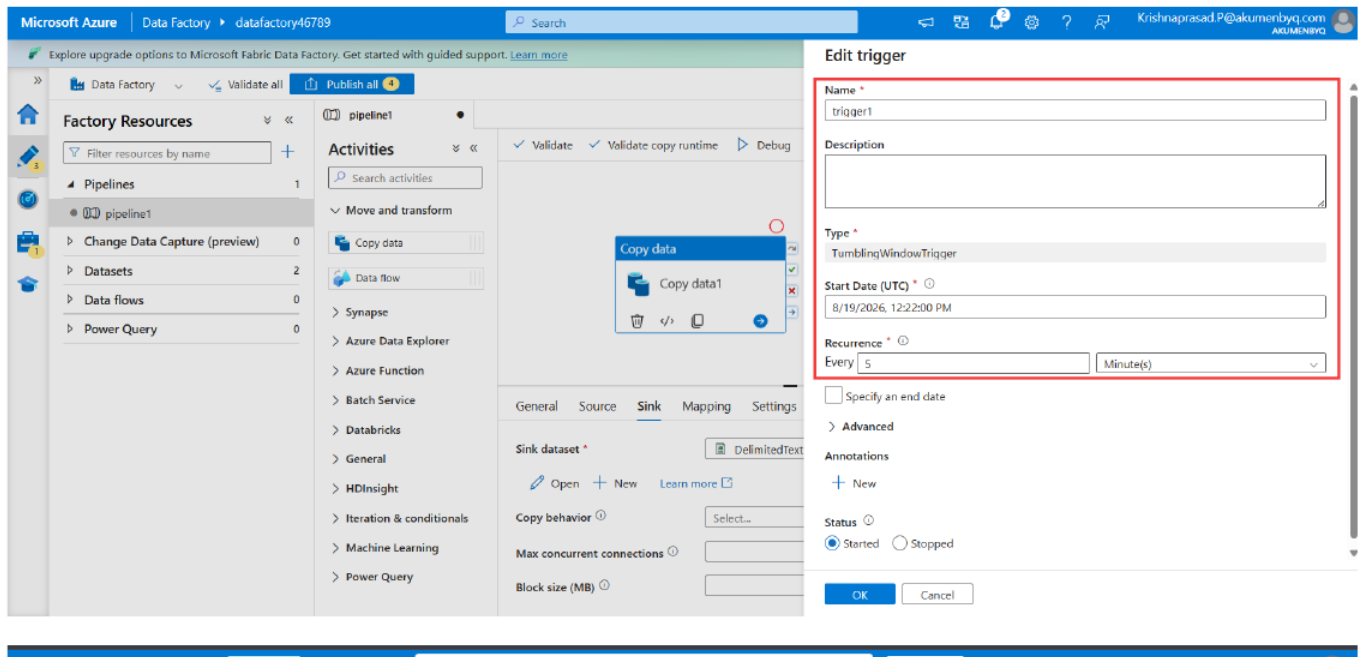


Step-by-step explanation

1. Open the trigger configuration and select **TumblingWindowTrigger**.
2. Set the **Start Date (UTC)** for the first window.
3. Configure the recurrence interval using the **Every** field and its time unit.
4. The screenshot shows an interval configured in minutes and the trigger status set to **Started**.
5. Tumbling windows provide a repeating time-window execution pattern and are configured independently from event-based triggers.

10. Azure Storage — Verify the File in the Container

Screenshot 10 — Detailed explanation

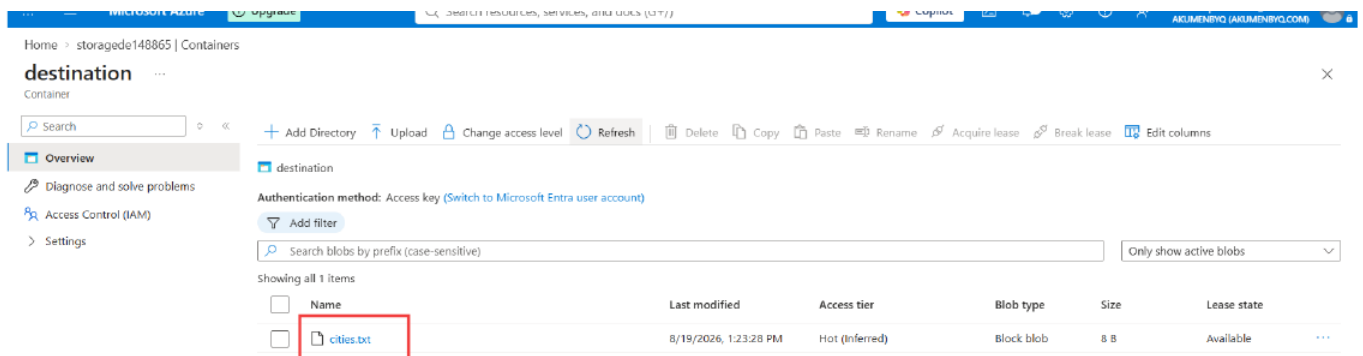

Step-by-step explanation

1. Open the Azure Storage account and navigate to the relevant container.
2. The screenshot shows the **destination** container in the Containers view.
3. Check the file listing to confirm that the expected blob is present.
4. The screenshot highlights a file named **cities.txt**.
5. This verification step confirms that a file is physically available in the storage container and can be used as the source for a storage-triggered workflow.