



Copy Data Operation

Step 1: Verify the Resource Group

- Opened the resource group DE_1 — at this point it had no resources deployed.

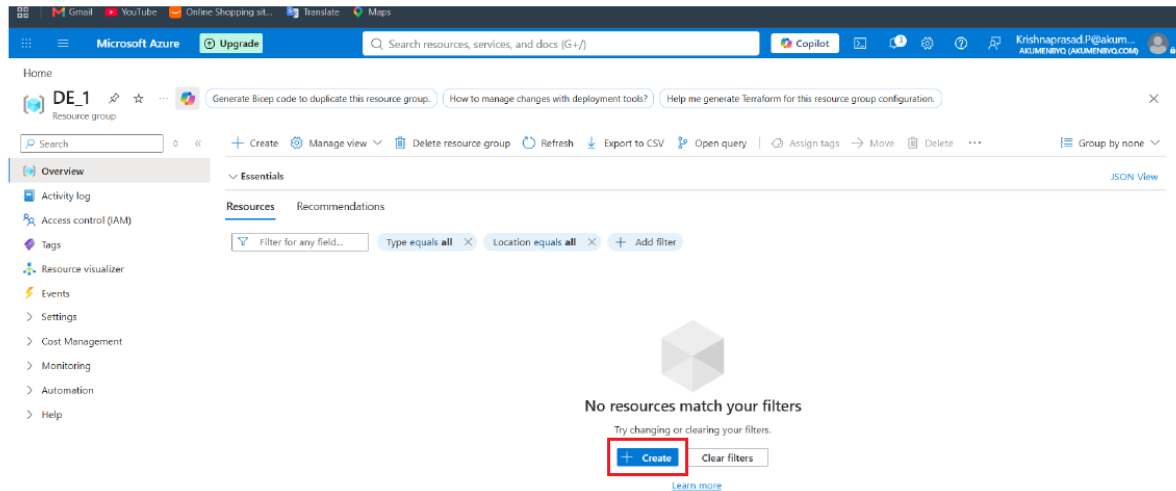


- After creating the required resources, DE_1 now shows two items: datafactory26123 (Data Factory V2) and storage16756 (Storage account), both deployed in East US.

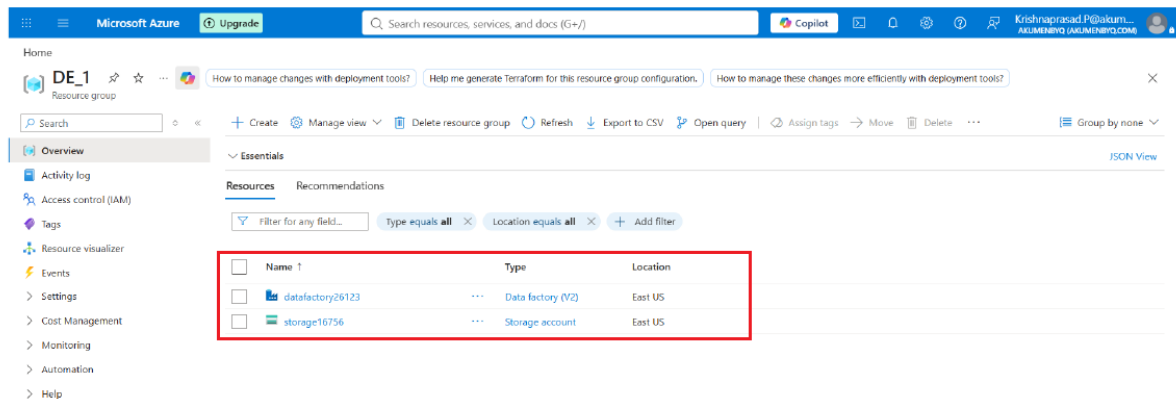


Step 2: Create the Source and Destination Containers

- Opened the storage account and navigated to Data storage > Containers.
- Used + Add container and entered a name in the New container panel, then clicked Create.
- Repeated this to create both the source and destination containers.

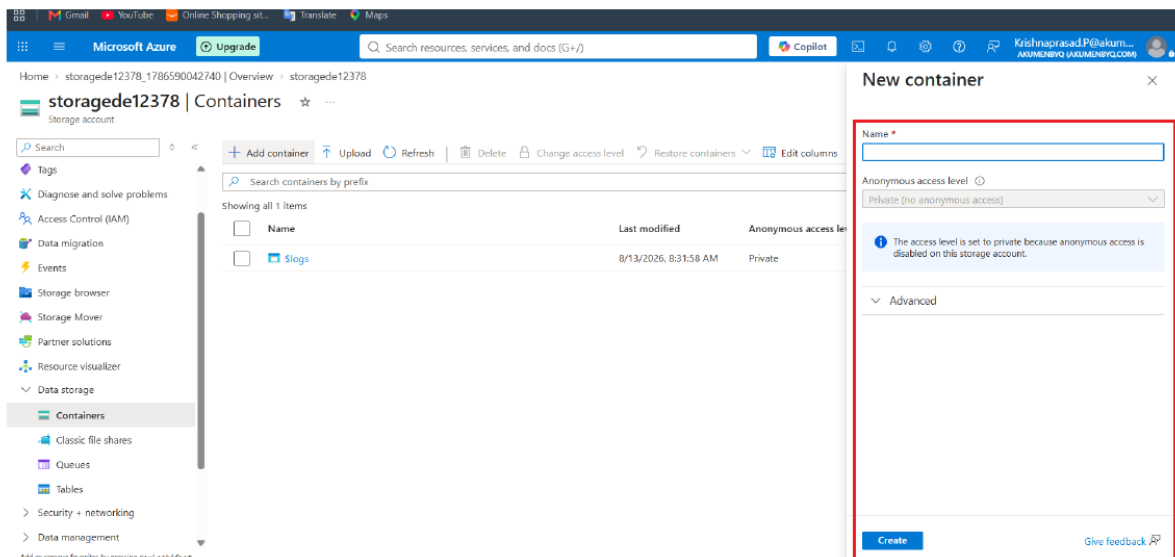


- Both containers now appear in the storage account, alongside the existing \$logs container.

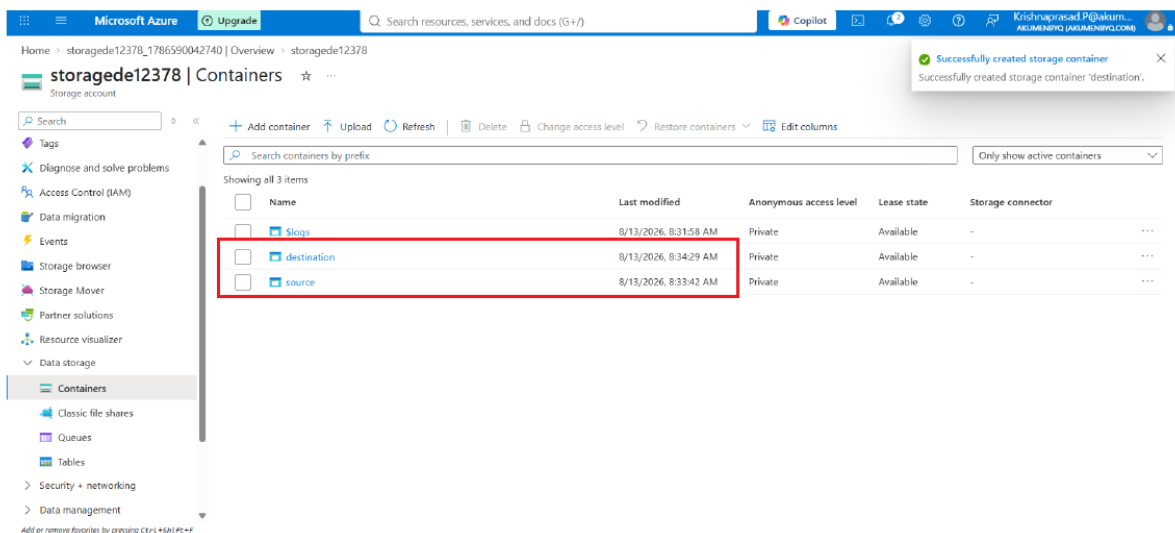


Step 3: Upload a File to the Source Container

- Opened the source container and uploaded a file.
- Confirmed the successful upload — cities.txt now appears inside the source container.

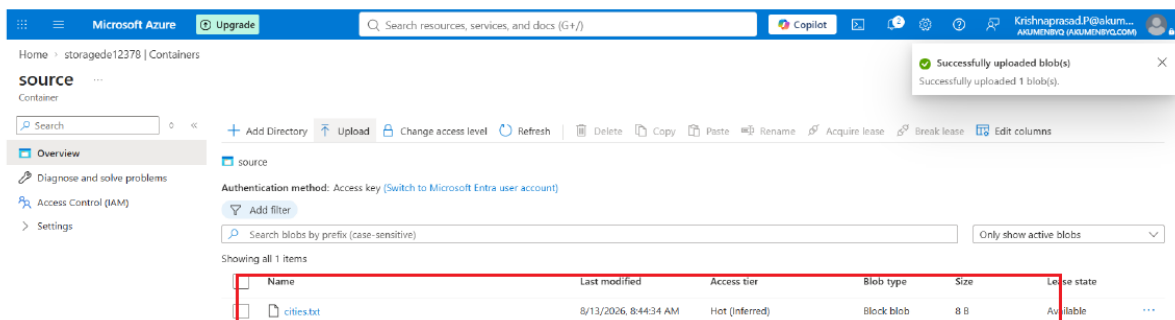


Step 4: Build the Copy Data Pipeline

- Opened Azure Data Factory Studio and created a new pipeline.
- From Activities > Move & transform, dragged the Copy data activity onto the canvas.

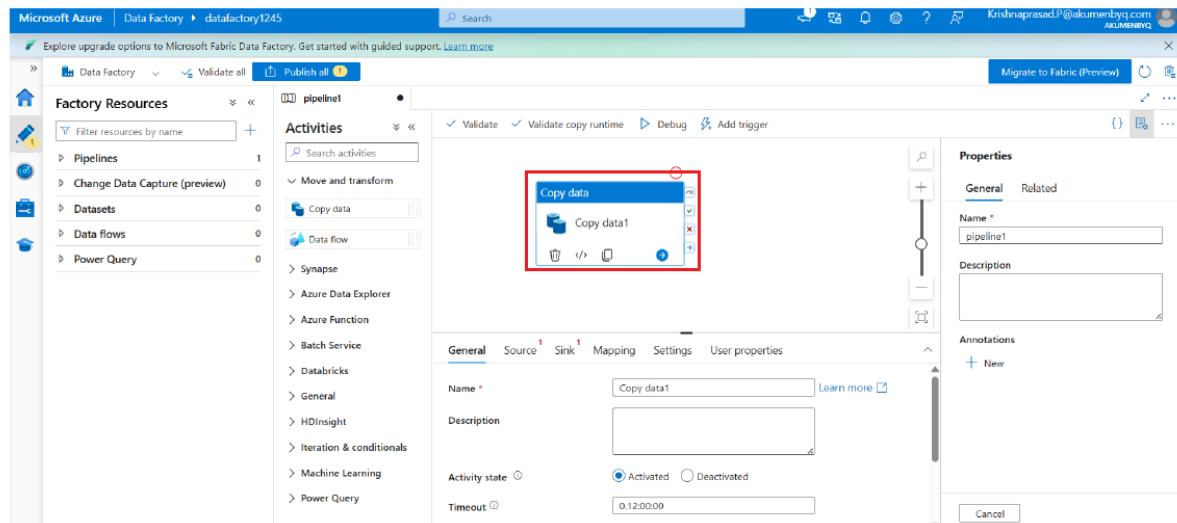


Step 5: Configure the Source Dataset


- On the Source tab, created a new dataset and selected Azure Blob Storage as the data store.

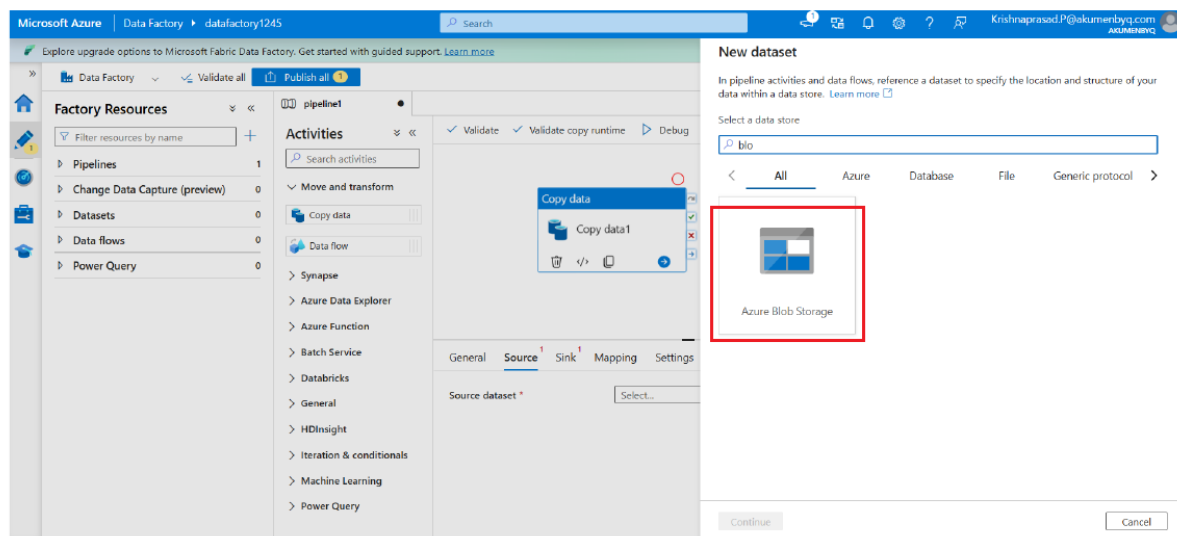

- Named the dataset DS_Blob and configured a new Linked Service pointing to the storage account.

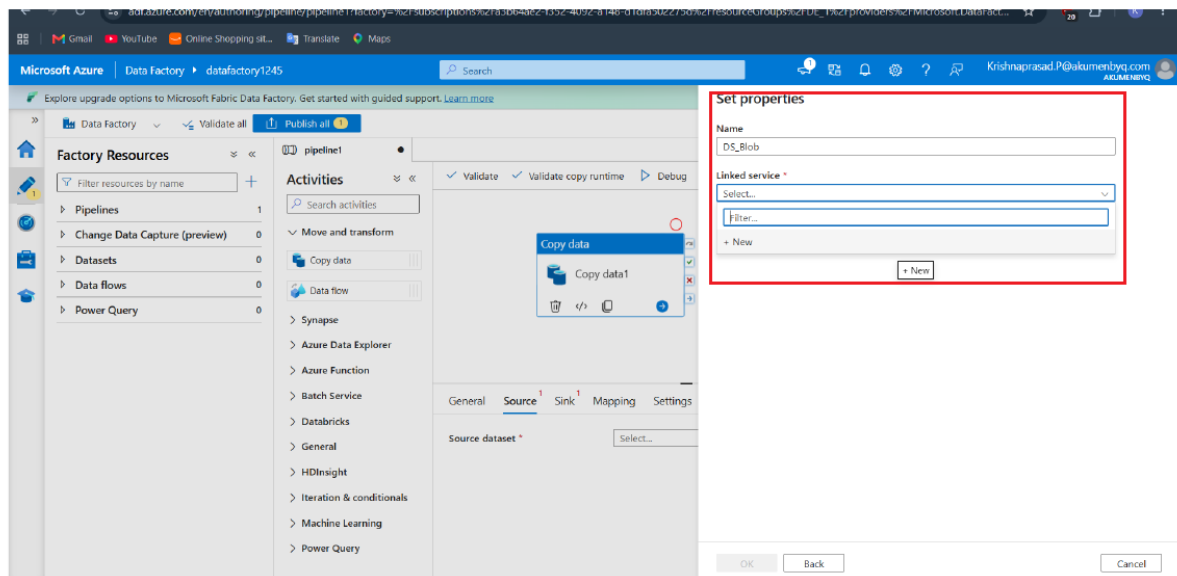


- Set the file path to source / cities.txt and kept First row as header enabled.

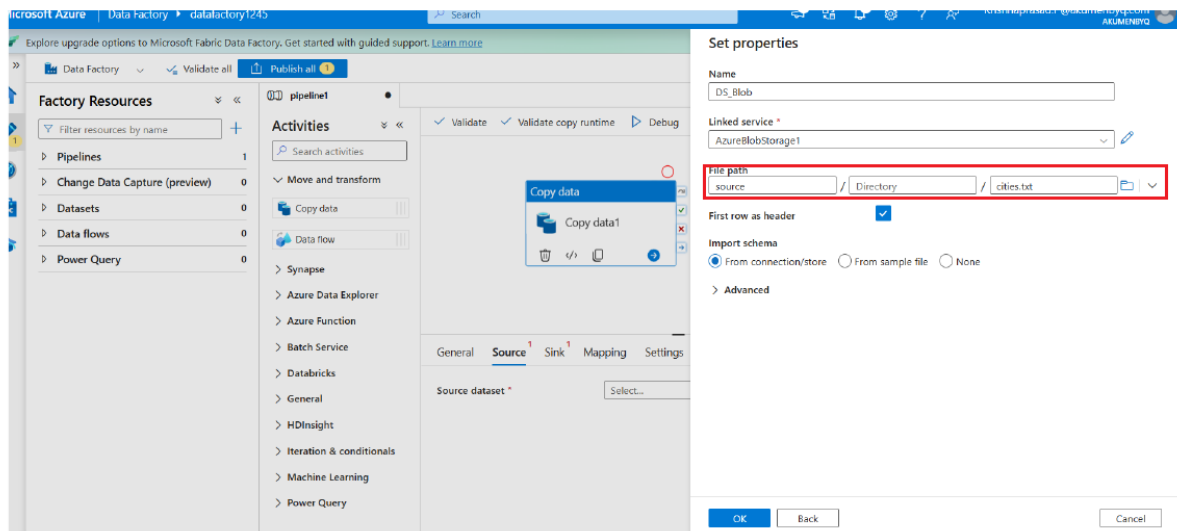


Step 6: Configure the Sink Dataset

- On the Sink tab, created dataset DE_Blob and pointed its file path to the destination container.

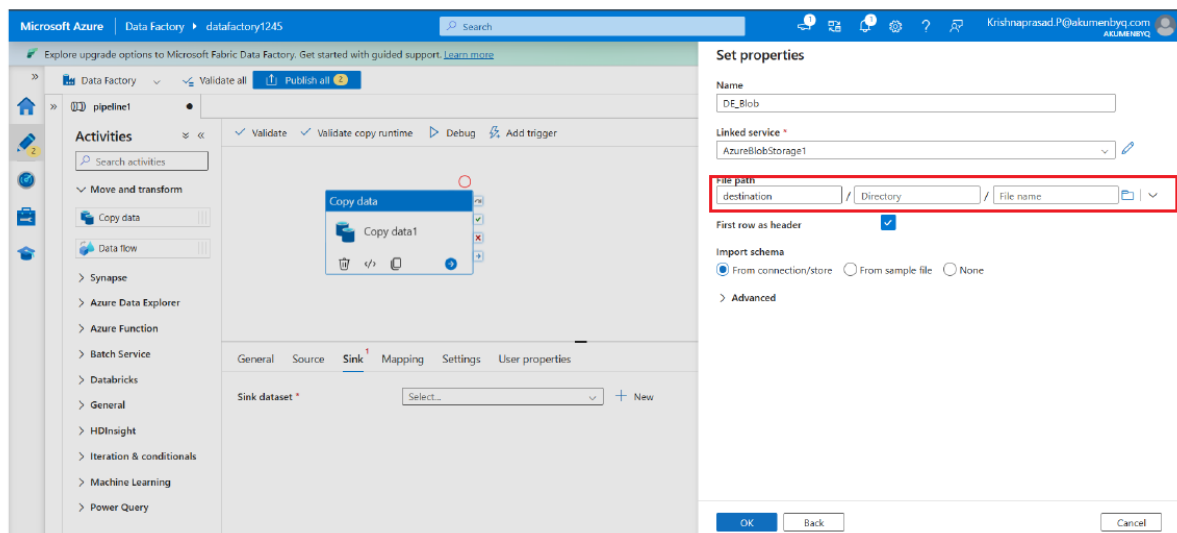


Step 7: Validate, Debug and Verify

- Clicked Validate — the pipeline validated with no errors — then ran Debug. The Copy data activity Succeeded.

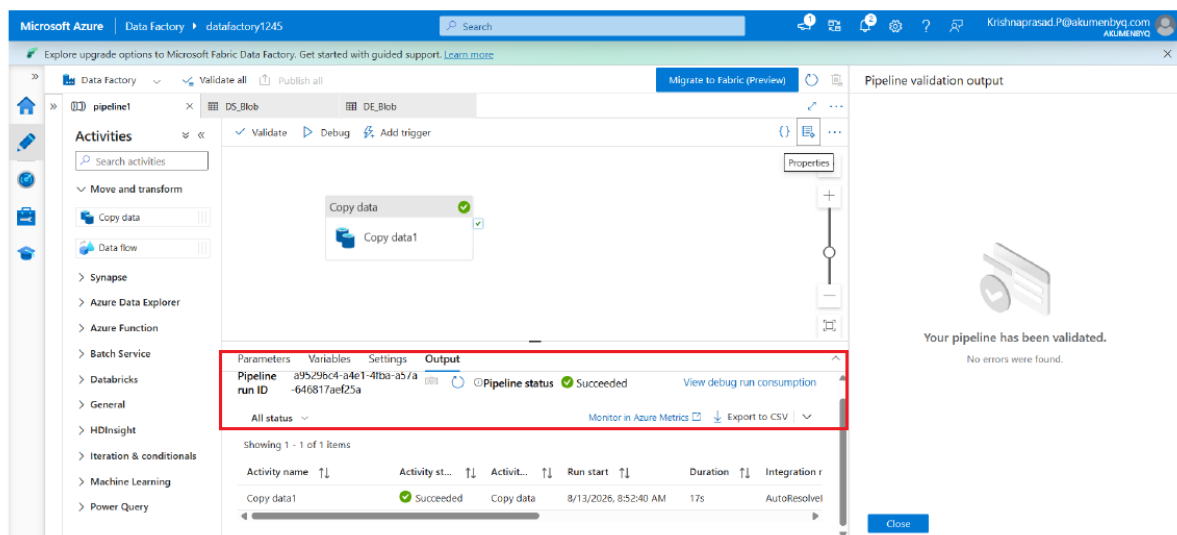

- Checked the destination container: cities.txt was successfully copied over.

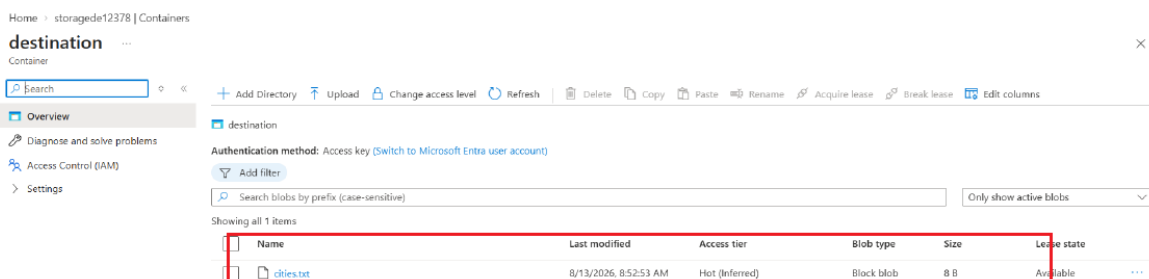

Step 8: Copy Files Using a Prefix Filter

- Using a second storage account, the source container now holds five files: SQL_B2.pdf, cities.txt, cities1.txt, cities2.txt and pratice.txt.

Microsoft Azure portal showing the 'source' container. The container lists five files:

Name	Last modified	Access tier	Blob type	Size	Lease state
SQL_B2.pdf	8/13/2026, 12:50:26 PM	Hot (Inferred)	Block blob	1.33 MiB	Available
cities.txt	8/13/2026, 12:50:25 PM	Hot (Inferred)	Block blob	8 B	Available
cities1.txt	8/13/2026, 12:53:19 PM	Hot (Inferred)	Block blob	7 B	Available
cities2.txt	8/13/2026, 12:53:19 PM	Hot (Inferred)	Block blob	7 B	Available
pratice.txt	8/13/2026, 12:50:25 PM	Hot (Inferred)	Block blob	8.75 KiB	Available

- In the pipeline's Source settings, set File path type to Prefix and entered "cit" so only files starting with those letters are copied.

Microsoft Azure portal showing the 'Data Factory' pipeline settings. The 'Source' tab is selected, and the 'File path type' is set to 'Prefix' with the value 'cit'.


- After running the pipeline, only the matching files — cities.txt, cities1.txt and cities2.txt — were copied to the destination.

Microsoft Azure portal showing the 'destination' container. The container lists three files:


Name	Last modified	Access tier	Blob type	Size	Lease state
cities.txt	8/13/2026, 1:05:50 PM	Hot (Inferred)	Block blob	8 B	Available
cities1.txt	8/13/2026, 1:05:50 PM	Hot (Inferred)	Block blob	7 B	Available
cities2.txt	8/13/2026, 1:05:50 PM	Hot (Inferred)	Block blob	7 B	Available

Step 9: Copy Files Using a Wildcard Path


- Changed File path type to Wildcard file path and set the wildcard to *.pdf to copy only PDF files.

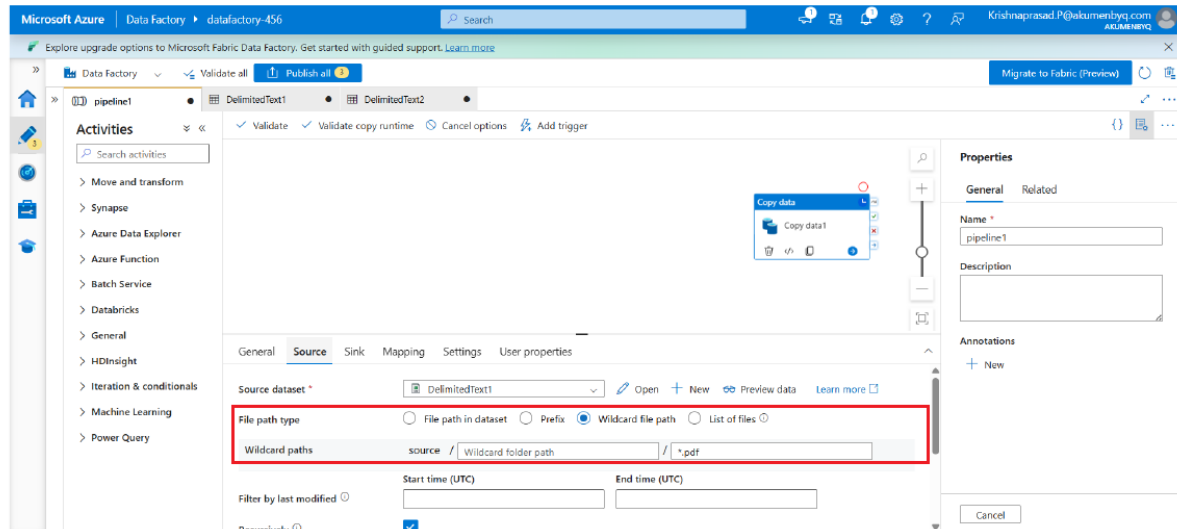

- Validated and ran Debug again — the pipeline Succeeded.

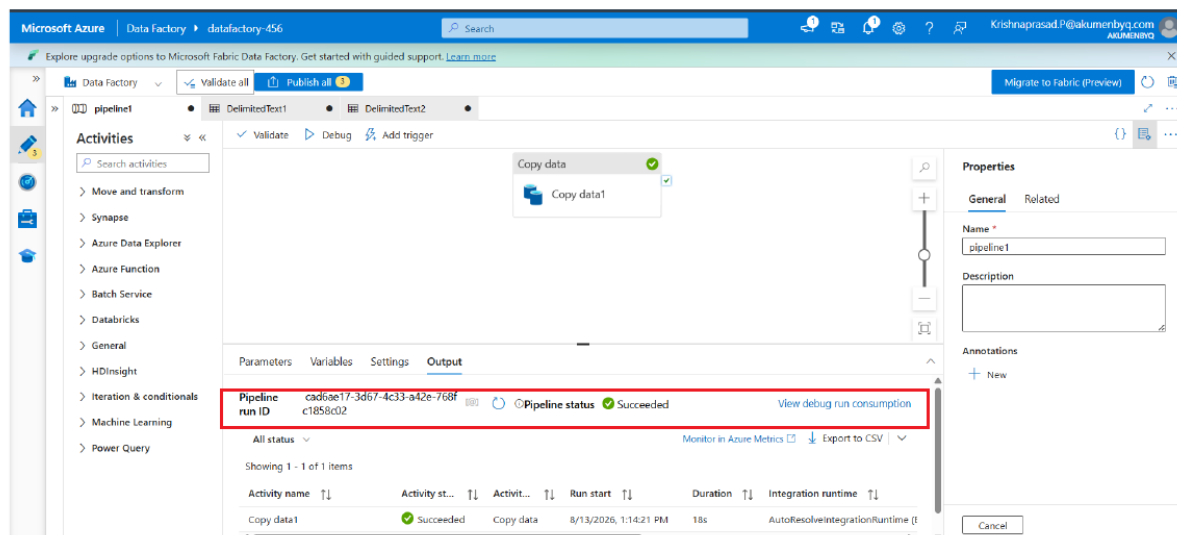


- Verified that SQL_B2.pdf was copied into the destination container.

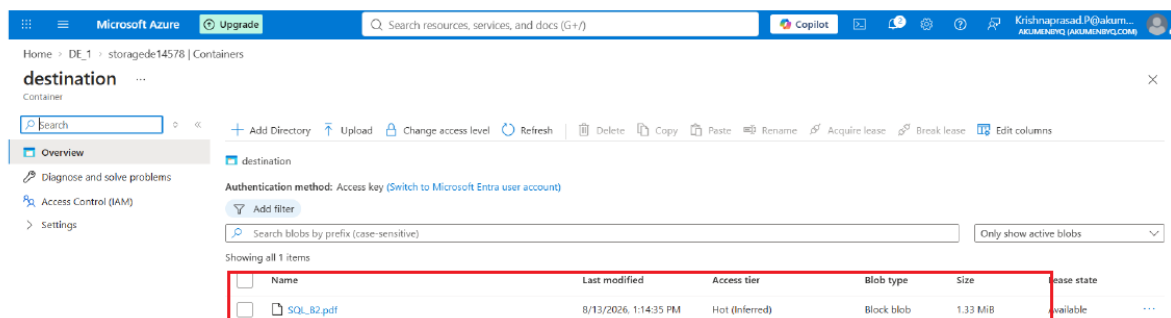

Step 10: Copy Files Using a List of Files

- Created a list.txt file naming the exact files to copy: cities.txt, practice.txt and SQL_B2.pdf.

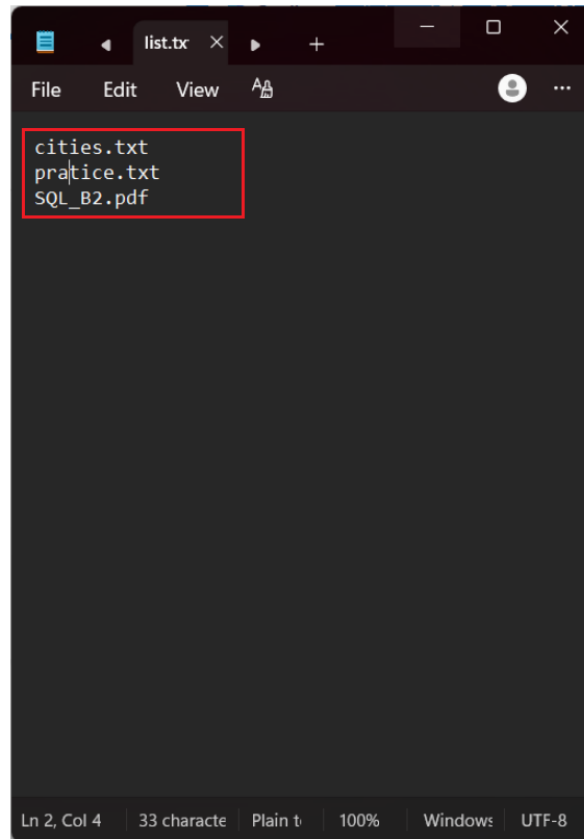


A screenshot of a code editor window titled 'list.txt'. The editor has a dark theme and a menu bar with 'File', 'Edit', and 'View'. The text inside the editor is:

```
cities.txt  
practice.txt  
SQL_B2.pdf
```

The text is highlighted with a red rectangular box. At the bottom of the editor, a status bar shows 'Ln 2, Col 4', '33 character', 'Plain text', '100%', 'Windows', and 'UTF-8'.


- Uploaded list.txt into the source container alongside the other files.

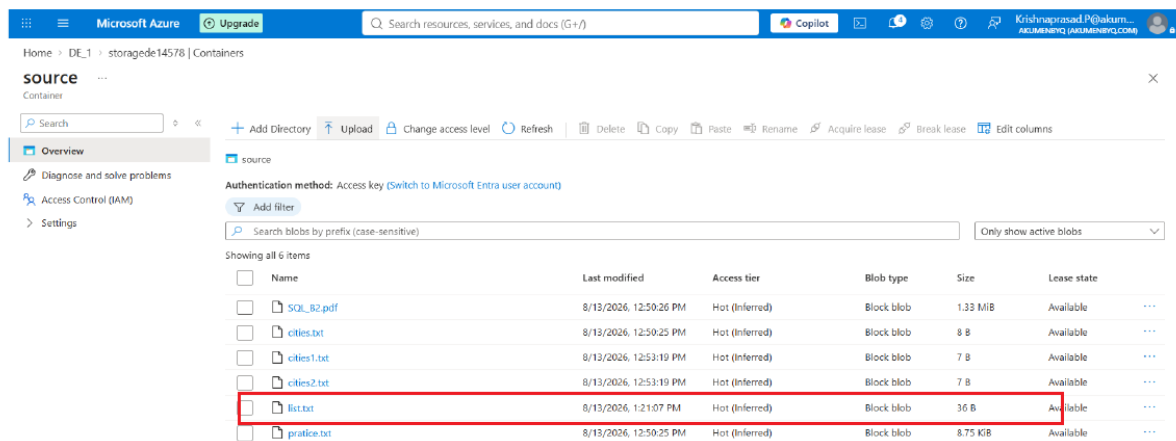

A screenshot of the Microsoft Azure portal interface. The top navigation bar shows 'Microsoft Azure' and a search bar. The main content area is titled 'source' and shows a list of blobs in a container. The table has columns for 'Name', 'Last modified', 'Access tier', 'Blob type', 'Size', and 'Lease state'. The row for 'list.txt' is highlighted with a red rectangular box.

	Name	Last modified	Access tier	Blob type	Size	Lease state
☐	SQL_B2.pdf	8/13/2026, 12:59:26 PM	Hot (Inferred)	Block blob	1.33 MB	Available
☐	cities.txt	8/13/2026, 12:59:25 PM	Hot (Inferred)	Block blob	8 B	Available
☐	cities1.txt	8/13/2026, 12:53:19 PM	Hot (Inferred)	Block blob	7 B	Available
☐	cities2.txt	8/13/2026, 12:53:19 PM	Hot (Inferred)	Block blob	7 B	Available
☐	list.txt	8/13/2026, 1:21:07 PM	Hot (Inferred)	Block blob	36 B	Available
☐	practice.txt	8/13/2026, 12:59:25 PM	Hot (Inferred)	Block blob	8.75 KB	Available

- Set File path type to List of files and pointed it to source/list.txt.

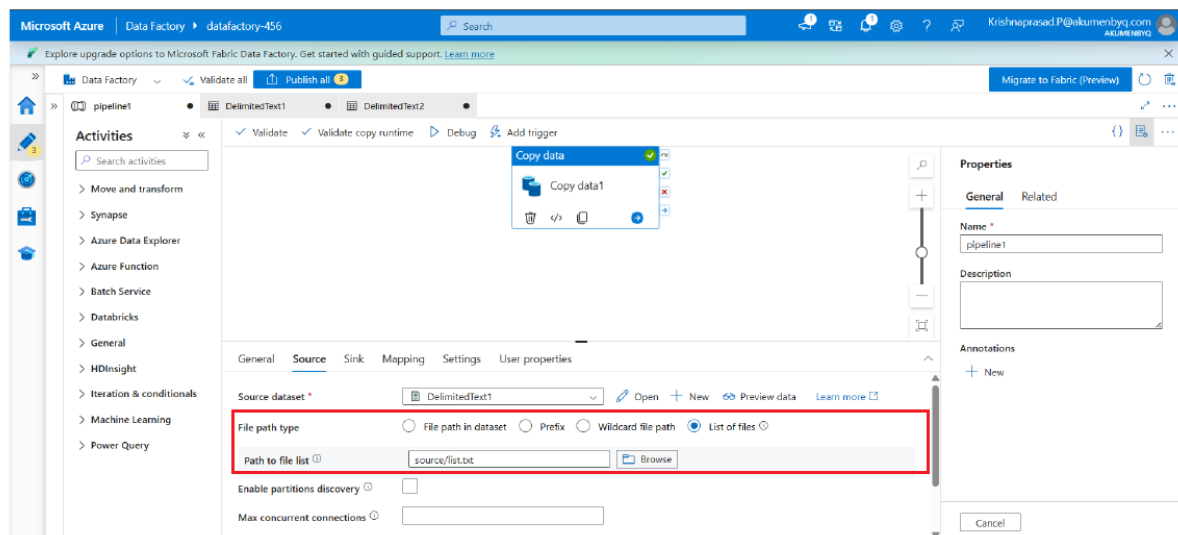

- After running the pipeline, the destination container contained exactly the three files named in the list: SQL_B2.pdf, cities.txt and pratice.txt.

