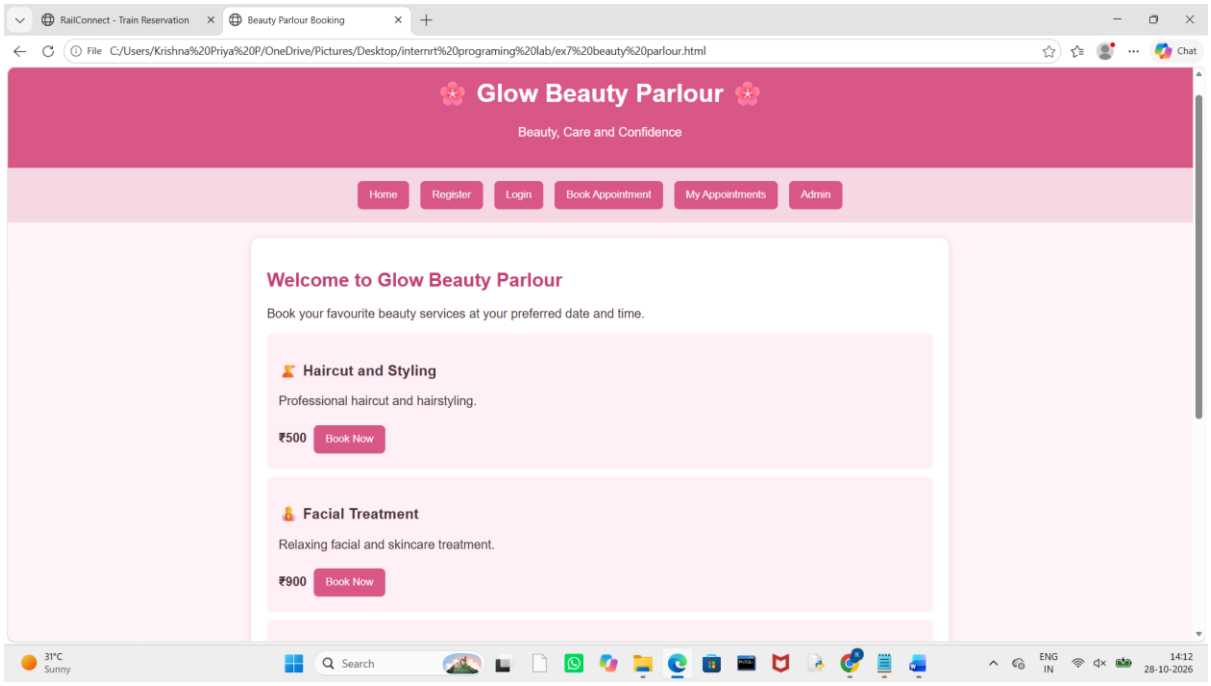



```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Beauty Parlour Booking</title>
<style>
body {
  font-family: Arial, sans-serif;
  background: #fff5f8;
  margin: 0;
  color: #49313d;
}
header {
  background: #d95787;
```

```
  color: white;
  text-align: center;
  padding: 20px;
}
nav {
  background: #f6d8e4;
  padding: 12px;
  text-align: center;
}
button {
  background: #d95787;
  color: white;
  border: none;
  padding: 10px 15px;
  margin: 5px;
  border-radius: 6px;
  cursor: pointer;
}
button:hover { background: #ad3767; }
section {
  max-width: 850px;
  margin: 20px auto;
  padding: 20px;
  background: white;
  border-radius: 12px;
  box-shadow: 0 2px 10px #ead4df;
}
input, select, textarea {
  width: 100%;
  padding: 10px;
  margin: 7px 0 14px;
```

```
  border: 1px solid #dfb8c9;
  border-radius: 6px;
  box-sizing: border-box;
}
h2 { color: #c63d75; }
.card {
  background: #fff0f5;
  padding: 15px;
  margin: 10px 0;
  border-radius: 8px;
}
.hidden { display: none; }
#message { color: green; font-weight: bold; }
table { width: 100%; border-collapse: collapse; }
td, th { border: 1px solid #e7c4d3; padding: 8px; }
footer { text-align: center; padding: 20px; }
@media(max-width:600px) {
  section { margin: 10px; padding: 14px; }
  nav button { padding: 8px; }
}
</style>
</head>
<body>

<header>
  <h1>🌸 Glow Beauty Parlour 🌸</h1>
  <p>Beauty, Care and Confidence</p>
</header>

<nav>
  <button onclick="showPage('home')">Home</button>
```

```
  <button onclick="showPage('register')">Register</button>
  <button onclick="showPage('login')">Login</button>
  <button onclick="showPage('booking')">Book Appointment</button>
  <button onclick="showPage('account')">My Appointments</button>
  <button onclick="showPage('admin')">Admin</button>
</nav>

<section id="home">
  <h2>Welcome to Glow Beauty Parlour</h2>
  <p>Book your favourite beauty services at your preferred date and time.</p>

  <div class="card">
    <h3> 💇 Haircut and Styling</h3>
    <p>Professional haircut and hairstyling.</p>
    <b>₹500</b>
    <button onclick="chooseService('Haircut and Styling',500)">Book Now</button>
  </div>

  <div class="card">
    <h3> 🧖 Facial Treatment</h3>
    <p>Relaxing facial and skincare treatment.</p>
    <b>₹900</b>
    <button onclick="chooseService('Facial Treatment',900)">Book Now</button>
  </div>

  <div class="card">
    <h3> 💅 Manicure and Pedicure</h3>
    <p>Nail care and beauty treatment.</p>
    <b>₹700</b>
    <button onclick="chooseService('Manicure and Pedicure',700)">Book Now</button>
  </div>
```

```
    <div class="card">
      <h3> 💄 Bridal Makeup</h3>
      <p>Makeup service for weddings and special occasions.</p>
      <b>₹4500</b>
      <button onclick="chooseService('Bridal Makeup',4500)">Book Now</button>
    </div>
</section>

<section id="register" class="hidden">
    <h2>Customer Registration</h2>
    <form onsubmit="registerUser(event)">
      <label>Full Name</label>
      <input id="regName" required>

      <label>Email</label>
      <input id="regEmail" type="email" required>

      <label>Password</label>
      <input id="regPassword" type="password" required>

      <label>Phone Number</label>
      <input id="regPhone" required>

      <button type="submit">Register</button>
    </form>
    <p id="registerMessage"></p>
</section>

<section id="login" class="hidden">
    <h2>Customer Login</h2>
```

```
  <form onsubmit="loginUser(event)">
    <label>Email</label>
    <input id="loginEmail" type="email" required>

    <label>Password</label>
    <input id="loginPassword" type="password" required>

    <button type="submit">Login</button>
  </form>
  <p id="loginMessage"></p>
</section>

<section id="booking" class="hidden">
  <h2>Book an Appointment</h2>
  <p id="message"></p>

  <form onsubmit="bookAppointment(event)">
    <label>Select Service</label>
    <select id="service" required onchange="updatePrice()">
      <option value="">Choose Service</option>
      <option value="Haircut and Styling" data-price="500">Haircut and Styling - ₹500</option>
      <option value="Facial Treatment" data-price="900">Facial Treatment - ₹900</option>
      <option value="Manicure and Pedicure" data-price="700">Manicure and Pedicure - ₹700</option>
      <option value="Bridal Makeup" data-price="4500">Bridal Makeup - ₹4500</option>
    </select>

    <label>Choose Stylist</label>
    <select id="stylist" required>
      <option value="Ananya">Ananya</option>
      <option value="Meera">Meera</option>
```

```
    <option value="Priya">Priya</option>
  </select>

  <label>Appointment Date</label>
  <input type="date" id="date" required>

  <label>Appointment Time</label>
  <select id="time" required>
    <option value="09:00">9:00 AM</option>
    <option value="10:00">10:00 AM</option>
    <option value="11:00">11:00 AM</option>
    <option value="12:00">12:00 PM</option>
    <option value="14:00">2:00 PM</option>
    <option value="15:00">3:00 PM</option>
    <option value="16:00">4:00 PM</option>
    <option value="17:00">5:00 PM</option>
  </select>

  <label>Payment Option</label>
  <select id="payment">
    <option>Pay at Parlour</option>
    <option>Full Payment (Demo)</option>
    <option>Partial Deposit (Demo)</option>
  </select>

  <label>Additional Requests</label>
  <textarea id="notes" placeholder="Enter your requests"></textarea>

  <button type="submit">Confirm Booking</button>
</form>
<h3>Reservation Calendar</h3>
```

```
  <p>Select your date above. Already-booked stylist and time combinations cannot be booked again.</p>
</section>

<section id="account" class="hidden">
  <h2>My Appointments</h2>
  <div id="myAppointments"></div>
  <button onclick="logout()">Logout</button>
</section>

<section id="admin" class="hidden">
  <h2>Admin Login</h2>
  <p>Demo email: admin@glow.com</p>
  <p>Demo password: admin123</p>

  <form onsubmit="adminLogin(event)">
    <label>Email</label>
    <input id="adminEmail" type="email" required>

    <label>Password</label>
    <input id="adminPassword" type="password" required>

    <button type="submit">Admin Login</button>
  </form>

  <div id="adminPanel" class="hidden">
    <h2>Manage Appointments</h2>
    <div id="allAppointments"></div>

    <h3>Block an Unavailable Time</h3>
    <form onsubmit="blockTime(event)">
```

```
        <label>Date</label>
        <input type="date" id="blockDate" required>
        <label>Stylist</label>
        <select id="blockStylist">
          <option>Ananya</option>
          <option>Meera</option>
          <option>Priya</option>
        </select>
        <label>Time</label>
        <select id="blockTime">
          <option>09:00</option>
          <option>10:00</option>
          <option>11:00</option>
          <option>12:00</option>
          <option>14:00</option>
          <option>15:00</option>
          <option>16:00</option>
          <option>17:00</option>
        </select>
        <button type="submit">Block Time Slot</button>
      </form>
      <div id="blockedList"></div>
    </div>
</section>

<footer>
  <p>© 2026 Glow Beauty Parlour</p>
</footer>

<script>
let users = JSON.parse(localStorage.getItem("beautyUsers") || "[]");
```

```
let appointments = JSON.parse(localStorage.getItem("beautyAppointments") || "[]");
let blocked = JSON.parse(localStorage.getItem("beautyBlocked") || "[]");
let currentUser = JSON.parse(localStorage.getItem("beautyCurrentUser") || "null");

document.getElementById("date").min = new Date().toISOString().split("T")[0];

function showPage(id) {
  document.querySelectorAll("main section");
  ["home","register","login","booking","account","admin"].forEach(p =>
    document.getElementById(p).classList.add("hidden")
  );
  document.getElementById(id).classList.remove("hidden");
  if(id === "account") showMyAppointments();
  if(id === "admin" && document.getElementById("adminPanel").classList.contains("hidden")) {
    // Admin login is required.
  }
}

function chooseService(name, price) {
  showPage("booking");
  document.getElementById("service").value = name;
  document.getElementById("message").textContent = "Selected service: " + name + " - ₹" +
price;
}

function updatePrice() {
  const option = document.getElementById("service").selectedOptions[0];
  document.getElementById("message").textContent =
    option && option.dataset.price ? "Service price: ₹" + option.dataset.price : "";
}
```

```
function registerUser(event) {
  event.preventDefault();
  const email = document.getElementById("regEmail").value.toLowerCase().trim();
  if(users.some(u => u.email === email)) {
    document.getElementById("registerMessage").textContent = "Email already registered.";
    return;
  }
  const user = {
    name: document.getElementById("regName").value,
    email: email,
    password: document.getElementById("regPassword").value,
    phone: document.getElementById("regPhone").value
  };
  users.push(user);
  localStorage.setItem("beautyUsers", JSON.stringify(users));
  document.getElementById("registerMessage").textContent = "Registration successful. Please login.";
  event.target.reset();
}

function loginUser(event) {
  event.preventDefault();
  const email = document.getElementById("loginEmail").value.toLowerCase().trim();
  const password = document.getElementById("loginPassword").value;
  const user = users.find(u => u.email === email && u.password === password);
  if(!user) {
    document.getElementById("loginMessage").textContent = "Invalid login. Please register first.";
    return;
  }
  currentUser = {name:user.name, email:user.email, phone:user.phone};
  localStorage.setItem("beautyCurrentUser", JSON.stringify(currentUser));
```

```
  document.getElementById("loginMessage").textContent = "Login successful!";
  showPage("account");
}

function bookAppointment(event) {
  event.preventDefault();
  if(!currentUser) {
    alert("Please register and login before booking.");
    showPage("login");
    return;
  }

  const service = document.getElementById("service").value;
  const date = document.getElementById("date").value;
  const time = document.getElementById("time").value;
  const stylist = document.getElementById("stylist").value;

  if(!service) {
    alert("Please select a service.");
    return;
  }
  if(date < new Date().toISOString().split("T")[0]) {
    alert("Please select a future date.");
    return;
  }

  const unavailable = appointments.some(a =>
    a.date === date && a.time === time && a.stylist === stylist && a.status !== "Cancelled"
  ) || blocked.some(b => b.date === date && b.time === time && b.stylist === stylist);

  if(unavailable) {
```

```
    alert("This time slot is unavailable. Choose another time.");
    return;
  }

  const price = Number(document.getElementById("service").selectedOptions[0].dataset.price
|| 0);
  const appointment = {
    id: Date.now(),
    email: currentUser.email,
    name: currentUser.name,
    service: service,
    date: date,
    time: time,
    stylist: stylist,
    price: price,
    payment: document.getElementById("payment").value,
    notes: document.getElementById("notes").value,
    status: "Confirmed"
  };

  appointments.push(appointment);
  localStorage.setItem("beautyAppointments", JSON.stringify(appointments));
  document.getElementById("message").textContent = "Appointment booked successfully!
Booking ID: " + appointment.id;
  event.target.reset();
}

function showMyAppointments() {
  const box = document.getElementById("myAppointments");
  if(!currentUser) {
    box.innerHTML = '<p>Please login to view your appointments.</p>';
    return;
```

```
  }

  const mine = appointments.filter(a => a.email === currentUser.email);
  if(mine.length === 0) {
    box.innerHTML = "<p>No appointments found.</p>";
    return;
  }

  box.innerHTML = mine.map(a => `
    <div class="card">
      <h3>${a.service}</h3>
      <p>Booking ID: ${a.id}</p>
      <p>Date: ${a.date} | Time: ${a.time}</p>
      <p>Stylist: ${a.stylist} | Price: ₹${a.price}</p>
      <p>Status: <b>${a.status}</b></p>
      ${a.status !== "Cancelled" && a.status !== "Completed" ?
      `<button onclick="cancelBooking(${a.id})">Cancel</button>
       <button onclick="rescheduleBooking(${a.id})">Reschedule</button>` : ""}
    </div>
  `).join("");
}

function cancelBooking(id) {
  const a = appointments.find(x => x.id === id);
  if(a && a.email === currentUser.email && confirm("Cancel this appointment?")) {
    a.status = "Cancelled";
    localStorage.setItem("beautyAppointments", JSON.stringify(appointments));
    showMyAppointments();
  }
}
```

```
function rescheduleBooking(id) {
  const a = appointments.find(x => x.id === id);
  if(!a || a.email !== currentUser.email) return;
  if(!confirm("Reschedule by cancelling this booking and creating a new one?")) return;
  a.status = "Cancelled";
  localStorage.setItem("beautyAppointments", JSON.stringify(appointments));
  showPage("booking");
  document.getElementById("service").value = a.service;
  document.getElementById("stylist").value = a.stylist;
  document.getElementById("message").textContent = "Choose a new date and time, then confirm a new booking.";
}

function logout() {
  currentUser = null;
  localStorage.removeItem("beautyCurrentUser");
  showPage("home");
}

function adminLogin(event) {
  event.preventDefault();
  if(document.getElementById("adminEmail").value === "admin@glow.com" &&
     document.getElementById("adminPassword").value === "admin123") {
      document.getElementById("adminPanel").classList.remove("hidden");
      showAdminAppointments();
  } else {
      alert("Incorrect admin email or password.");
  }
}

function showAdminAppointments() {
```

```
  const box = document.getElementById("allAppointments");
  if(appointments.length === 0) {
    box.innerHTML = "<p>No appointments yet.</p>";
  } else {
    box.innerHTML = appointments.map(a => `
      <div class="card">
        <b>${a.name}</b> — ${a.service}
        <p>${a.date} at ${a.time} | Stylist: ${a.stylist}</p>
        <p>Phone: ${a.email} | ₹${a.price}</p>
        <label>Status</label>
        <select id="status${a.id}">
          <option ${a.status==="Confirmed"?"selected":""}>Confirmed</option>
          <option ${a.status==="Completed"?"selected":""}>Completed</option>
          <option ${a.status==="Cancelled"?"selected":""}>Cancelled</option>
        </select>
        <button onclick="updateStatus(${a.id})">Update Status</button>
      </div>
    `).join("");
  }
  document.getElementById("blockedList").innerHTML = "<h3>Unavailable Slots</h3>" +
    blocked.map(b => `<p>${b.date} | ${b.time} | ${b.stylist}</p>`).join("");
}

function updateStatus(id) {
  const a = appointments.find(x => x.id === id);
  if(a) {
    a.status = document.getElementById("status" + id).value;
    localStorage.setItem("beautyAppointments", JSON.stringify(appointments));
    showAdminAppointments();
  }
}
```

```
function blockTime(event) {
  event.preventDefault();
  const b = {
    date: document.getElementById("blockDate").value,
    stylist: document.getElementById("blockStylist").value,
    time: document.getElementById("blockTime").value
  };
  if(blocked.some(x => x.date === b.date && x.time === b.time && x.stylist === b.stylist)) {
    alert("This slot is already blocked.");
    return;
  }
  blocked.push(b);
  localStorage.setItem("beautyBlocked", JSON.stringify(blocked));
  showAdminAppointments();
  alert("Time slot blocked successfully.");
}

if(currentUser) {
  localStorage.setItem("beautyCurrentUser", JSON.stringify(currentUser));
}
</script>
</body>
</html>
```