1. Create Resource Group

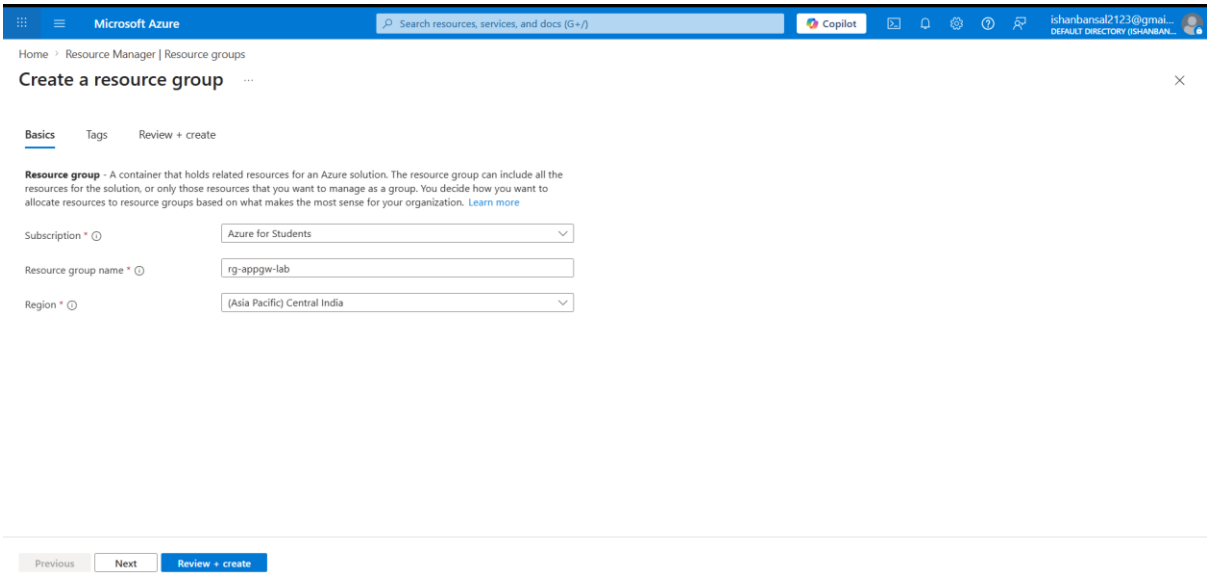

2. Create Virtual Network

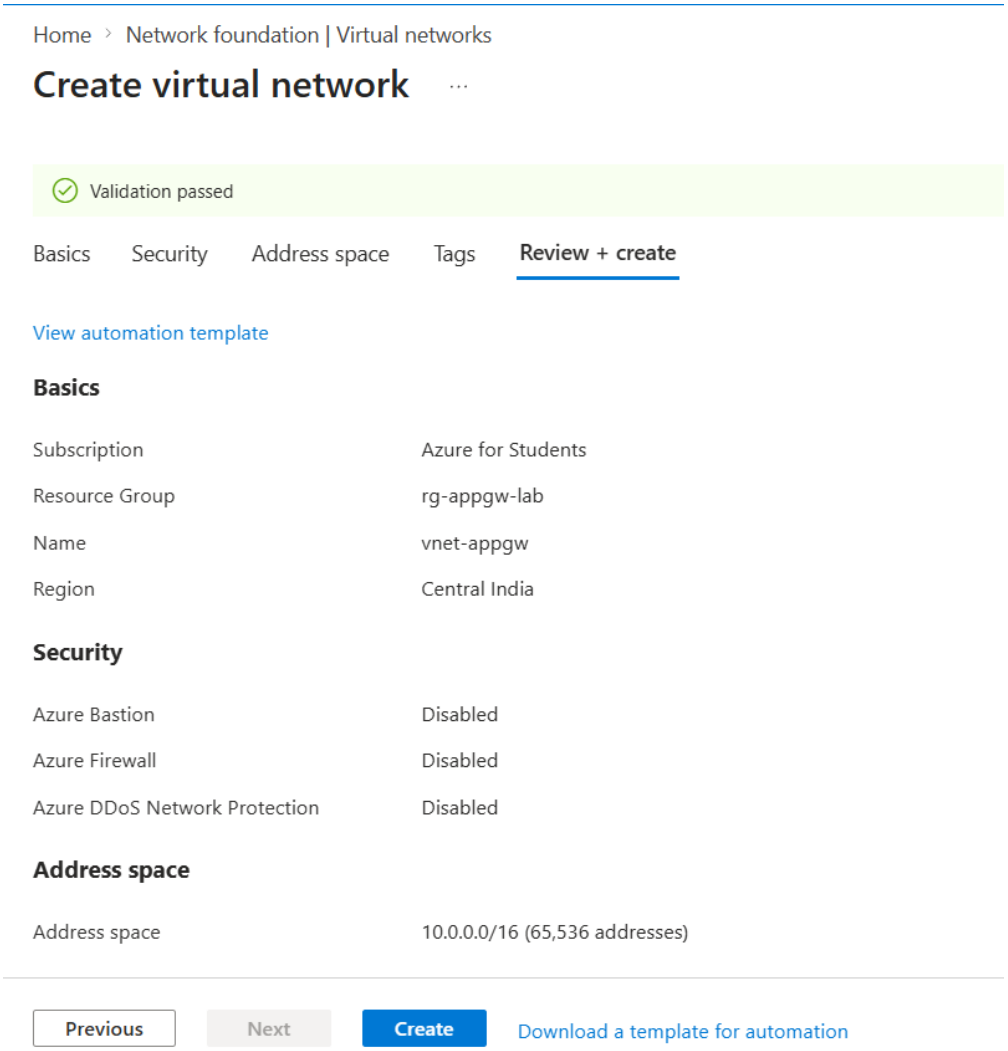

3. Create VMs

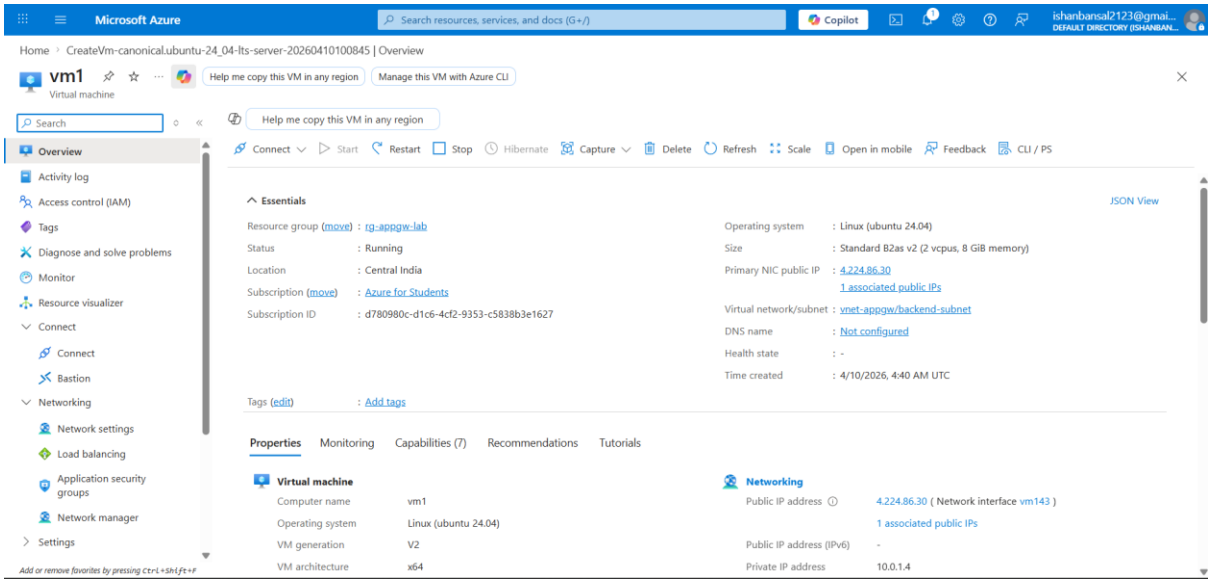

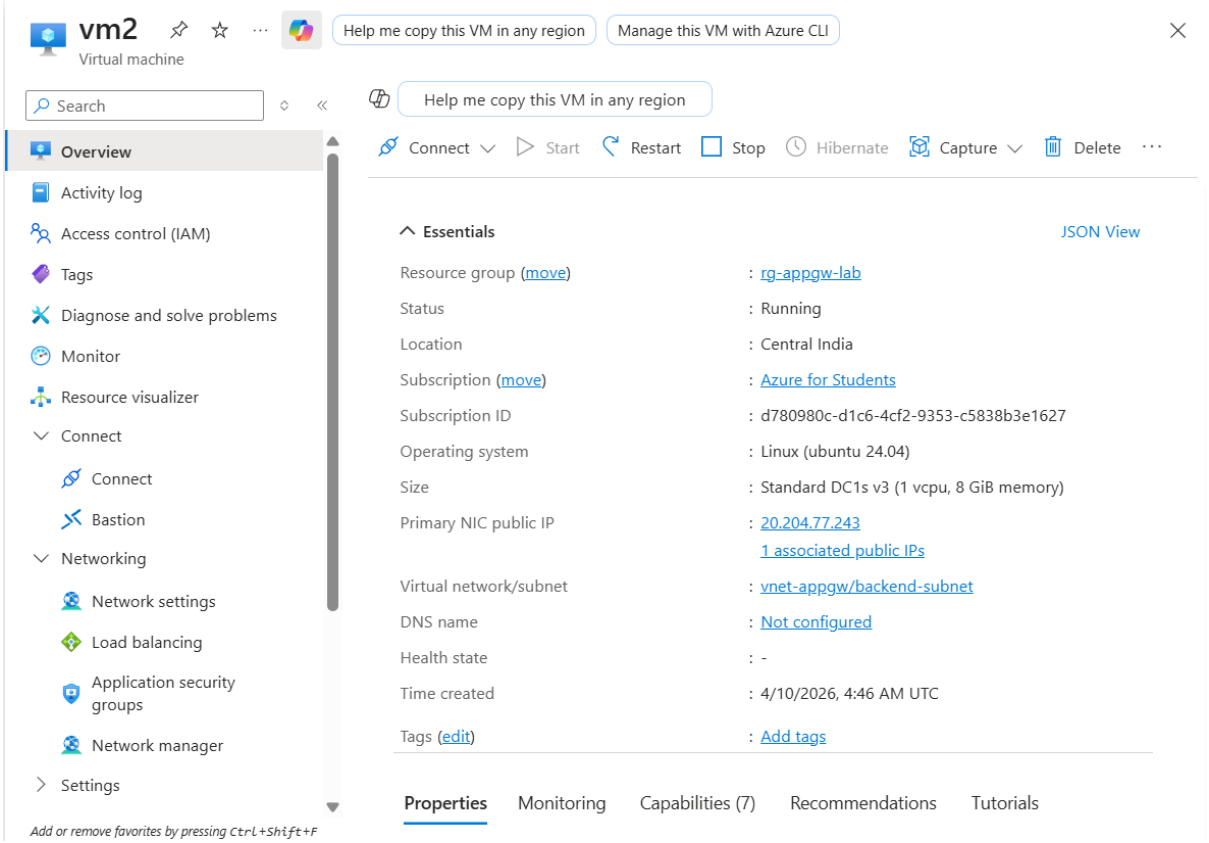


```
azureuser@vm1:~$ echo "Hello From VM1" | sudo tee /var/www/html/index.html
Hello From VM1
azureuser@vm1:~$
```

```
No VM guests are running outdated hypervisor (qemu) binaries on this host.
azureuser@vm2:~$ echo "Hello From VM2" | sudo tee /var/www/html/index.html
Hello From VM2
azureuser@vm2:~$
```

4. Application Gateway

Create application gateway

Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the application gateway.

creating application gateway

Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription *	Azure for Students
Resource group *	rg-appgw-lab Create new

Instance details

Application gateway name *	appgw-demo
Region *	Central India
Tier	Standard V2
Enable autoscaling	Yes / No
Minimum instance count *	1
Maximum instance count	5

Previous | Next : Frontends >

Create application gateway

Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the application gateway.

Basics | Frontends | Backends | Configuration | Tags | Review + create

Traffic enters the application gateway via its frontend IP address(es). An application gateway can use a public IP address, private IP address, or one of each type.

Frontend IP address type	Public / Private / Both
Public IPv4 address *	(New) appgw-pip Add new

Create application gateway

Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the application gateway.

Basics | Frontends | Backends | Configuration | Tags | Review + create

A backend pool is a collection of resources to which your application gateway can send traffic. A backend pool can contain virtual machines, virtual machine scale sets, app services, IP addresses, or fully qualified domain names (FQDN).

Add a backend pool

Backend pool	Targets	
backend-pool	2 targets	•••
	vm143	•••
	vm2710	•••

Manage Backend settings

← Save changes

Backend settings name: http-setting

Backend protocol: (•) HTTP ( ) HTTPS

Backend port *: 80 ✓

Additional backend settings

Cookie-based affinity ⓘ: ( ) Enable (•) Disable

Connection draining ⓘ: ( ) Enable (•) Disable

Dedicated backend connection ⓘ: ( ) Enable (•) Disable

Request time-out (seconds) * ⓘ: 20

Override backend path ⓘ:

Override hostname

By default, the Application Gateway sends the same HTTP host header to the backend as it receives from the client. If your backend application/service requires a specific host value, you can override it using this setting.

Override with new host name: Yes | No

Save | Cancel

Create application gateway ...

✓ Validation passed

✓ Basics ✓ Frontends ✓ Backends ✓ Configuration ✓ Tags 6 Review + create

Basics

Subscription	Azure for Students
Resource group	rg-appgw-lab
Name	appgw-demo
Region	Central India
Tier	Standard_v2
Enable autoscaling	Enabled
Minimum instance count	1
Maximum instance count	5
Availability zone	Zones 1, 2, 3
HTTP2	Enabled
FIPS (Federal Information Processing Standard) mode 140-2	Disabled
Virtual network	vnet-appgw
Subnet	appgw-subnet (10.0.0.0/24)

Create | Previous | Next | Download a template for automation
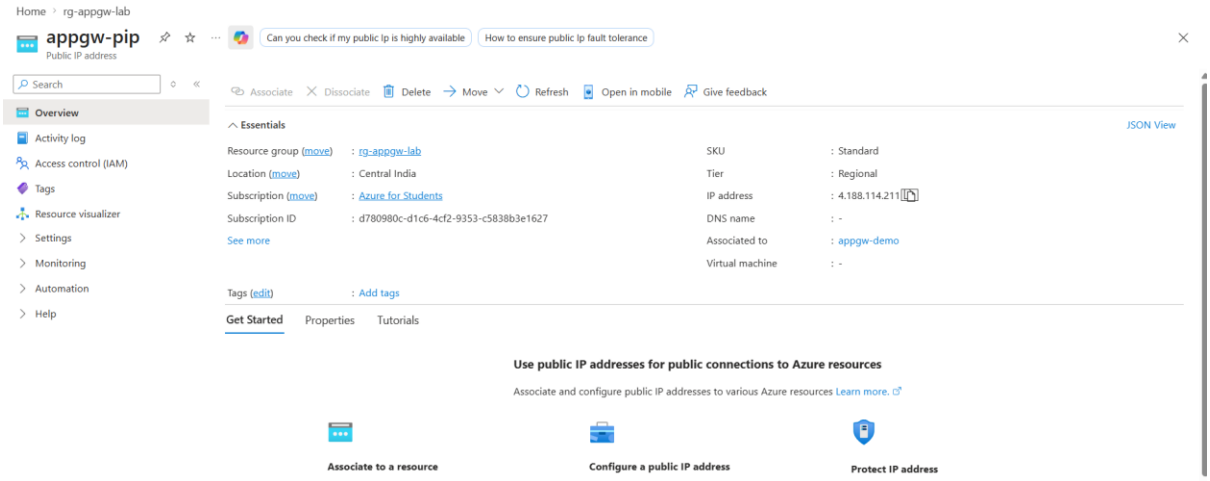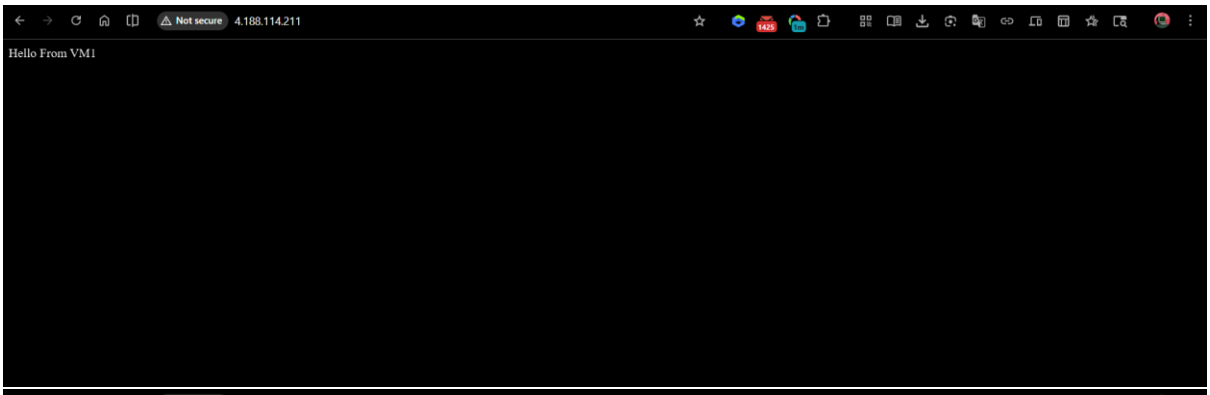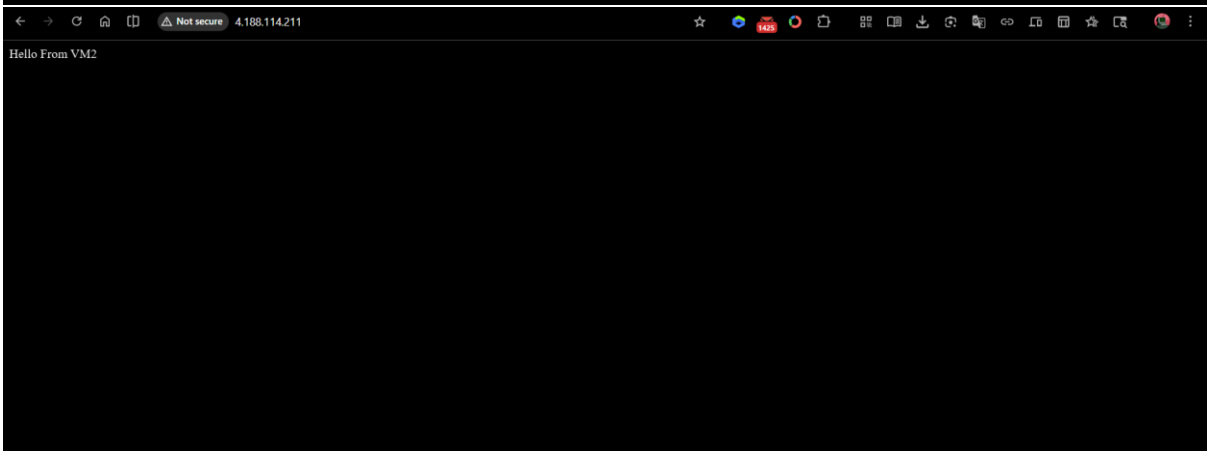
5. Testing Application Gateway