


Cascading Style Sheets

HTML Vs CSS

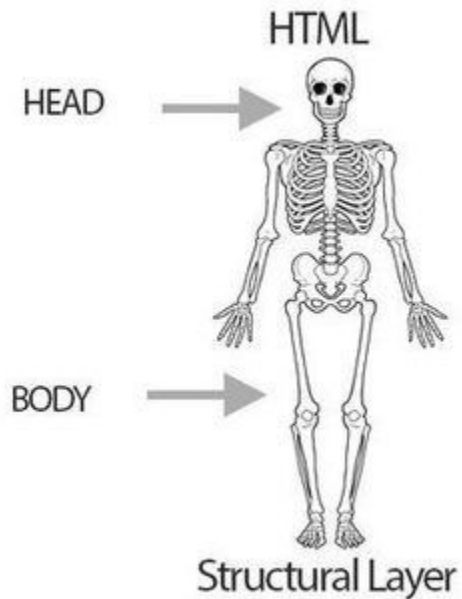

History


- CSS was first proposed by Håkon Wium Lie on 10 October 1994. At the time, Lie was working with [Tim Berners-Lee](#) at [CERN](#) (The European Organization for Nuclear Research, known as **CERN**,)



What is CSS?

- CSS stands for Cascading Style Sheets.
- Its describes how HTML elements are to be displayed on screen, paper, or in other media.
- By using CSS, its saves a lot of work. It can control the layout of multiple web pages all at once.
- External stylesheets are stored in CSS files.

CSS Syntax

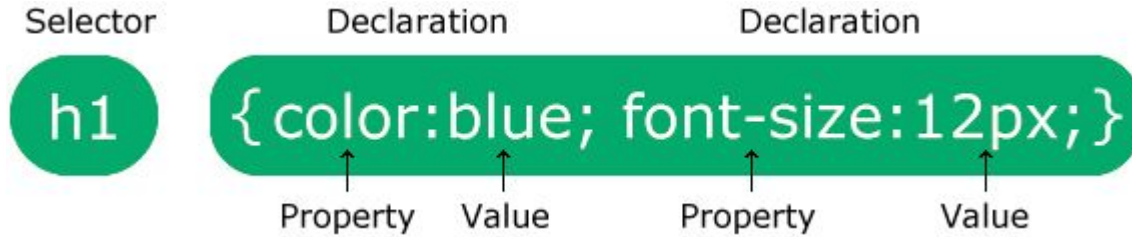

CSS element Selector

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<style>
```

```
p {
```

```
  color: red;
```

```
  text-align: center;
```

```
}
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<p>Hello World!</p>
```

```
<p>These paragraphs are styled with CSS.</p>
```

```
</body>
```

```
</html>
```

Hello World!

These paragraphs are styled with CSS.

CSS id Selector

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<style>
```

```
#para1 {
```

```
  text-align: center;
```

```
  color: red;
```

```
}
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<p id="para1">Hello World!</p>
```

```
<p>This paragraph is not affected by the style.</p>
```

```
</body>
```

```
</html>
```

Hello World!

This paragraph is not affected by the style.

CSS class Selector

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<style>
```

```
.center {
```

```
  text-align: center;
```

```
  color: red;
```

```
}
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<h1 class="center">Red and center-aligned heading</h1>
```

```
<p class="center">Red and center-aligned paragraph.</p>
```

```
</body>
```

```
</html>
```

Red and center-aligned heading

Red and center-aligned paragraph.

CSS Universal Selector

```
<!DOCTYPE html>
<html>
<head>
<style>
* {
  text-align: center;
  color: blue;
}
</style>
</head>
<body>
```

```
<h1>Hello world!</h1>
```

```
<p>Every element on the page will be affected by the style.</p>
```

```
<p id="para1">Me too!</p>
```

```
<p>And me!</p>
```

```
</body>
```

```
</html>
```

Hello world!

Every element on the page will be affected by the style.

Me too!

And me!

CSS Grouping Selector

```
<!DOCTYPE html>
<html>
<head>
<style>
h1, h2, p {
  text-align: center;
  color: red;
}
</style>
</head>
<body>
```

```
<h1>Hello World!</h1>
<h2>Smaller heading!</h2>
<p>This is a paragraph.</p>
```

```
</body>
</html>
```

```
h1 {
  text-align: center;
  color: red;
}
```

```
h2 {
  text-align: center;
  color: red;
}
```

```
p {
  text-align: center;
  color: red;
}
```

Hello World!

Smaller heading!

This is a paragraph.

Three Ways to Insert CSS

- **External CSS**
- **Internal CSS**
- **Inline CSS**

External CSS

"mystyle.css"

```
body {  
  background-color: lightblue;  
}  
  
h1 {  
  color: navy;  
  margin-left: 20px;  
}
```

```
<!DOCTYPE html>  
<html>  
  <head>  
    <link rel="stylesheet"  
    href="mystyle.css">  
  </head>  
  <body>  
  
    <h1>This is a heading</h1>  
    <p>This is a paragraph.</p>  
  
  </body>  
</html>
```

This is a heading

This is a paragraph.

Internal CSS

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-color: linen;

h1 {
  color: maroon;
  margin-left: 40px;
}
</style>
</head>
<body>

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.

Inline CSS

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<h1 style="color:blue;text-align:center;">This is a heading</h1>
```

```
<p style="color:red;">This is a paragraph.</p>
```

```
</body>
```

```
</html>
```

This is a heading

This is a paragraph.

CSS Comments

```
/* This is a single-line comment */
```

```
p {  
  color: red;  
}
```

```
/* This is  
a multi-line  
comment */
```

```
p {  
  color: red;  
}
```

CSS Background Color

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<h1 style="background-color:DodgerBlue;">Hello  
World</h1>
```

```
<p style="background-color:Tomato;">  
Welcome to CSS  
</p>
```

```
</body>
```

```
</html>
```

Hello World

Welcome to CSS

CSS Text Color

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<h3 style="color:Tomato;">Hello World</h3>
```

```
<p style="color:DodgerBlue;">Welcome to Clarent Institute</p>
```

```
<p style="color:MediumSeaGreen;">Learn about CSS Session </p>
```

```
</body>
```

```
</html>
```

Hello World

Welcome to Clarent Institute

Learn about CSS Session

CSS Border Color

```
<!DOCTYPE html>
```

```
<html>
```

```
<body>
```

```
<h1 style="border: 2px solid Tomato;">Hello World</h1>
```

```
<h1 style="border: 2px solid DodgerBlue;">Hello World</h1>
```

```
<h1 style="border: 2px solid Violet;">Hello World</h1>
```

```
</body>
```

```
</html>
```

Hello World

Hello World

Hello World

CSS Links

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<style>
```

```
a {
```

```
  color: hotpink;
```

```
}
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<h2>CSS Links</h2>
```

```
<p><b><a href="https://www.clarent.institute/" target="_blank">This is a link</a></b></p>
```

```
</body>
```

```
</html>
```

CSS Links

[This is a link](https://www.clarent.institute/)

CSS Lists

```
<!DOCTYPE html>
<html>
<head>
<style>
ul.a {
  list-style-type: circle;
}

ul.b {
  list-style-type: square;
}

ol.c {
  list-style-type: upper-roman;
}

ol.d {
  list-style-type: lower-alpha;
}
</style>
</head>
```

```
<body>

<h2>Lists</h2>
<p>Example of unordered lists:</p>
<ul class="a">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ul>

<ul class="b">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ul>

<p>Example of ordered lists:</p>
<ol class="c">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ol>

<ol class="d">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ol>

</body>
</html>
```

Lists

Example of unordered lists:

- Coffee
- Tea
- Coca Cola

- Coffee
- Tea
- Coca Cola

Example of ordered lists:

- I. Coffee
- II. Tea
- III. Coca Cola

- a. Coffee
- b. Tea
- c. Coca Cola

CSS Tables

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
  border: 1px solid black;
}
```

```
table {
  width: 100%;
  border-collapse: collapse;
}
</style>
</head>
```

```
<body>
```

```
<h2>Let the borders collapse</h2>
```

```
<table>
  <tr>
    <th>Firstname</th>
    <th>Lastname</th>
  </tr>
  <tr>
    <td>Peter</td>
    <td>Griffin</td>
  </tr>
  <tr>
    <td>Lois</td>
    <td>Griffin</td>
  </tr>
</table>
```

```
</body>
</html>
```

Let the borders collapse

Firstname	Lastname
Peter	Griffin
Lois	Griffin

Difference between CSS and CSS3

Features	CSS	CSS3
Compatibility	The primary purpose of CSS was to focus on formatting features.	When CSS3 code is written in CSS, it is invalid. CSS3 makes the Web Pages more attractive. It takes less time to create a page.
Design	CSS does not support responsive design.	CSS3 is the latest version and supports the responsive design.
Modules	CSS is not divided into modules.	CSS3 could split into modules.
Animation	CSS cannot produce 3D animation and transformation.	In CSS3, the animation and 3D transformations are used.
Text Effects and Text Animations	In CSS, animations are written in JavaScript and JQuery . It had no special effects such as shadowing text, text animation , etc.	In CSS3, the developer adds text-shadows to make it easy and effective. It changes the size and color of the text.
Capacity	CSS is slower.	CSS3 is faster than CSS.
Color	CSS provides unique color schemas and standard color.	CSS3 supports HSL RGBA, HSLA and the gradient colors.

The background of the slide is a solid blue color. Overlaid on this background are several light blue, semi-transparent rectangles of various sizes and orientations, creating a layered, geometric effect. The rectangles are positioned in the corners and along the edges, leaving the center area clear for the text.

Thank you