


Action Results

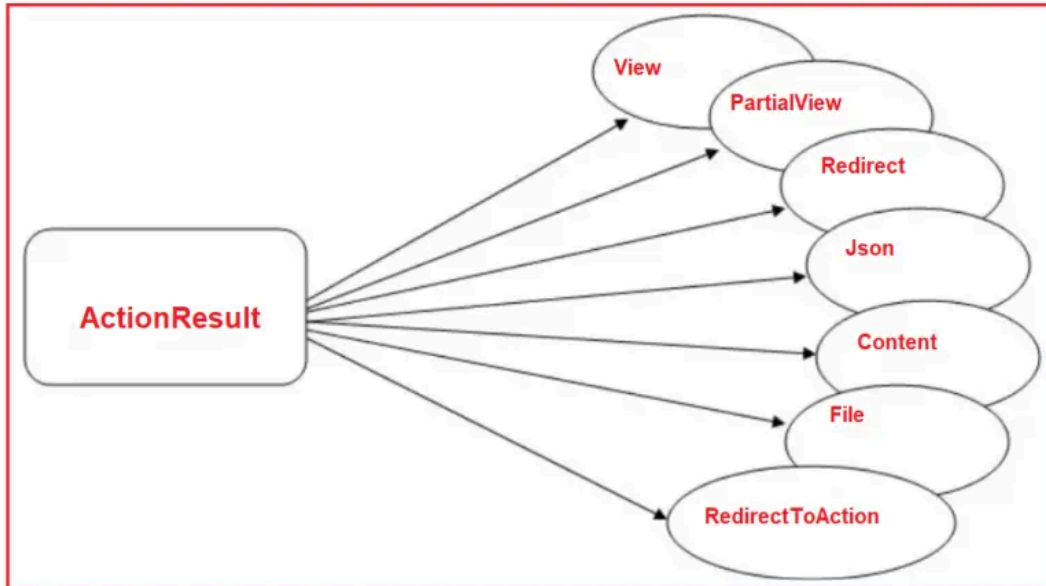

List of Action Results

1. View Results
 - ViewResult
 - PartialViewResult
2. JSON and Data Results
 - JsonResult
 - ObjectResult
3. File Results
 - FileResult (Base Class)
 - FileContentResult
 - FileStreamResult
 - VirtualFileResult
 - PhysicalFileResult
4. Status Results
 - StatusCodeResult
 - BadRequestResult / BadRequestObjectResult
 - NotFoundResult / NotFoundObjectResult
 - OkResult / OkObjectResult
 - NoContentResult
 - UnauthorizedResult
 - ForbidResult
 - ConflictResult
5. Redirect Results
 - RedirectResult
 - RedirectToActionResult
 - RedirectToRouteResult
6. Content Results
 - ContentResult
7. Empty Result
 - EmptyResult
8. Challenge and Sign-Out Results
 - ChallengeResult
 - SignOutResult
9. Custom Results
 - Implemented via `ActionResult`

Details with Examples

1. View Results

ViewResult

Returns a view with a model.

```
public IActionResult Index()
{
    return View();
}
```

Output:

Renders the **Index.cshtml** view.

PartialViewResult

Returns a partial view.

```
public IActionResult LoadPartial()
{
    return PartialView("_MyPartialView");
}
```

Output:

Renders **_MyPartialView.cshtml** without a full layout.

2. JSON and Data Results

JsonResult

Returns data as JSON.

```
public IActionResult GetJsonData()
{
    var data = new { Name = "John", Age = 30 };
    return Json(data);
}
```

Output:

```
{
  "Name": "John",
  "Age": 30
}
```

ObjectResult

Returns an object with a specific status code.

```
public IActionResult GetData()
{
    var data = new { Message = "Success", Code = 200 };
    return new ObjectResult(data) { StatusCode = 200 };
}
```

Output:
HTTP 200

```
{
  "Message": "Success",
  "Code": 200
}
```

3. File Results

FileContentResult

Returns a file from a byte array.

```
public IActionResult DownloadFile()
{
    byte[] fileBytes =
System.IO.File.ReadAllBytes("wwwroot/sample.pdf");
    return File(fileBytes, "application/pdf", "download.pdf");
}
```

Output:

Prompts file download.

FileStreamResult

Returns a file from a stream.

```
public IActionResult GetFileStream()
{
    var stream = new FileStream("wwwroot/sample.pdf", FileMode.Open);
    return File(stream, "application/pdf", "sample.pdf");
}
```

Output:

Downloads `sample.pdf`.

VirtualFileResult

Returns a file from a virtual path.

```
public IActionResult GetVirtualFile()
{
    return File("wwwroot/sample.pdf", "application/pdf",
"sample.pdf");
}
```

Output:

Downloads `sample.pdf`.

PhysicalFileResult

Returns a file from an absolute path.

```
public IActionResult GetPhysicalFile()
{
    return PhysicalFile("C:\\files\\document.pdf", "application/pdf",
"document.pdf");
}
```

Output:

Downloads `document.pdf`.

4. Status Results

StatusCodeResult

Returns a specific HTTP status.

```
public IActionResult CustomStatus()
{
    return StatusCode(418);
}
```

Output:

HTTP 418 (I'm a teapot)

BadRequestResult / BadRequestObjectResult

Returns a `400 Bad Request`.

```
public IActionResult GetBadRequest()
{
    return BadRequest("Invalid request");
}
```

Output:

HTTP 400

`"Invalid request"`

NotFoundResult / NotFoundObjectResult

Returns a 404 Not Found.

```
public IActionResult GetNotFound()
{
    return NotFound("Item not found");
}
```

Output:
HTTP 404

"Item not found"

OkResult / OkObjectResult

Returns a 200 OK.

```
public IActionResult GetOkResponse()
{
    return Ok(new { Message = "Success" });
}
```

Output:
HTTP 200

```
{
  "Message": "Success"
}
```

NoContentResult

Returns a 204 No Content.

```
public IActionResult GetNoContent()
{
    return NoContent();
}
```

Output:
HTTP 204 (No Content Response)

UnauthorizedResult

Returns a 401 Unauthorized.

```
public IActionResult GetUnauthorized()
{
    return Unauthorized();
}
```

Output:
HTTP 401

ForbiddenResult

Returns a 403 Forbidden.

```
public IActionResult GetForbidden()
{
    return Forbid();
}
```

Output:
HTTP 403

ConflictResult

Returns a 409 Conflict.

```
public IActionResult GetConflict()
{
    return Conflict("Resource already exists");
}
```

Output:
HTTP 409

"Resource already exists"

5. Redirect Results

RedirectResult

Redirects to a URL.

```
public IActionResult RedirectToGoogle()
{
    return Redirect("https://www.google.com");
}
```

Output:

Redirects to Google.

RedirectToActionResult

Redirects to another action.

```
public IActionResult GoToHome()
{
    return RedirectToAction("Index", "Home");
}
```

Output:

Redirects to [Index](#) action of [HomeController](#).

RedirectToRouteResult

Redirects using routing.

```
public IActionResult GoToPrivacy()
{
    return RedirectToRoute(new { controller = "Home", action =
    "Privacy" });
}
```

Output:

Redirects to [Privacy](#) action of [HomeController](#).

6. Content Results

ContentResult

Returns raw content.

```
public IActionResult GetText()
{
    return Content("Hello, world!", "text/plain");
}
```

Output:

HTTP 200

Plain text response: Hello, world!

7. Empty Result

EmptyResult

Returns no response.

```
public IActionResult GetEmpty()
{
    return new EmptyResult();
}
```

Output:

No response body.

8. Challenge and Sign-Out Results

ChallengeResult

Triggers authentication challenge.

```
public IActionResult RequireLogin()
{
    return Challenge();
}
```

Output:

Redirects to the login page if not authenticated.

SignInResult

Logs the user out.

```
public IActionResult Logout()
{
    return SignIn();
}
```

Output:

Logs out the user.

9. Custom Results

Implemented via **IActionResult**

Custom response based on business logic.

```
public IActionResult CustomResponse()
{
    if (DateTime.Now.Hour < 12)
        return Ok("Good Morning");
    else
        return BadRequest("Too late!");
}
```

Output:

- **Before 12 PM** → HTTP 200: "Good Morning"
- **After 12 PM** → HTTP 400: "Too late!"