


Section 3 Clusters


2022-11-04

```
results <- data.frame(location = c("Negative Control", "Off-Campus Fountain",  
                                "On-Campus Fountain", "Off-Campus Sink",  
                                "On-Campus Sink", "Off-Campus Restaurant",  
                                "On-Campus Restaurant", "Positive Control"),  
                      total_cfu_count_rep1 = c(0.37, 30, 0.35, 3.5,  
                                                0.39, 0.30, 16.8, 30),  
                      total_cfu_count_rep2 = c(0.50, 30, 0.37, 3.2,  
                                                0.43, 0.33, 18.9, 30),  
                      total_cfu_count_rep3 = c(0.70, 30, 0.30, 6.2,  
                                                0.67, 0.31, 15.1, 30))  
  
results$total_cfu_mean <- rowMeans(results[,2:4], na.rm = TRUE)  
results <- results %>%  
  mutate(total_cfu_sd = rowSds(as.matrix(.[c("total_cfu_count_rep1",  
                                             "total_cfu_count_rep2",  
                                             "total_cfu_count_rep3"])))) %>%  
  mutate(total_cfu_se = total_cfu_sd/sqrt(3))  
  
results <- results %>%  
  mutate(campus = case_when(  
    str_detect(location, "^On-Campus") ~ "On-Campus",  
    str_detect(location, "^Off-Campus") ~ "Off-Campus",  
    str_detect(location, "Control") ~ "Control")) %>%  
  mutate(source = case_when(  
    str_detect(location, "Fountain") ~ "Fountain",  
    str_detect(location, "Sink") ~ "Sink",  
    str_detect(location, "Restaurant") ~ "Restaurant",  
    str_detect(location, "Control") ~ "Control"))  
  
t.score <- qt(0.025, df = 2, lower.tail = F)  
  
results %>%  
  ggplot() +  
  geom_bar(aes(x = location, y = total_cfu_mean),  
           stat = "identity", fill = "blue") +  
  geom_point(aes(x = location, y = total_cfu_count_rep1)) +  
  geom_point(aes(x = location, y = total_cfu_count_rep2)) +  
  geom_point(aes(x = location, y = total_cfu_count_rep3)) +  
  geom_errorbar(aes(x = location,  
                    ymin = total_cfu_mean - (t.score * total_cfu_se),  
                    ymax = total_cfu_mean + (t.score * total_cfu_se),  
                    width = 0.25)) +  
  theme(axis.text.x = element_text(angle = 35, hjust = 1)) +  
  labs(title = "Total Colony Forming Units Across Water Sources",  
       x = "Location", y = "Total CFU Count/ (Dilution Factor x 100 mL)")
```

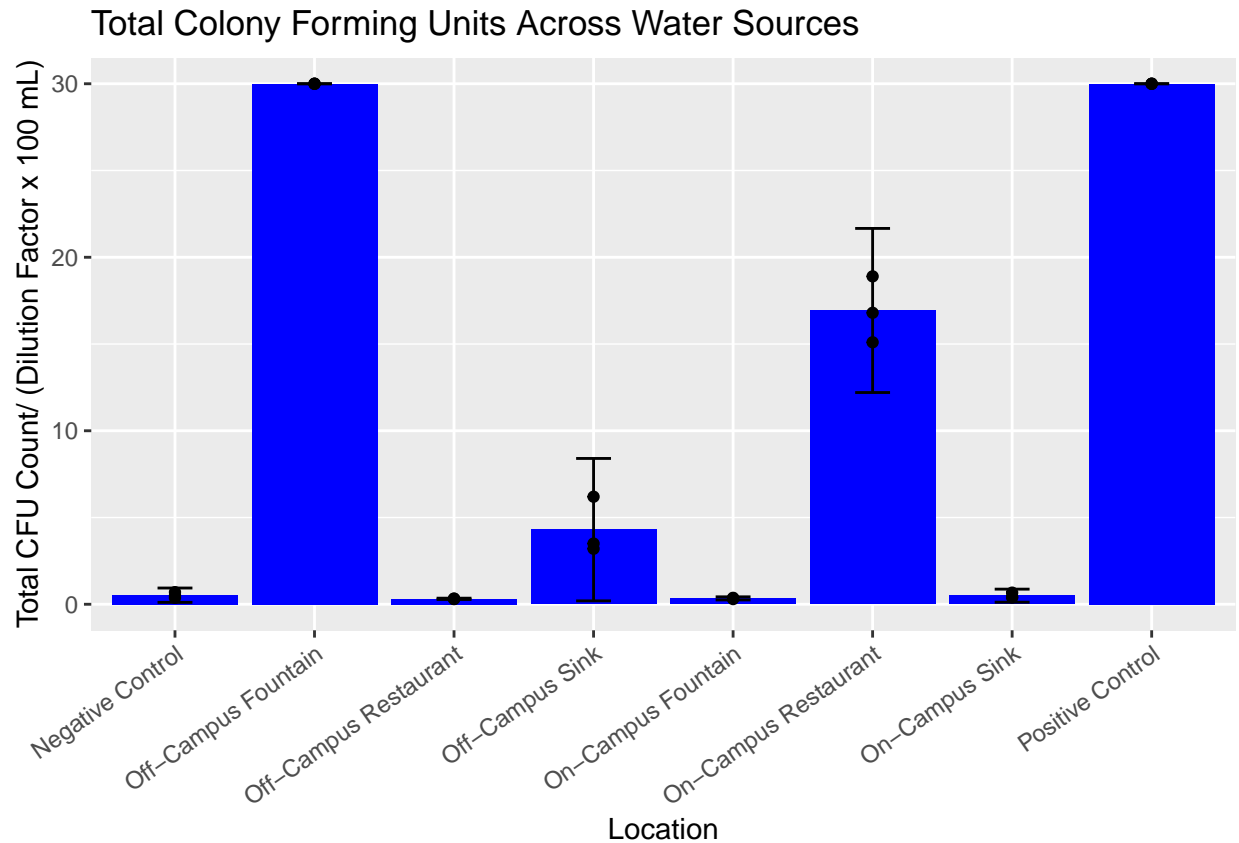

```
results %>%
  filter-campus != "Control") %>%
  group_by-campus) %>%
  summarise-campus_mean_cfu = mean(total_cfu_mean)) %>%
  ggplot(aes(x = campus, y = campus_mean_cfu, fill = source)) +
  geom_bar(position = "stack", stat="identity", fill = "blue") +
  theme(axis.title.x = element_blank()) +
  labs(title = "Off-Campus vs On-Campus Mean Total Colony Forming Units",
        y = "Total CFU Count/ (Dilution Factor x 100 mL)")
```

Off-Campus vs On-Campus Mean Total Colony Forming Units

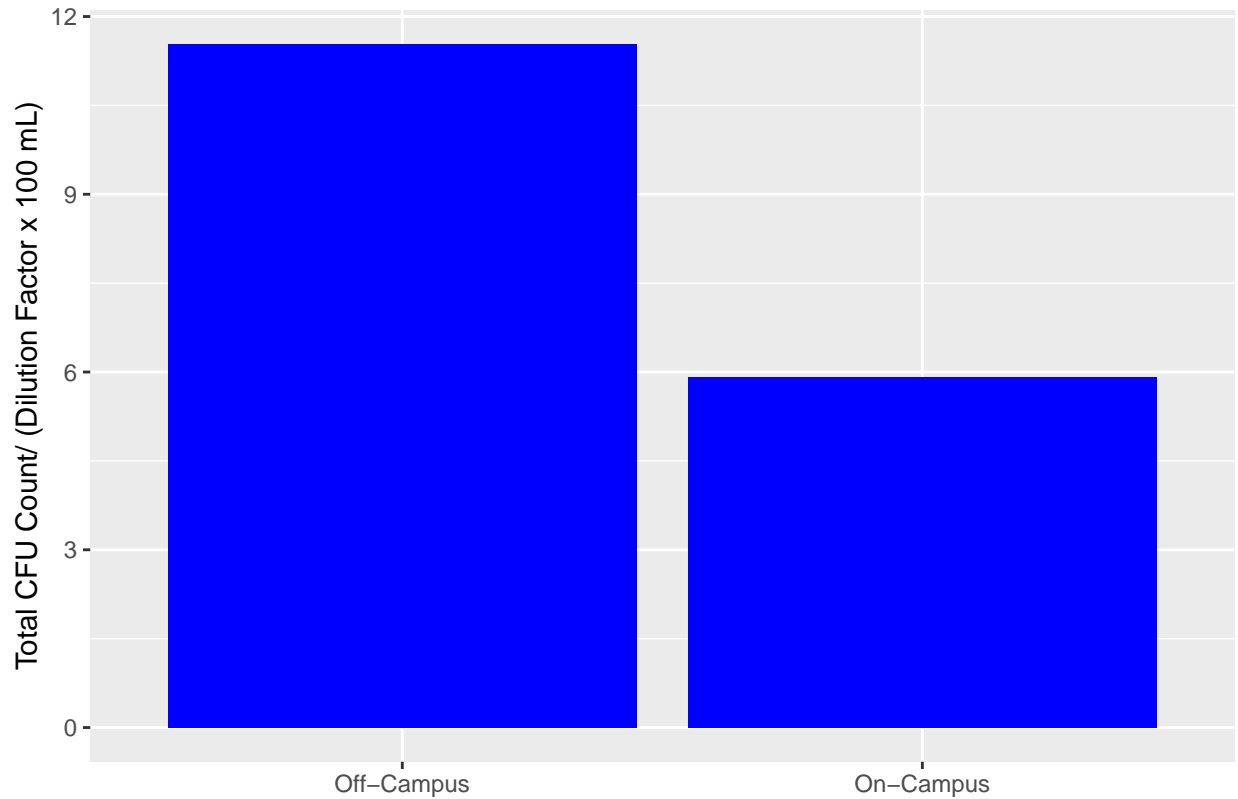


```
results %>%
  ungroup()
```

```
##           location total_cfu_count_rep1 total_cfu_count_rep2
## 1   Negative Control                0.37                0.50
## 2   Off-Campus Fountain             30.00             30.00
## 3   On-Campus Fountain              0.35              0.37
## 4   Off-Campus Sink                 3.50              3.20
## 5   On-Campus Sink                  0.39              0.43
## 6   Off-Campus Restaurant            0.30              0.33
## 7   On-Campus Restaurant            16.80             18.90
## 8   Positive Control                30.00             30.00
##  total_cfu_count_rep3 total_cfu_mean total_cfu_sd total_cfu_se campus
## 1                0.70      0.5233333  0.16623277  0.095974534   Control
## 2               30.00     30.0000000  0.00000000  0.000000000 Off-Campus
## 3                0.30      0.3400000  0.03605551  0.020816660 On-Campus
## 4                6.20      4.3000000  1.65227116  0.953939201 Off-Campus
## 5                0.67      0.4966667  0.15143756  0.087432514 On-Campus
## 6                0.31      0.3133333  0.01527525  0.008819171 Off-Campus
## 7               15.10     16.9333333  1.90350554  1.098989435 On-Campus
## 8               30.00     30.0000000  0.00000000  0.000000000   Control
##           source
## 1       Control
## 2       Fountain
## 3       Fountain
## 4         Sink
```

```
## 5      Sink
## 6 Restaurant
## 7 Restaurant
## 8      Control
```

```
results %>%
  filter(campus != "Control") %>%
  ggplot(aes(x= source, y=total_cfu_mean, fill = campus)) +
  geom_bar(position = "stack", stat = "identity") +
  labs(title = "Source Types and Campus Colony Forming Units",
       x = "Source Type", y = "Total CFU Count/ (Dilution Factor x 100 mL)",
       fill = "Campus")
```

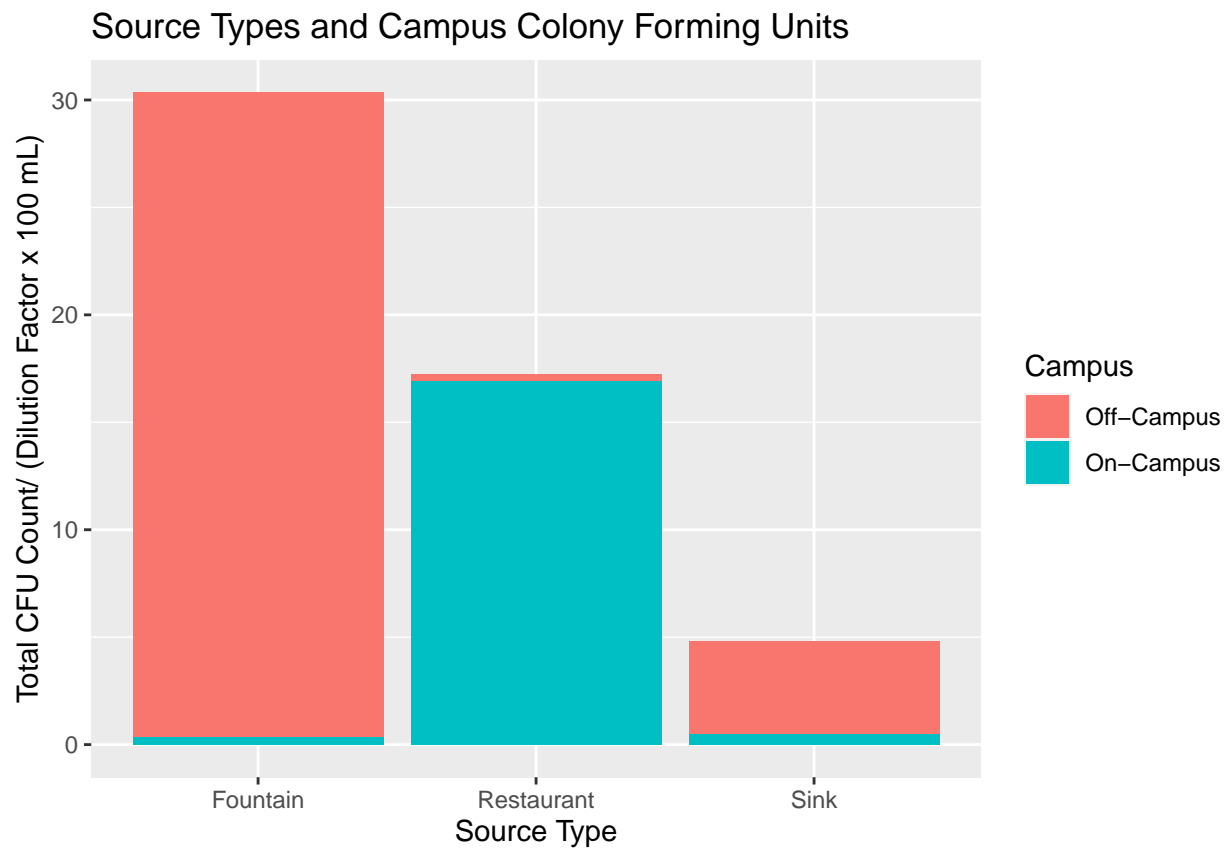

```
analysis_df <- data.frame(campus = c("On-Campus", "On-Campus", "On-Campus",
                                       "On-Campus", "On-Campus", "On-Campus",
                                       "On-Campus", "On-Campus", "On-Campus",
                                       "Off-Campus", "Off-Campus", "Off-Campus",
                                       "Off-Campus", "Off-Campus", "Off-Campus",
                                       "Off-Campus", "Off-Campus", "Off-Campus"),
                           source = c("Fountain", "Fountain", "Fountain",
                                       "Sink", "Sink", "Sink",
                                       "Restaurant", "Restaurant", "Restaurant",
                                       "Fountain", "Fountain", "Fountain",
                                       "Sink", "Sink", "Sink",
                                       "Restaurant", "Restaurant", "Restaurant"),
                           location = c("On-Campus Fountain",
                                         "On-Campus Fountain",
```

```

"On-Campus Fountain",
"On-Campus Sink",
"On-Campus Sink",
"On-Campus Sink",
"On-Campus Restaurant",
"On-Campus Restaurant",
"On-Campus Restaurant",
"Off-Campus Fountain",
"Off-Campus Fountain",
"Off-Campus Fountain",
"Off-Campus Sink",
"Off-Campus Sink",
"Off-Campus Sink",
"Off-Campus Restaurant",
"Off-Campus Restaurant",
"Off-Campus Restaurant"),
total_cfu_count = c(0.35, 0.37, 0.30,
                    0.39, 0.43, 0.67,
                    16.80, 18.90, 15.10,
                    30, 30, 30,
                    3.50, 3.20, 6.20,
                    0.30, 0.33, 0.31))

## ANOVA for location
summary(aov(total_cfu_count~location, data = analysis_df))

##           Df Sum Sq Mean Sq F value    Pr(>F)
## location      5 2245.1   449.0    422.4 4.73e-13 ***
## Residuals    12   12.8     1.1
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

## With  $p < 4.73 \times 10^{-13}$ , we reject the null hypothesis that the means of all groups are the same

## Step-down pairwise tests to find significant pairs
pairs <- pairwise.t.test(analysis_df$total_cfu_count, analysis_df$location, p.adj = "bonferroni")
broom::tidy(pairs) %>%
  arrange(p.value)

## # A tibble: 15 x 3
##   group1          group2          p.value
##   <chr>          <chr>          <dbl>
## 1 Off-Campus Restaurant Off-Campus Fountain 2.59e-12
## 2 On-Campus Fountain   Off-Campus Fountain 2.62e-12
## 3 On-Campus Sink       Off-Campus Fountain 2.79e-12
## 4 Off-Campus Sink      Off-Campus Fountain 1.44e-11
## 5 On-Campus Restaurant Off-Campus Restaurant 2.43e- 9
## 6 On-Campus Restaurant On-Campus Fountain 2.48e- 9
## 7 On-Campus Sink       On-Campus Restaurant 2.77e- 9
## 8 On-Campus Restaurant Off-Campus Fountain 3.94e- 8
## 9 On-Campus Restaurant Off-Campus Sink     5.80e- 8
## 10 Off-Campus Sink      Off-Campus Restaurant 7.26e- 3
## 11 On-Campus Fountain   Off-Campus Sink     7.66e- 3
## 12 On-Campus Sink       Off-Campus Sink     1.06e- 2

```

## 13	On-Campus Fountain	Off-Campus Restaurant	1	e+ 0
## 14	On-Campus Sink	Off-Campus Restaurant	1	e+ 0
## 15	On-Campus Sink	On-Campus Fountain	1	e+ 0