


Workshop Lab Preparation Guide

Secure Agentic Development:
Workstation to CI/CD



Please complete this preparation before workshop day.

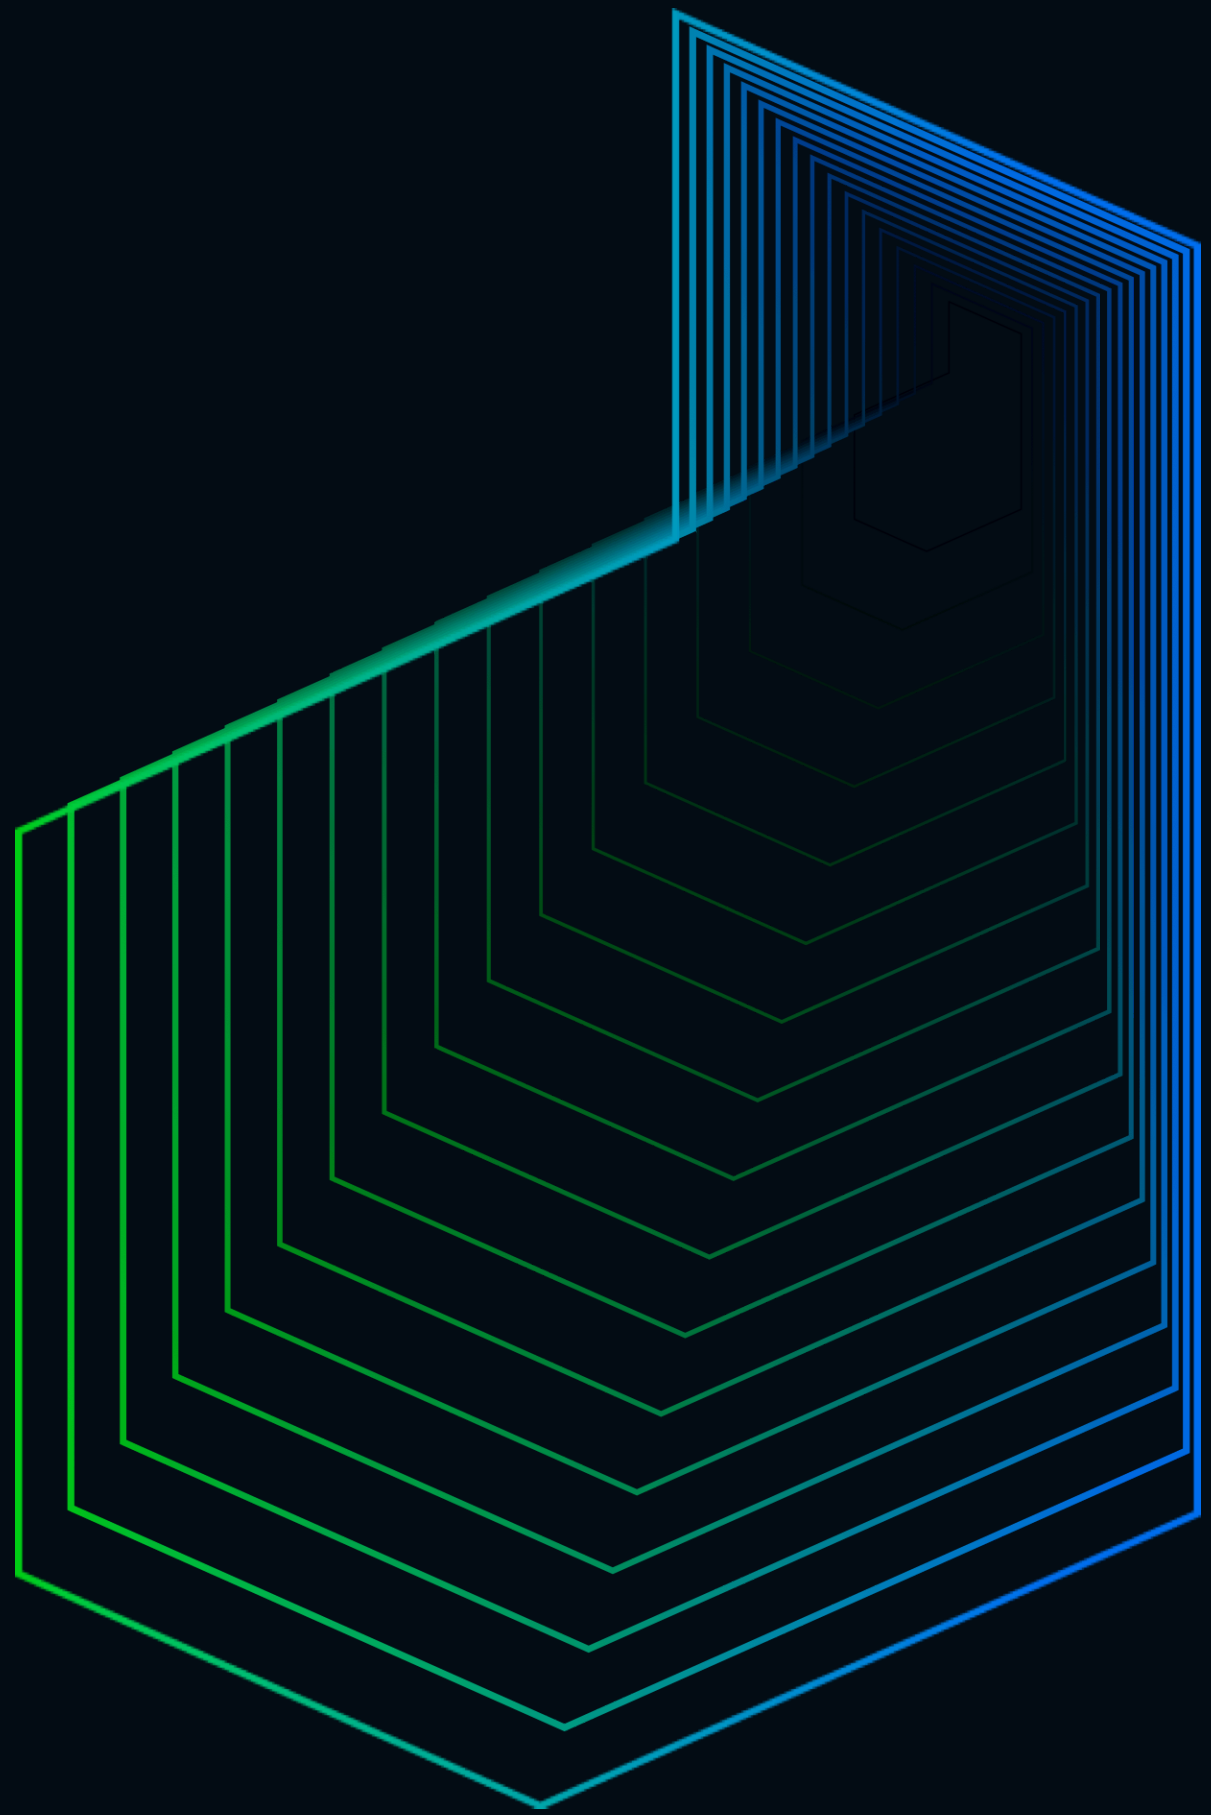

Platforms

macOS, Windows (WSL2), and Linux.

Docker: Linux amd64 or arm64 containers.



Prepare Docker

Install and start Docker with Linux containers.
Then run the Hello World test in your terminal.

1. Run the test

```
docker run hello-world
```

2. Check the result

Look for this line

```
Hello from Docker!
```

If the test fails, fix Docker before continuing.



Installation: [Official Docker guide](#)
Alternative: [Colima](#)

Get the preparation files

Use a terminal, or WSL2 Bash on Windows. Git must already be installed. Cloning creates a local folder. Run the help command to confirm the script opens correctly.

1. Clone the repository

Expected: files in `secure-agent-workshop`

```
git clone https://github.com/kritskn/secure-agent-workshop.git
```

2. Enter the folder

Normally no output

```
cd secure-agent-workshop
```

3. Check the commands

First line: `Usage: ./lab.sh <command>`

```
./lab.sh help
```



Missing Git? Follow the installation instructions on the [official Git website](https://git-scm.com/) first.

Setup

Run from the secure-agent-workshop folder with Docker running. Do not use sudo.
Online check uses quota, may cost, and tests logging in the workshop Docker volume.

Run setup

Includes a live check.

```
./lab.sh setup
```

What setup does

- Builds or reuses base images for the workshop tools.
- Creates or reuses private HOME in the workshop Docker volume.
- Retains a valid saved key or asks privately for a new one.
- Checks one online reply and a new matching log in the workshop Docker volume.
- No lab, gateway or sandbox services are started.



If the online check fails, setup may offer a new key and one retry. Enter keeps your key and stops.

If setup fails, keep your files and follow the error. Cancelling does not undo work.
The new key stays saved even if the retry fails.

Enter the workshop key

Create your own Ollama Cloud API key. [Official guide](#).
Enter your key only at setup's masked prompt.

Prompt shown in Terminal

Example only

```
Workshop Ollama Cloud token (masked):
```

Enter your key privately

- Paste your key, then press Enter.
- Asterisks mask your input. Backspace deletes. Ctrl-U clears.
- Setup saves the key in the workshop Docker volume.
- Saved keys can skip this prompt.

You can use Ollama's free plan for the workshop model if you have free usage credits available. Check your usage [here](#).



Keep keys out of commands, environment variables, chat and screenshots.
Docker administrators can access saved keys, sessions and logs. Do not copy personal Pi login files.
Use a separate key for this workshop. Revoke it after the workshop.

Expected setup result

A successful setup shows these messages.
Progress and the key prompt are omitted from this example.

Successful setup

Core success messages

```
[PASS] Workshop Tools ready.  
[PASS] Agent profile ready.  
[WARN] Online check uses available free credits first and tests observer log writing.  
[PASS] Ollama response and fresh observer log verified.  
[PASS] Preparation setup completed. Run ./lab.sh check to confirm readiness.
```



Setup checks the tools, profile, one online reply and a new matching log.
Next, run `./lab.sh check` to confirm preparation. Neither command verifies lab exercises or sandbox enforcement.

Check preparation

Run `./lab.sh check` from the `secure-agent-workshop` folder in Bash.
On Windows, use WSL2. The check uses quota and may use paid credits.

Expected output

Core success messages

```
[PASS] Workshop Tools ready.  
[PASS] Agent profile ready.  
[WARN] Online check uses available free credits first and tests observer log writing.  
[PASS] Ollama response and fresh observer log verified.  
[PASS] Workshop preparation is ready.
```

```
+-----+  
| Preparation completed!  
| See you at the workshop.  
| LINE DEV CONF 2026  
| 17 Oct 2026 • BITEC  
+-----+
```



Uses cached images only. No repairs, key changes or lab startup.
If it fails, follow [SUGGESTED FIX] and the recovery pages that follow.
Pi's `/observer` shows Cycle, Tool details and Context. It reports activity, not sandbox enforcement.

If preparation fails

Docker or tools fail

- Read [FAIL] and [SUGGESTED FIX]. Keep your existing files.
- Start Docker. Check the selected engine with `docker context show`.
- For download errors, check internet access and free disk space.
- Fix the cause, then run `./lab.sh setup`. Valid tools and keys are reused.

Live response or activity log fails

- Check internet access, Ollama service status, model access and quota.
- The failure does not prove your key is wrong. It may be a logging problem.
- Then run `./lab.sh check` once. It may use paid credits; avoid retry loops.
- Reset does not fix a network outage, unavailable model or exhausted quota.



Missing tools or profile? Run setup. Refused files? See the next page.
Share failure messages only, never keys or private log contents.

Files or settings refused

Files in the repository are missing or changed

- Use a fresh copy of the published workshop files without changes.
- Clone the repository again into a new folder, then run setup there.
- A new clone does not reset the workshop Docker volume.

Saved profile or HOME is refused

- The saved profile is inside the workshop Docker volume, not the repository.
- Do not edit auth.json or manifests, change ownership or weaken permissions.
- If you can discard its data, use the reset steps on the next page.



A generic profile failure may also be a Docker problem: check Docker first.
A fresh clone fixes checkout problems, not conflicting images or saved profiles.

Reset and start again

Save needed work first. Reset is optional.

- Reset deletes keys, sessions, logs and preparation containers.
- Images, lab data, unrelated containers, Docker configuration and VMs stay.
- Deleting the saved key does not revoke it at Ollama.

1. Run in an interactive terminal

```
./lab.sh remove
```

2. Read the warning and confirm your choice

- At `Reset preparation? (Y/n)`, Enter `y` / `yes` confirms deletion.
- Type `n` / `no`, or press `Ctrl-C`, to cancel before deletion.
- After removal succeeds, run `./lab.sh setup` and enter your key again.



Keep the same intended Docker context for removal and setup.
If removal fails, use the next page. Never force-delete or run a global prune.

Volume used by another container

1. Find the container using the workshop volume

```
docker ps -a --filter volume=secagent-vol --format '{{.Names}}'
```

2. Stop and remove it only if you created it and no longer need it

Replace `<container-name>` with its name.

```
docker stop <container-name>  
docker rm <container-name>
```

3. Run removal again. After it succeeds, run setup.

```
./lab.sh remove && ./lab.sh setup
```



Volume still rejected? Check that you selected the correct Docker engine.

Other preparation problems

Default embedded Buildx builder required

- Check Buildx with `docker buildx version`.
- If it is missing, follow the official Docker installation guide.
- macOS with Homebrew:

```
brew install docker-buildx
```

Follow Homebrew's plugin setup instructions, then check the version again.

Removal stops part-way through

- Remaining data is kept. Completed deletions cannot be undone.
- Check Docker and its context. Close other preparation commands.
- Run `./lab.sh remove` again. Review what it will delete before confirming.



Cancelled setup or check? Check active Docker work before retrying. An online request may still finish.
Cancelled at the removal prompt? Nothing was deleted. No further action is needed.

See you at the workshop!

LINE DEV CONF 2026

Build the Next Frontier • 17 Oct 2026 • BITEC

