

# HTTP


Daniel Zappala

CS 360 Internet Programming  
Brigham Young University


# HTTP Objects

# Requesting Objects

- clients request **objects** from servers using the HTTP protocol
  - client sends an HTTP request
  - server sends an HTTP response
- does not necessarily have a GUI
  - collecting hourly reports on competitor's prices
  - mining Twitter data

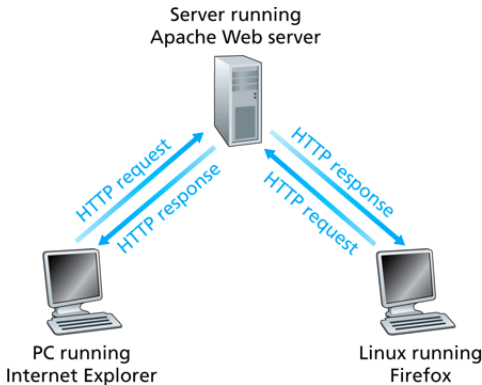

# Web Objects



- **object names:** Uniform Resource Identifier (URI)
  - a name that refers to a resource
  - a Uniform Resource Locator (URL) is one type of URI
  - popular URL schemes: http, ftp, gopher, mailto
- **object delivery:** Hypertext Transfer Protocol (HTTP)
  - IETF standard
  - defines message format for making requests and receiving responses
- **object format:** Hypertext Markup Language (HTML)
  - representation of documents in ASCII format
  - many other formats - XHTML, XML, PNG, JPG, PDF, etc.


# URIs, URLs, and URNs



- URI: Uniform Resource Identifier
  - The generic set of all names that refer to resources
- URL: Uniform Resource Locator
  - An informal term (no longer used in technical specifications) associated with popular URI schemes: http, ftp, gopher, mailto, etc.
- URN : Uniform Resource Name
  - A URI that has an institutional commitment to persistence, availability, etc. May also be a URL: see PURLs.
  - persistent, location-independent resource identifiers, urn: specified by RFC 2141

# Container Objects

- a web page consists of a **container** object, which may link to other objects
- fetching a web page consists of requesting the container object and then requesting any linked objects (images, CSS, Javascript, etc.)

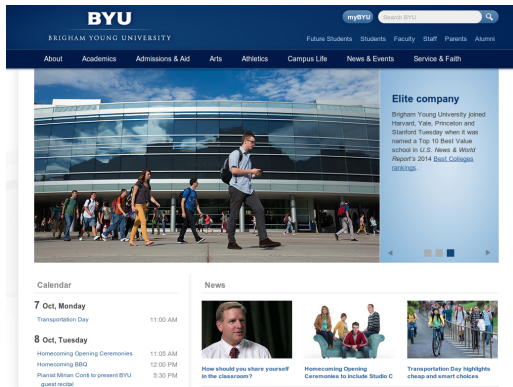

# Handling Objects

- determines how responses are handled
  - appearance (fonts)
  - content transformations (language)
  - whether to accept cookies
  - whether to allow javascript, popups
  - MIME types and handlers
- see Chrome advanced settings

# HTTP Message Formats



# HTTP Standards

- HTTP 1.0
  - RFC 1945: <http://www.ietf.org/rfc/rfc1945.txt>
  - very basic protocol, documenting what earliest servers and browsers used
- HTTP 1.1
  - RFC 2616: <http://www.ietf.org/rfc/rfc2616.txt>
  - backward compatibility with HTTP/1.0, plus many improvements and features
  - what all modern servers and browsers uses


# Standardization History

- HTTP/1.1 standardization took 4 years
- after two years RFC 2068 captured the early state of the HTTP/1.1 specification *process*
- browsers started implementing the “HTTP/1.1 standard” before it was officially a standard
- HTTP/1.1 needed to be backward-compatible with many browsers or else many sites would not deploy it
- as a result, RFC 2616 contains some idiosyncrasies, never fully adopted as an official standard

# Specification Language

- specification language is precise
  - **MUST**: absolutely essential - if you don't implement this feature you are not compliant
  - **SHOULD**: recommendation - you are compliant if you don't implement this feature, but you should implement it if at all possible
  - **MAY**: optional - not considered necessary
  - there are two obvious counterparts: **MUST NOT**, **SHOULD NOT**
- see RFC 2119

# HTTP Request Format

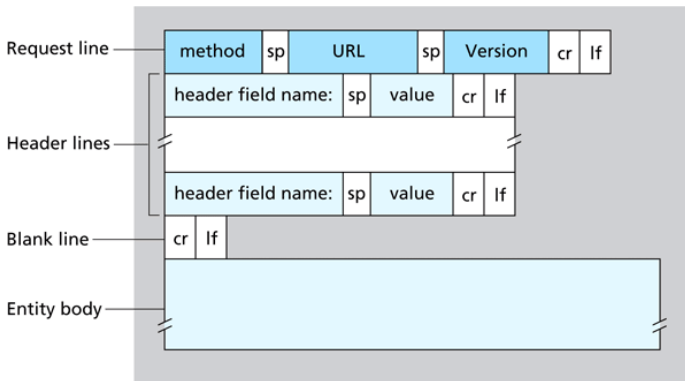

- entity body is optional, with a header that indicates the length of the body in bytes


# Example HTTP Request

---

```
1 GET /index.html HTTP/1.1
2 Host: cs360.byu.edu
3 Accept: text/html,application/xhtml+xml,application/xml
4 Accept-Encoding: gzip, deflate, sdch
5 Accept-Language: en-US,en;q=0.8
6 Connection: keep-alive
7 User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit
8 /537.36 (KHTML, like Gecko) Chrome/29.0.1547.76 Safari/537.36
```

---

# HTTP Response Format

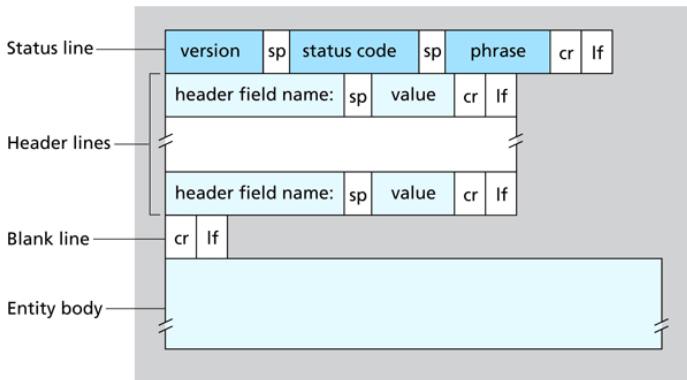

- entity body is optional, with a header that indicates the length of the body in bytes

# Example HTTP Response

---

```
1 HTTP/1.1 200 OK
2 Connection: Keep-Alive
3 Date: Mon, 07 Oct 2013 16:31:00 GMT
4 ETag: "c01e0-c4f-4e6c0444f4e40"
5 Keep-Alive: timeout=5, max=100
6 Server: Apache/2.2.22 (Ubuntu)
7 Vary: Accept-Encoding
8
9 <!DOCTYPE html>
10 <html lang="en">
11   <head>
12     <title>CS 360 Internet Programming</title>
13   ...
```

---

- use [telnet cs360.byu.edu 80](http://telnet.cs360.byu.edu) to experiment

# Request Methods



# GET, HEAD

- GET
  - see RFC 1945, section 8.1
  - MAY encode arguments to a script
  - `GET /book.cgi?lastname=Stevens`
- HEAD
  - see RFC 1945, section 8.2
  - MUST NOT return entity body

# POST

- see RFC 1945, section 8.3
- MUST have a [Content-Length](#) to determine length of entity body
- actions taken depend on the URI

# PUT, DELETE, LINK, UNLINK

- see RFC 1945, Appendix D
- PUT and DELETE considered dangerous because the client is in charge
- not usually supported by web servers
- when coupled with authentication, can create an API for third-party clients to interact with web services

# Headers

# Header Syntax

---

1      HTTP-header = field-name ":" [ field-value ] CRLF

---

- arbitrary length
- order is not significant, but recommended that you send General, Request, Response, and Entity Headers in that order
- see RFC 1945, section 4.2

# General Headers

- **Date**
  - RFC 1945, Section 10.6
  - date and time at which message originated
  - specifies format of date and time
  - MUST be in GMT

# Request Headers

- **If-Modified-Since**
  - RFC 1945, Section 10.9
  - defines a conditional GET - retrieve resource only if it hasn't been changed since the given date
  - uses the same format as the **Date** header
- **From**
  - RFC 1945, Section 10.8
  - used to give user's email address
  - server should parse and log
- **User-Agent**
  - RFC 1945, Section 10.15
  - information about user's browser
  - server should parse and log

# Response Headers

- **Server**
  - RFC 1945, Section 10.14
  - identifies server software
  - many servers include this in all responses



# Entity Headers

- **Content-Length**
  - RFC 1945, Section 10.4
  - size of the entity body in bytes
  - MUST be included for any message containing an entity body
  - server should send an error if it is missing, see Section 7.2.2
- **Last-Modified**
  - RFC 1945, Section 10.10
  - date and time at which resource was last modified
  - MUST NOT send a time later than message origination
- **Content-Type**
  - RFC 1945, Section 10.5
  - indicates media type of entity body
  - server SHOULD include this header if the message has an entity body

# Response Codes

# Response Classes

- HTTP groups response codes together into classes
- 100: informational class
- 200: success class
- 300: redirection class
- 400: client error class
- 500: server error class

# Notable Error Codes

- 200 OK
- 304 Not Modified
- 400 Bad Request
- 403 Forbidden
- 404 Not Found
- 501 Not Implemented

# Features

# Multiple Web Sites

- HTTP/1.1 allows many web sites per server
- server MUST include **Host** header in HTTP/1.1

---

1	GET /index.html HTTP/1.1
2	Host: cs360.byu.edu

---

# Content Negotiation

- client can ask for different versions
- server-driven
  - client sends hints about user's preference using `Accept-Language`, `Accept-Charset`, `Accept-Encoding`
  - server chooses the best match
- agent-driven
  - server responds with `300 Multiple Choices` that includes list of available representations
  - client makes a new request with the chosen variant
- server-driven is widely used, reduces latency

# Persistent Connections and Pipelining

- TCP works best for long-lived connections
  - starts with a slow rate
  - increases rate as segments are delivered successfully
  - decreases rate when loss occurs
- HTTP allows browser to use a single connection for many requests, to keep the rate high
  - useful for fetching images, CSS, Javascript
  - can also use to fetch subsequent pages and their objects
- Connection header
  - by default, connections stay open
  - server sends `Connection:close` to notify client it will close the connection
  - connections may be closed at any time
- many clients use parallel connections to further increase speed
- Chrome uses prefetching to guess which page you will view next



# Downloading a Part of a File

- user may want only part of a resource
  - continuing after an aborted transfer
  - fetching in parallel from multiple servers
- **Range** header
  - specify one or more ranges of contiguous bytes
  - **Range: bytes=0-1000**
  - if server's response contains a range, it uses **206 Partial Content**

# Compression

- 1997 study showed that compression could save 40% of the bytes sent via HTTP
- [Content-Encoding](#): indicates end-to-end content coding
- [Transfer-Encoding](#): indicates hop-by-hop transfer-codings (applied by proxies)
- [Accept-Encoding](#): indicates the type of encodings a client can accept
- [TE](#): indicates the type of transfer-codings a client prefers
- IANA registers transfer-coding token values, including [chunked](#), [identity](#), [gzip](#), [compress](#), and [deflate](#)

# Chunked Transfers

- chunked transfers are used by a web server for dynamic content, when it doesn't know ahead of time the length of the entire body of the object
- does **not** use Content-Length header
- sends the body as a series of chunks, each having the following format:
  - length of the chunk, in hexadecimal, followed by a CRLF (`\r\n`)
  - a sequence of bytes, whose length is given by the previous line
  - a CRLF
- to end the body, the server sends a valid last chunk with a length of 0 bytes