UNIVERSITY INSTITUTE of COMPUTING
Asia's Fastest Growing University

NAAC GRADE A+ Accredited University

Name:- Kumar Saurav Suman **UID:- 25MCI10320**

Branch:- MCA [AI&ML] **Section/Group:- 25MAM-2B**

Semester:- 3rd **Date of Performance:- 04/10/2026**

Subject Name:- Technical Training II **Subject Code: 25CAP-707**

Experiment-5

Aim:-

To design, develop, test and deploy the responsive food delivery web interface using appropriate web technologies

Implementation:-

index.html

```
<!doctype html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>FoodieExpress - Hot Food, Delivered Fast</title>
  </head>
  <body>
    <div id="root"></div>
    <script type="module" src="/src/main.jsx"></script>
  </body>
</html>
```

package.json

```
{
  "name": "food-delivery",
  "private": true,
  "version": "1.0.0",
  "type": "module",
  "scripts": {
    "dev": "vite",
```

```
 "build": "vite build",
    "preview": "vite preview"
  },
  "dependencies": {
    "bootstrap": "^5.3.3",
    "bootstrap-icons": "^1.11.3",
    "react": "^18.3.1",
    "react-dom": "^18.3.1"
  },
  "devDependencies": {
    "@vitejs/plugin-react": "^4.3.1",
    "vite": "^5.4.1"
  }
}
```

vite.config.js

```
import { defineConfig } from 'vite'
import react from '@vitejs/plugin-react'

// https://vitejs.dev/config/
export default defineConfig({
  plugins: [react()],
})
```

src/main.jsx

```
import React from 'react'
import ReactDOM from 'react-dom/client'
import 'bootstrap/dist/css/bootstrap.min.css'
import 'bootstrap-icons/font/bootstrap-icons.css'
import App from './App.jsx'
import './App.css'

ReactDOM.createRoot(document.getElementById('root')).render(<App />)
```

src/components/Navbar.jsx

```
import { useState } from 'react'
```

```
function Navbar({ currentPage, setCurrentPage, isLoggedIn, setIsLoggedIn, darkMode, setDarkMode,
cartCount, showToast }) {
  const [open, setOpen] = useState(false)

  const go = (page) => {
    setCurrentPage(page)
    setOpen(false)
  }

  const handleLogout = () => {
    setIsLoggedIn(false)
    setCurrentPage('home')
    setOpen(false)
    showToast('You have been logged out.', 'info')
  }

  const link = (page, icon, label) => (
    <button
      className={currentPage === page ? 'nav-link-btn active' : 'nav-link-btn'}
      onClick={() => go(page)}
    >
      <i className={`bi ${icon} me-1`}></i>{label}
    </button>
  )

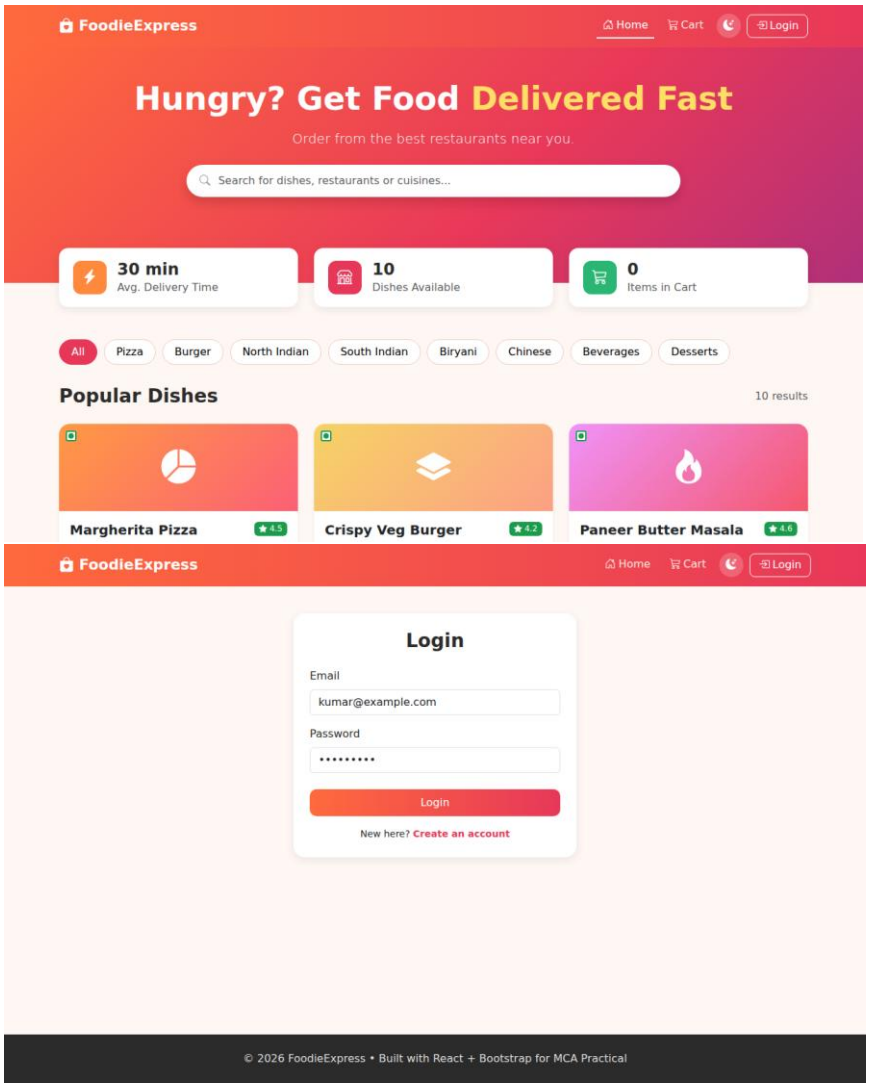
  return (
    <nav className="app-navbar">
      <div className="container d-flex align-items-center justify-content-between">
        <span className="brand" onClick={() => go('home')}>
          <i className="bi bi-bag-heart-fill me-2"></i>FoodieExpress
        </span>

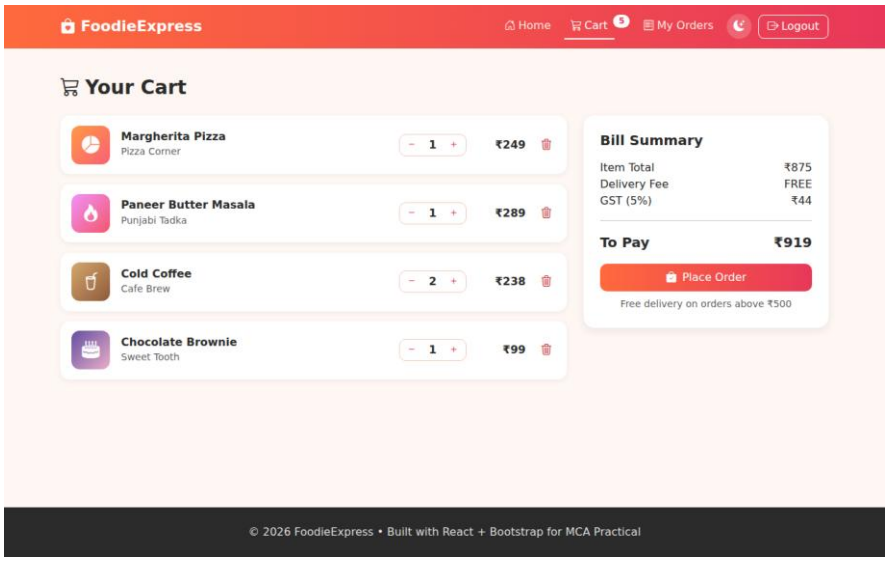
        <button className="menu-toggle d-lg-none" onClick={() => setOpen(!open)}>
```

```
    <i className={`bi ${open ? 'bi-x-lg' : 'bi-list'}`}></i>
      </button>

      <div className={`nav-items ${open ? 'open' : ''}`}>
        {link('home', 'bi-house-door', 'Home')}
        {link('cart', 'bi-cart3', 'Cart')}
        {cartCount > 0 && <span className="cart-badge">{cartCount}</span>}
        {isLoggedIn && link('orders', 'bi-receipt', 'My Orders')}
        <button className="icon-btn" onClick={() => setDarkMode(!darkMode)} title="Toggle theme">
          <i className={`bi ${darkMode ? 'bi-sun-fill' : 'bi-moon-stars-fill'}`}></i>
        </button>
        {isLoggedIn ? (
          <button className="btn-outline-light-custom" onClick={handleLogout}>
            <i className="bi bi-box-arrow-right me-1"></i>Logout
          </button>
        ) : (
          <button className="btn-outline-light-custom" onClick={() => go('login')}>
            <i className="bi bi-box-arrow-in-right me-1"></i>Login
          </button>
        )}
      </div>
    </div>
  </nav>
 )
}
```

OUTPUT:


FoodieExpress
Home
Cart
Login
Hungry? Get Food Delivered Fast
Order from the best restaurants near you.
Search for dishes, restaurants or cuisines...
30 min
Avg. Delivery Time
10
Dishes Available
0
Items in Cart
All
Pizza
Burger
North Indian
South Indian
Biryani
Chinese
Beverages
Desserts
Popular Dishes
10 results
Margherita Pizza
4.5
Crispy Veg Burger
4.2
Paneer Butter Masala
4.6
FoodieExpress
Home
Cart
Login
Login
Email
kumar@example.com
Password
Login
New here? Create an account
© 2026 FoodieExpress • Built with React + Bootstrap for MCA Practical


FoodieExpress
Home
Cart
5
My Orders
Logout
Your Cart
Margherita Pizza
Pizza Corner
1
₹249
Paneer Butter Masala
Punjabi Tadka
1
₹289
Cold Coffee
Cafe Brew
2
₹238
Chocolate Brownie
Sweet Tooth
1
₹99
Bill Summary
Item Total
₹875
Delivery Fee
FREE
GST (5%)
₹44
To Pay
₹919
Place Order
Free delivery on orders above ₹500
© 2026 FoodieExpress • Built with React + Bootstrap for MCA Practical

Learning Outcome:-

- Understand the structure of a responsive food delivery web application.
- Develop a responsive frontend using React and Bootstrap.
- Build reusable components and manage application state with React hooks.
- Implement dish search, category filtering and dynamic rendering using map() and filter().
- Implement cart operations, bill calculation and order placement.
- Understand how a backend (Node.js / Python) and a database (MySQL / MongoDB) can be connected to the frontend through REST APIs.
- Test the interface on different screen sizes and prepare the project for deployment using Git & GitHub.