Lab 5. Update, Delete

1. Update Endpoint (PUT)

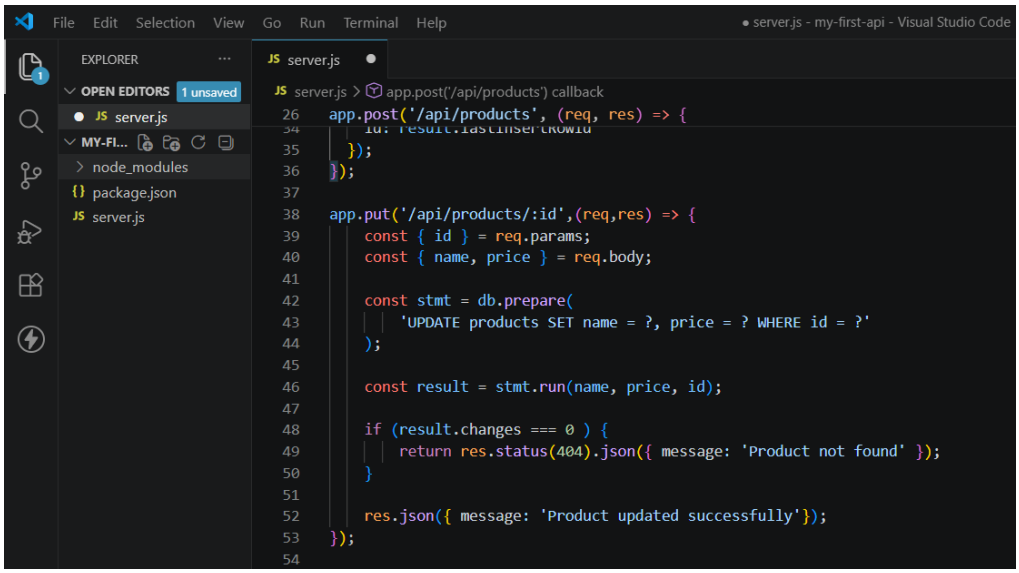


2. Delete Endpoint

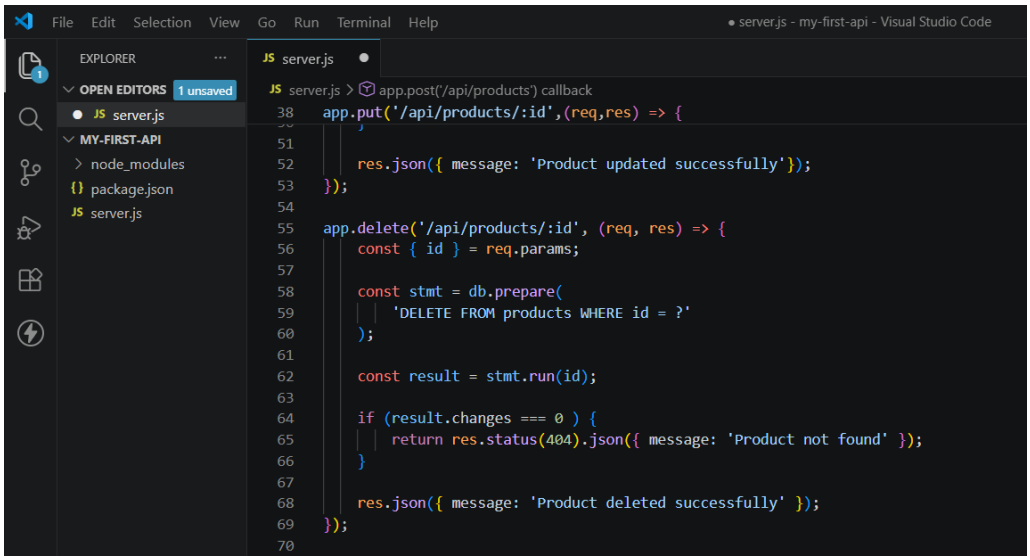

GET

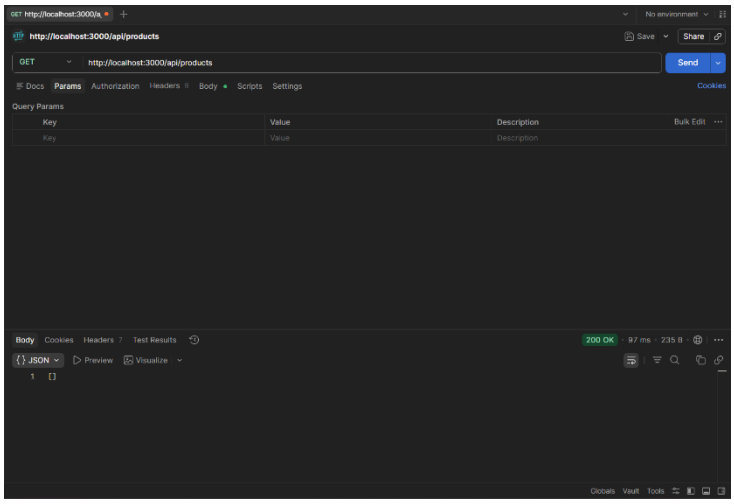


POST

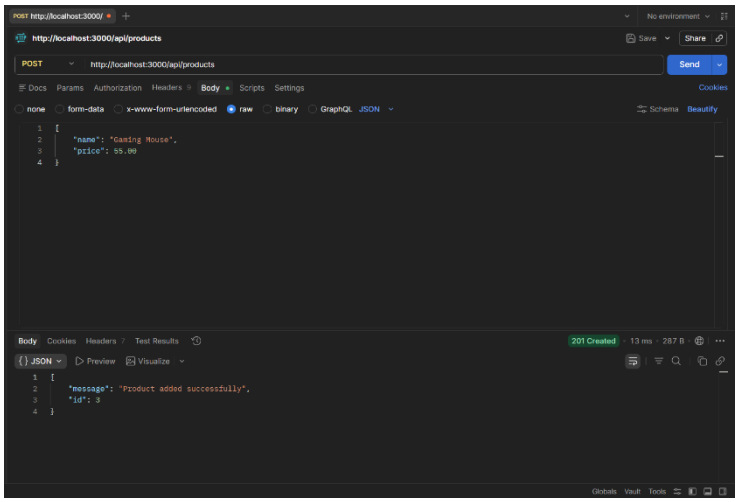


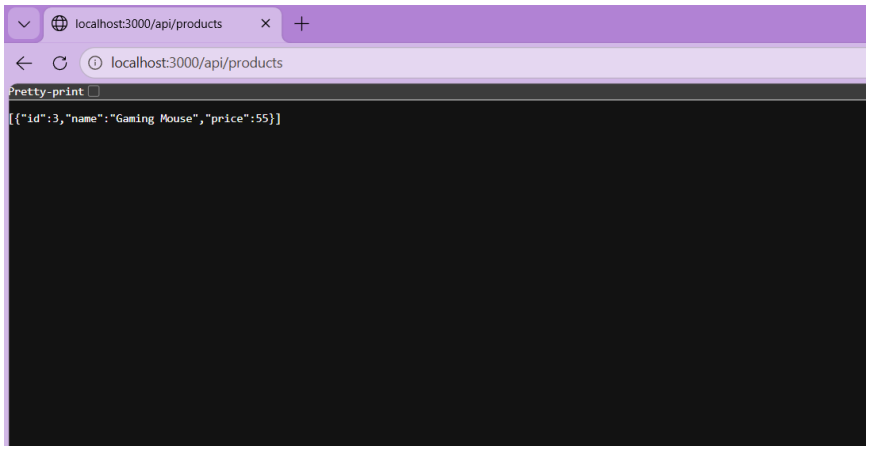


Seguiente, Alteraddo, Baladiang, Tamano, Navaroza

DELETE

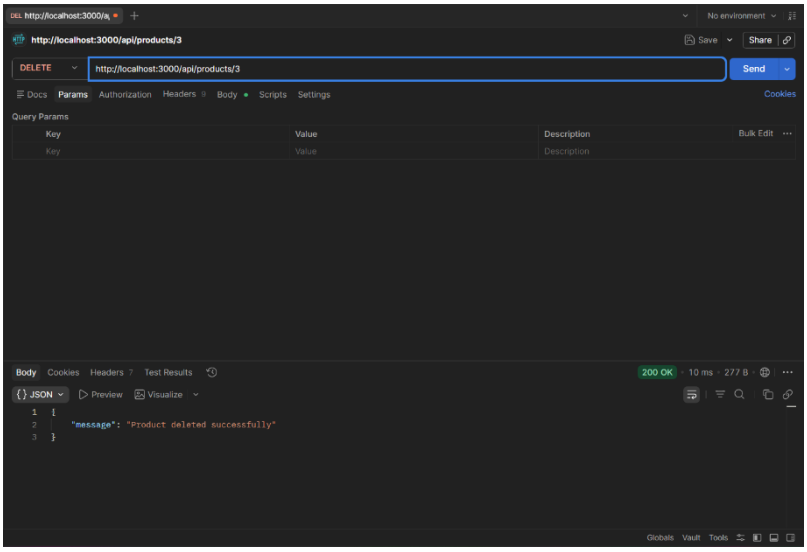


Questions:

a. Why is PUT used for updating data instead of POST? Think about the "Strict Synchronous Contract"
   - PUT is idempotent, meaning sending the same request multiple times produces the same result. While POST is mainly used for creating new resources; it is non-idempotent, meaning that sending multiple requests can create duplicates.
b. In your DELETE logic, why is it better to return a 404 error if the ID doesn't exist, rather than just sending a "Success" message anyway?
   - Returning a **404 error** when the ID does not exist is better because it clearly indicates that the resource is not found, instead of misleading the client with a success message. This improves API reliability and makes debugging easier.
c. You've now built a full CRUD API. If you were to connect a React or Mobile app to this, which part of the "Modern API Architecture" would this Node.js server represent?
   - The **backend API layer (application server)** in a modern API architecture, handling requests from the React or mobile app and processes business logic and communication with the database.