

SQL PROJECT ON PIZZA SALES


Hello I am **kruthika**. I have a strong interest in data analysis and working with databases.

This project is focused on analyzing pizza sales using SQL. It involves writing queries to explore different aspects of the sales data, such as total revenue, popular pizzas, order trends, and customer preferences.

Through this project, I have learned how to organize and retrieve useful information from a database.

I enjoyed working on this project as it helped me improve my SQL skills and gain practical experience in handling real-world data.

SCHEMA REPRESENTATION

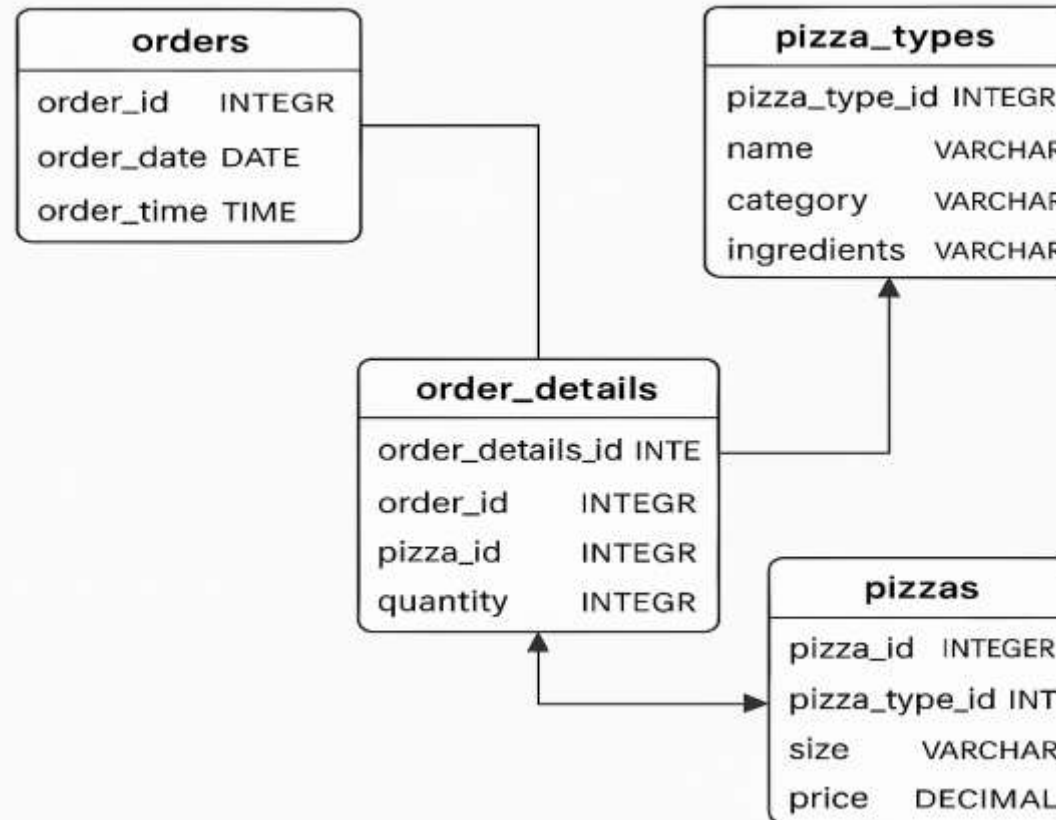

-- CALCULATE TOTAL REVENUE GENERATED FROM PIZZAS SALES

```
SELECT
    ROUND(SUM(orders_details.quantity * pizzas.price),
          2) AS total_sales
FROM
    orders_details
    JOIN
    pizzas ON orders_details.pizza_id = pizzas.pizza_id;
```

	total_sales
▶	817860.05

-- CALCULATE THE HIGHEST PRICED PIZZA.

5

```
SELECT
```

```
    pizzas.price, pizza_types.name
```

```
FROM
```

```
    pizzas
```

```
    JOIN
```

```
    pizza_types ON pizzas.pizza_type_id = pizza_types.pizza_type_id
```

```
ORDER BY pizzas.price DESC
```

```
LIMIT 1;
```

price	name
35.95	The Greek Pizza

-- IDENTIFY THE MOST COMMON SIZE ORDERED.

6

```
SELECT
    pizzas.size,
    COUNT(orders_details.order_details_id) AS order_count
FROM
    pizzas
    JOIN
    orders_details ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

	size	order_count
▶	L	18526
	M	15385
	S	14137
	XL	544
	XXL	28

-- LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES. 7

```
SELECT
    pizza_types.name, sum (orders_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    orders_details ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

	name	quantity
►	The Classic Deluxe Pizza	2453
	The Barbecue Chicken Pizza	2432
	The Hawaiian Pizza	2422
	The Pepperoni Pizza	2418
	The Thai Chicken Pizza	2371

-- JOIN THE NECESSARY TABLE TO FIND THE TOTAL QUANTITY EACH PIZZA CATEGORY ORDERED.

8

```
SELECT
    pizza_types.category,
    SUM(orders_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    orders_details ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```

	category	quantity
▶	Classic	14888
	Supreme	11987
	Veggie	11649
	Chicken	11050

-- DETERMINE THE DISTRIBUTION OF ORDER BY HOURS OF THE DAY

```
SELECT  
    HOUR(order_time) AS hour, COUNT(order_id) AS count  
FROM  
    orders  
GROUP BY hour;
```

	hour	count
▶	11	1231
	12	2520
	13	2455
	14	1472
	15	1468
	16	1920
	17	2336
	18	2399
	19	2009
	20	1642
	21	1198
	22	663
	23	28
	10	8
	9	1

-- JOIN THE RELEVANT TABLES TO FIND THE CATEGORY WISE DISTRIBUTION ON PIZZA. 10

```
SELECT
    category, COUNT(name)
FROM
    pizza_types
GROUP BY category;
```

	category	COUNT(name)
▶	Chicken	6
	Classic	8
	Supreme	9
	Veggie	9

-- GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZA ORDER PER DAY.

11

```
SELECT
    AVG(quantity) AS pizza_orderd_per_day
FROM
    (SELECT
        orders.order_date, SUM(orders_details.quantity) AS quantity
    FROM
        orders
    JOIN orders_details ON orders.order_id = orders_details.order_id
    GROUP BY order_date) AS order_quantity;
```

	pizza_orderd_per_day
▶	138.4749

-- DETERMINE THE TOP 3 MOST ORDERED PIZZA_TYPES BASED ON REVENUE.

```
SELECT
    pizza_types.name,
    SUM(orders_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    orders_details ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

	name	revenue
	The Thai Chicken Pizza	43434.25
	The Barbecue Chicken Pizza	42768
▶	The California Chicken Pizza	41409.5

--CALCULATE THE PERCENTAGE CONTRIBUTION ON EACH PIZZA TYPES TO TOTAL₁₃ REVENUE.

```
SELECT
    pizza_types.category,
    SUM(orders_details.quantity * pizzas.price) / (SELECT
        ROUND(SUM(orders_details.quantity * pizzas.price),
            2) AS total_sales
    FROM
        orders_details
        JOIN
            pizzas ON orders_details.pizza_id = pizzas.pizza_id) * 100 AS revenue
FROM
    pizza_types
    JOIN
        pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
        orders_details ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC
LIMIT 3;
```

	category	revenue
▶	Classic	26.90596025566967
	Supreme	25.45631126009862
	Chicken	23.955137556847287

-- ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.

14

```
select order_date, sum(revenue) over ( order by order_date) from (select orders.order_date,  
(sum(orders_details.quantity*pizzas.price)) as revenue from  
orders_details join pizzas on orders_details.pizza_id = pizzas.pizza_id join orders  
on orders_details.order_id = orders.order_id group by orders.order_date) as sales;
```

	order_date	sum(revenue) over (order by order_date)
▶	2015-01-01	2713.85000000000004
	2015-01-02	5445.75
	2015-01-03	8108.15
	2015-01-04	9863.6
	2015-01-05	11929.55
	2015-01-06	14358.5
	2015-01-07	16560.7
	2015-01-08	19399.05
	2015-01-09	21526.4
	2015-01-10	23990.3500000000002
	2015-01-11	25862.65

The background features a large, light cream-colored circle on the left and a large, light pink circle on the right. These two circles overlap in the center. The area where they overlap is filled with a dark blue color. In the top right corner, there are several thin, concentric white lines that form a circular pattern, partially overlapping the pink circle.

THANK YOU