Capture the Flag 3: Data-Driven UI

Goal: Separate application data from the UI and handle multiple pieces of data in a usable interface.

Instructor Note

These activities require your own problem-solving and research skills.

DO NOT use AI to generate the code for you.

You may use AI to:

- Research what a Dart/Flutter feature does
- Understand syntax
- **Explain** an error (not **fix** your error)
- Clarify documentation

You may **NOT** ask AI to generate the solution/code for a flag.

🏴 Flag 0 — Create Your Feature Branch


Objective: Create a feature branch before modifying your application.

Create:

`feature/data-ui`

Screenshot:

- Terminal showing your current branch

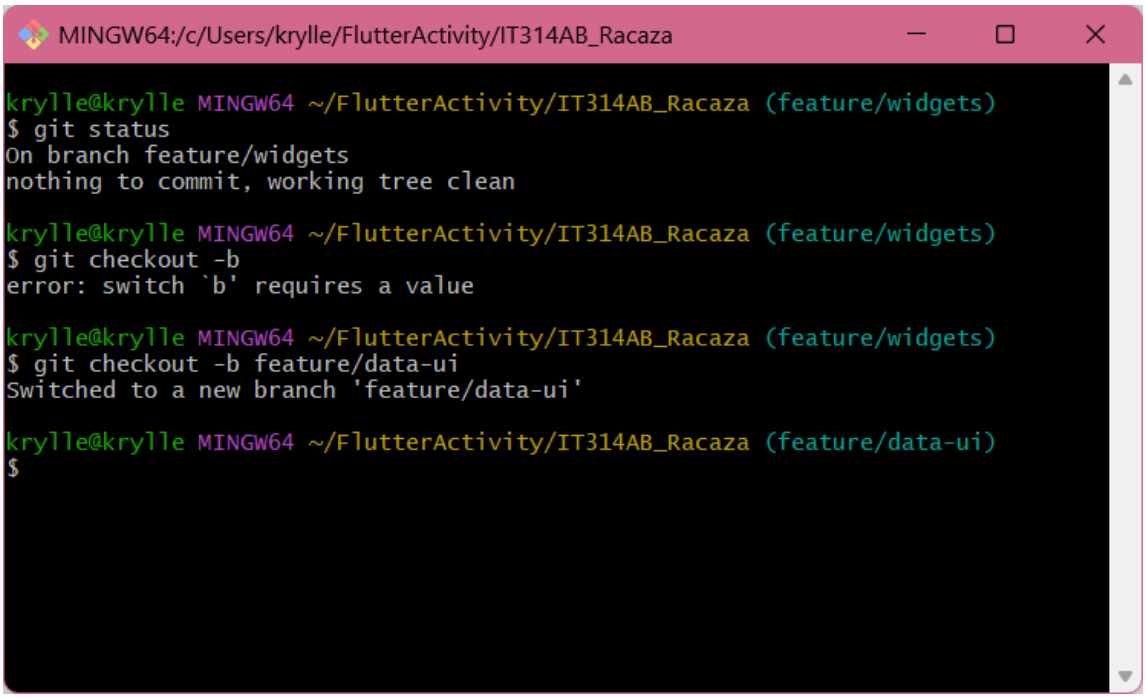

🏴 Flag 1 — Identify the Data

Objective: Identify the appropriate Dart data type for the information in your profile.

Research basic Dart data types and identify at least **four different types** that could be used in your application.

Examples:

String
int
double
bool

Create a table identifying the information and its appropriate data type.

Screenshot:

- Your identified data
- The corresponding data types

Krylle Jane Y. Racaza	String
Age	Int
Height	Double
Student Status	Bool

🏴 Flag 2 — Create Your Data

Objective: Create appropriately typed variables for your profile.

Create variables for at least:

- Name
- Course & Section
- Age
- Hobby
- Height
- Student status

Your data should exist **separately from your UI widgets**.

Screenshot:

- Your variables
- Their data types
- Application still running

```dart
String name = "Krylle";
String courseSection = "BSIT - 3";
int age = 20;
String hobby = "Dancing";
double height = 4.11;
bool isStudent = true;
```

```dart
    Text(
      'Name: $name',
      style: const TextStyle(fontSize: 16),
    ), // Text

    const SizedBox(height: 8),

    Text(
      'Course & Section: $courseSection',
      style: const TextStyle(fontSize: 16),
    ), // Text

    const SizedBox(height: 8),

    Text(
      'Age: $age',
      style: const TextStyle(fontSize: 16),
    ), // Text

    const SizedBox(height: 8),
```


```dart
    Text(
      'Hobby: $hobby',
      style: const TextStyle(fontSize: 16),
    ), // Text

    const SizedBox(height: 8),

    Text(
      'Height: $height ft',
      style: const TextStyle(fontSize: 16),
    ), // Text

    const SizedBox(height: 8),

    Text(
      'Student: $isStudent',
      style: const TextStyle(fontSize: 16),
    ), // Text
  ],
```

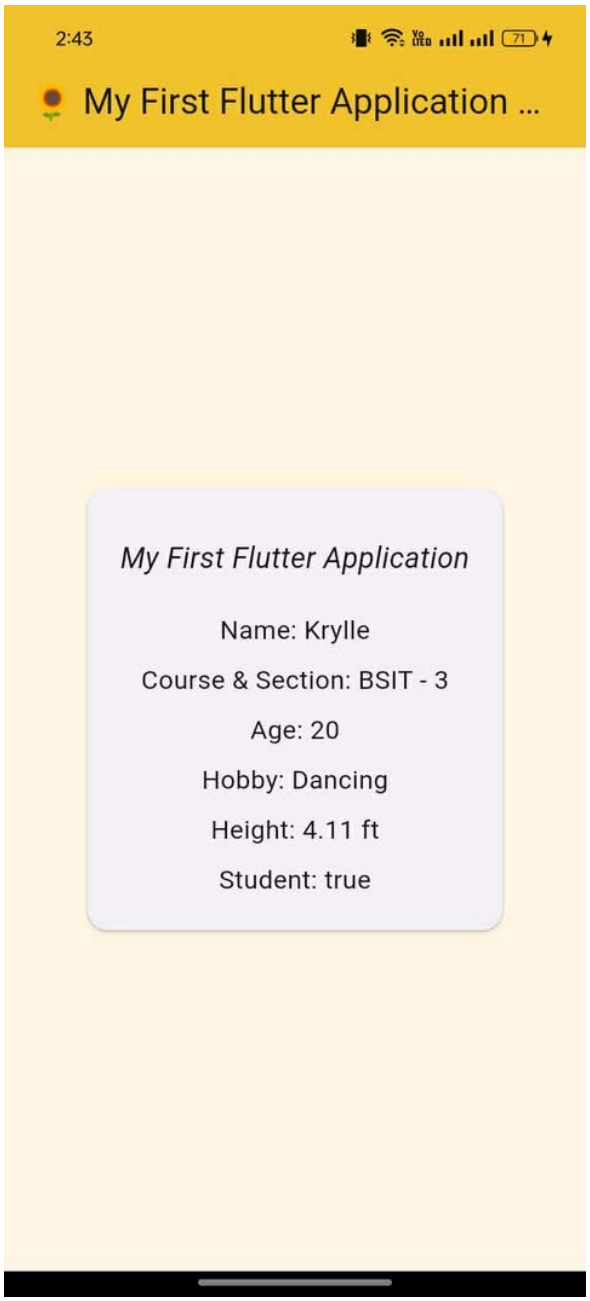
2:43
My First Flutter Application ...
My First Flutter Application
Name: Krylle
Course & Section: BSIT - 3
Age: 20
Hobby: Dancing
Height: 4.11 ft
Student: true

🏴 Flag 3 — Connect Data to UI

Objective: Replace your hardcoded information with your variables.

Your profile should now display information using the variables you created.

Test:

Change the value of one of your variables.

The UI should automatically display the new value.

Screenshot:

- Variables
- Widgets displaying the variables
- Updated application

```
String name = "Jane";
String courseSection = "BSIT - 3";
int age = 20;
String hobby = "Dancing";
double height = 4.11;
bool isStudent = true;
```

```
Text(
  'Name: $name',
  style: const TextStyle(fontSize: 16),
), // Text

const SizedBox(height: 8),

Text(
  'Course & Section: $courseSection',
  style: const TextStyle(fontSize: 16),
), // Text

const SizedBox(height: 8),

Text(
  'Age: $age',
  style: const TextStyle(fontSize: 16),
), // Text

const SizedBox(height: 8),
```


```
Text(
  'Hobby: $hobby',
  style: const TextStyle(fontSize: 16),
), // Text

const SizedBox(height: 8),

Text(
  'Height: $height ft',
  style: const TextStyle(fontSize: 16),
), // Text

const SizedBox(height: 8),

Text(
  'Student: $isStudent',
  style: const TextStyle(fontSize: 16),
), // Text
],
```

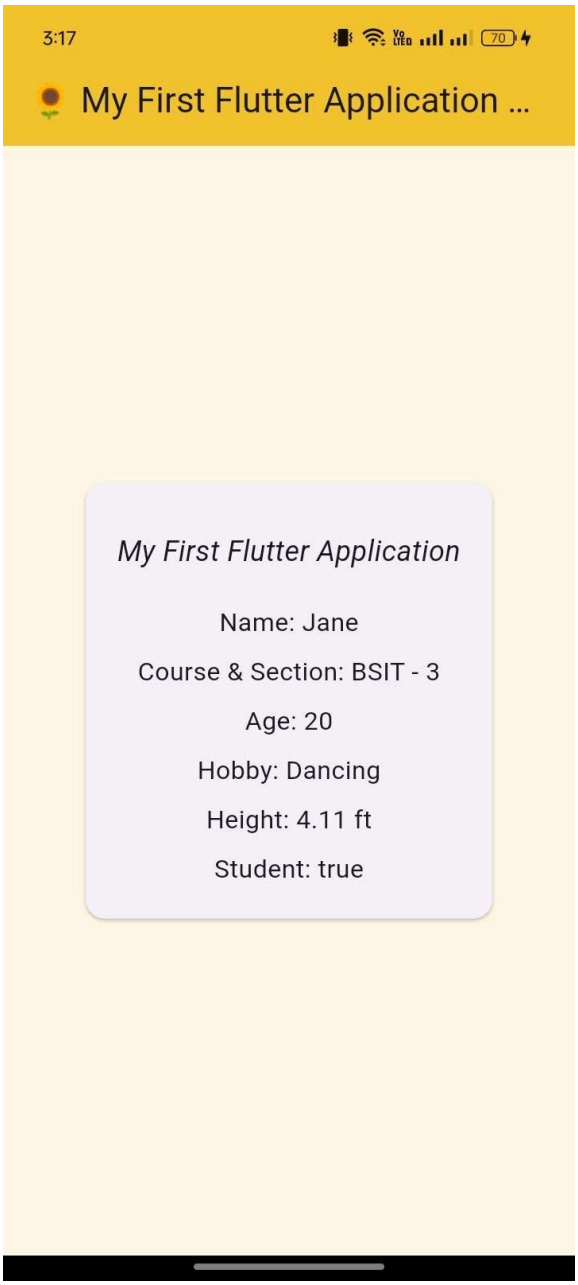
3:17
My First Flutter Application ...
My First Flutter Application
Name: Jane
Course & Section: BSIT - 3
Age: 20
Hobby: Dancing
Height: 4.11 ft
Student: true

🏴 Flag 4 — Make the Image Data-Driven

Objective: Make your profile image part of your data.

Create a variable containing the path to your profile image.

Use the variable when displaying the image.

Then change the variable to another registered image.

The image displayed by the application should change.


Screenshot:

- Image variable
- Image widget using the variable
- Updated application

```dart
String imagePathfirst = 'assets/sunflower.png';
String imagePathsecond = 'assets/profile.png';
String name = "Jane";
String courseSection = "BSIT - 3";
int age = 20;
String hobby = "Dancing";
double height = 4.11;
bool isStudent = true;
```

```dart
Row(mainAxisAlignment: MainAxisAlignment.spaceEvenly,),
ClipOval(
 child: Image.asset(
  'assets/sunflower.png',
  width: 120,
  height: 120,
  fit: BoxFit.cover,
 ), // Image.asset
), // ClipOval

ClipOval(
  child: Image.asset(
    'assets/profile.png',
    width: 120,
    height: 120,
    fit: BoxFit.cover,
  ), // Image.asset
), // ClipOval
```

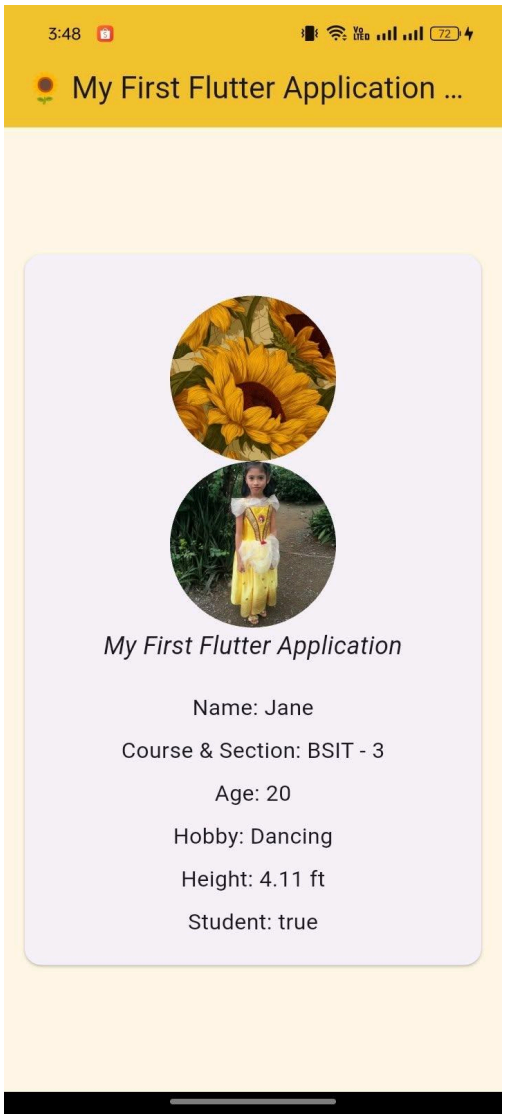

🏴 Flag 5 — Five Profiles, One Design

Objective: Create at least **five different profile cards** using the same visual design.

Each profile must contain at least:

- Image
- Name
- Course & Section
- Age
- Hobby

The five profiles must contain different information.

Important

All five profiles should use the **same visual design**.

You are demonstrating that the same UI can represent different data.

Screenshot:

- Your 5 different profile data

```
String name1 = "Krylle Jane";
String course1 = "BSIT - 3";
int age1 = 20;
String hobby1 = "Dancing";
String image1 = "assets/profile1.png";

String name2 = "Kayra Ylaya";
String course2 = "BSHM - 2";
int age2 = 19;
String hobby2 = "Dancing";
String image2 = "assets/profile2.png";

String name3 = "Kristine Ybanez";
String course3 = "BPed - 1";
int age3 = 18;
String hobby3 = "Gaming";
String image3 = "assets/profile3.png";

String name4 = "Maria Cristina";
String course4 = "BSTM - 4";
int age4 = 21;
String hobby4 = "Reading";
String image4 = "assets/profile4.png";

String name5 = "Anna Belle";
String course5 = "BSIS - 3";
int age5 = 20;
String hobby5 = "Photography";
String image5 = "assets/profile5.png";
```

```
body: SingleChildScrollView(
  child: Column(
    children: [

      Card(
        margin: const EdgeInsets.all(12),
        child: Padding(
          padding: const EdgeInsets.all(16),
          child: Column(
            children: [
              Image.asset(
                image1,
                height: 120,
                width: 120,
                fit: BoxFit.cover,
              ), // Image.asset
              const SizedBox(height: 10),
              Text(
                name1,
                style: const TextStyle(
                  fontSize: 22,
                  fontWeight: FontWeight.bold,
                ), // TextStyle
              ), // Text
              Text("Course: $course1"),
              Text("Age: $age1"),
              Text("Hobby: $hobby1"),
            ],
          ), // Column
        ), // Padding
      ), // Card
```

```
Card(
  margin: const EdgeInsets.all(12),
  child: Padding(
    padding: const EdgeInsets.all(16),
    child: Column(
      children: [
        Image.asset(
          image2,
          height: 120,
          width: 120,
          fit: BoxFit.cover,
        ), // Image.asset
        const SizedBox(height: 10),
        Text(
          name2,
          style: const TextStyle(
            fontSize: 22,
            fontWeight: FontWeight.bold,
          ), // TextStyle
        ), // Text
        Text("Course: $course2"),
        Text("Age: $age2"),
        Text("Hobby: $hobby2"),
      ],
    ), // Column
  ), // Padding
), // Card
```

```
Card(
  margin: const EdgeInsets.all(12),
  child: Padding(
    padding: const EdgeInsets.all(16),
    child: Column(
      children: [
        Image.asset(
          image3,
          height: 120,
          width: 120,
          fit: BoxFit.cover,
        ), // Image.asset
        const SizedBox(height: 10),
        Text(
          name3,
          style: const TextStyle(
            fontSize: 22,
            fontWeight: FontWeight.bold,
          ), // TextStyle
        ), // Text
        Text("Course: $course3"),
        Text("Age: $age3"),
        Text("Hobby: $hobby3"),
      ],
    ), // Column
  ), // Padding
), // Card
```

```
Card(
  margin: const EdgeInsets.all(12),
  child: Padding(
    padding: const EdgeInsets.all(16),
    child: Column(
      children: [
        Image.asset(
          image4,
          height: 120,
          width: 120,
          fit: BoxFit.cover,
        ), // Image.asset
        const SizedBox(height: 10),
        Text(
          name4,
          style: const TextStyle(
            fontSize: 22,
            fontWeight: FontWeight.bold,
          ), // TextStyle
        ), // Text
        Text("Course: $course4"),
        Text("Age: $age4"),
        Text("Hobby: $hobby4"),
      ],
    ), // Column
  ), // Padding
), // Card
```

```
Card(
  margin: const EdgeInsets.all(12),
  child: Padding(
    padding: const EdgeInsets.all(16),
    child: Column(
      children: [
        Image.asset(
          image5,
          height: 120,
          width: 120,
          fit: BoxFit.cover,
        ), // Image.asset
        const SizedBox(height: 10),
        Text(
          name5,
          style: const TextStyle(
            fontSize: 22,
            fontWeight: FontWeight.bold,
          ), // TextStyle
        ), // Text
        Text("Course: $course5"),
        Text("Age: $age5"),
        Text("Hobby: $hobby5"),
      ],
    ), // Column
  ), // Padding
), // Card
```

🏴 Flag 6 — THE HIDDEN PROBLEM

You didn't see your UI?

Objective: Make all five profiles accessible to the user.

You just added five profile cards.

Now run your application.

Something is wrong.

Look carefully at your emulator.

Can you see all five profiles?

Maybe you can see the first one...

Maybe part of the second...

But where are the rest?

That's right.

You can't see them.

Your UI is larger than the available screen.

The profiles exist.

The data exists.

The widgets exist.

But the user can't access everything.

Your Mission:

Figure out how Flutter allows users to **scroll through content that is larger than the available screen**.

Research Flutter's **scrolling widgets** and determine which one is appropriate for your current layout.

You must make it possible to scroll through all five profiles.

Requirement:


The user must be able to:


Scroll → see Profile 1 → Profile 2 → Profile 3 → Profile 4 → Profile 5


without changing the size of the screen.

Screenshot:

- The scrolling widget in your code
- Top portion of the application
- The rest of the portion of the application showing the later profiles

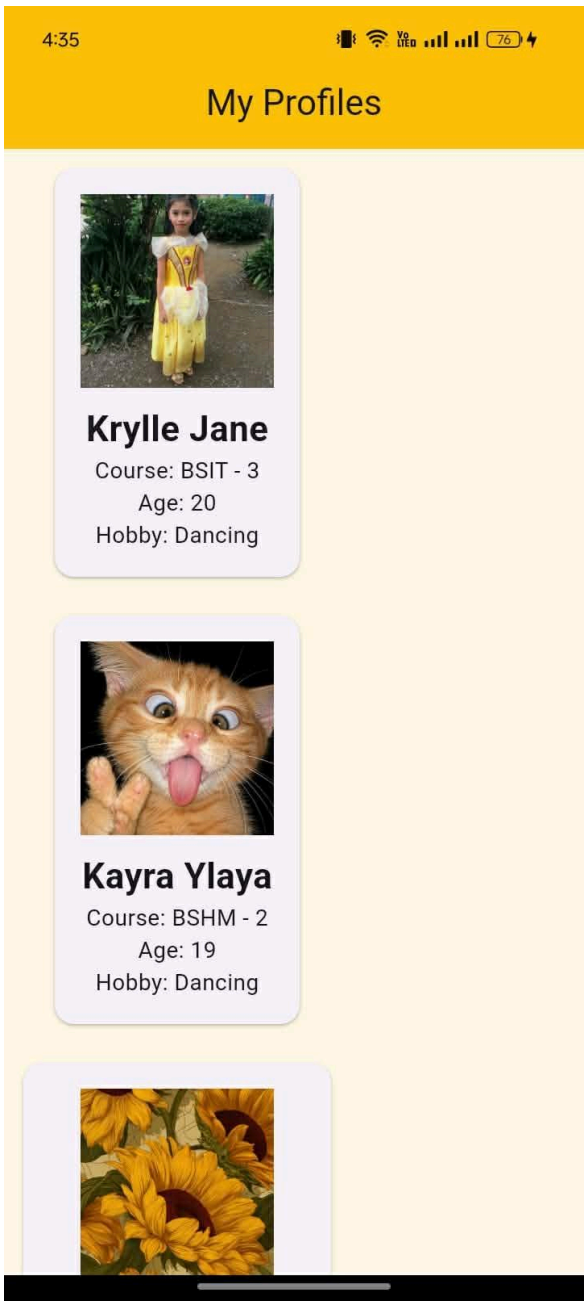

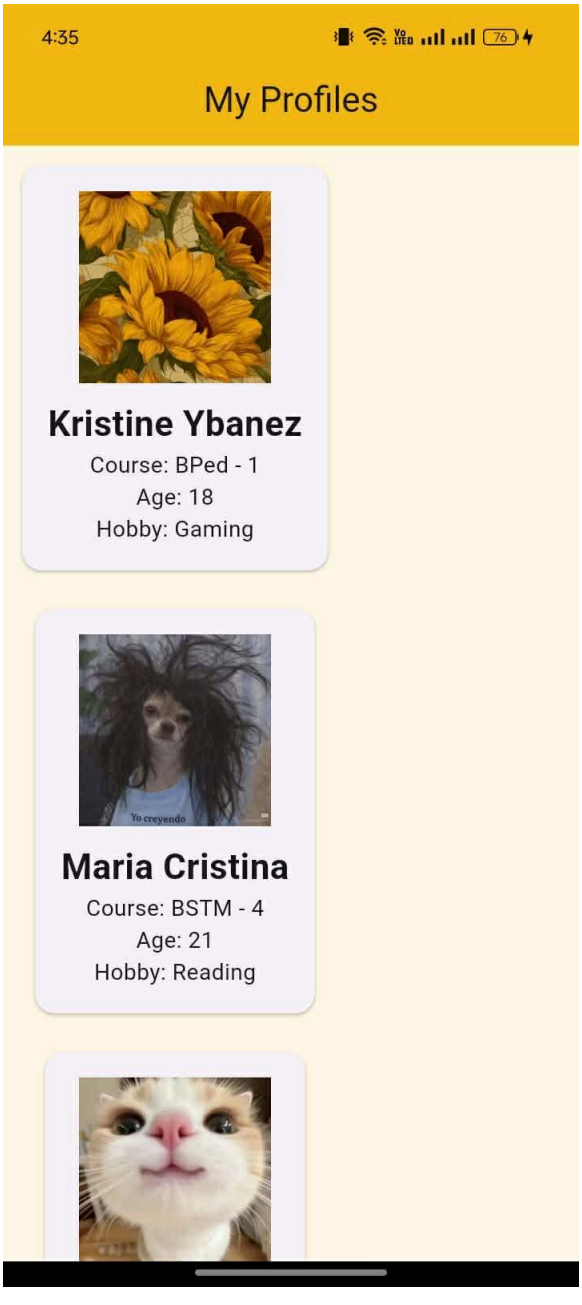

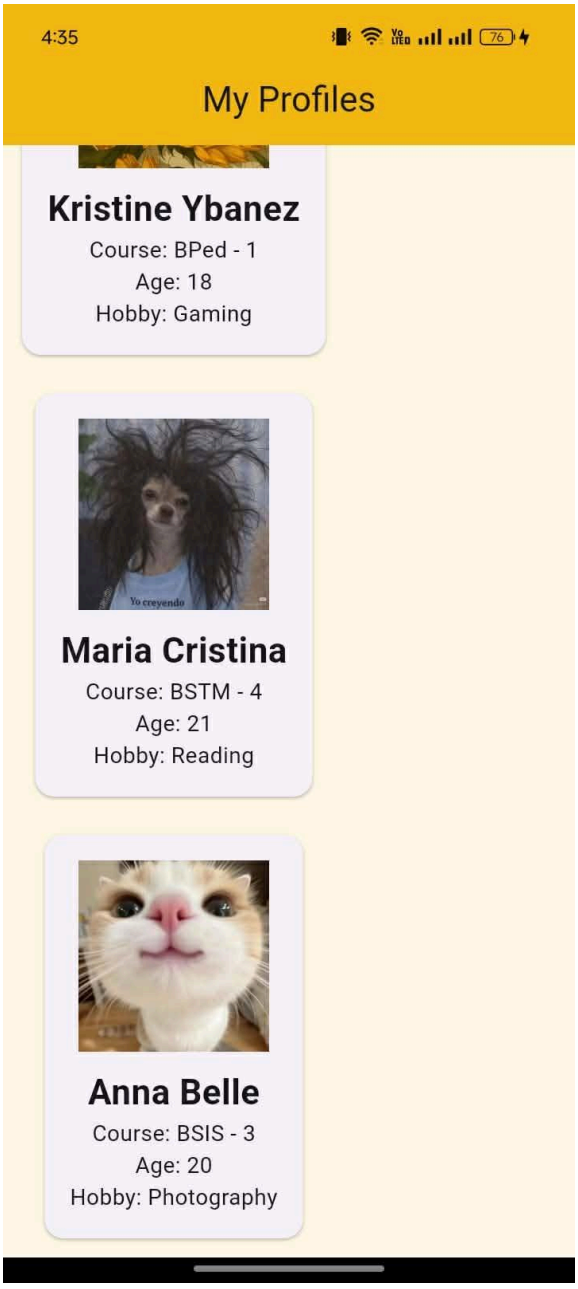


```
body: SingleChildScrollView(
  child: Column(
    children: [
```

🏴 Flag 7 — Survive the Database

Objective: Prepare your UI for incomplete data.

Now imagine your profiles aren't manually created.

Someday, the data will come from a database.

And real data isn't always perfect.

Some information may be:

- Missing
- Empty
- `null`
- Not provided

Create at least **three profiles with missing information**.

For example:

Profile A
Name: Maria
Course: BSIT
Hobby: missing

Profile B
Name: Juan
Course: missing
Hobby: Gaming

Profile C
Name: missing
Course: MMA
Hobby: Drawing

Your application must **not crash** when information is missing.

Instead, provide an appropriate fallback.

Examples:


Hobby: Not provided
Course: Unknown


Challenge

Your placeholders should look intentional and clean.

Screenshot:


- Incomplete profile data
- Application displaying fallback values
- Application still functioning correctly

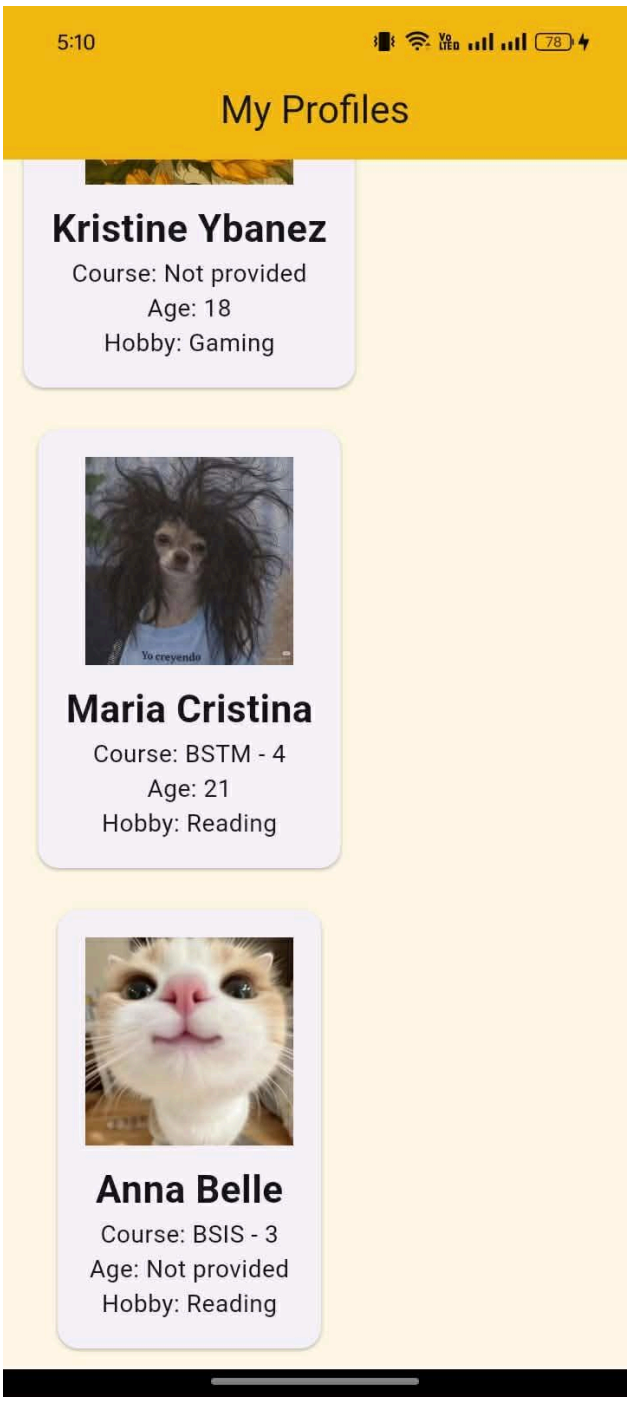

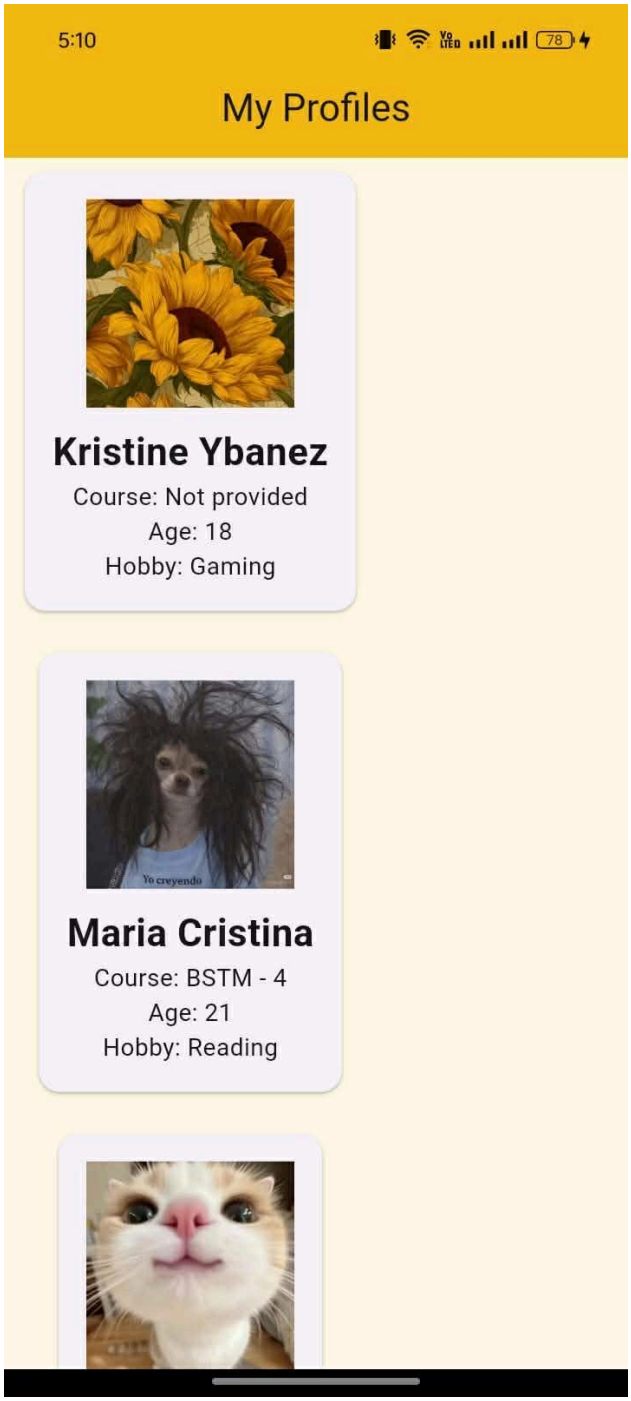


5:10

My Profiles




Krylle Jane

Course: BSIT - 3
Age: 20
Hobby: Not provided



Kayra Ylaya

Course: BSHM - 2
Age: 19
Hobby: Dancing



🏴 Flag 8 — Save Your Progress

Objective: Commit and push your completed Data-Driven UI CTF.

Use an appropriate commit message following proper Git standards.

Branch:

`feature/data-ui`

Screenshot:

- Successful commit
- Current branch
- Terminal showing the commit

