







Run dots, run

Customer  
.....

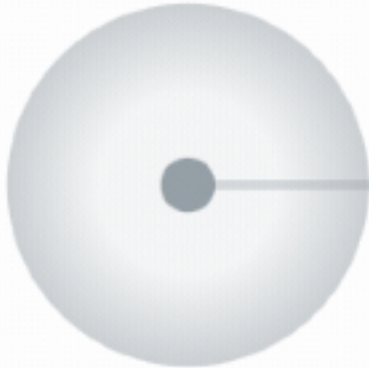

1

Active carts

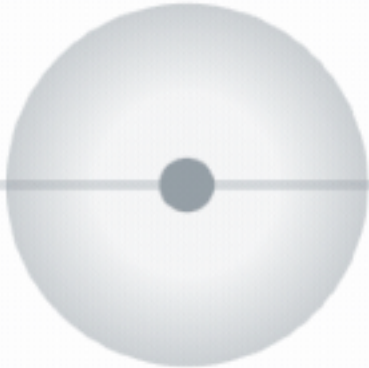

1

Checking out




0

Purchased

← Open custom settings




```
const ordersRunningDots = useSprings(
  newOrders.length,
  newOrders.map((item, index) => ({
    delay: index * springDelay,
    from: {
      cx: item.fromCx,
      fill: rgba(gray, 1),
      radius: item.radius,
    },
    to: {
      cx: item.toCx,
      fill: rgba(green, 1),
      radius: item.radius,
    },
  })))
);
```






Customer  
.....

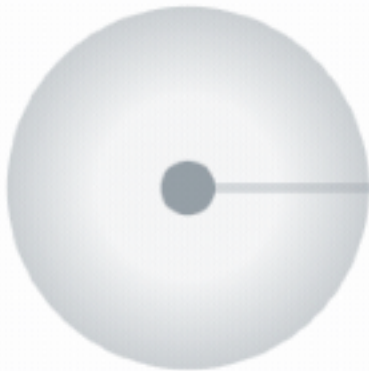

1

Active carts

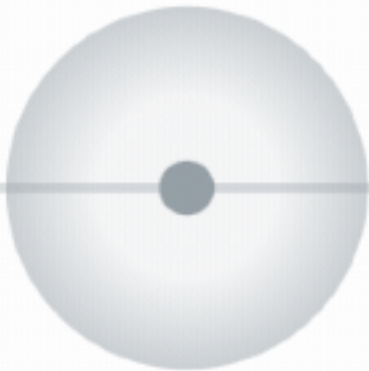

1

Checking out




0

Purchased

← Open custom settings




Customer  
.....

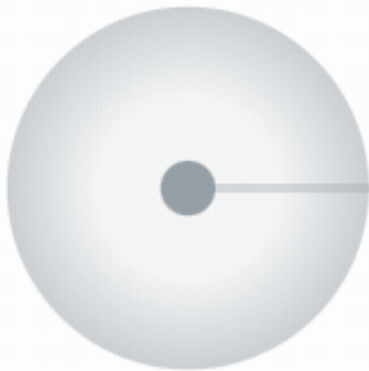

1

Active carts

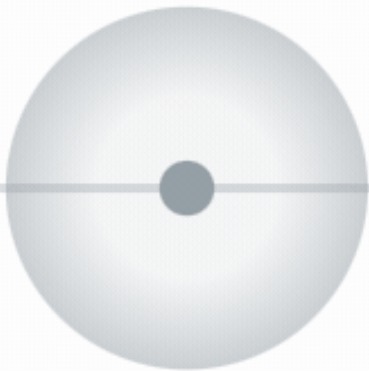

1

Checking out



0


Purchased

← Open custom settings




# Run dots, run!

```
const ordersRunningDots = useSprings(
  newOrders.length,
  newOrders.map((item, index) => ({
    delay: index * springDelay,
    from: {
      cx: item.fromCx,
      fill: rgba(gray, 1),
      radius: item.radius,
    },
    to: {
      cx: item.toCx,
      fill: rgba(green, 1),
      radius: item.radius,
    },
  })))
);
```

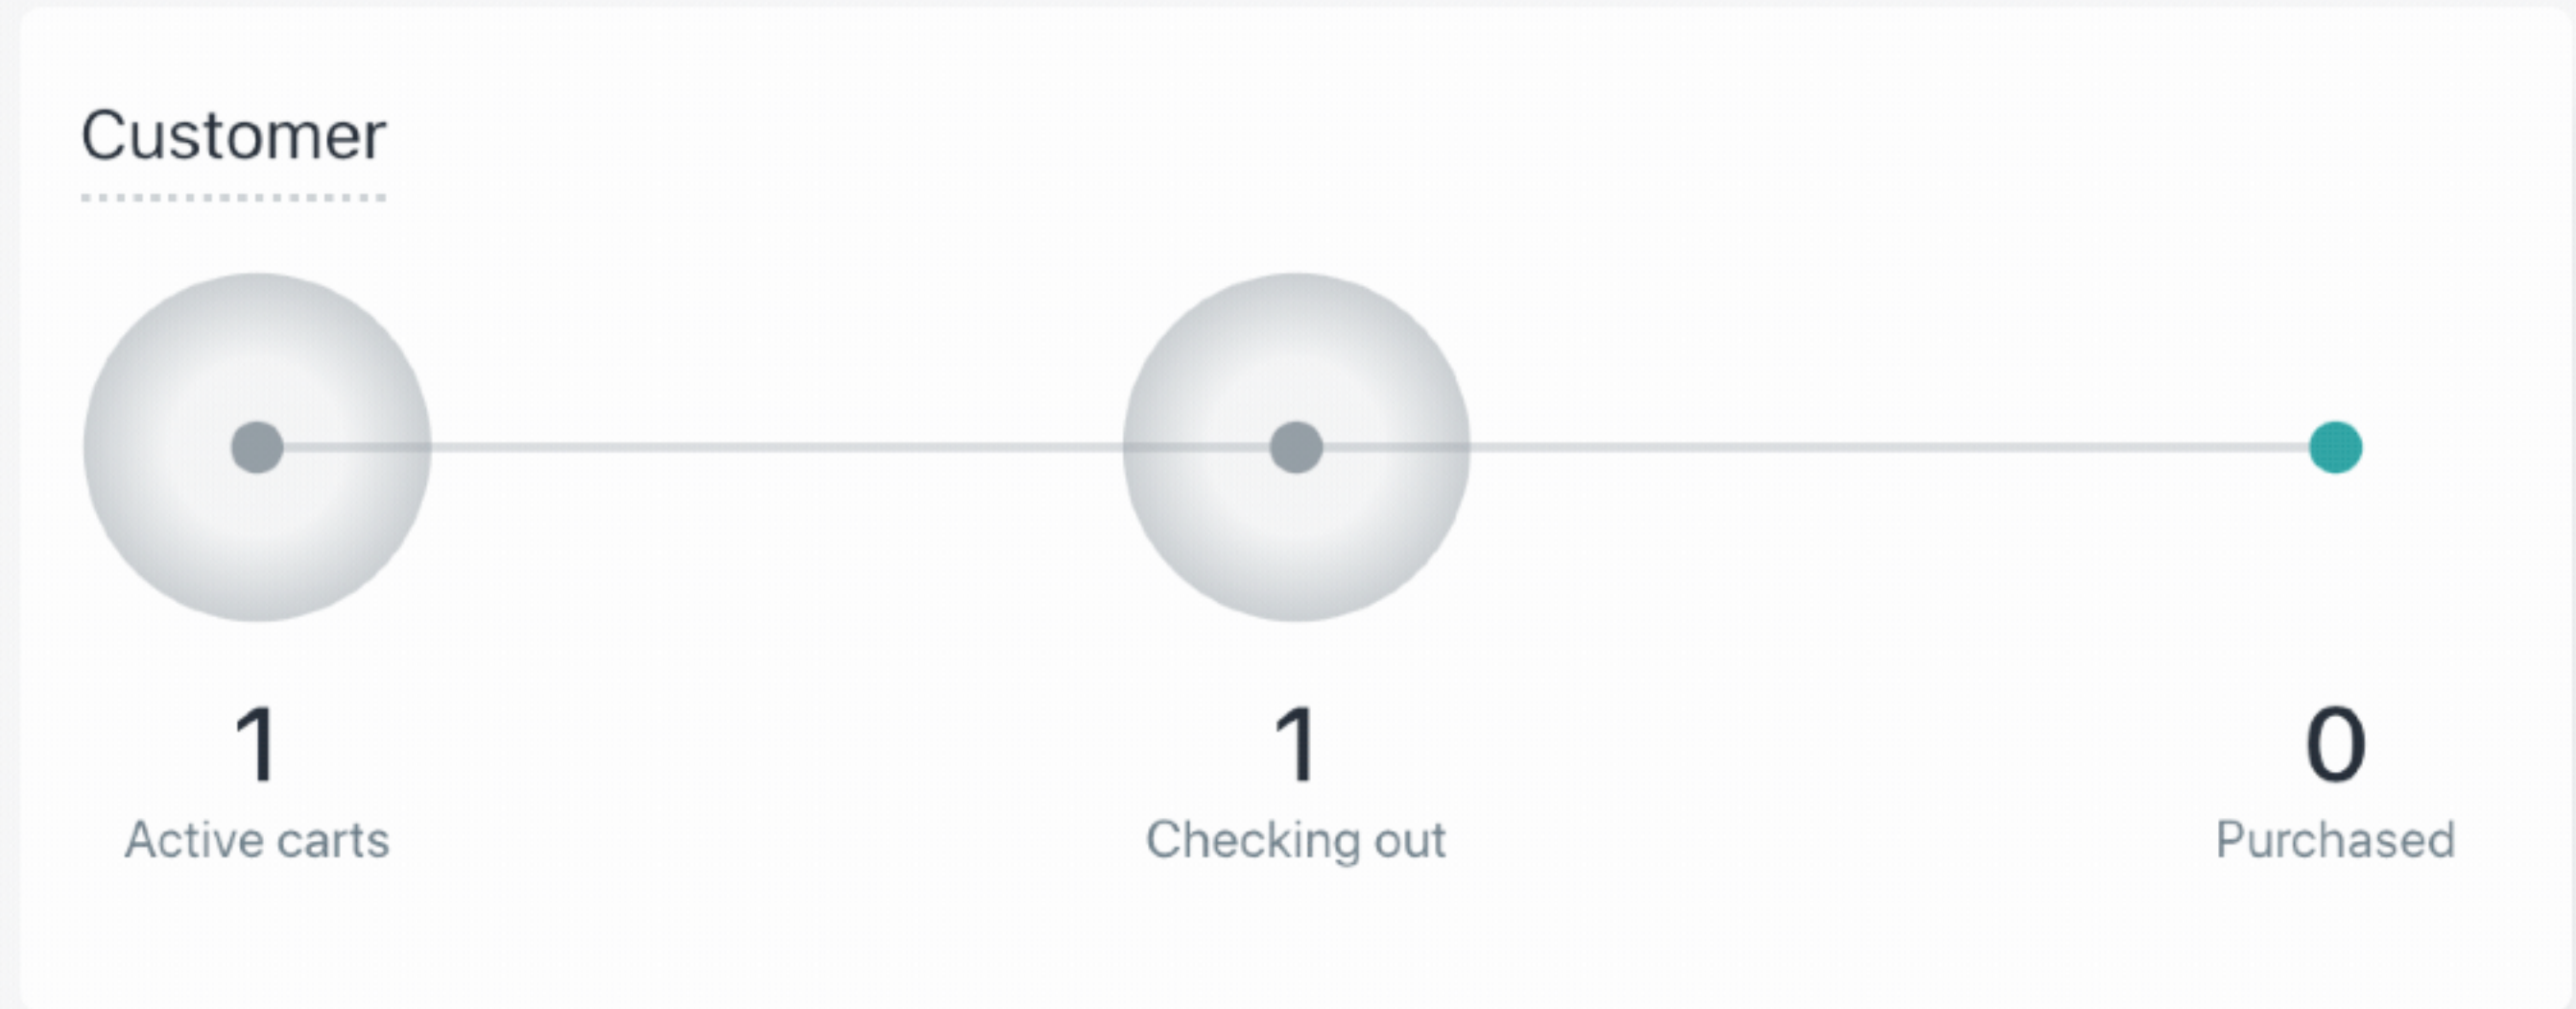

## Customer

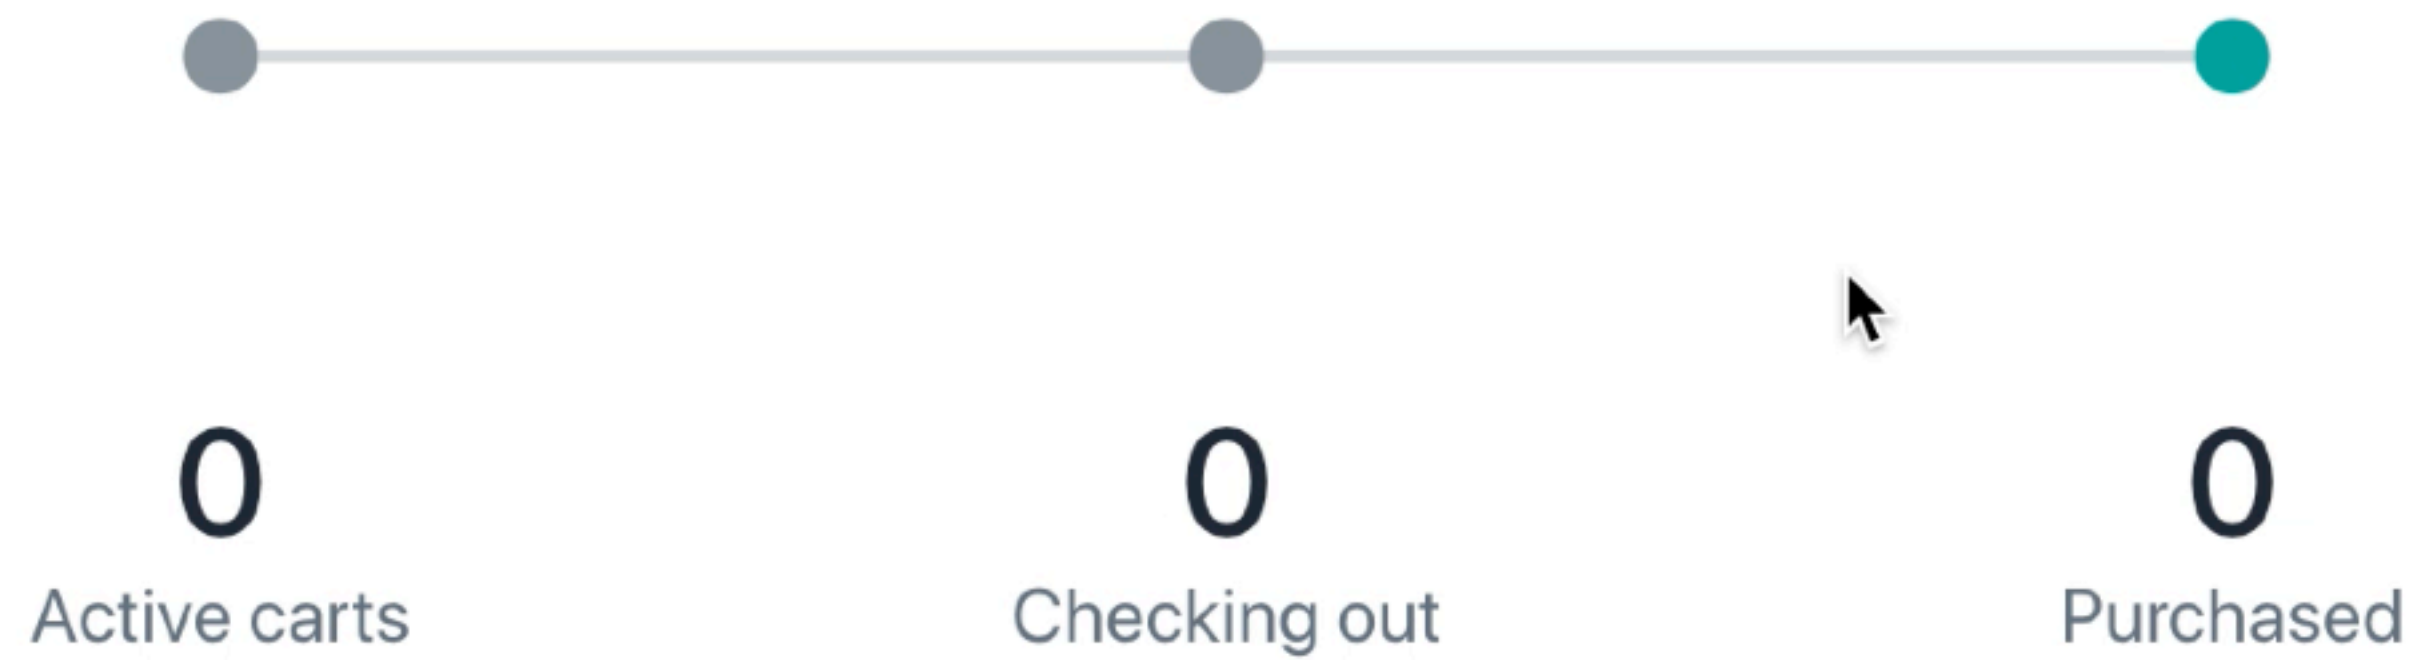

← Open custom settings