





PUTTING ALL TOGETHER

```
CSS (scss)

1 - .class {
2    animation: nome-da-animacao 3s infinite alternate ease;
3  }
4  
5 - /* ou */
6
```

.class {


animation-name: nome-da-animacao;

animation-timing-function: ease;

animation-iteration-count: infinite; /* quantas vezes tocar a animacao */

animation-direction: alternate; /* alternate "rebobina" a animacao no final */


animation-duration: 3s;

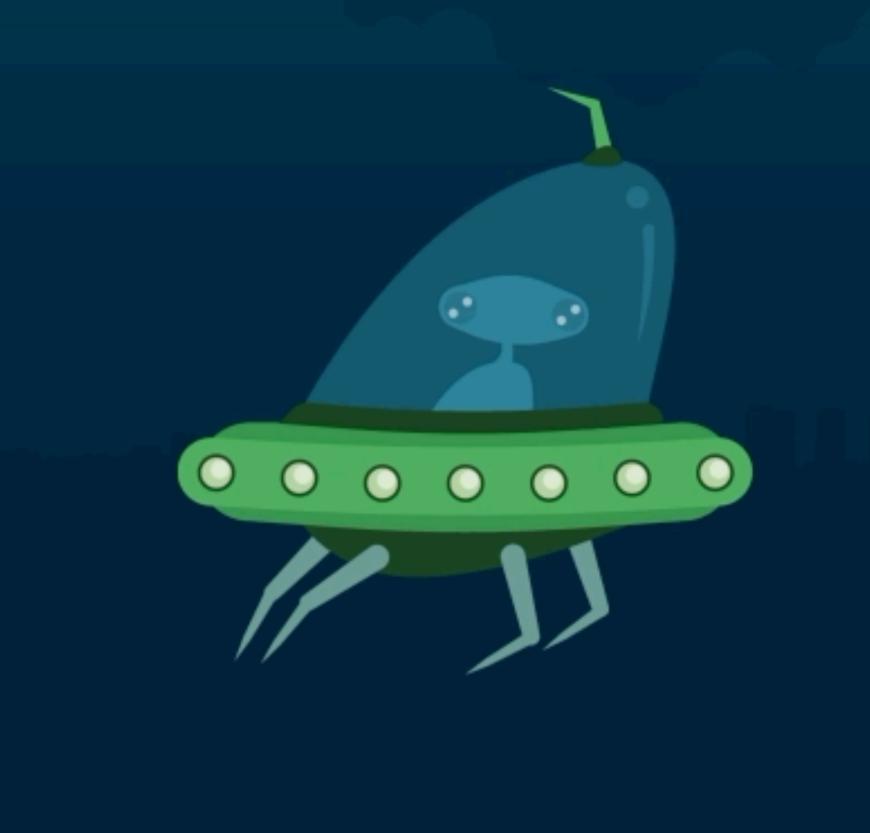

```
// group that wraps the top and bottom portions of the leg
<g id="leg-1" class="leg leg__1 leg--moving">
// Top portion of the leg
 <path d="M23.5 99 ... 1 1.7z" class="leg"></path>
  Bottom portion of the leg
 <path d="M24.9 10 ... 6-5.1z" class="leg leg__1_tip leg--moving-tip"></path>
```


```
.leg {
 transform-origin: top;
 animation-duration: 2s;
 8__1 {
   transform-origin: 30px 80px;
   8__tip {
     transform-origin: 20px 99px 0;
      animation-duration: 2.5s;
```



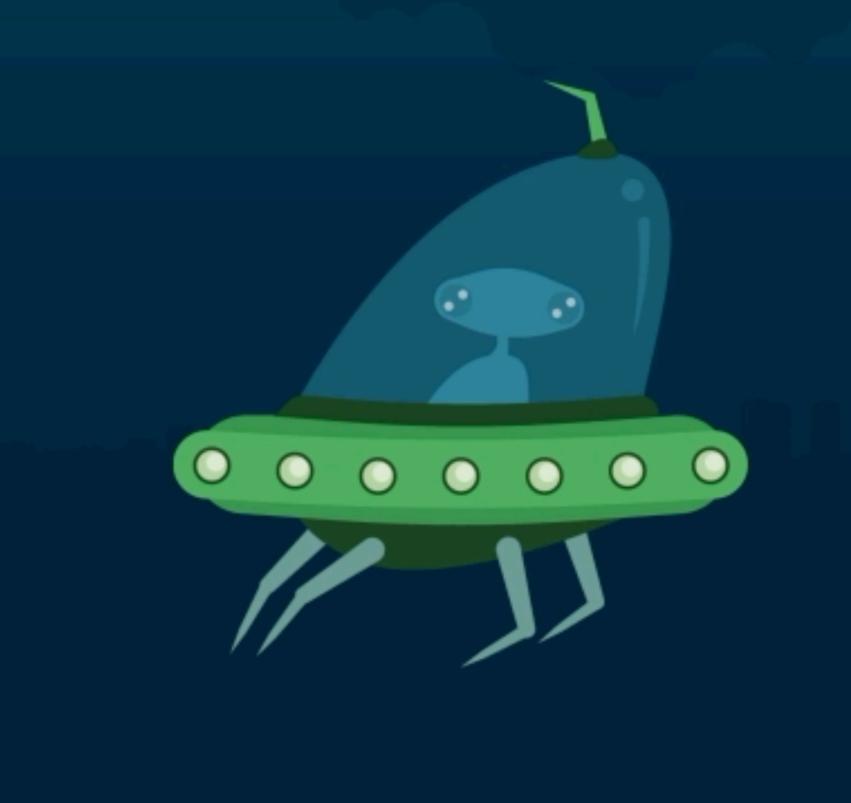







```
Okeyframes float {
  0% {
    transform: translate(0px, 0px) rotate(0deg);
 50% {
   transform: translate(20px, 80px) rotate(0deg);
  100% -
    transform: translate(50px, -20px) rotate(5deg);
```

```
.spaceship {
 animation: float 2.8s infinite alternate ease-in-out;
 transform-origin: -10% 60%;
```

