

Form1

파일(F)   편집(E)   도움말(H)

Form1

파일(F)

편집(E)

도움말(H)

여기에 입력

새 파일(N)   Ctrl+N

열기(O)   Ctrl+O

닫기(C)

저장(S)   Ctrl+S

다른 이름으로 저장(A)

인쇄(P)   Ctrl+P

미리보기(V)

종료(X)

여기에 입력

Form1

파일(F) 편집(E) 도움말(H)

새 파일(&N)  
저장(&S)  
인쇄(&P)  
저장(&S)  
인쇄(&P)  
열기(&O)  
잘라내기(&T)  
새 파일(&N)  
복사(&C)  
붙여넣기(&P)

clear

exit

```
참조 1개  
private void 새파일ToolStripMenuItem_Click(object sender, EventArgs e)  
{  
    listBox1.Items.Add(((ToolStripMenuItem)sender).Text);  
}  
  
참조 1개  
private void fileToolStripMenuItem_Click(object sender, EventArgs e)  
{  
}  
  
참조 1개  
private void 편집ToolStripMenuItem_Click(object sender, EventArgs e)  
{  
}  
  
참조 1개  
private void button1_Click(object sender, EventArgs e)  
{  
    listBox1.Items.Clear();  
}  
  
참조 1개  
private void button2_Click(object sender, EventArgs e)  
{  
    Application.Exit();  
}  
  
참조 1개  
private void listBox1_SelectedIndexChanged(object sender, EventArgs e)  
{  
}  
  
참조 1개  
private void 열기ToolStripMenuItem_Click(object sender, EventArgs e)  
{  
    listBox1.Items.Add(((ToolStripMenuItem)sender).Text);  
}
```

오전 9:26 (ListBox)MouseDown  
오전 9:26 (ListBox)DoubleClick >  
오전 9:26 (ListBox)MouseDown  
오전 9:26 (ListBox)MouseDown  
오전 9:26 (ListBox)MouseDown  
오전 9:26 (ListBox)DoubleClick >  
오전 9:26 (ListBox)MouseDown  
오전 9:26 (ListBox)MouseDown  
오전 9:26 (ListBox)MouseDown

Close

Clicks: 1, Delta: 0, Buttons: Left

참조 2개

```
private void UpdateEventLabels(string msg, int x, int y, MouseEventArgs e)
{
    string message = string.Format("{0} X:{1}, Y:{2}", msg, x, y);
    string eventMsg = DateTime.Now.ToShortTimeString();
    eventMsg += " " + message;
    listBox1.Items.Insert(0, eventMsg);
    listBox1.TopIndex = 0;
    string mouseInfo;
    if (e != null)
    {
        mouseInfo = string.Format("Clicks: {0}, Delta: {1}, " +
            "Buttons: {2}", e.Clicks, e.Delta,
            e.Button.ToString());
    }
    else
    {
        mouseInfo = string.Format("Clicks: {0}", msg);
    }
    label1.Text = mouseInfo;
}
```

참조 1개



```
private void listBox1_MouseDown(object sender, MouseEventArgs e)
{
    UpdateEventLabels("(ListBox)MouseDown", e.X, e.Y, e);
}
```

참조 1개

```
private void listBox1_DoubleClick(object sender, EventArgs e)
{
    Point mousePoint = PointToClient(MousePosition);
    UpdateEventLabels("(ListBox)DoubleClick", mousePoint.X, mousePoint.Y, null);
}
```

참조 1개


```
private void button1_Click(object sender, EventArgs e)
{
    Application.Exit();
}
```

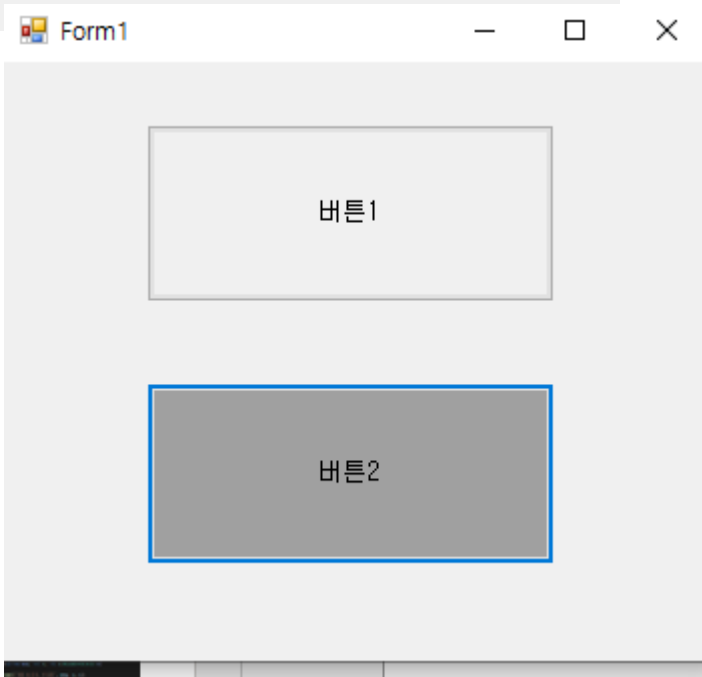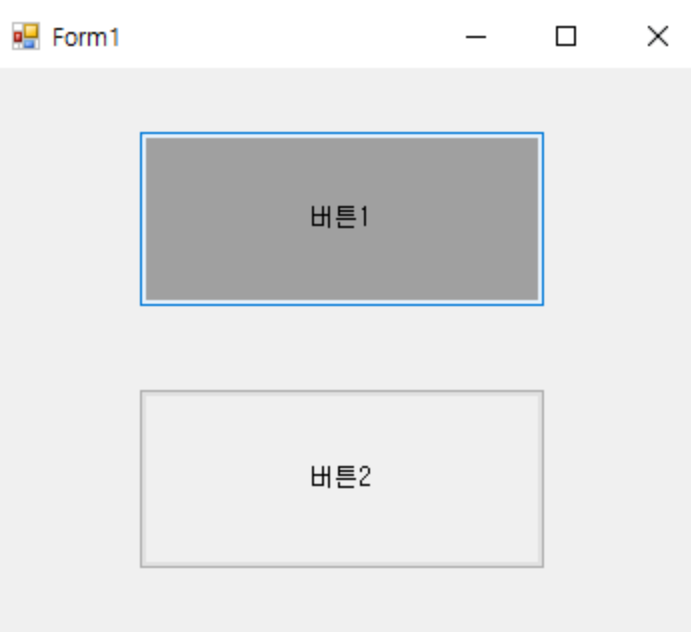

```
namespace Focus
{
    참조 3개
    public partial class Form1 : Form
    {
        참조 1개
        public Form1()
        {
            InitializeComponent();
        }

        참조 1개
        private void button1_Click(object sender, EventArgs e)
        {
            this.button1.BackColor = SystemColors.Control;
            this.button2.Focus();
            if (this.button2.Focused)
                this.button2.BackColor = SystemColors.ControlDark;
        }

        참조 1개
        private void button2_Click(object sender, EventArgs e)
        {
            this.button2.BackColor = SystemColors.Control;
            this.button1.Focus();
            if (this.button1.Focused)
                this.button1.BackColor = SystemColors.ControlDark;
        }
    }
}
```

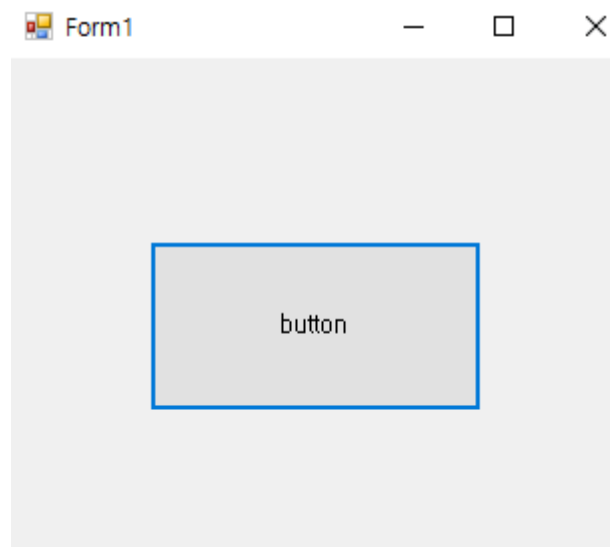

```
public Form1()
{
    InitializeComponent();
}

참조 1개
private void button1_Click(object sender, EventArgs e)
{
}

public int xPt, yPt;
public static readonly int MOVE = 10;

참조 1개
private void button1_KeyUp(object sender, KeyEventArgs e)
{
    this.xPt = this.button1.Location.X;
    this.yPt = this.button1.Location.Y;
    switch (e.KeyCode)
    {
        case Keys.Left:
            xPt -= MOVE; break;
        case Keys.Right:
            xPt += MOVE; break;
        case Keys.Up:
            yPt -= MOVE; break;
        case Keys.Down:
            yPt += MOVE; break;
    }
    this.button1.Text = e.KeyCode.ToString();
    this.button1.Location = new Point(xPt, yPt);
}
}
```

Form1

1.5


Log 1,5 = 0,17609125905568

1,5\*1,5 = 2,25

$\sqrt{1,5}$  = 1,22474487139159

```
namespace UpDown
{
    참조 3개
    public partial class Form1 : Form
    {
        참조 1개
        public Form1()
        {
            InitializeComponent();
        }

        참조 1개
        private void numericUpDown1_ValueChanged(object sender, EventArgs e)
        {
            decimal d = numericUpDown1.Value;
            label1.Text = "Log " + d + " = ";
            textBox1.Text = System.Math.Log10((double)d).ToString();
            label2.Text = d + "*" + d + " = ";
            textBox2.Text = System.Math.Pow((double)d, 2).ToString();
            label3.Text = " $\sqrt{" + d + "}$  = ";
            textBox3.Text = System.Math.Sqrt((double)d).ToString();
        }
    }
}
```

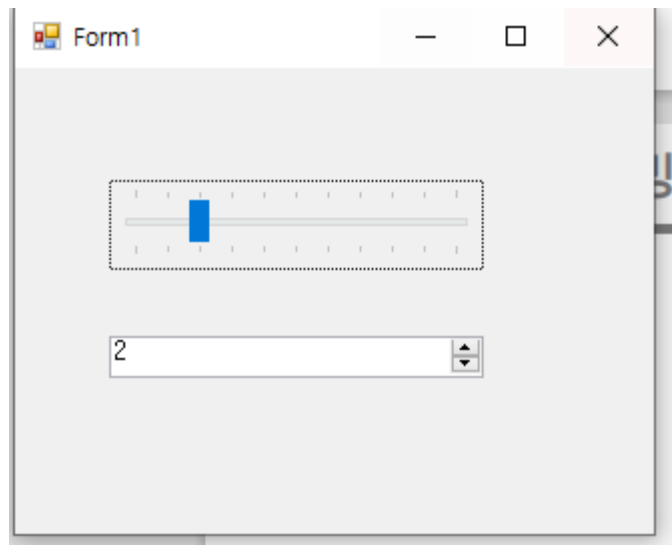

```
namespace TrackBar
{
    참조 3개
    public partial class Form1 : Form
    {
        참조 1개
        public Form1()
        {
            InitializeComponent();
        }

        참조 1개
        private void trackBar1_Scroll(object sender, EventArgs e)
        {
            numericUpDown1.Value = trackBar1.Value;
        }

        참조 1개
        private void numericUpDown1_ValueChanged(object sender, EventArgs e)
        {
            trackBar1.Value = (int)numericUpDown1.Value;
        }
    }
}
```

