



Vi. CentOS:

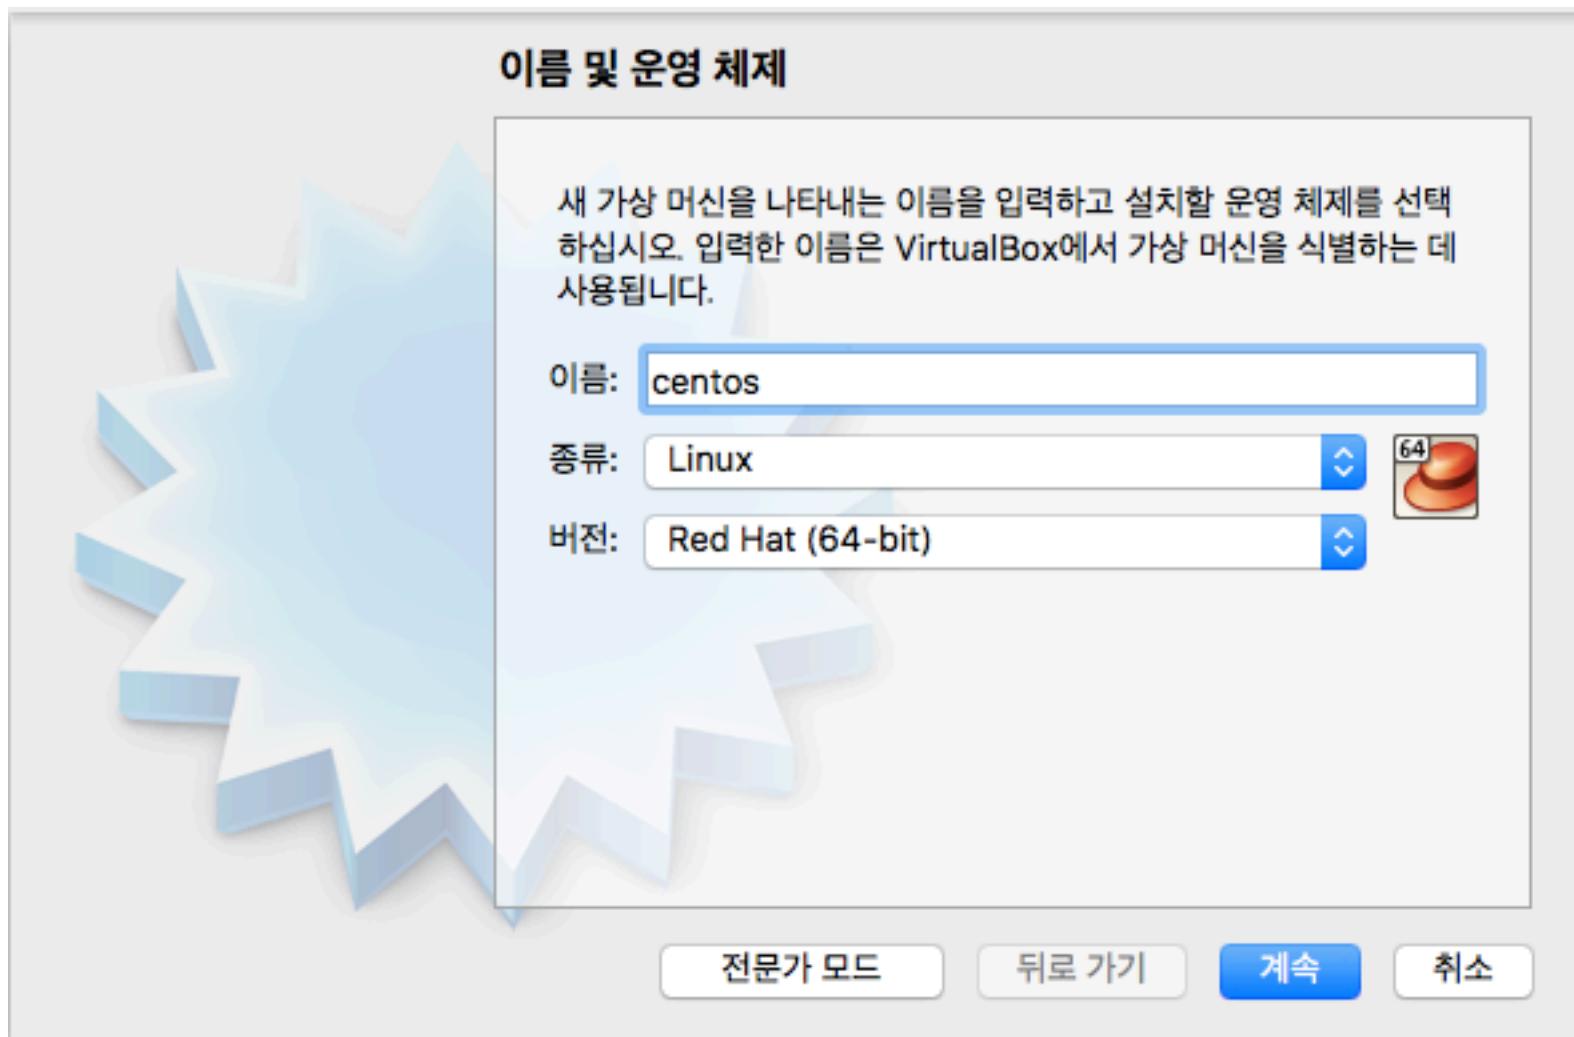

Vi. CentOS:

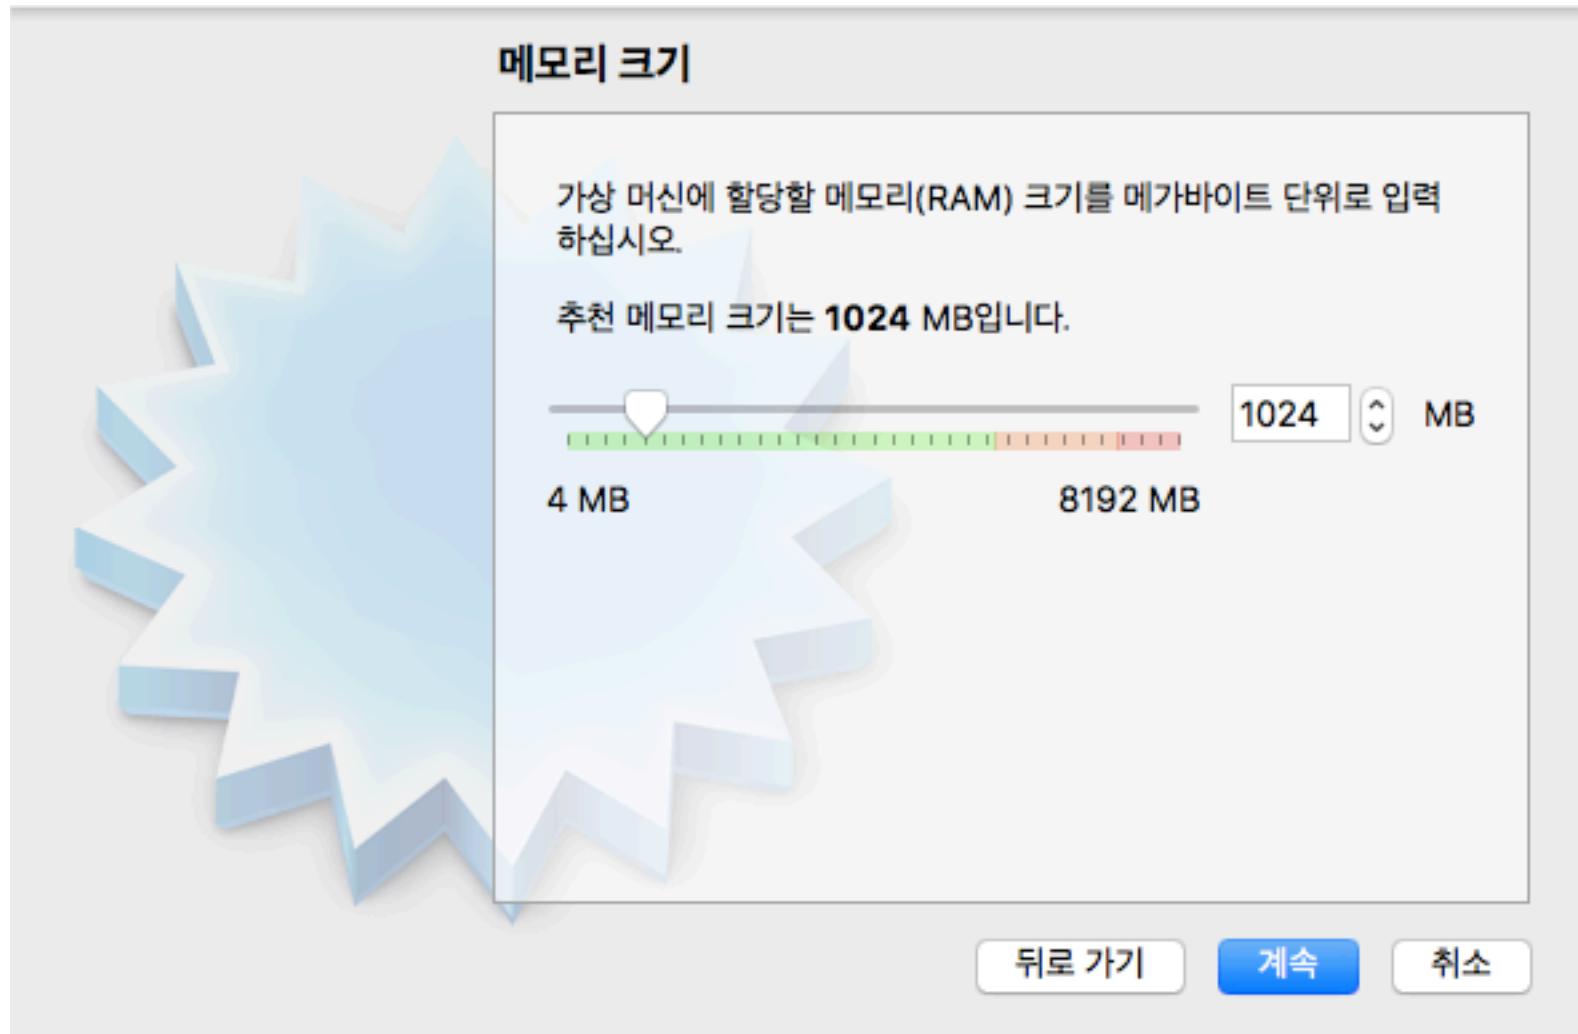

Vi. CentOS:

파일 위치 및 크기

새 가상 하드 디스크 파일의 이름을 아래 상자에 입력하거나 폴더 아이콘을 눌러서 파일을 생성할 폴더를 지정할 수 있습니다.



새 가상 하드 디스크 크기를 메가바이트 단위로 입력하십시오. 가상 머신에서 가상 하드 드라이브에 저장할 수 있는 데이터의 최대 크기입니다.


24.00 GB

4.00 MB


2.00 TB

[뒤로 가기](#) [만들기](#) [취소](#)


Vi. CentOS:

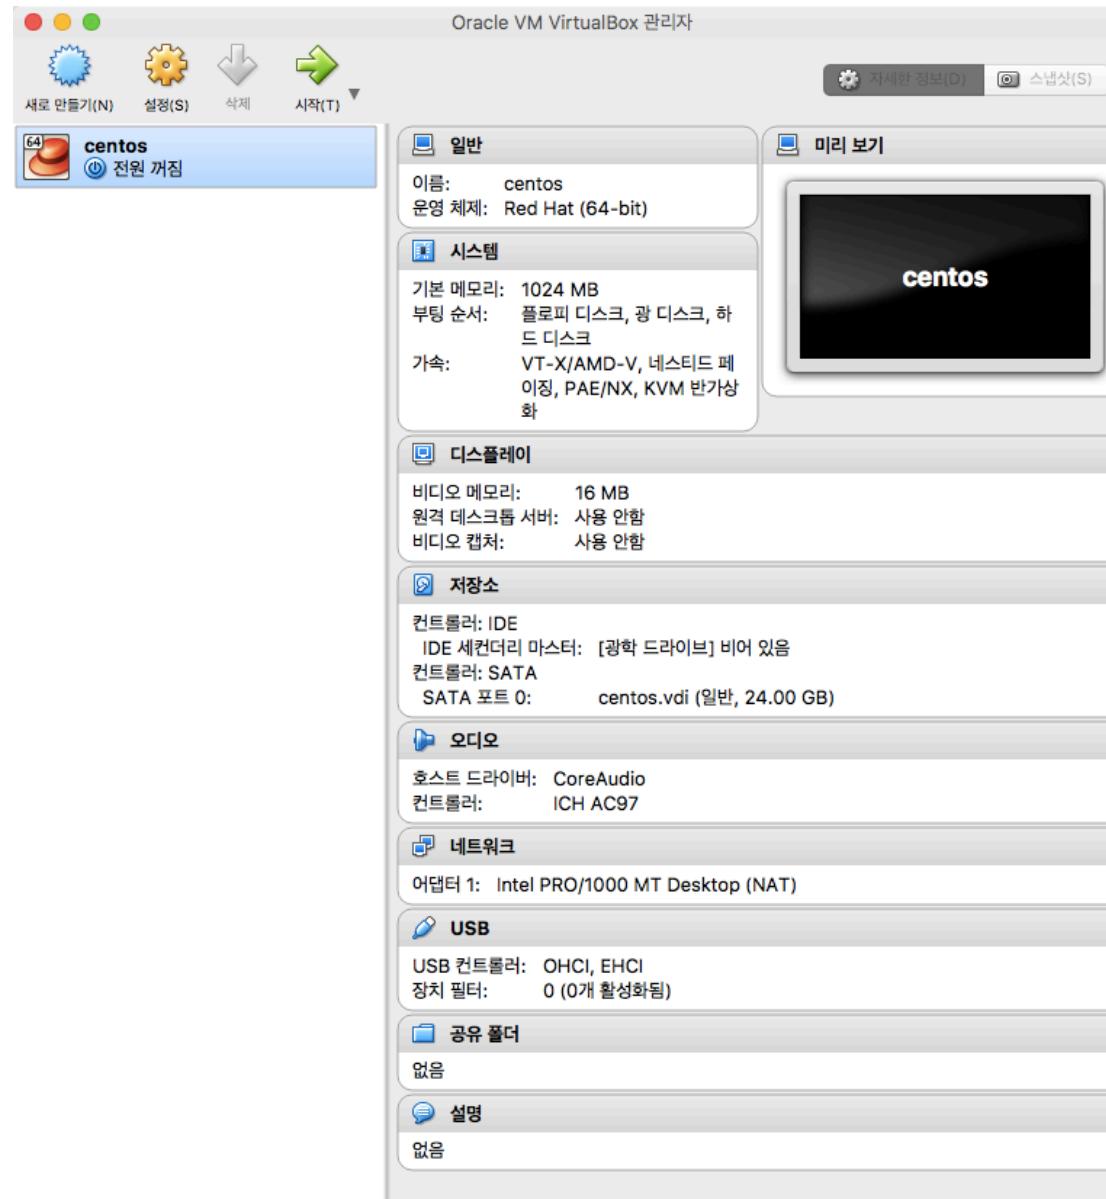


Vi. CentOS:

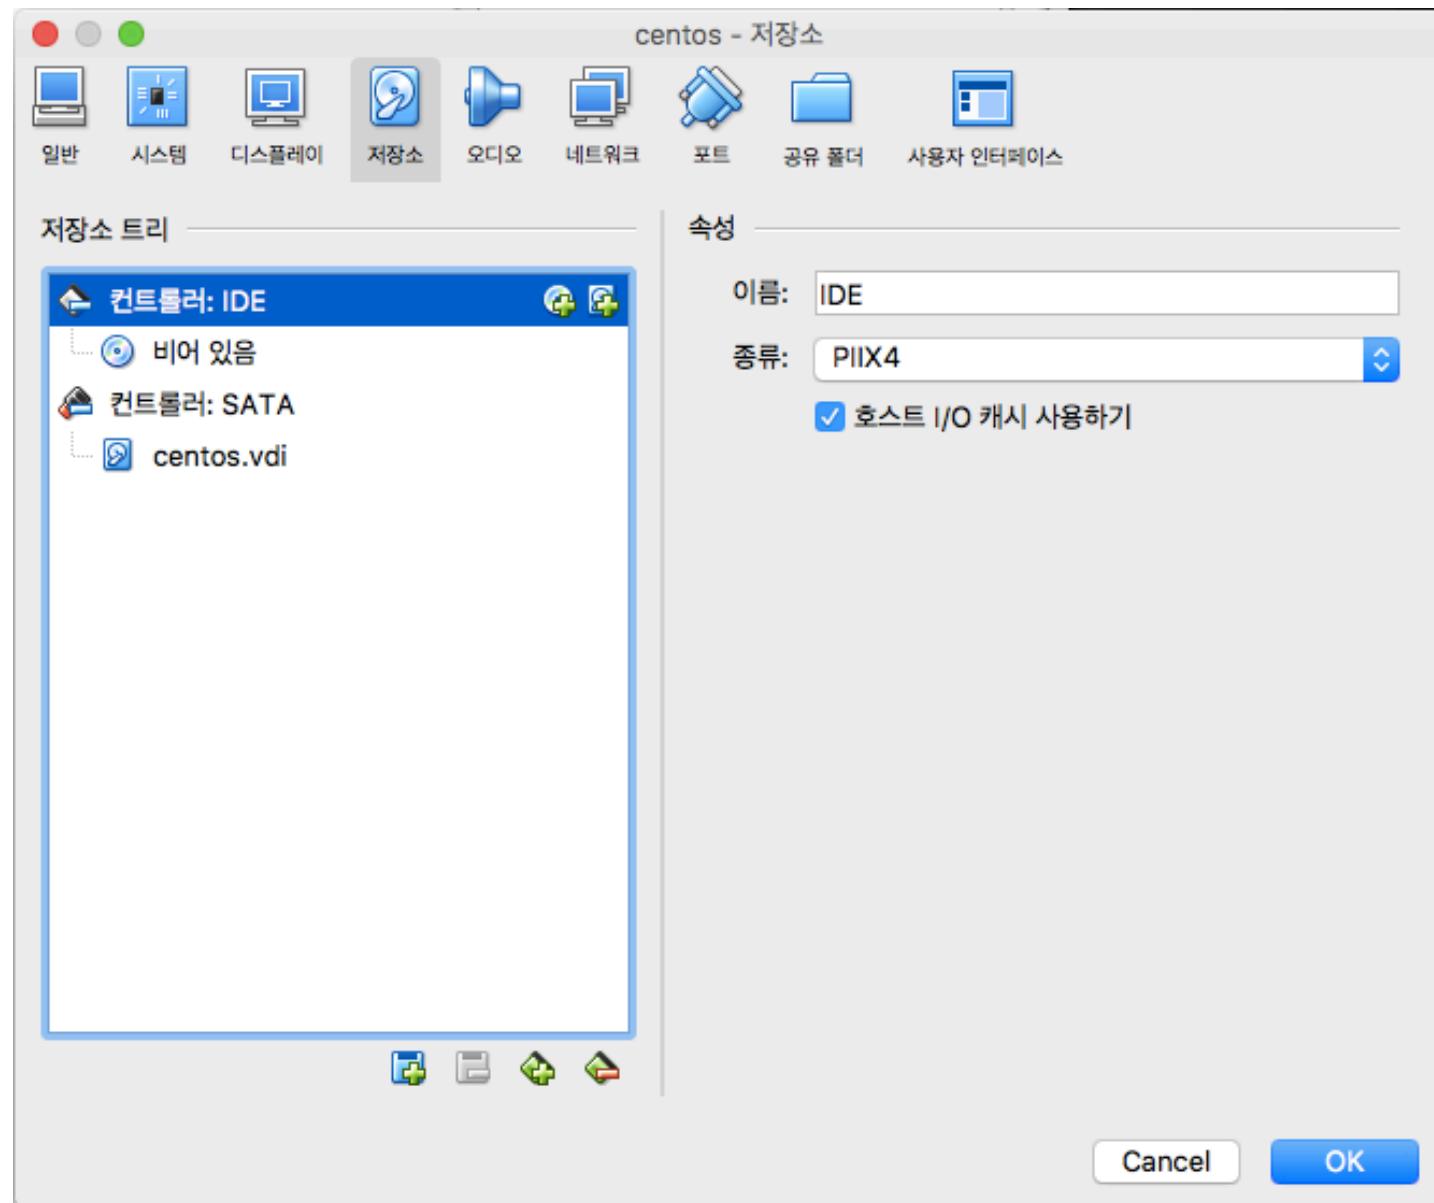


Vi. CentOS:

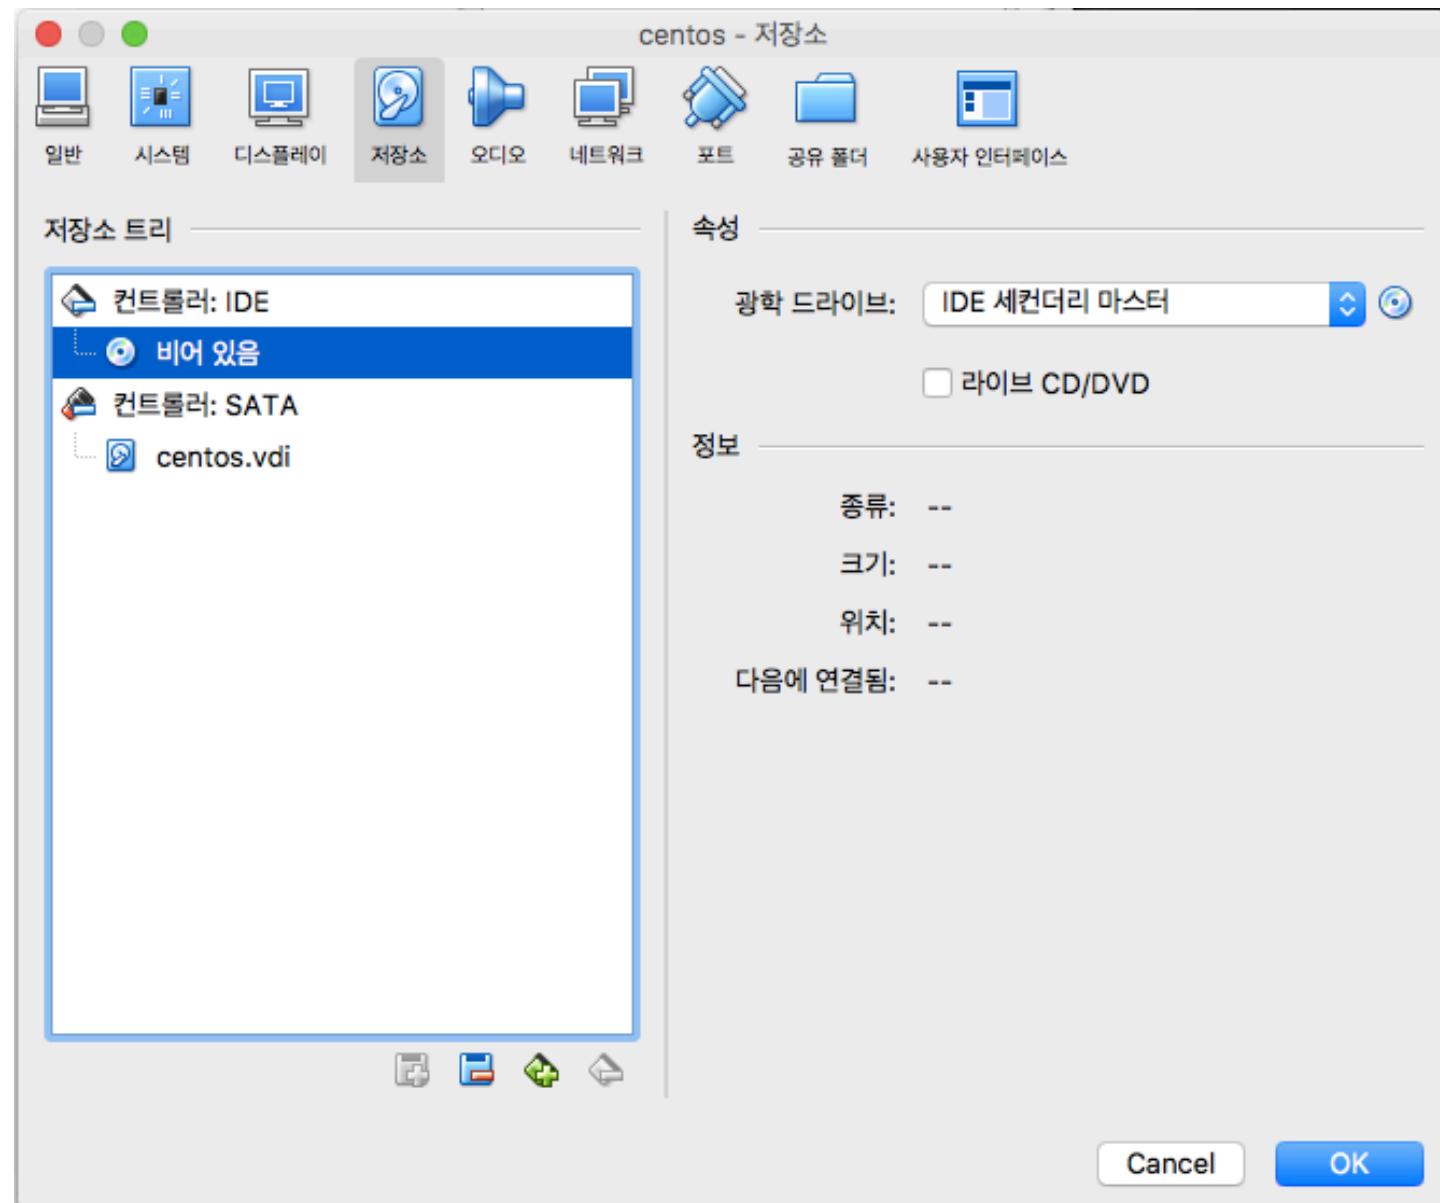


Vi. CentOS:

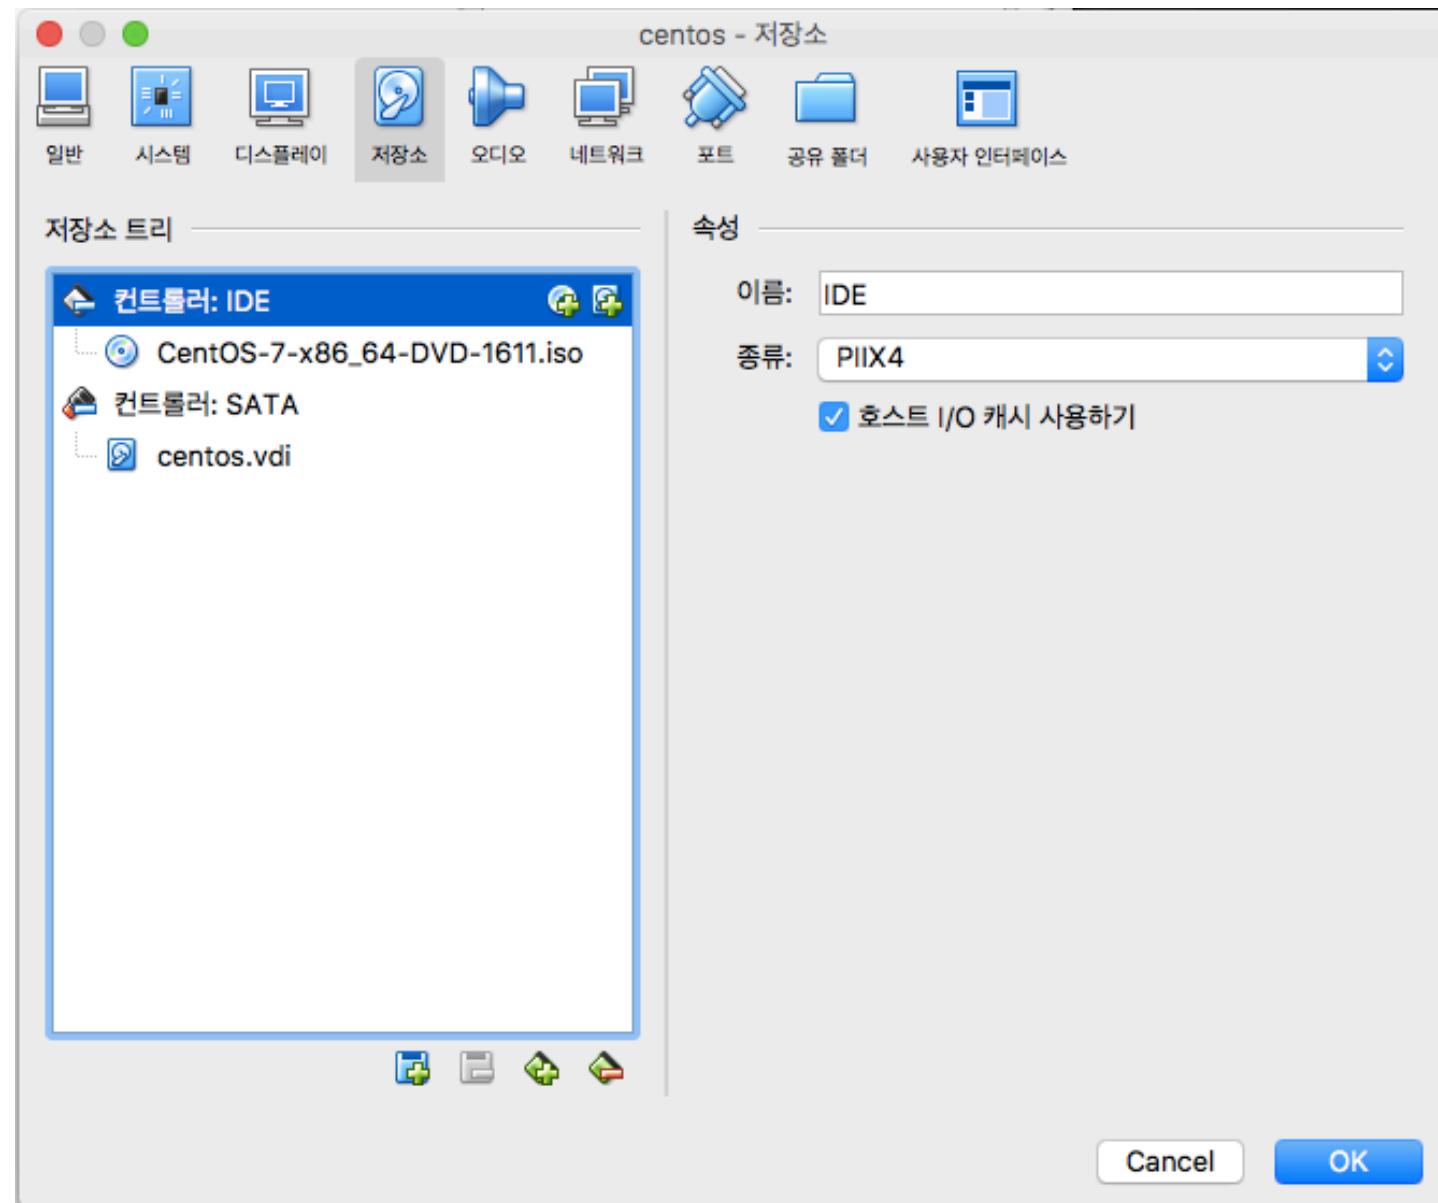


Vi. CentOS:

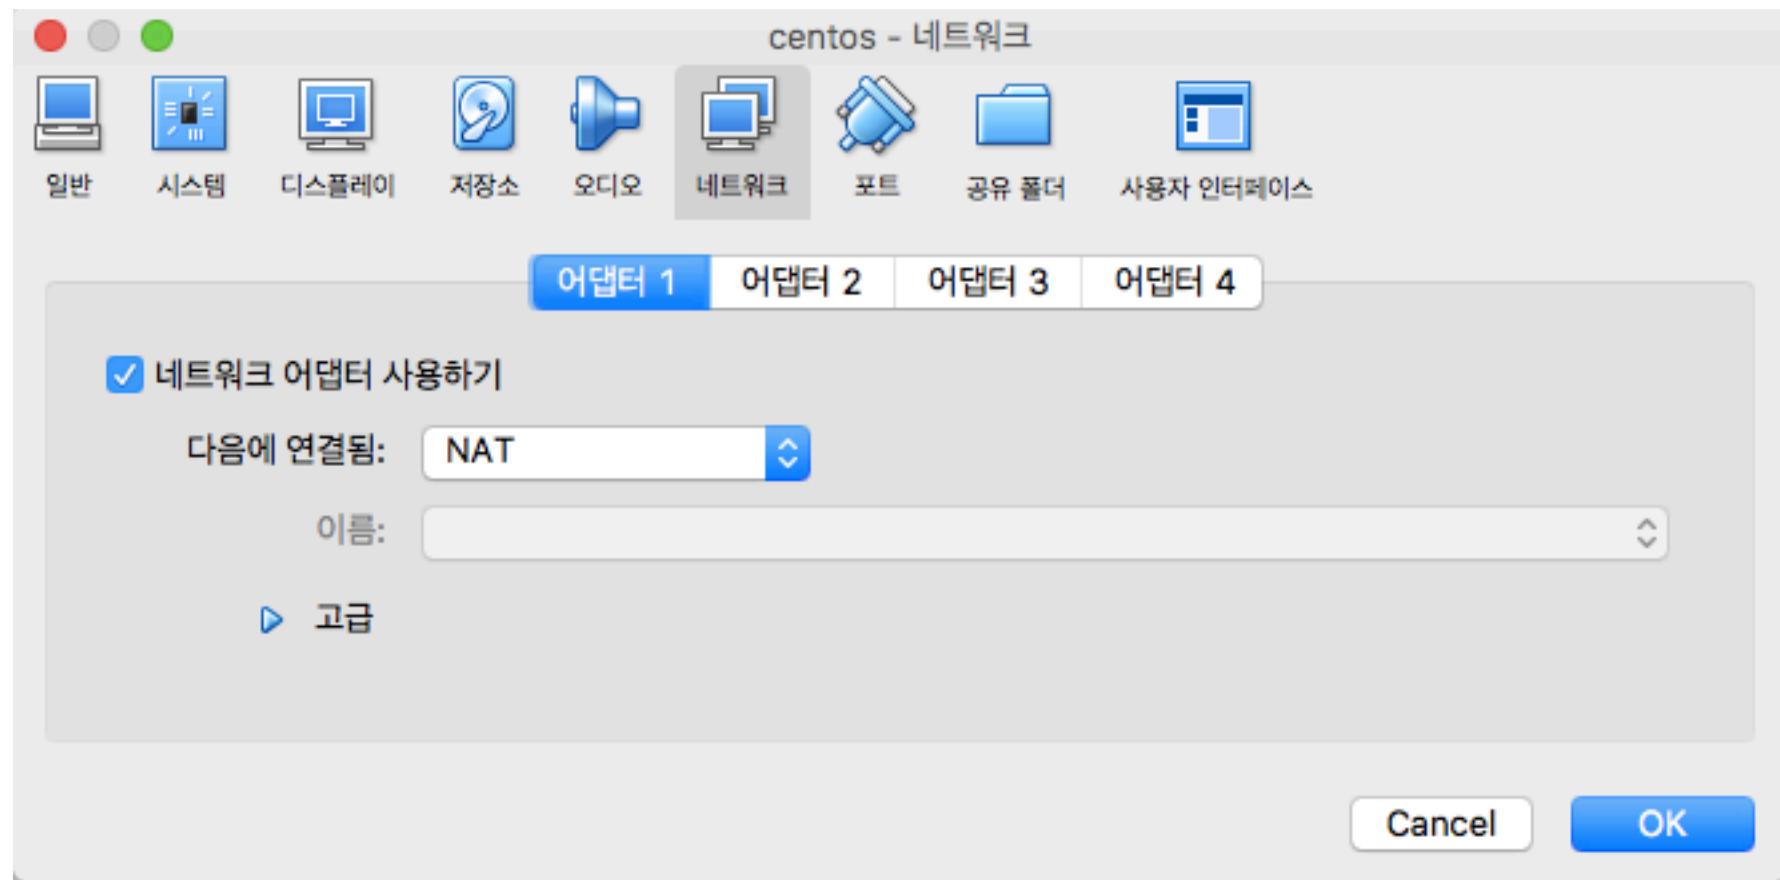


Vi. CentOS:

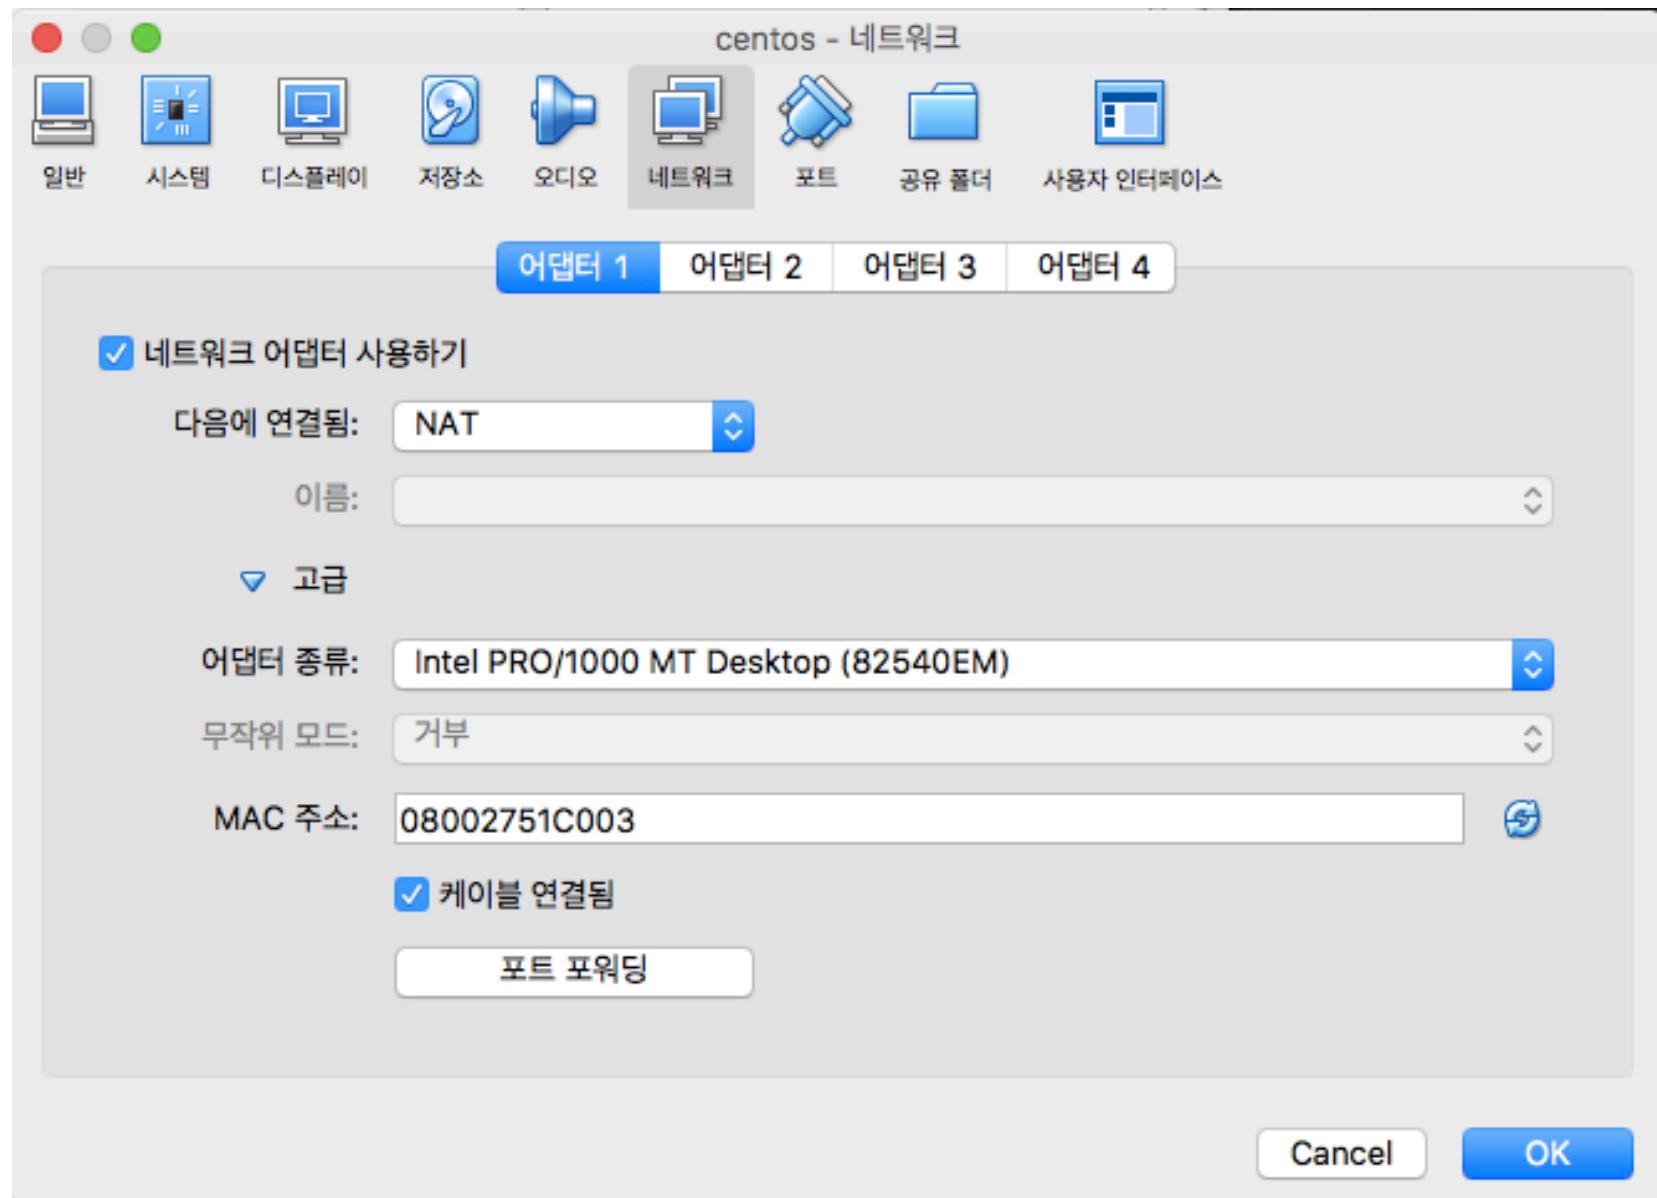


Vi. CentOS:

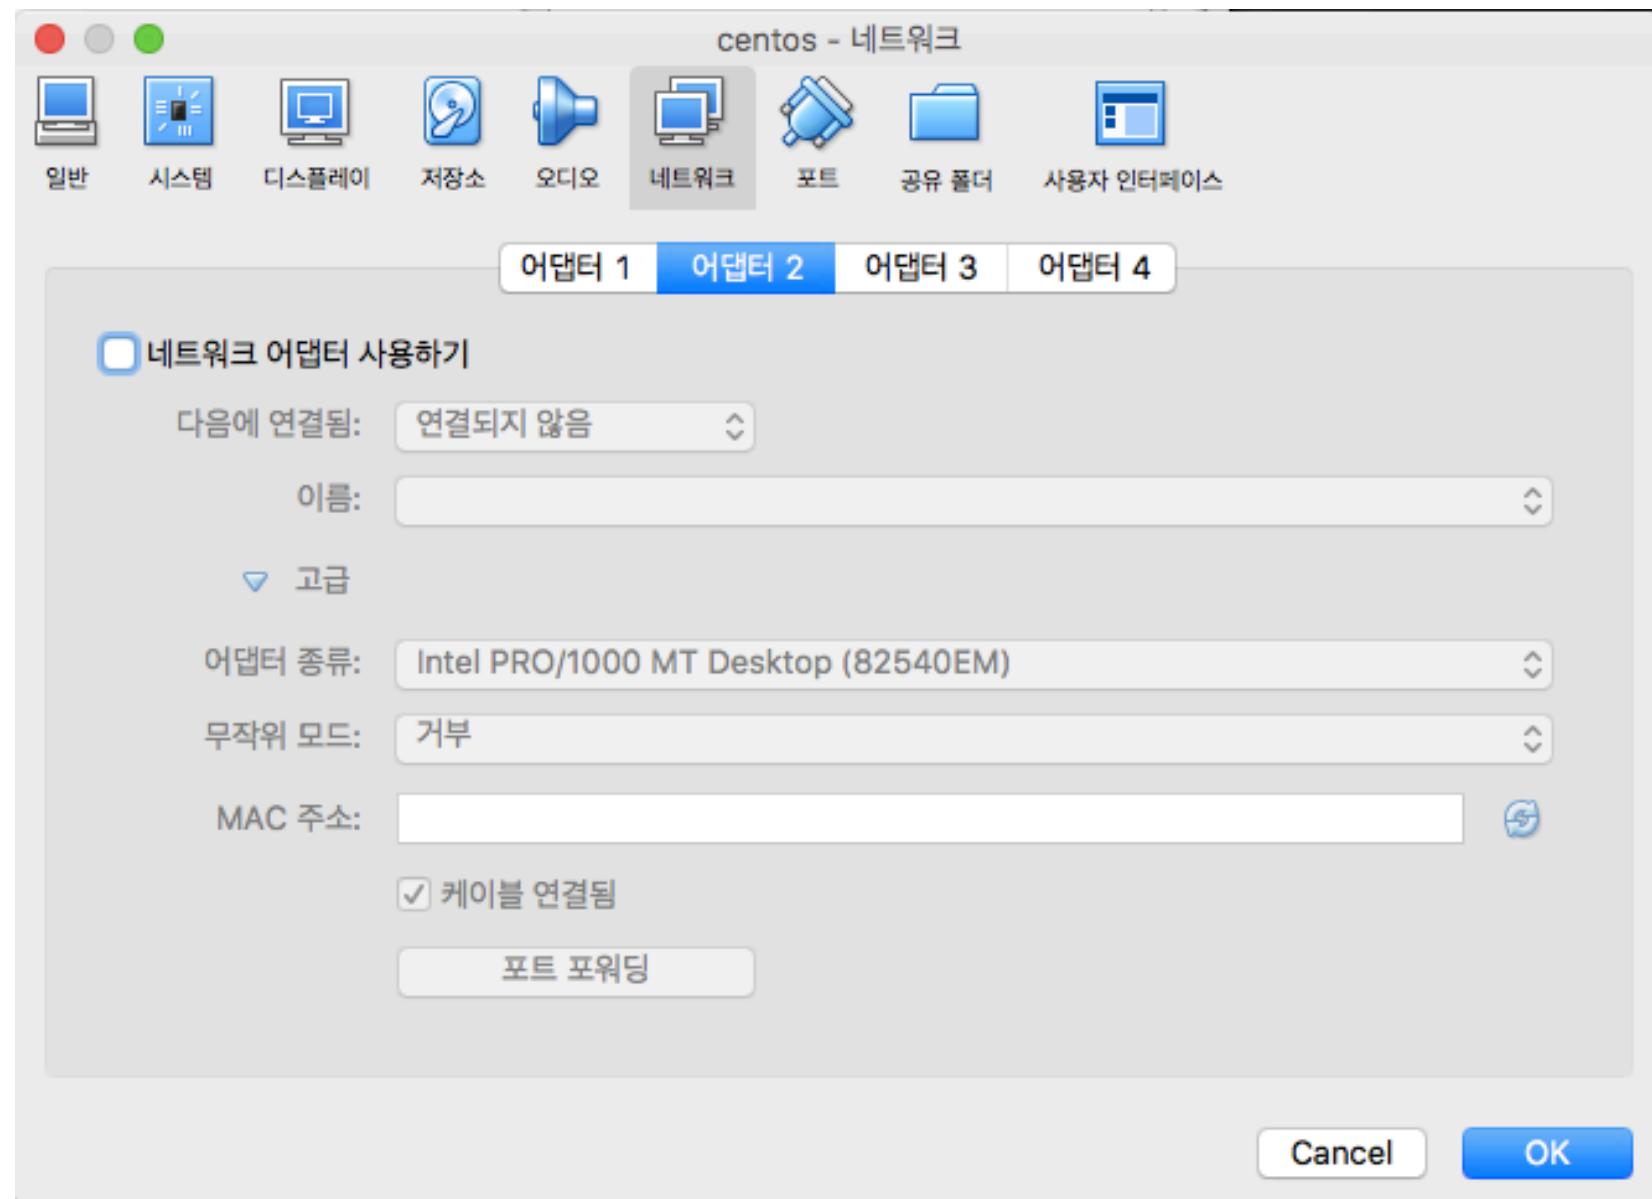


Vi. CentOS:

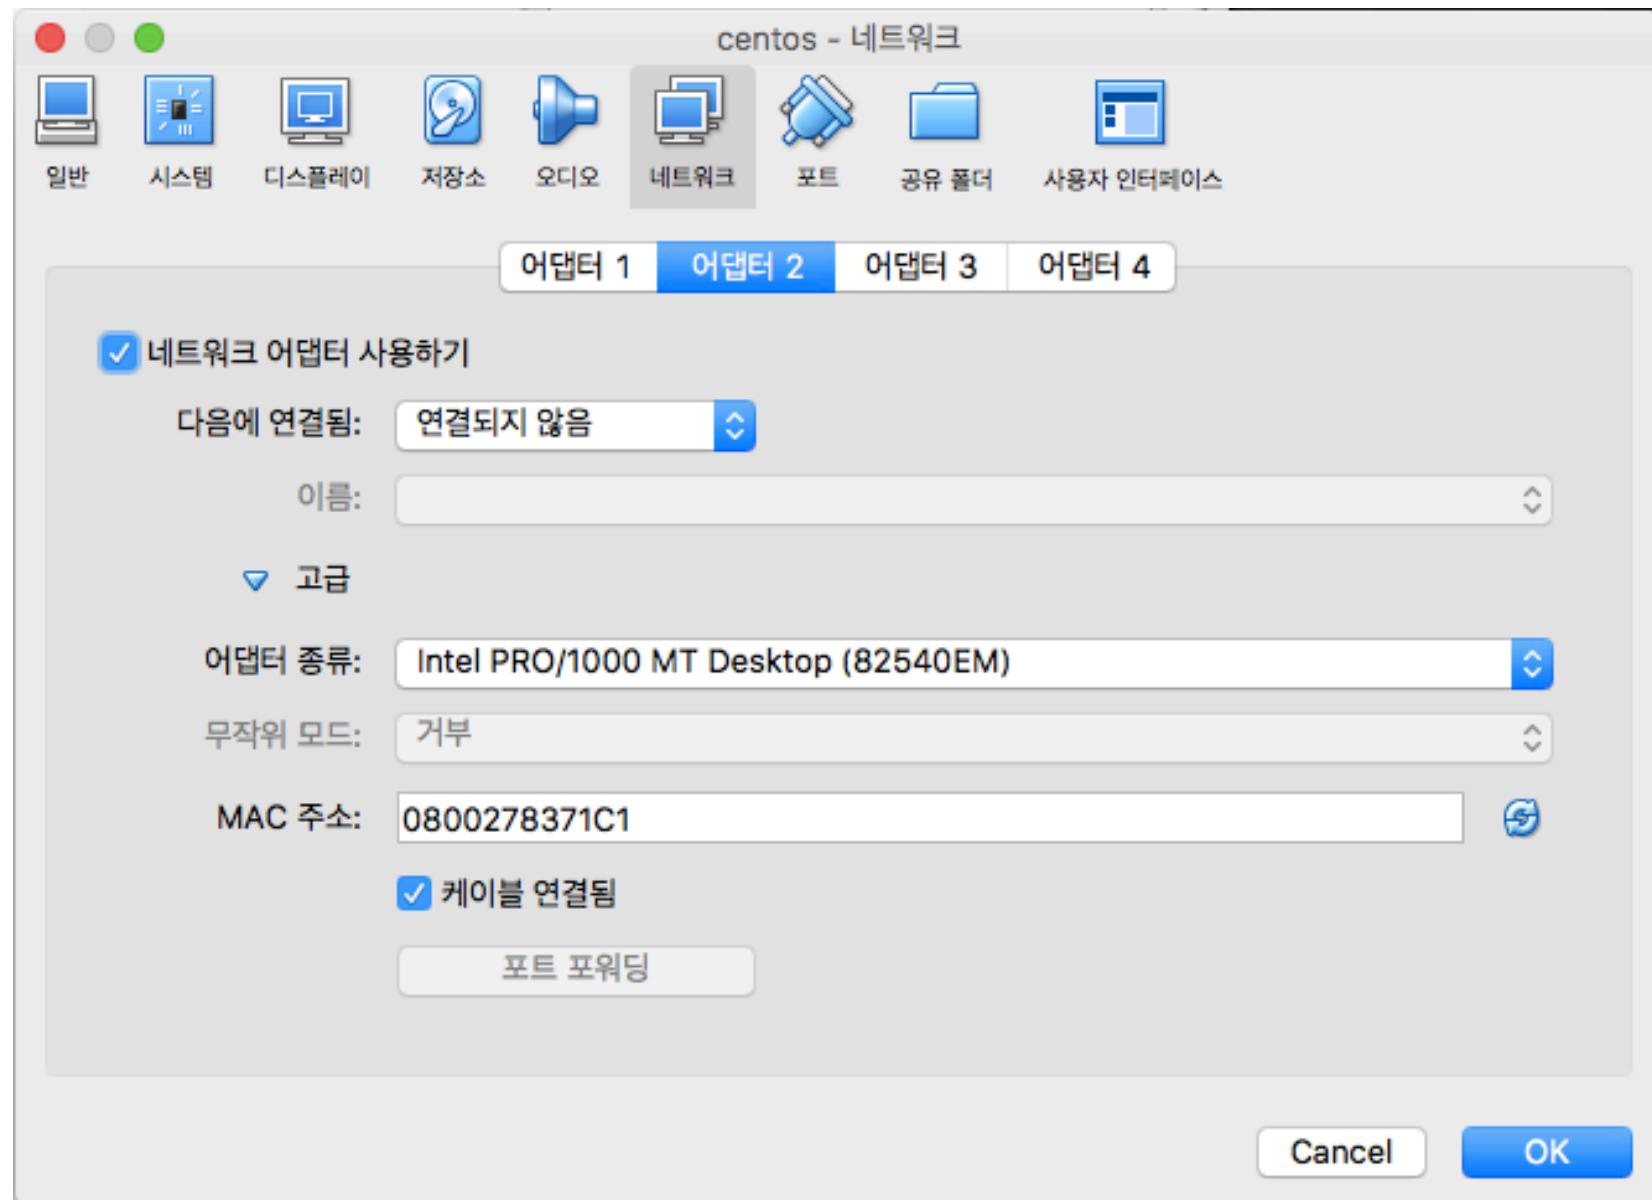


Vi. CentOS:

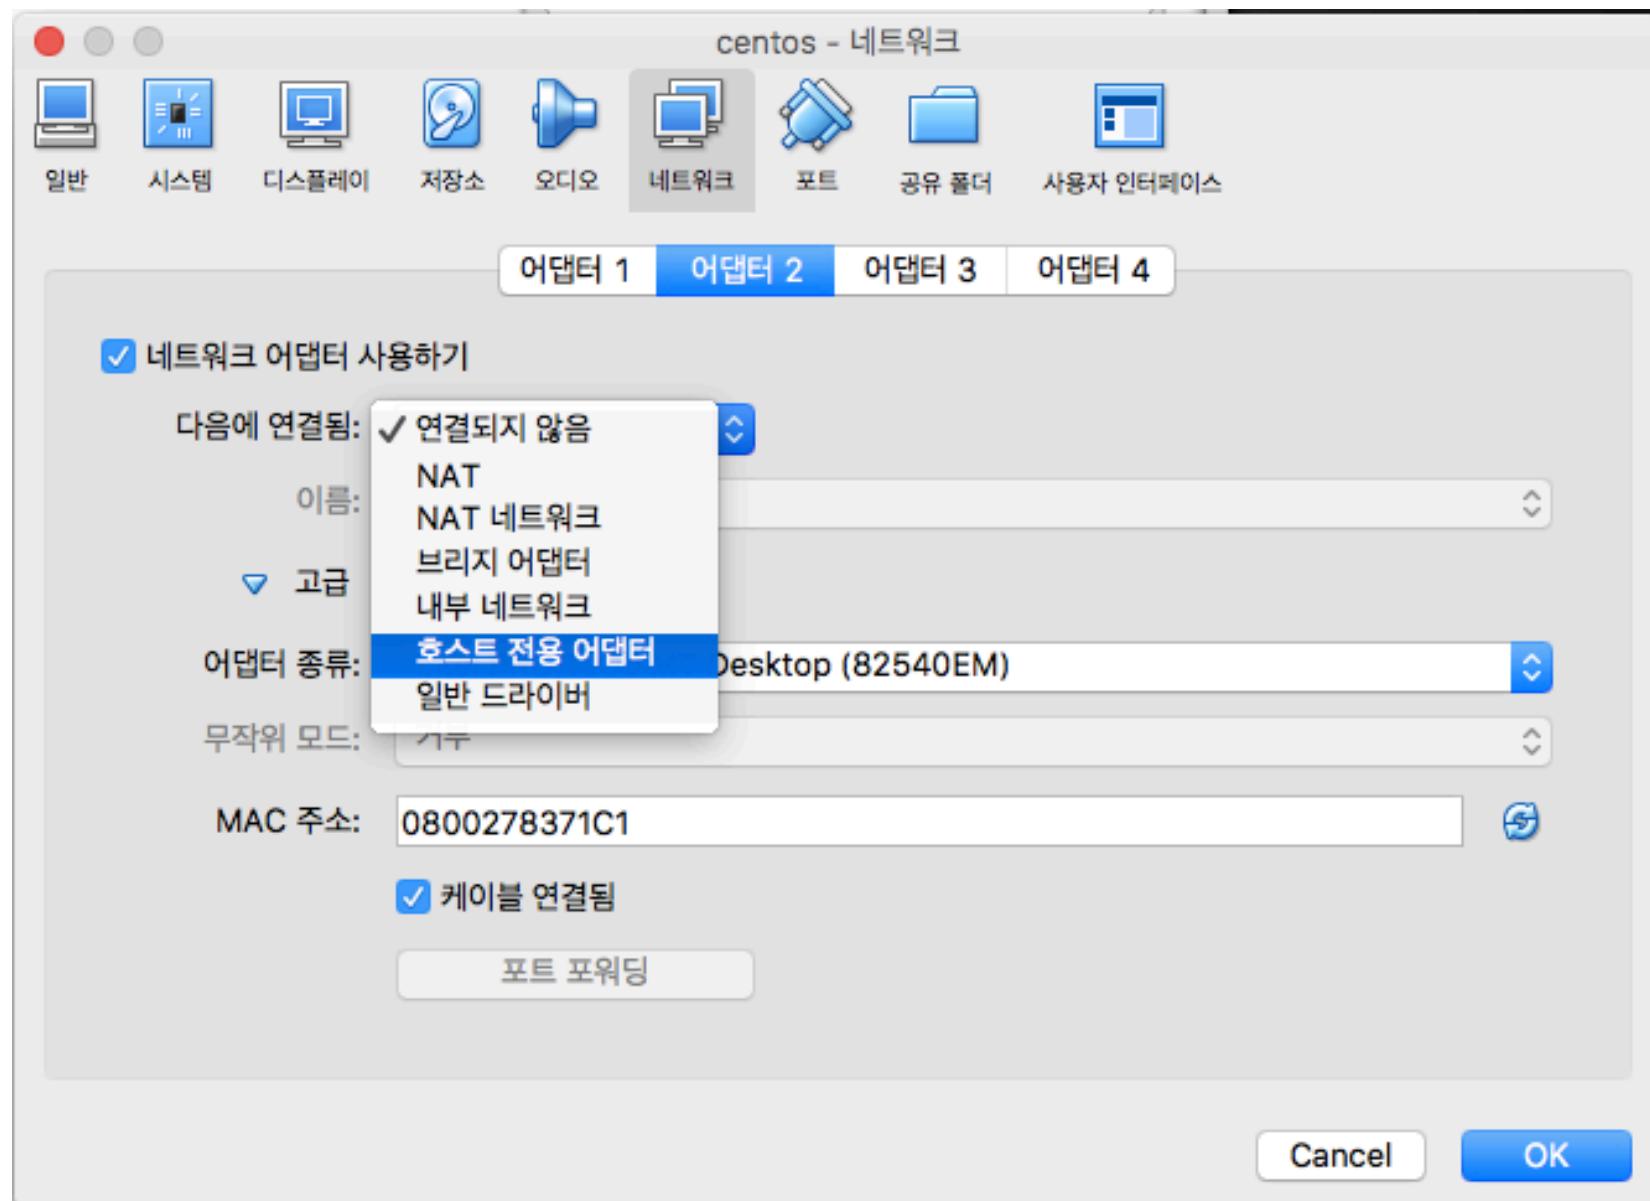


Vi. CentOS:

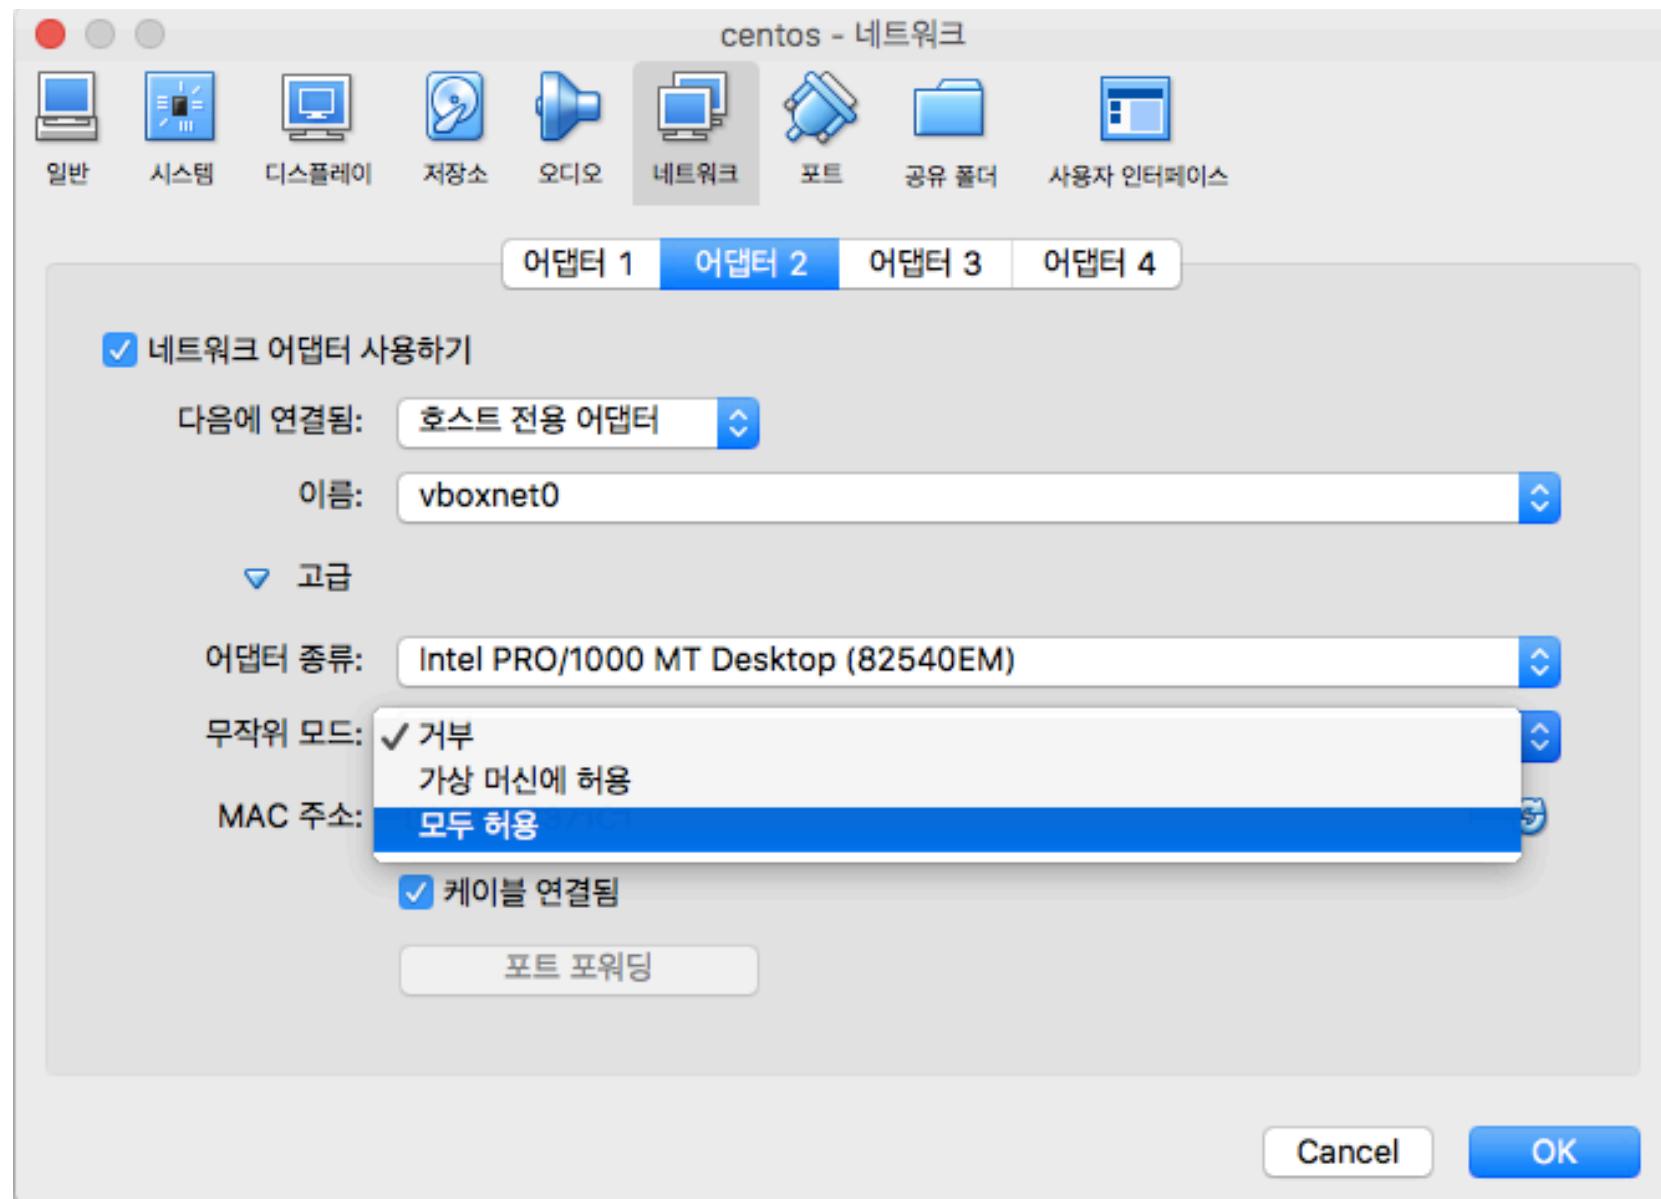


Vi. CentOS:

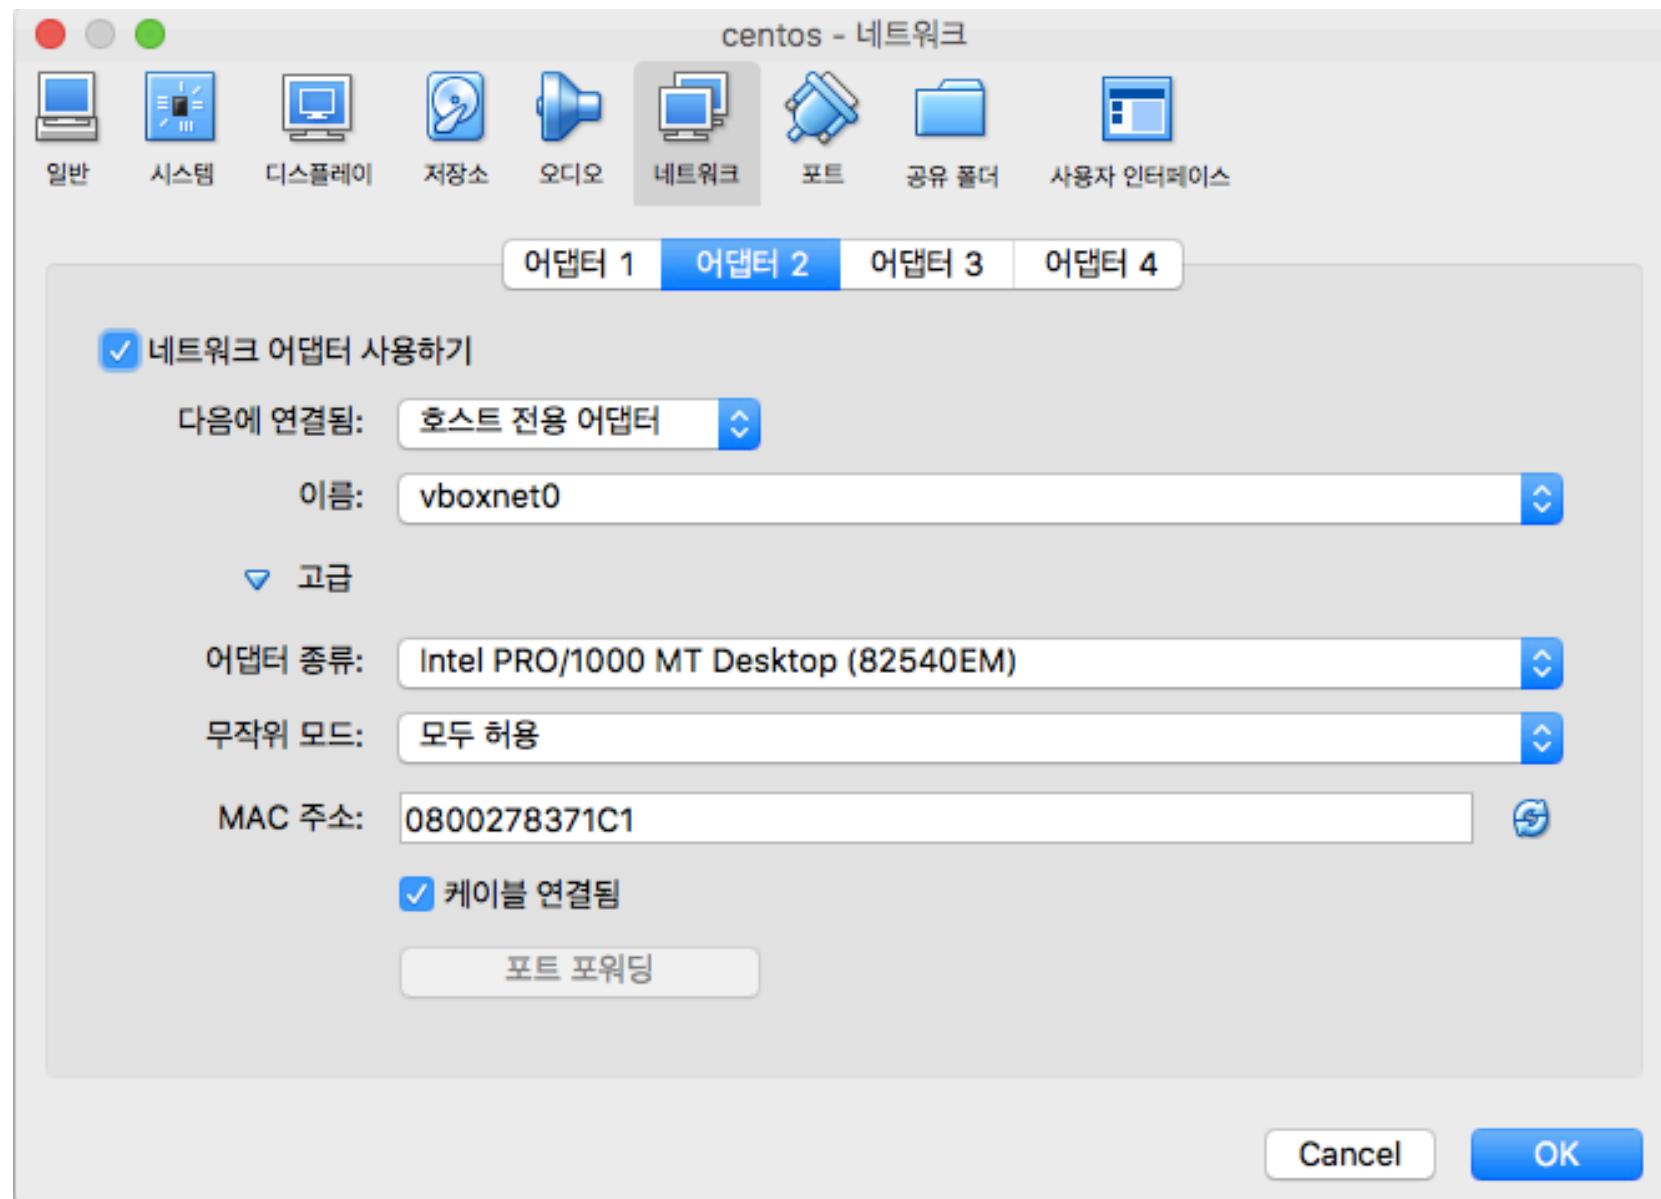


Vi. CentOS:

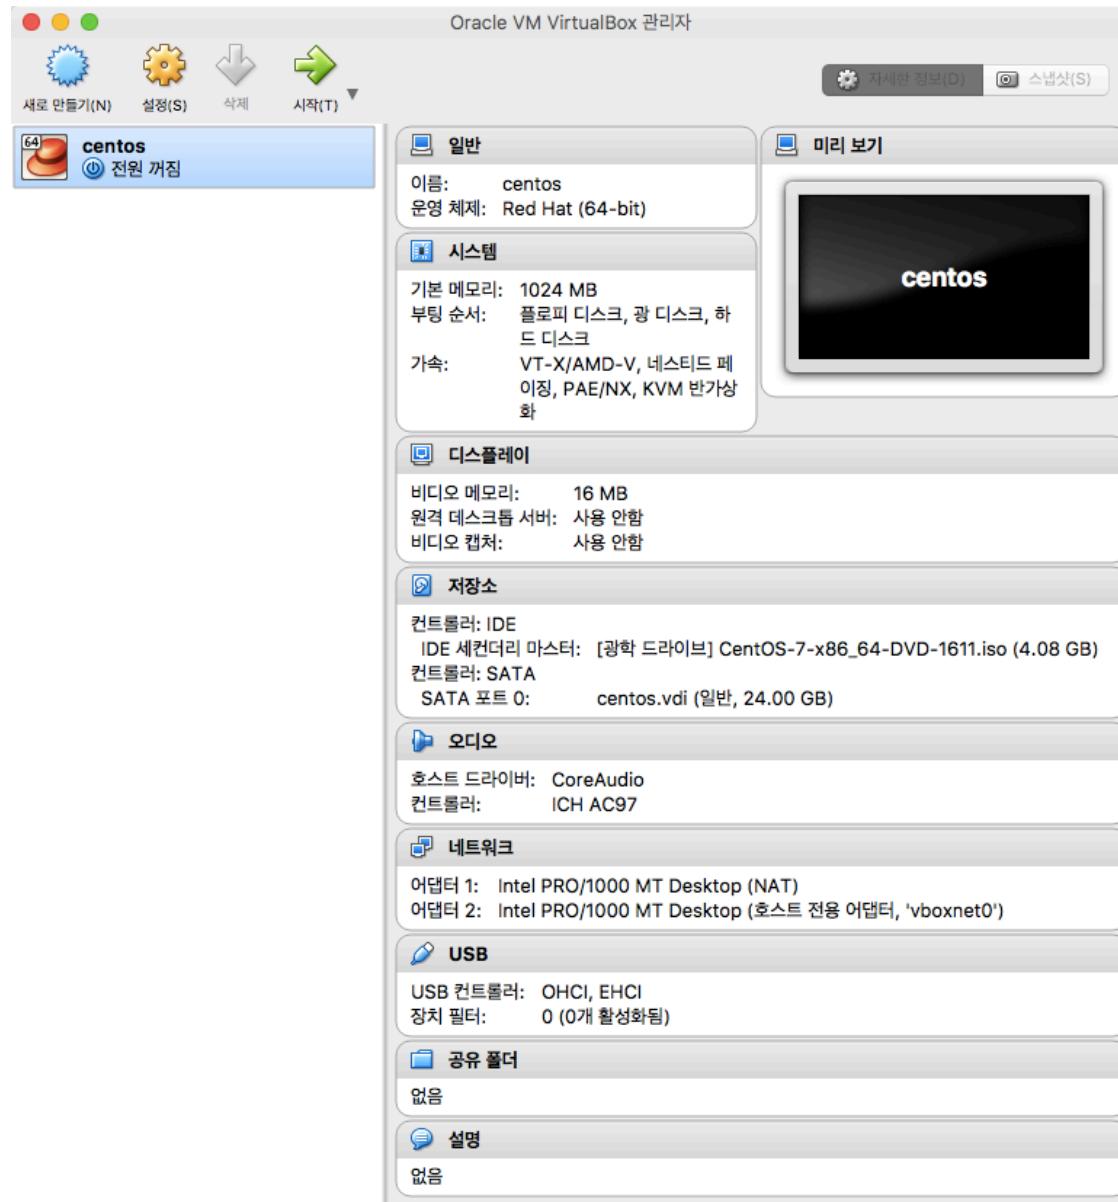


Vi. CentOS:

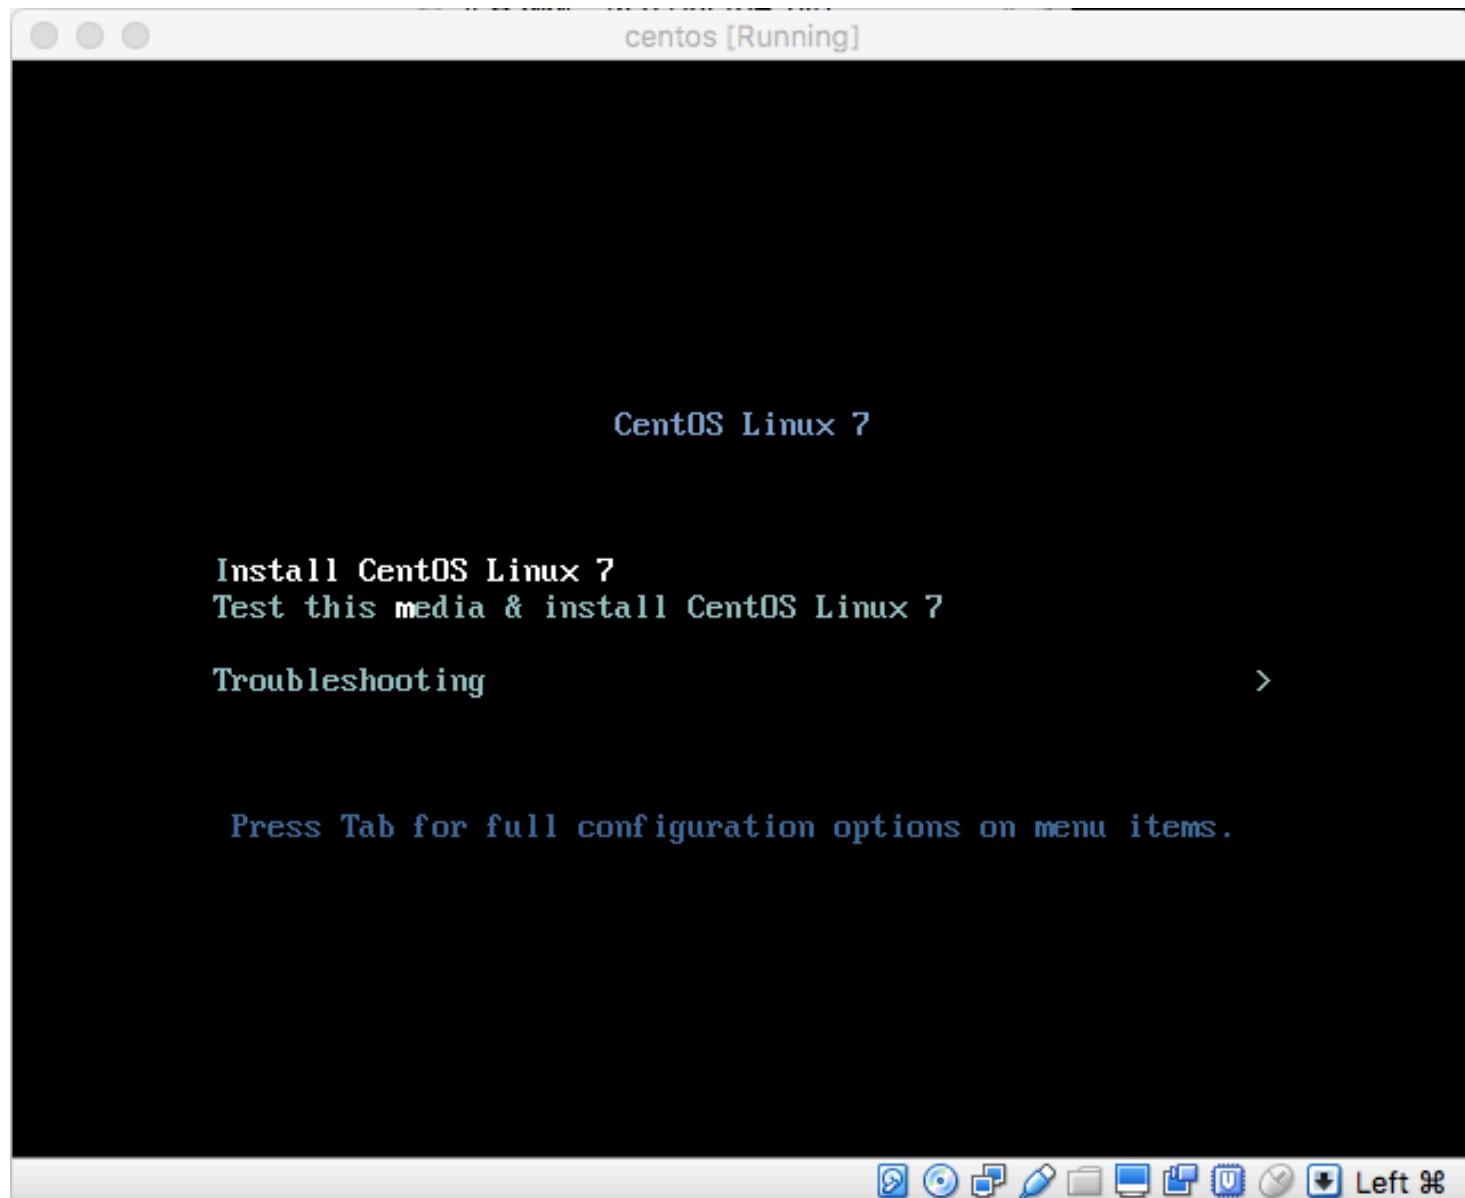


Vi. CentOS:

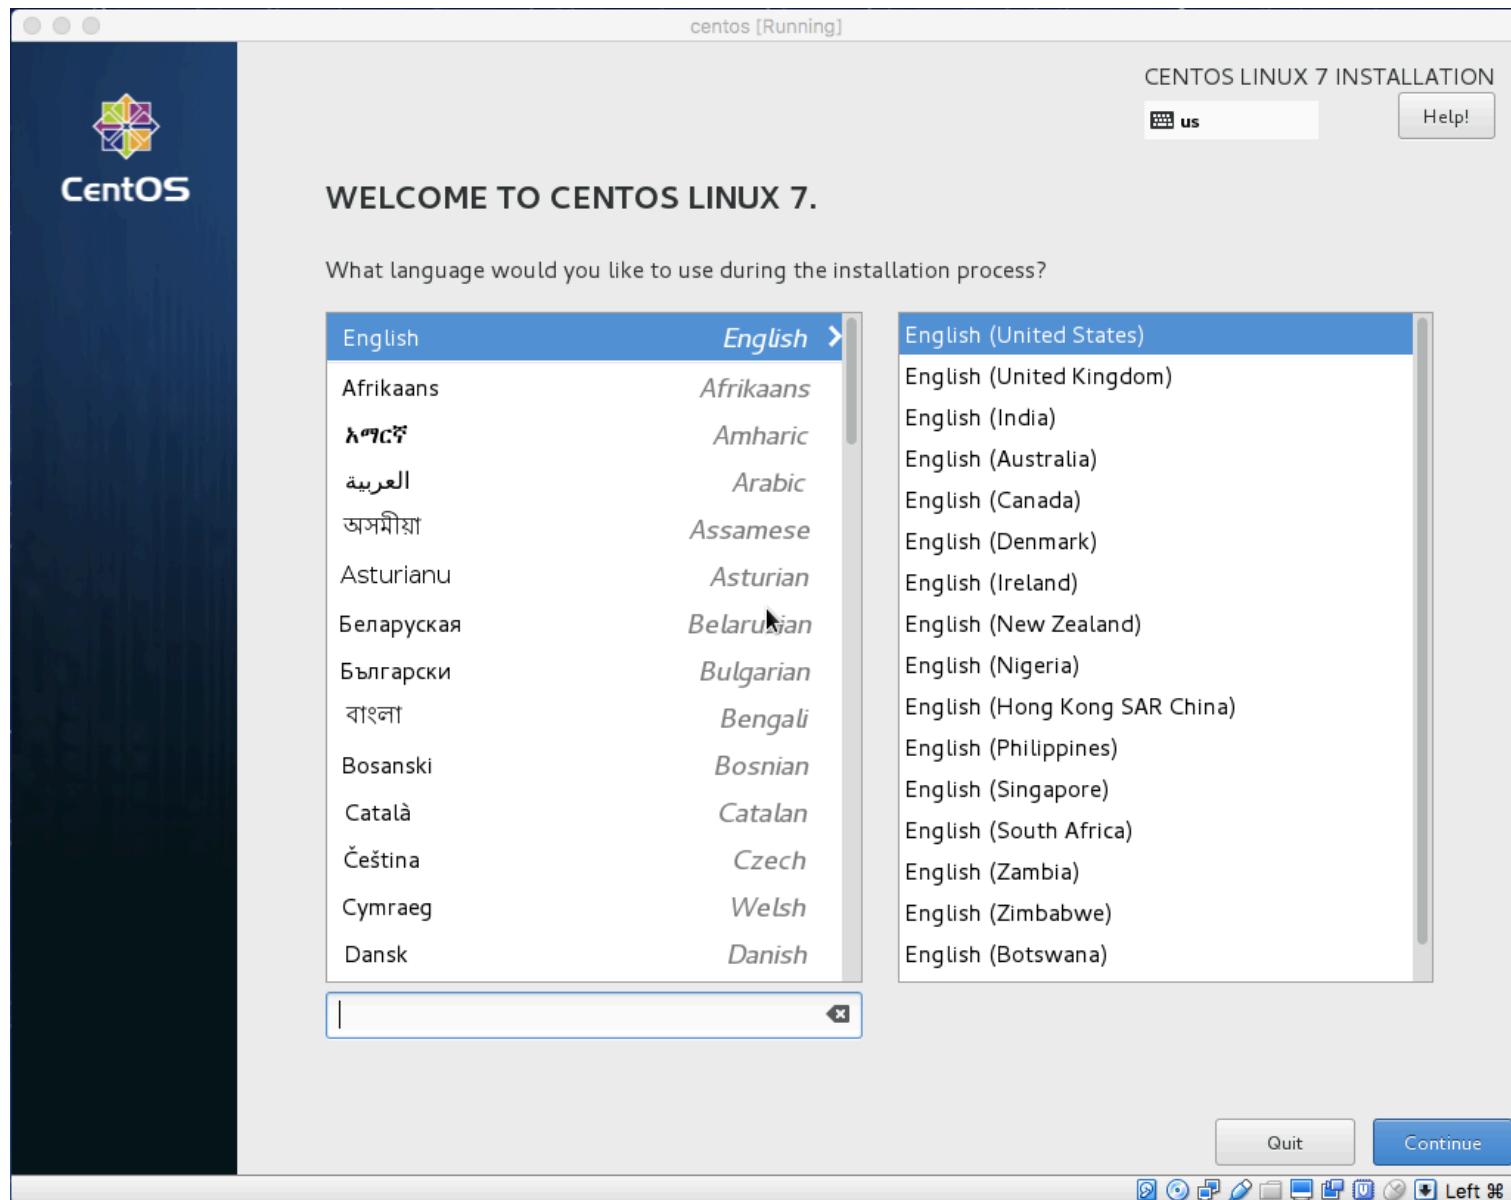


Vi. CentOS:

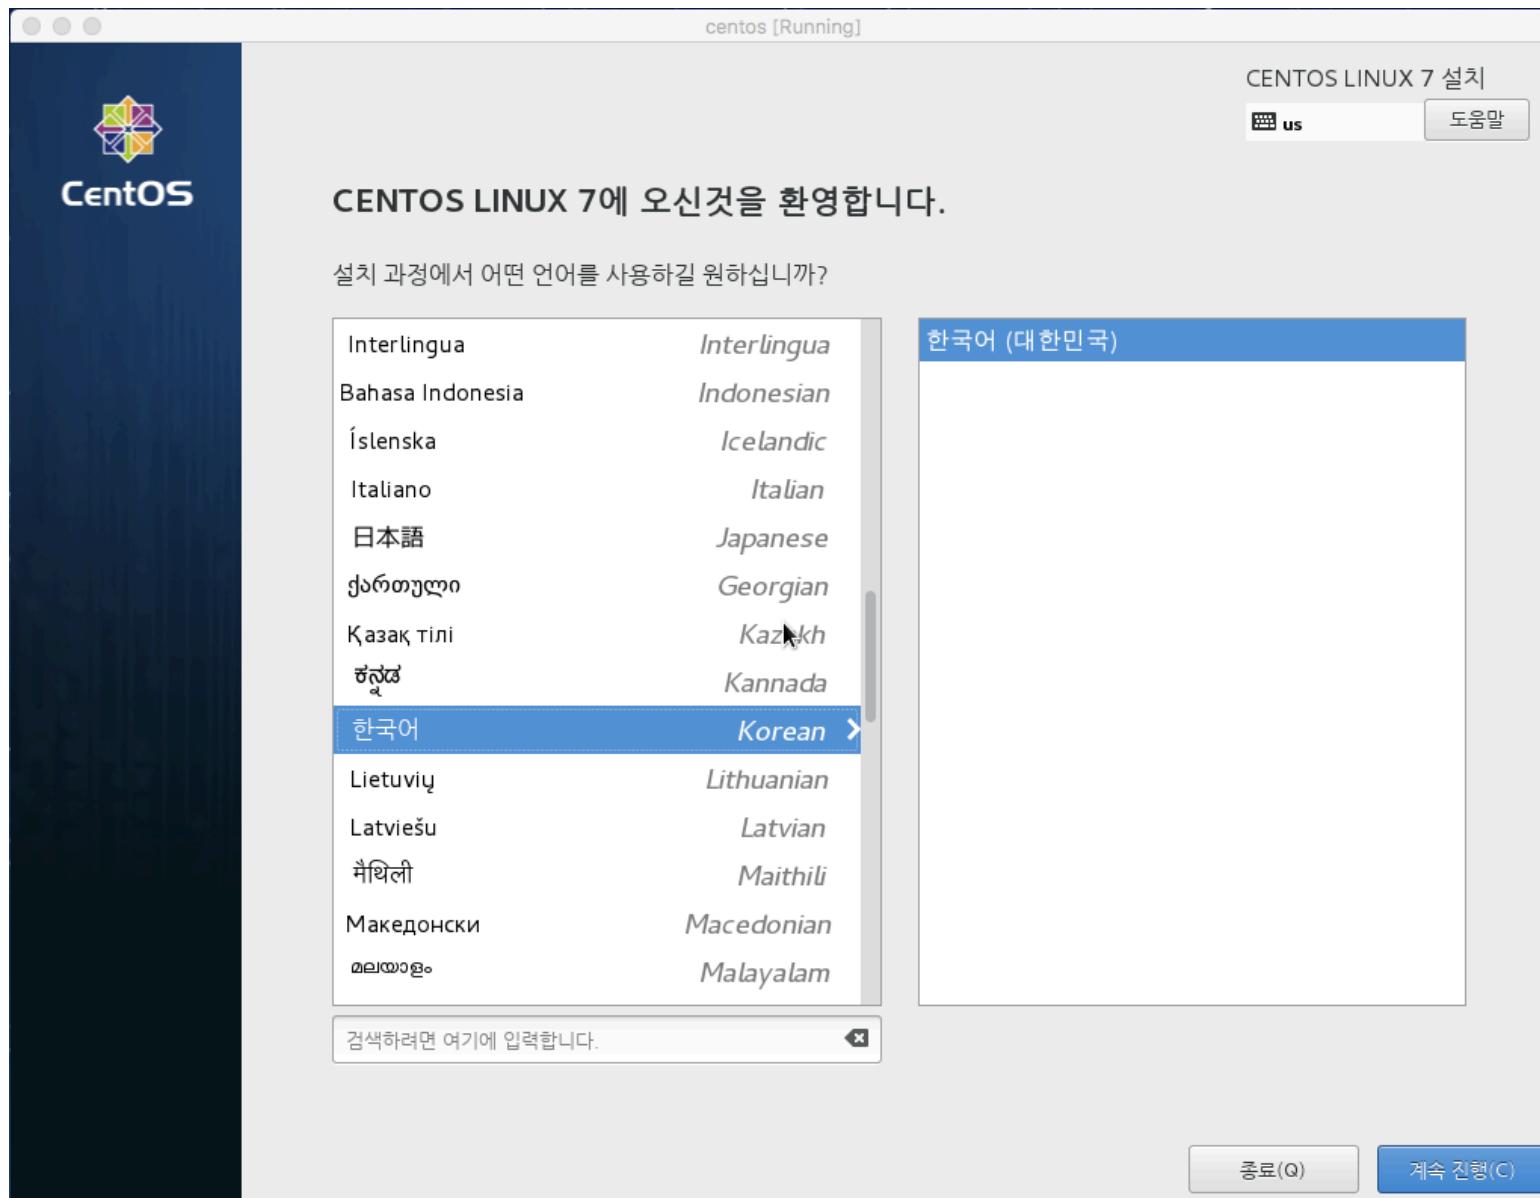


Vi. CentOS:

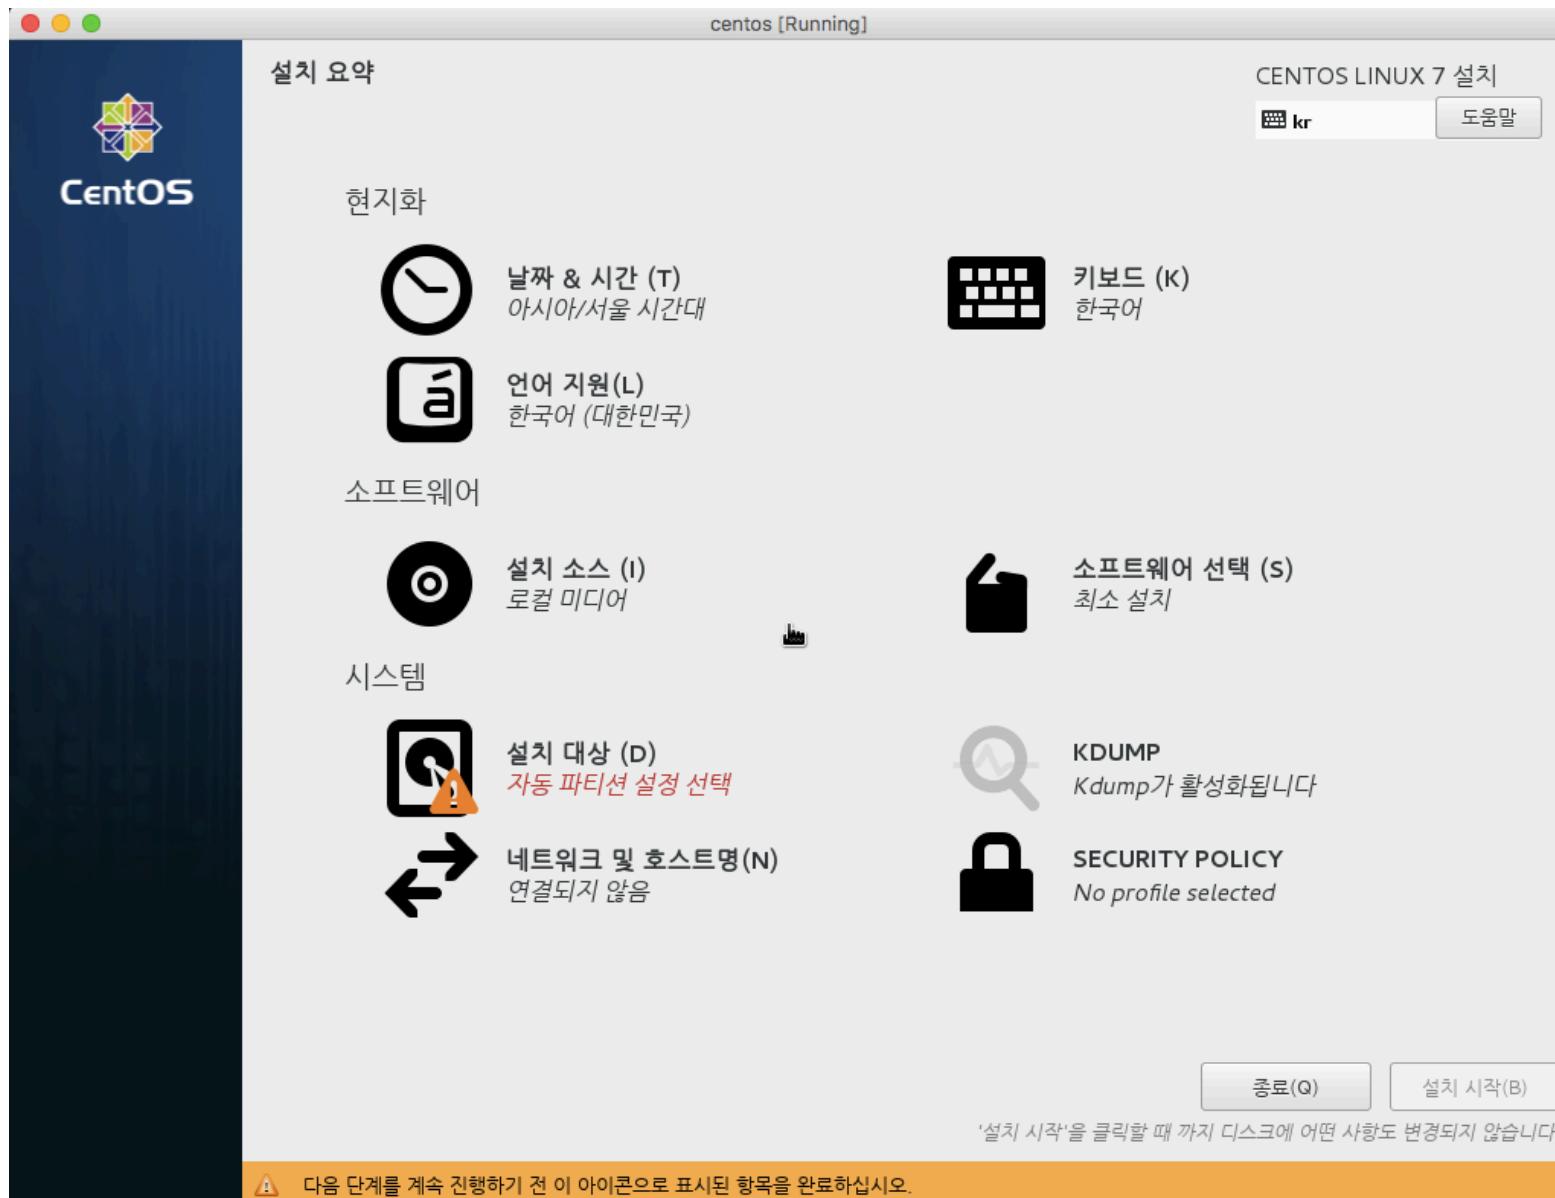


Vi. CentOS:

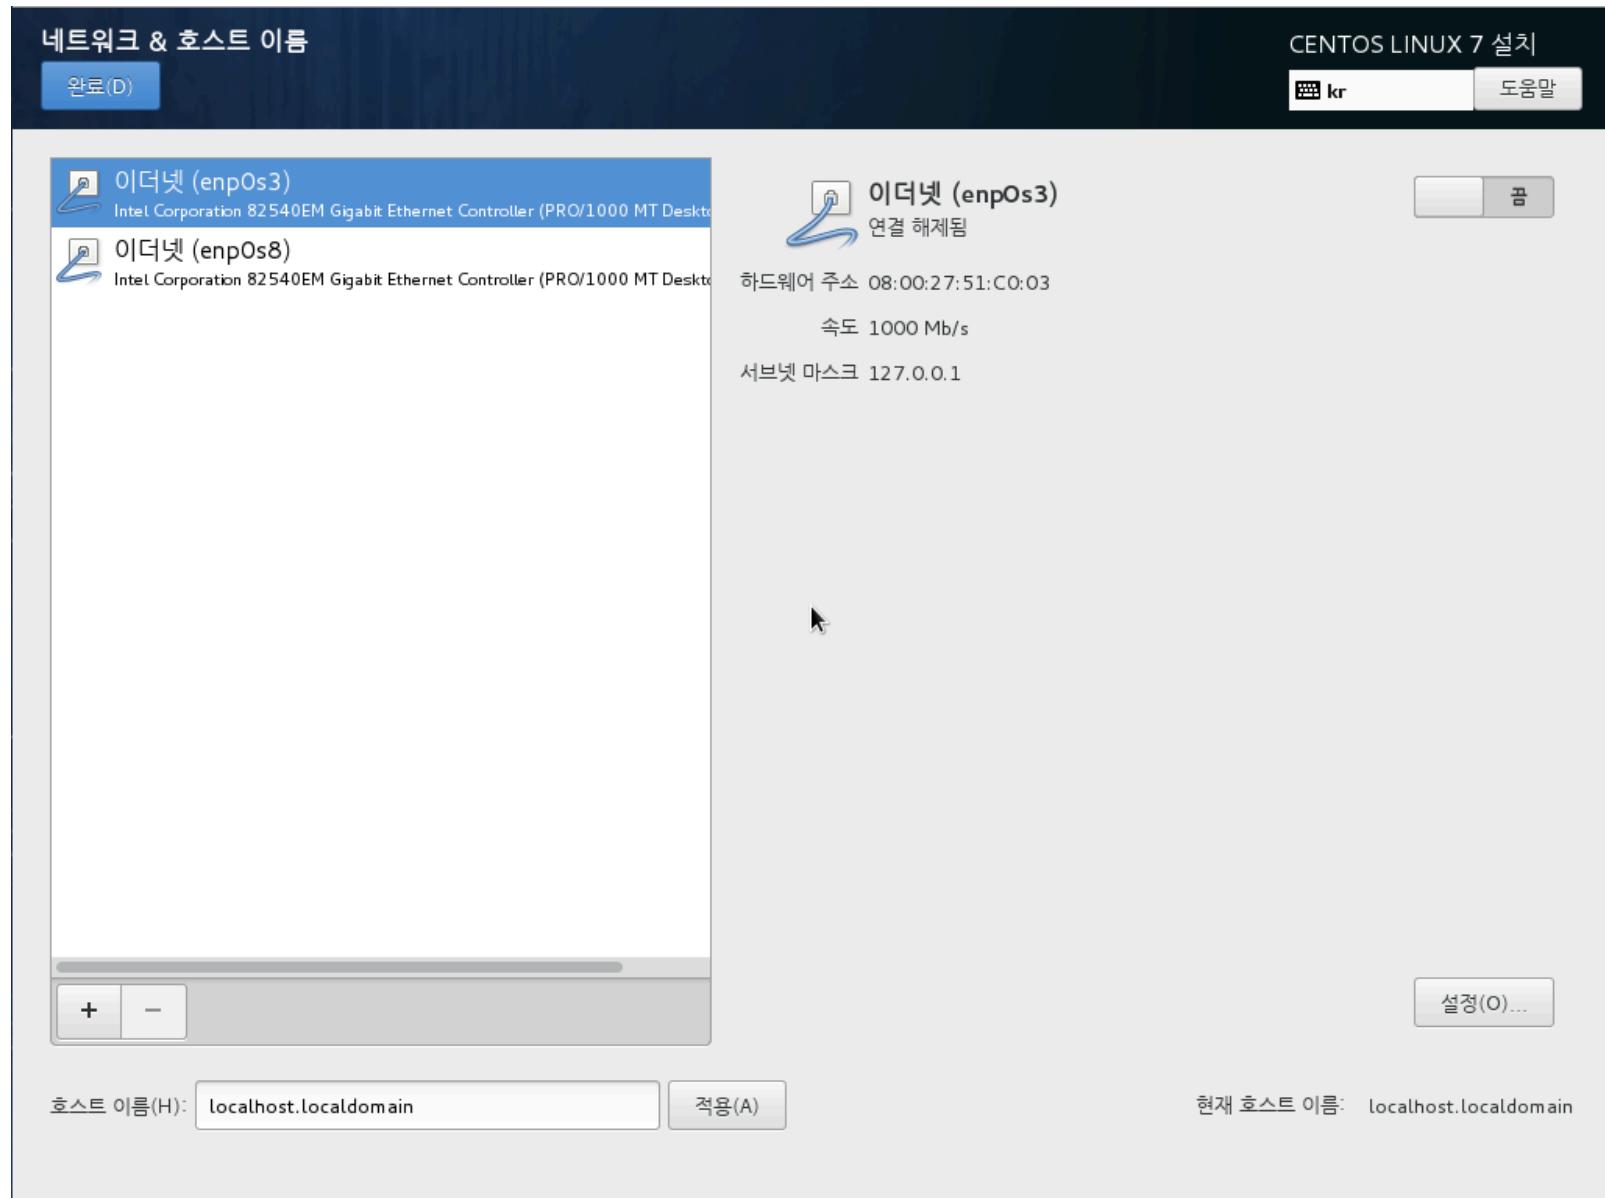


Vi. CentOS:

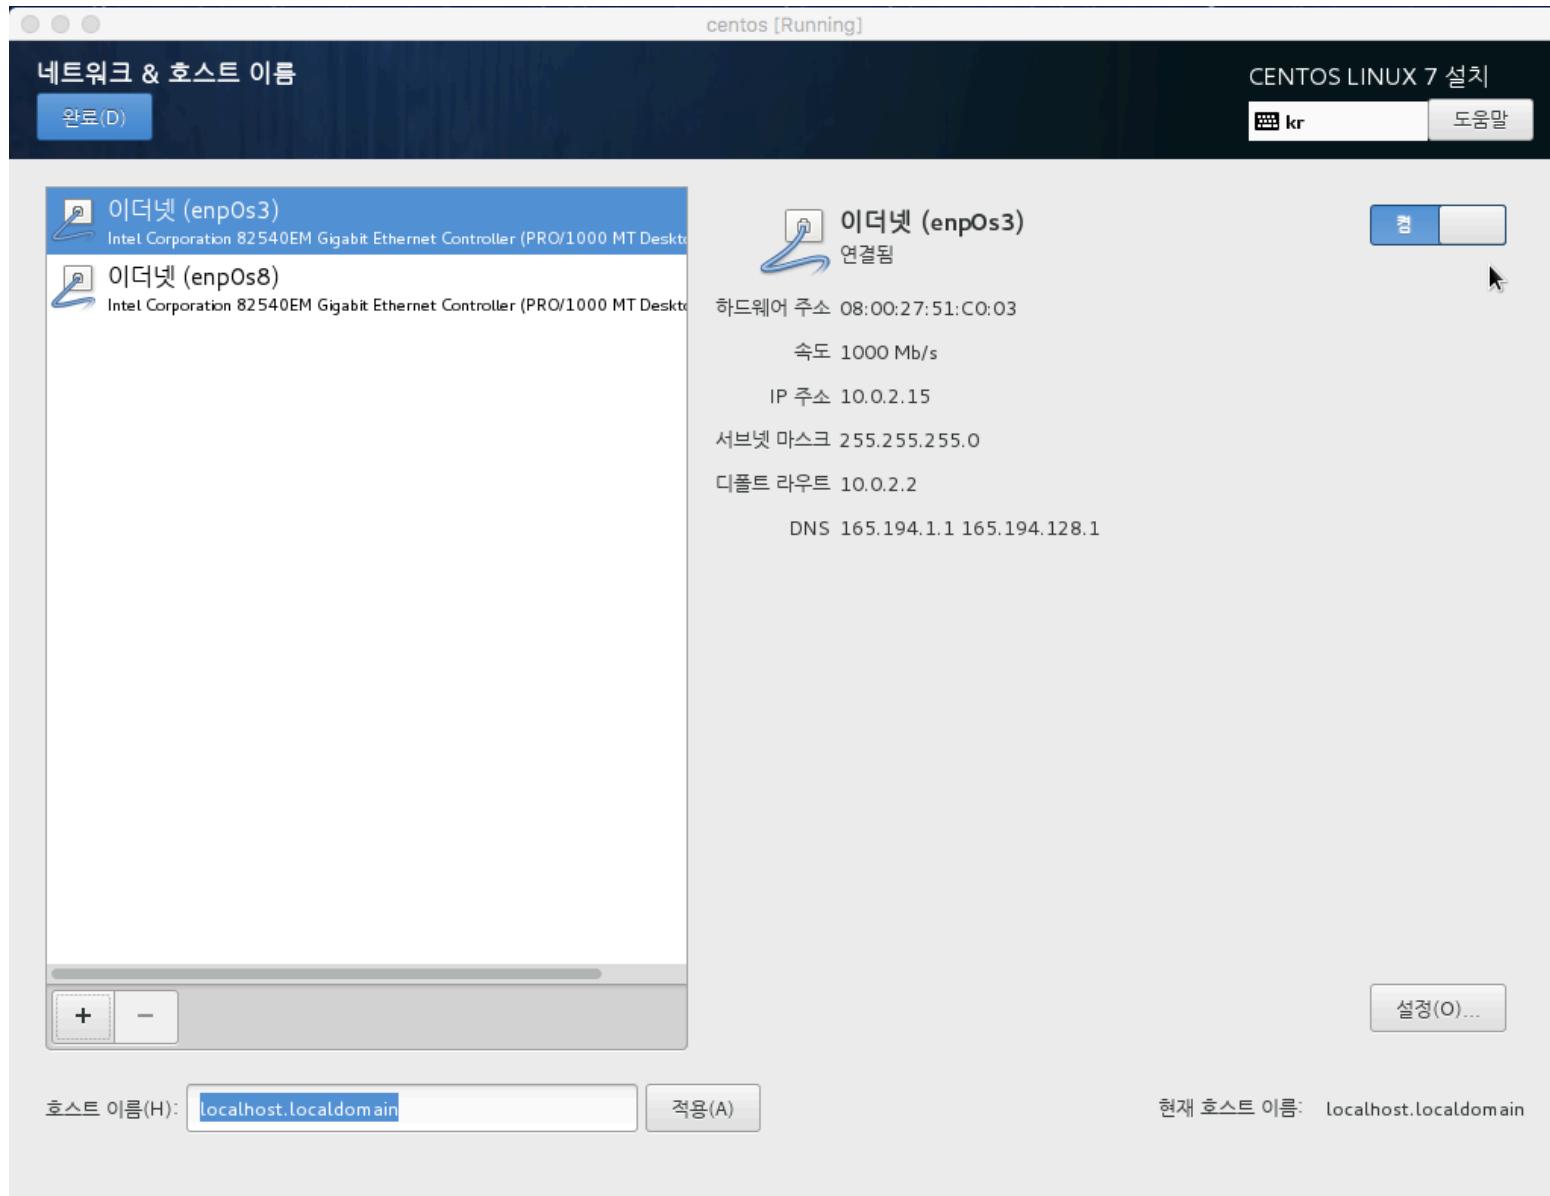


Vi. CentOS:

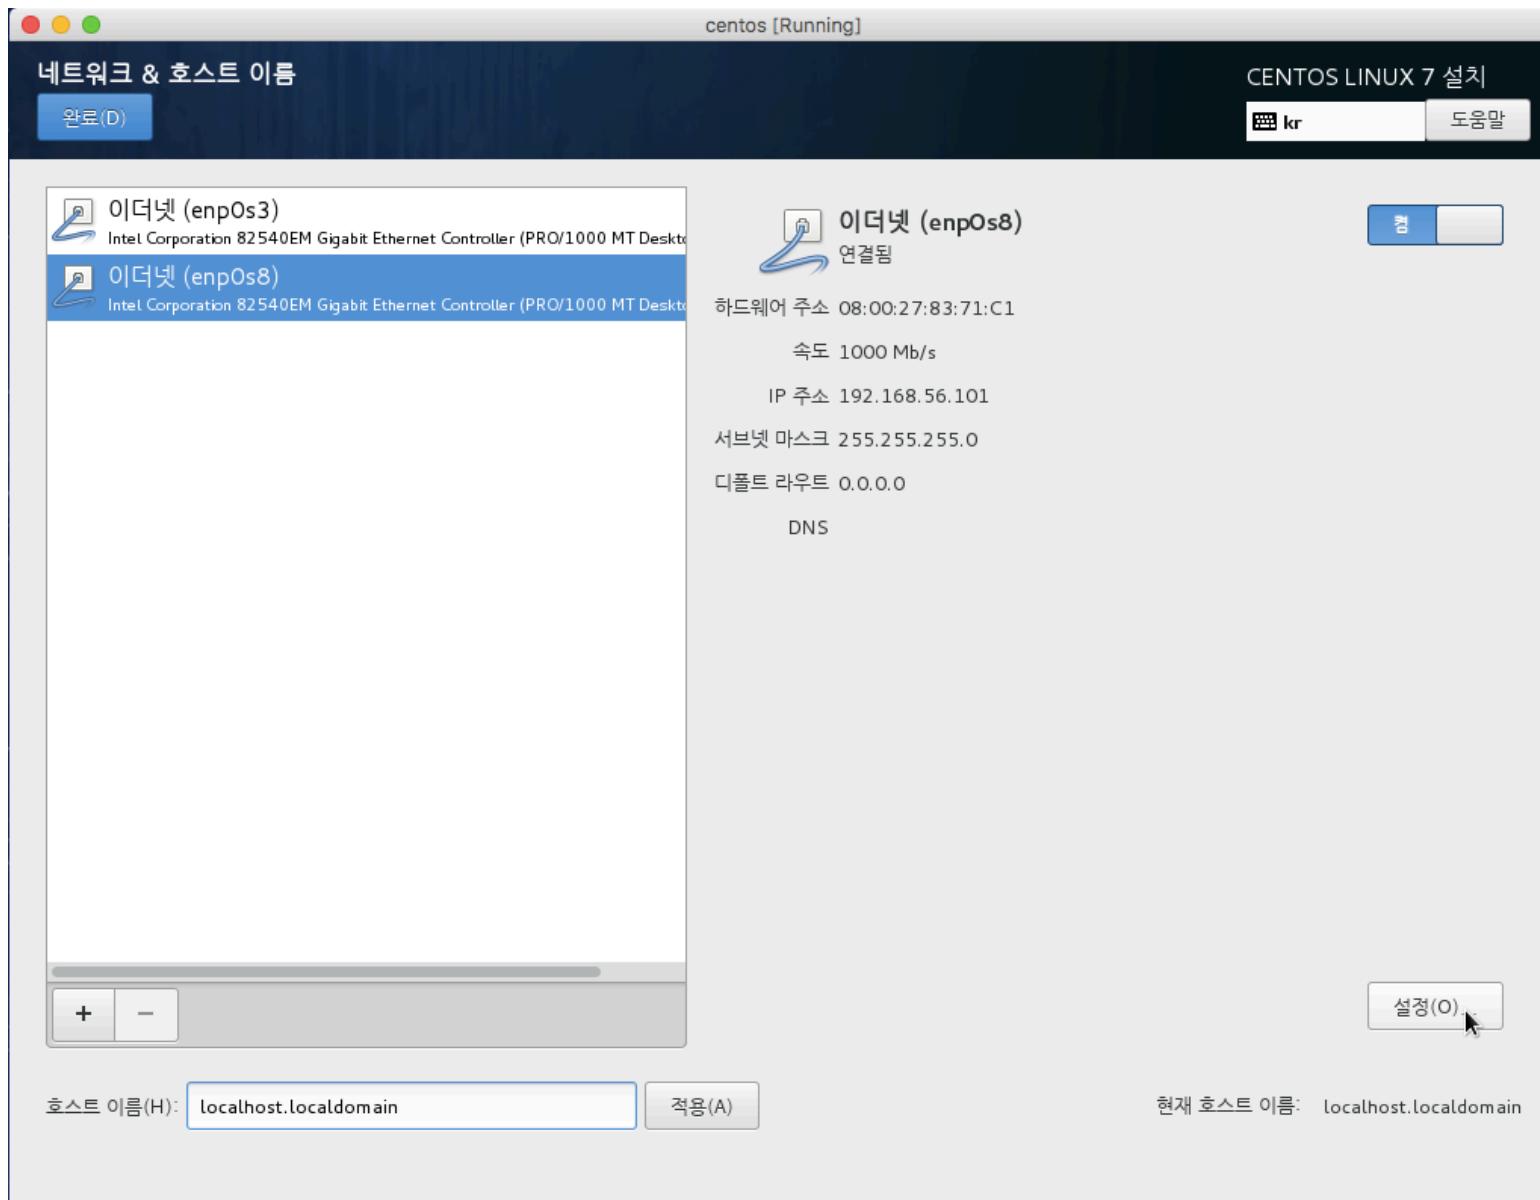


Vi. CentOS:

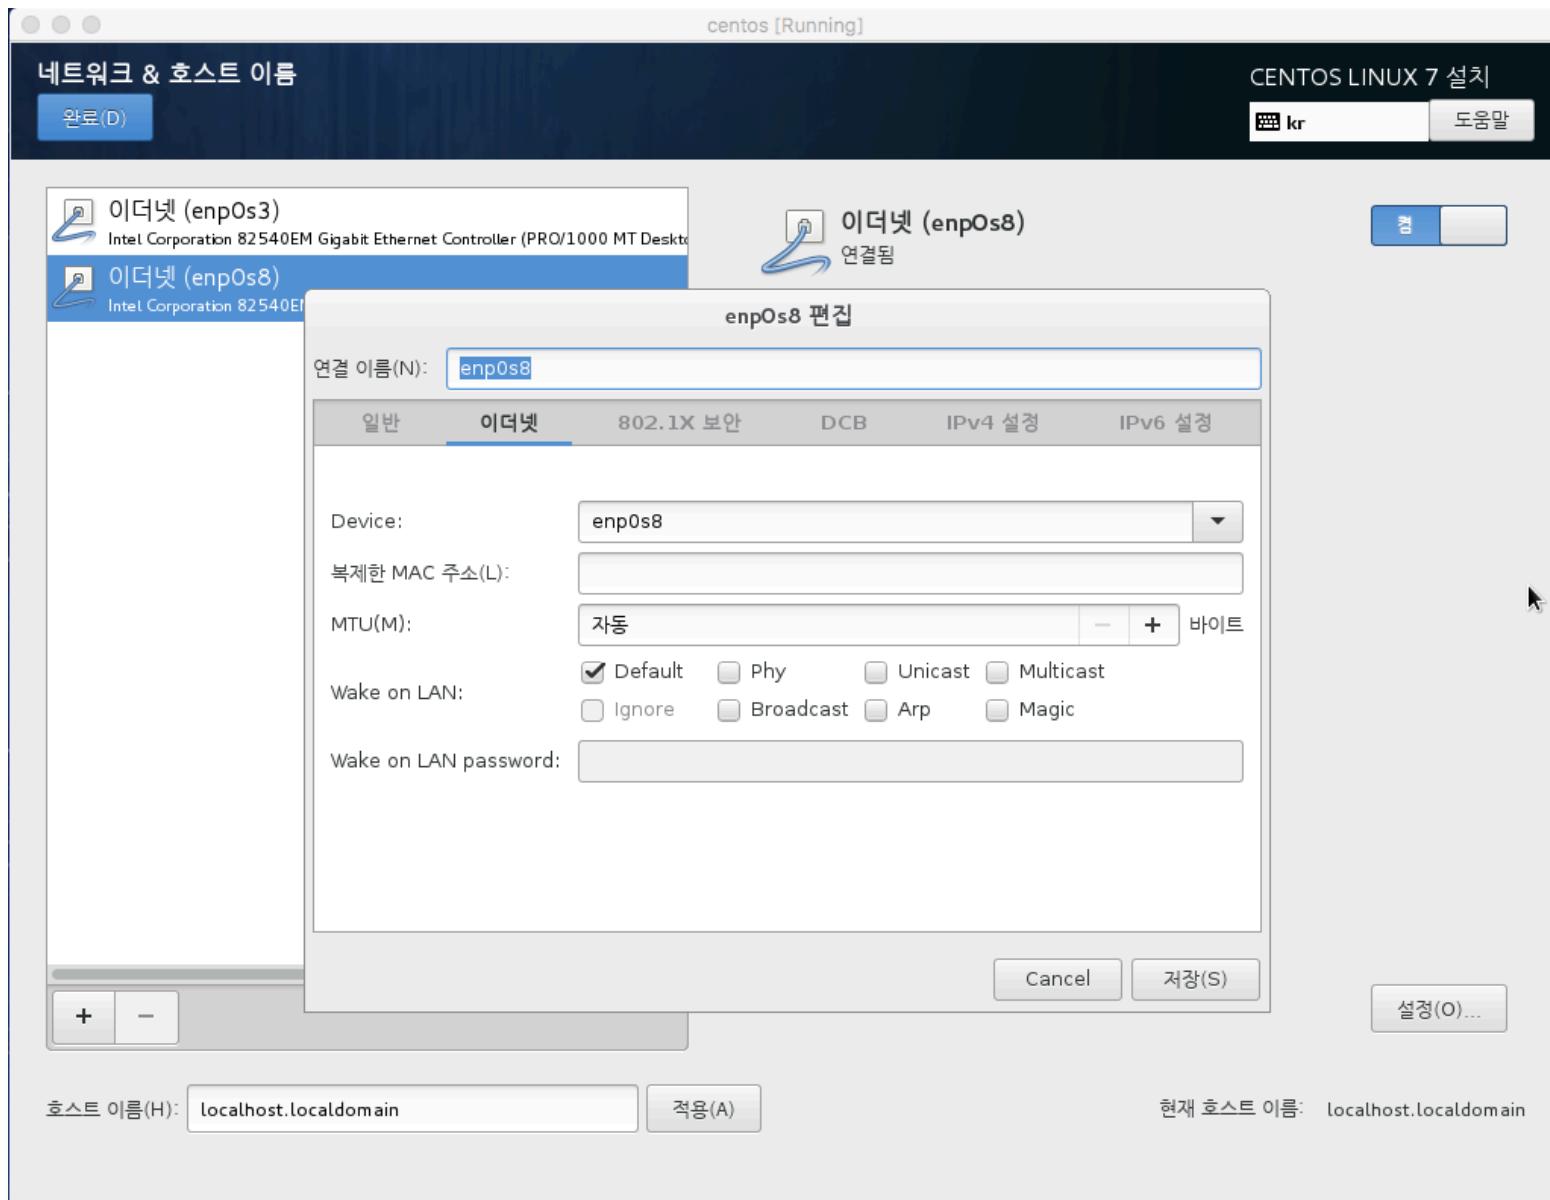


Vi. CentOS:

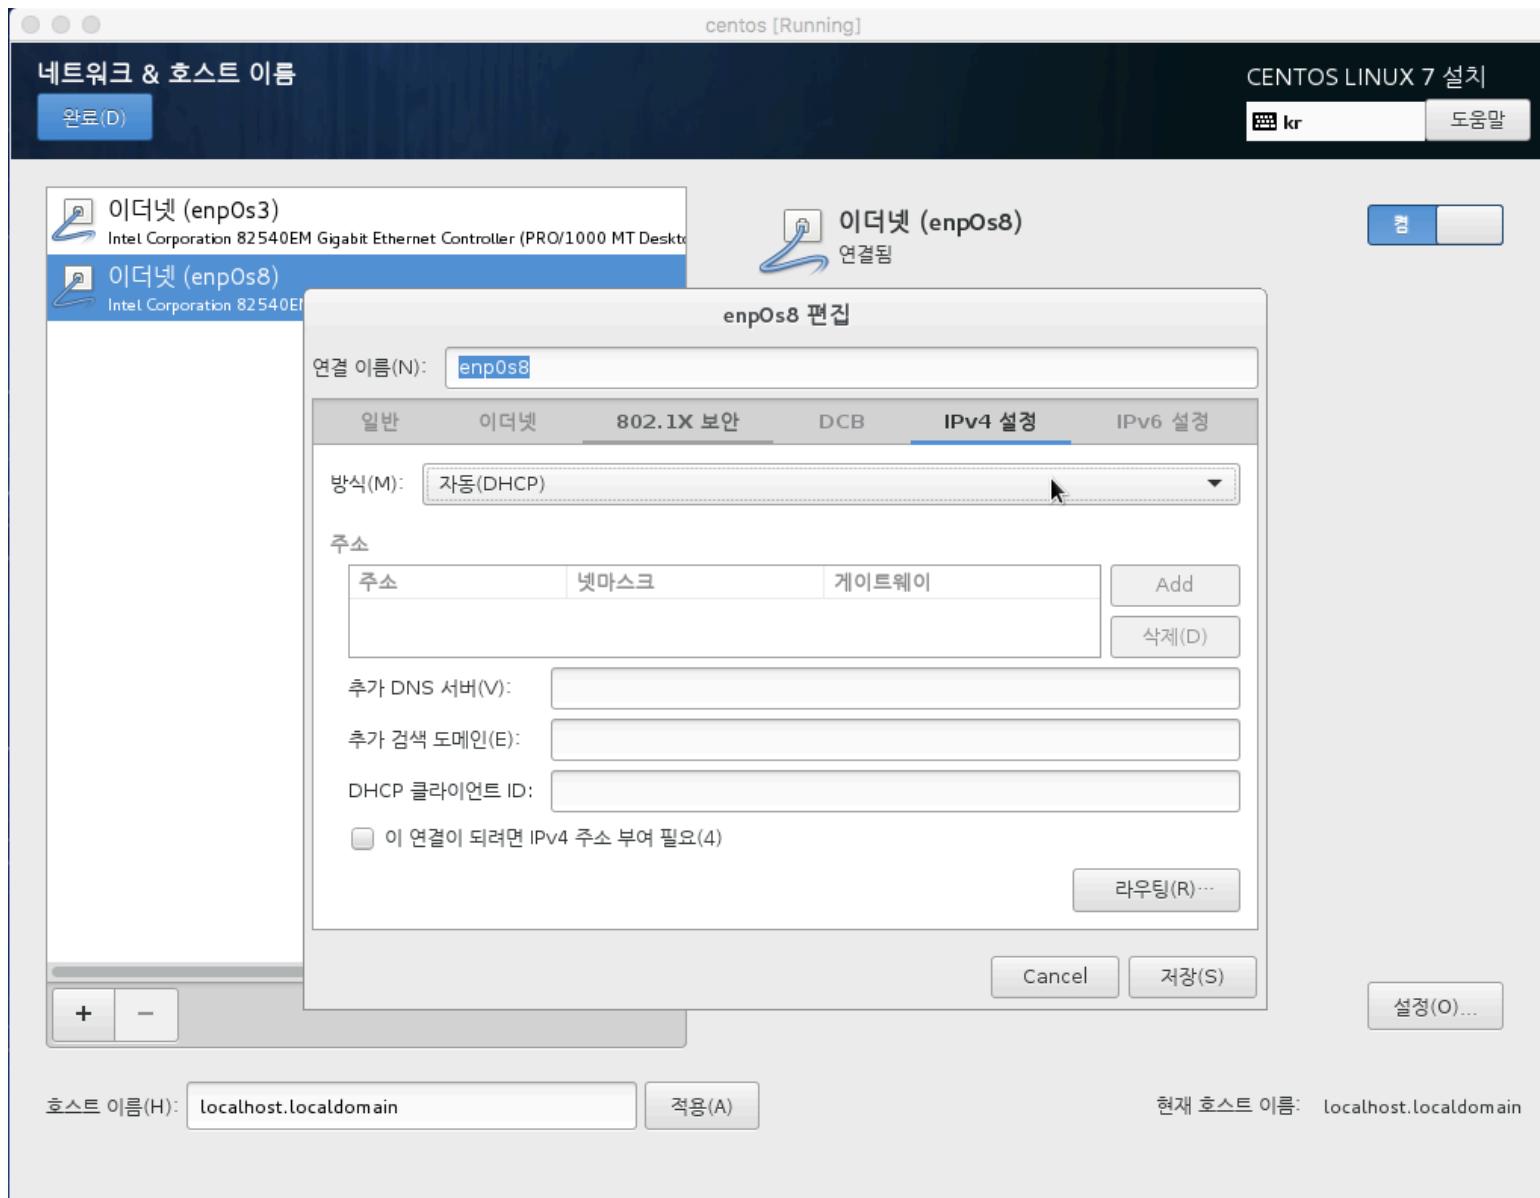


Vi. CentOS:

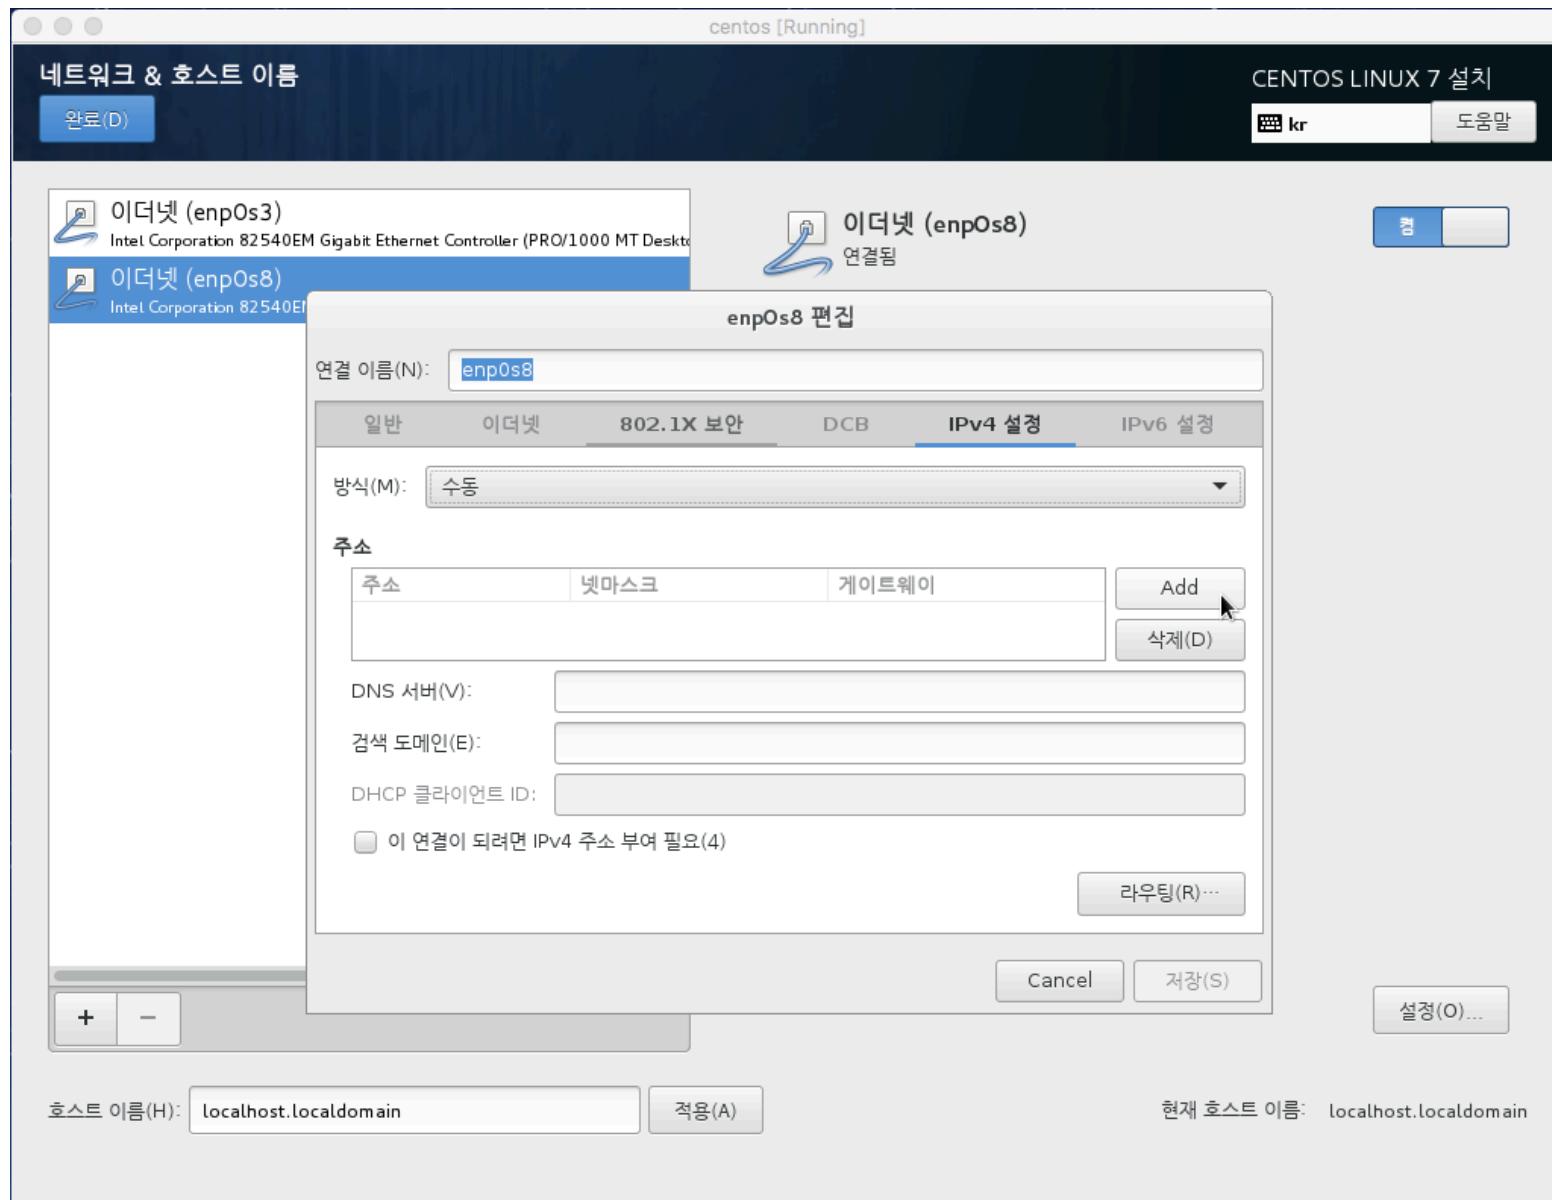


Vi. CentOS:

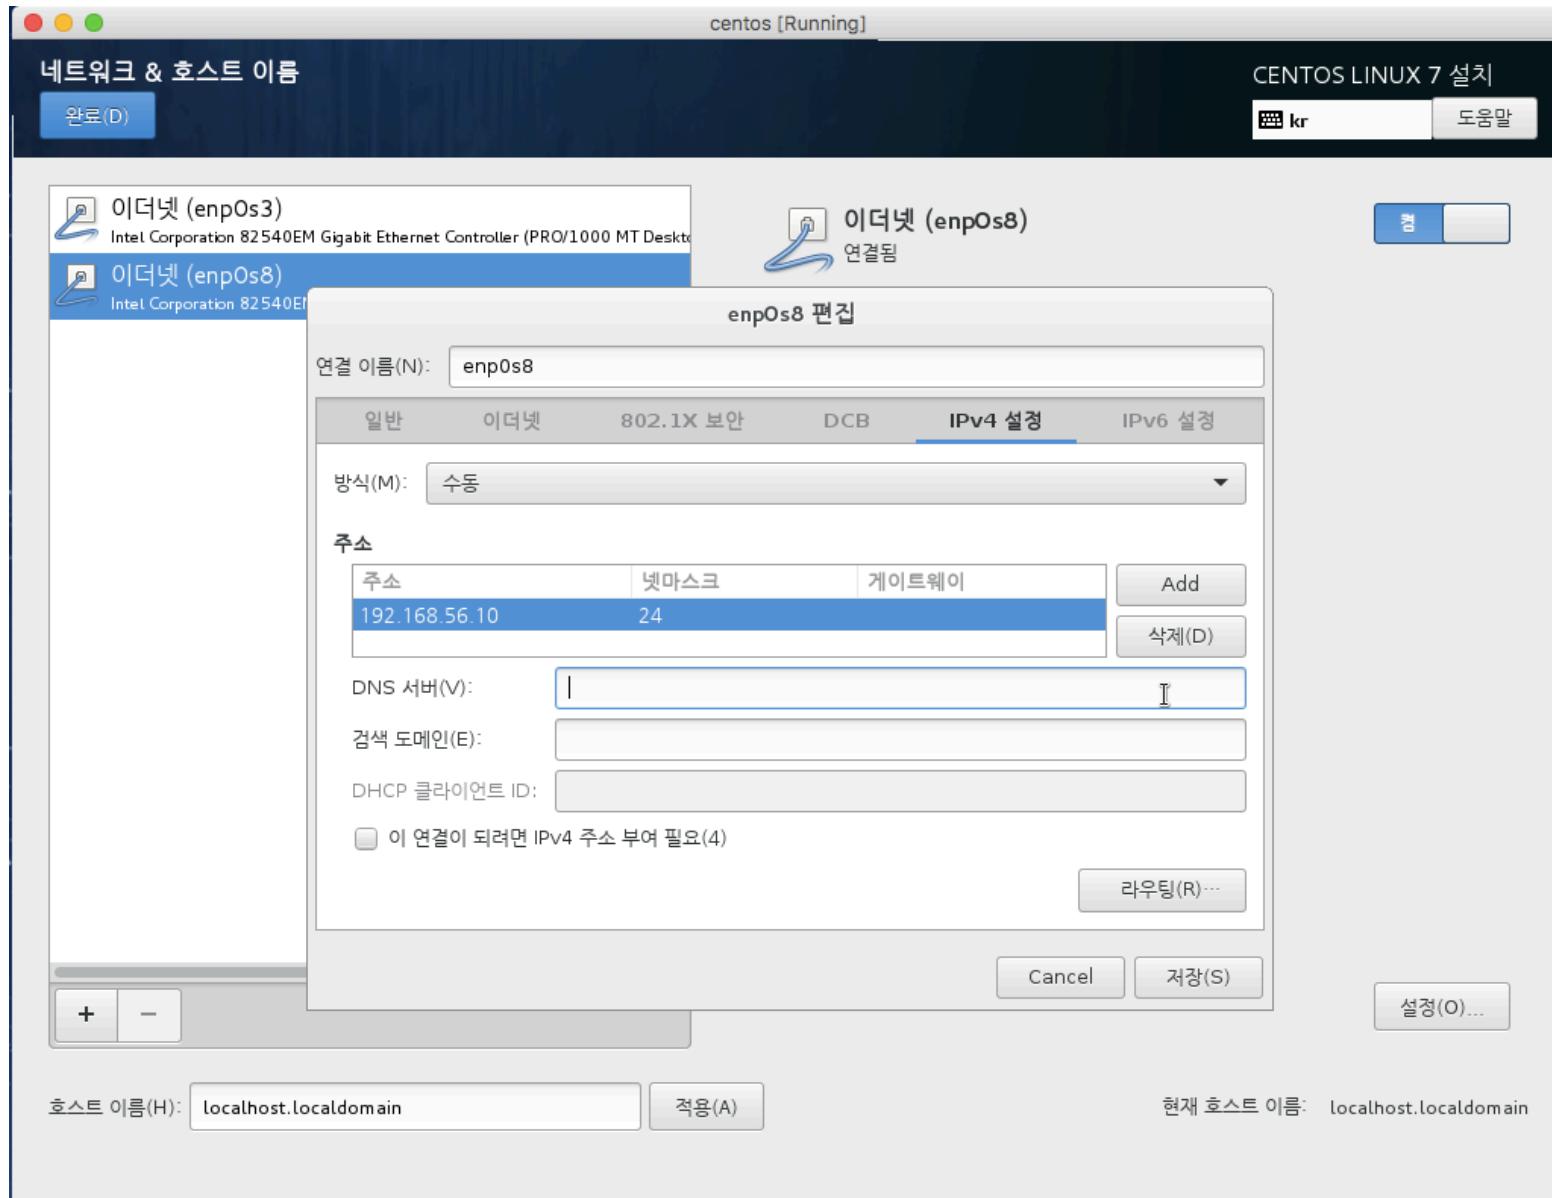


Vi. CentOS:

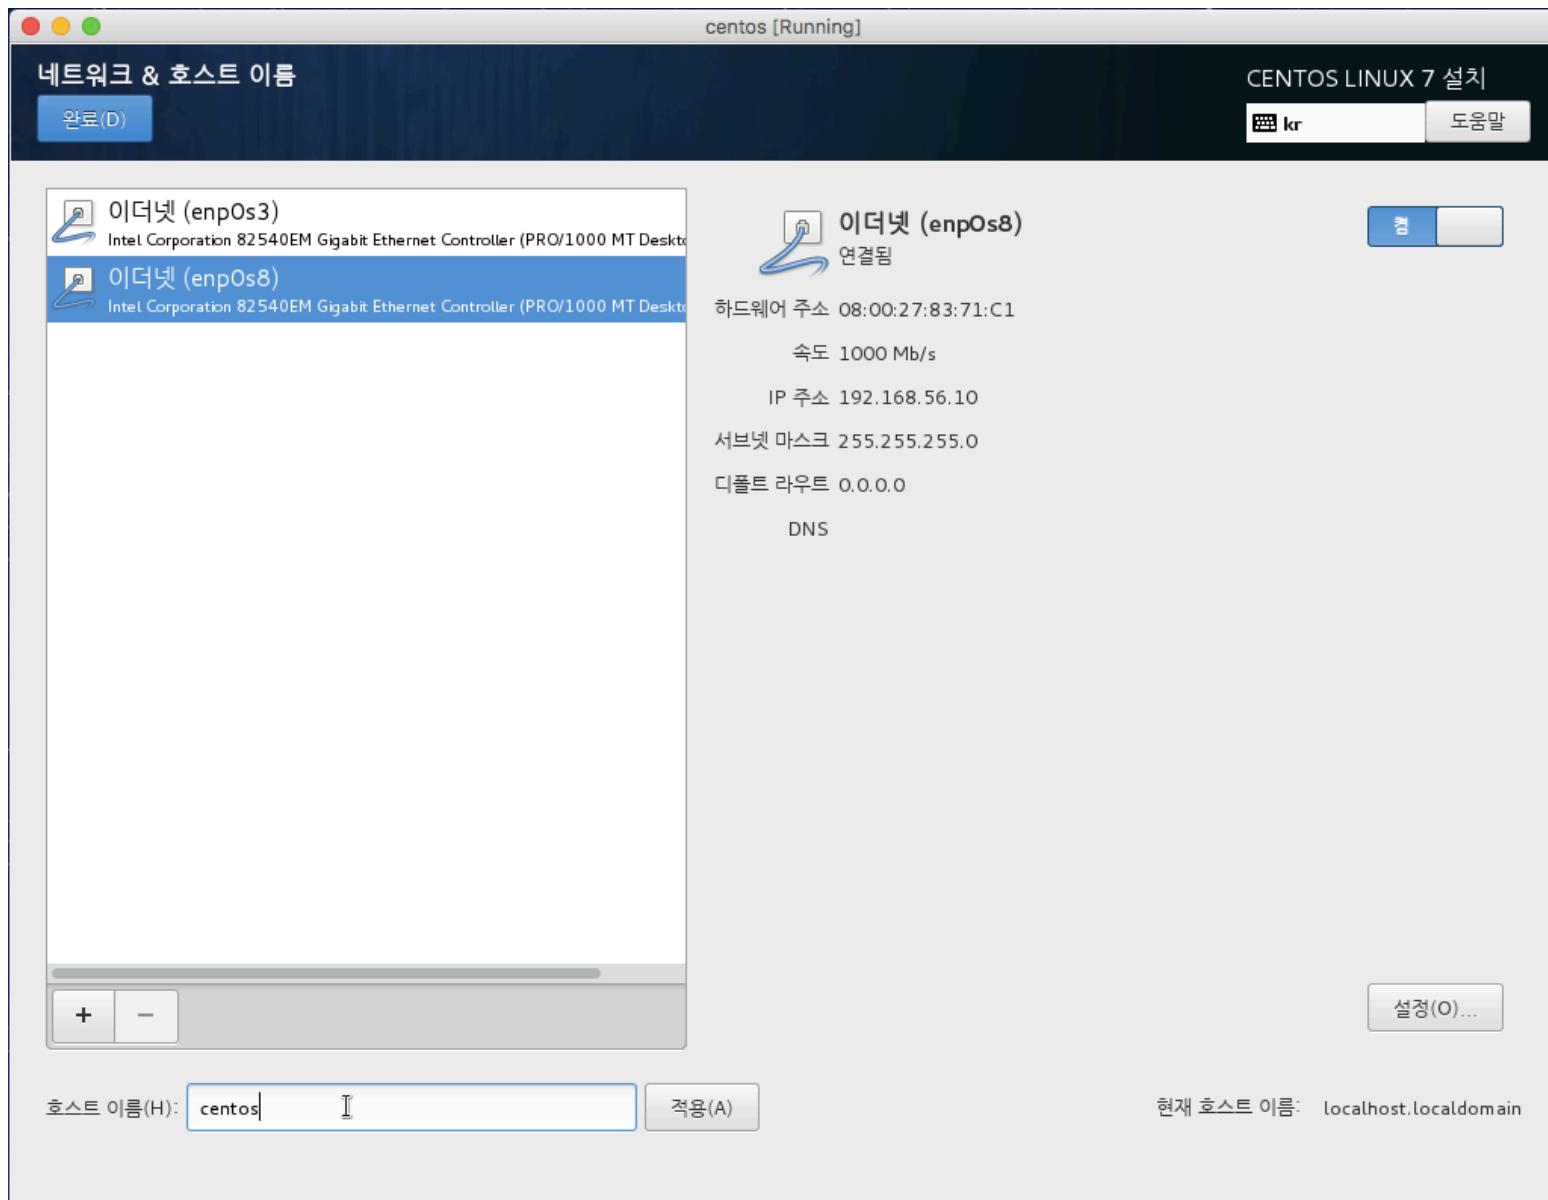


Vi. CentOS:

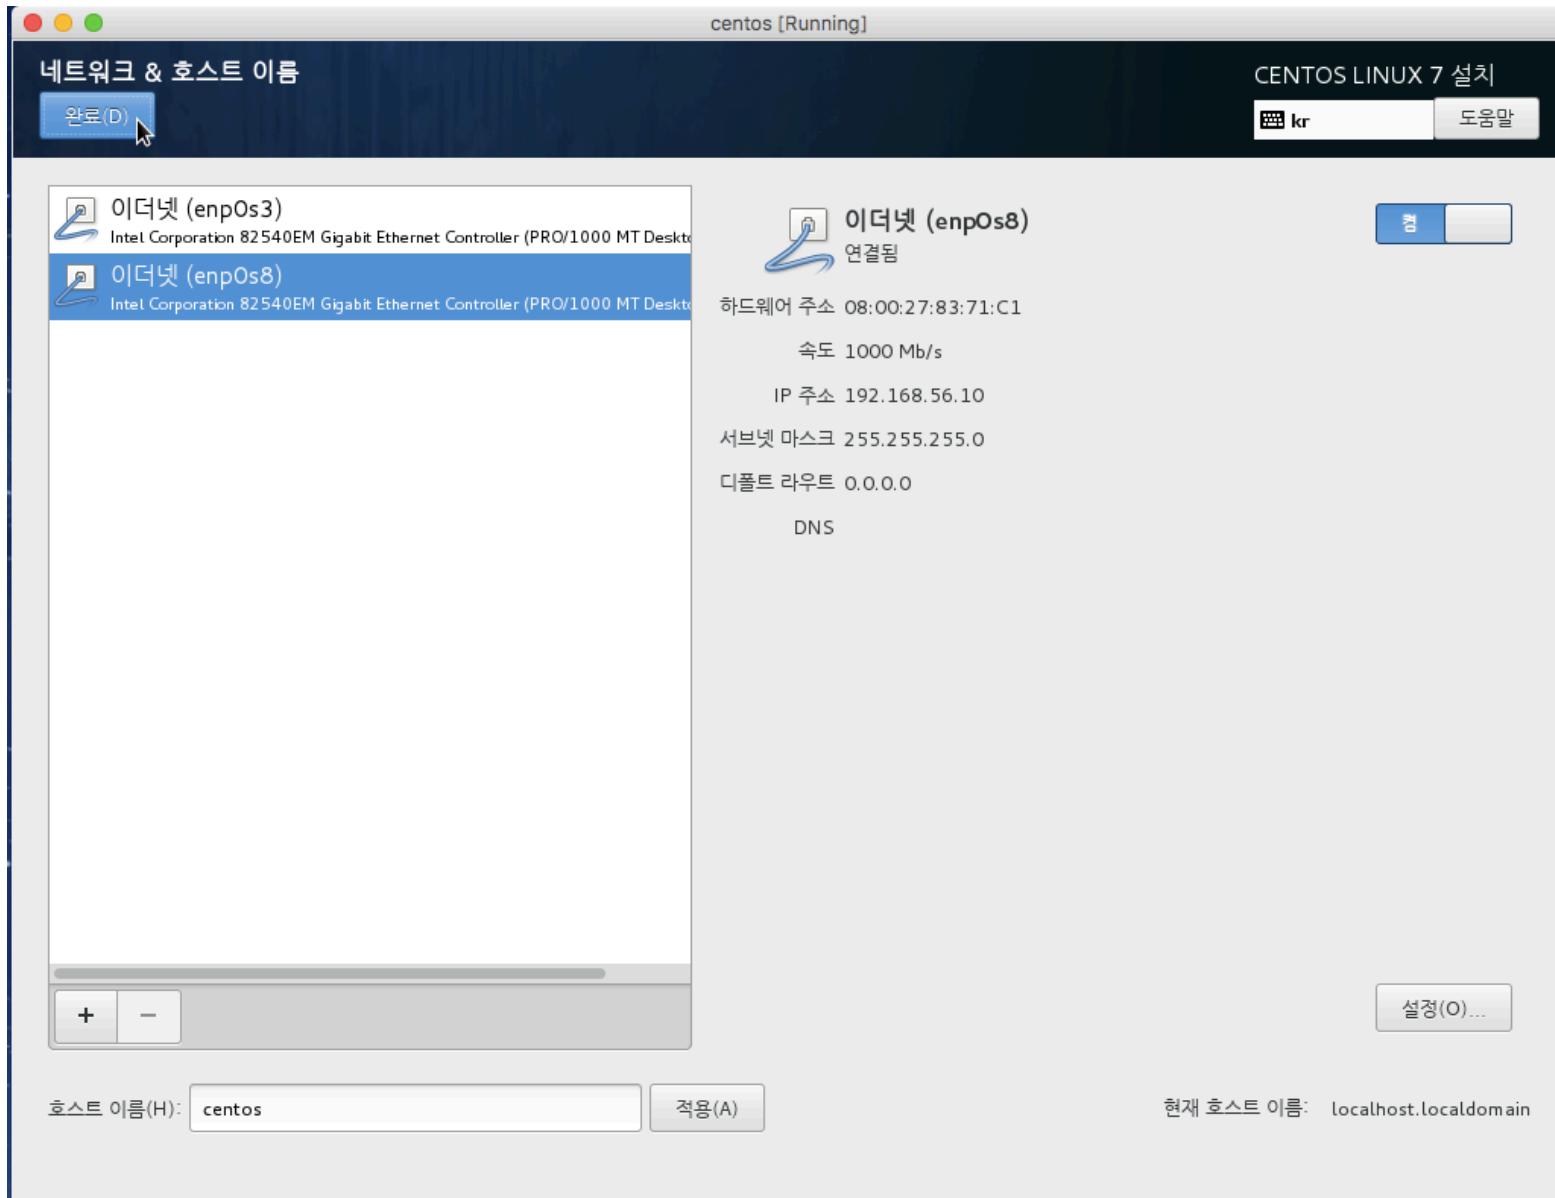

Vi. CentOS:

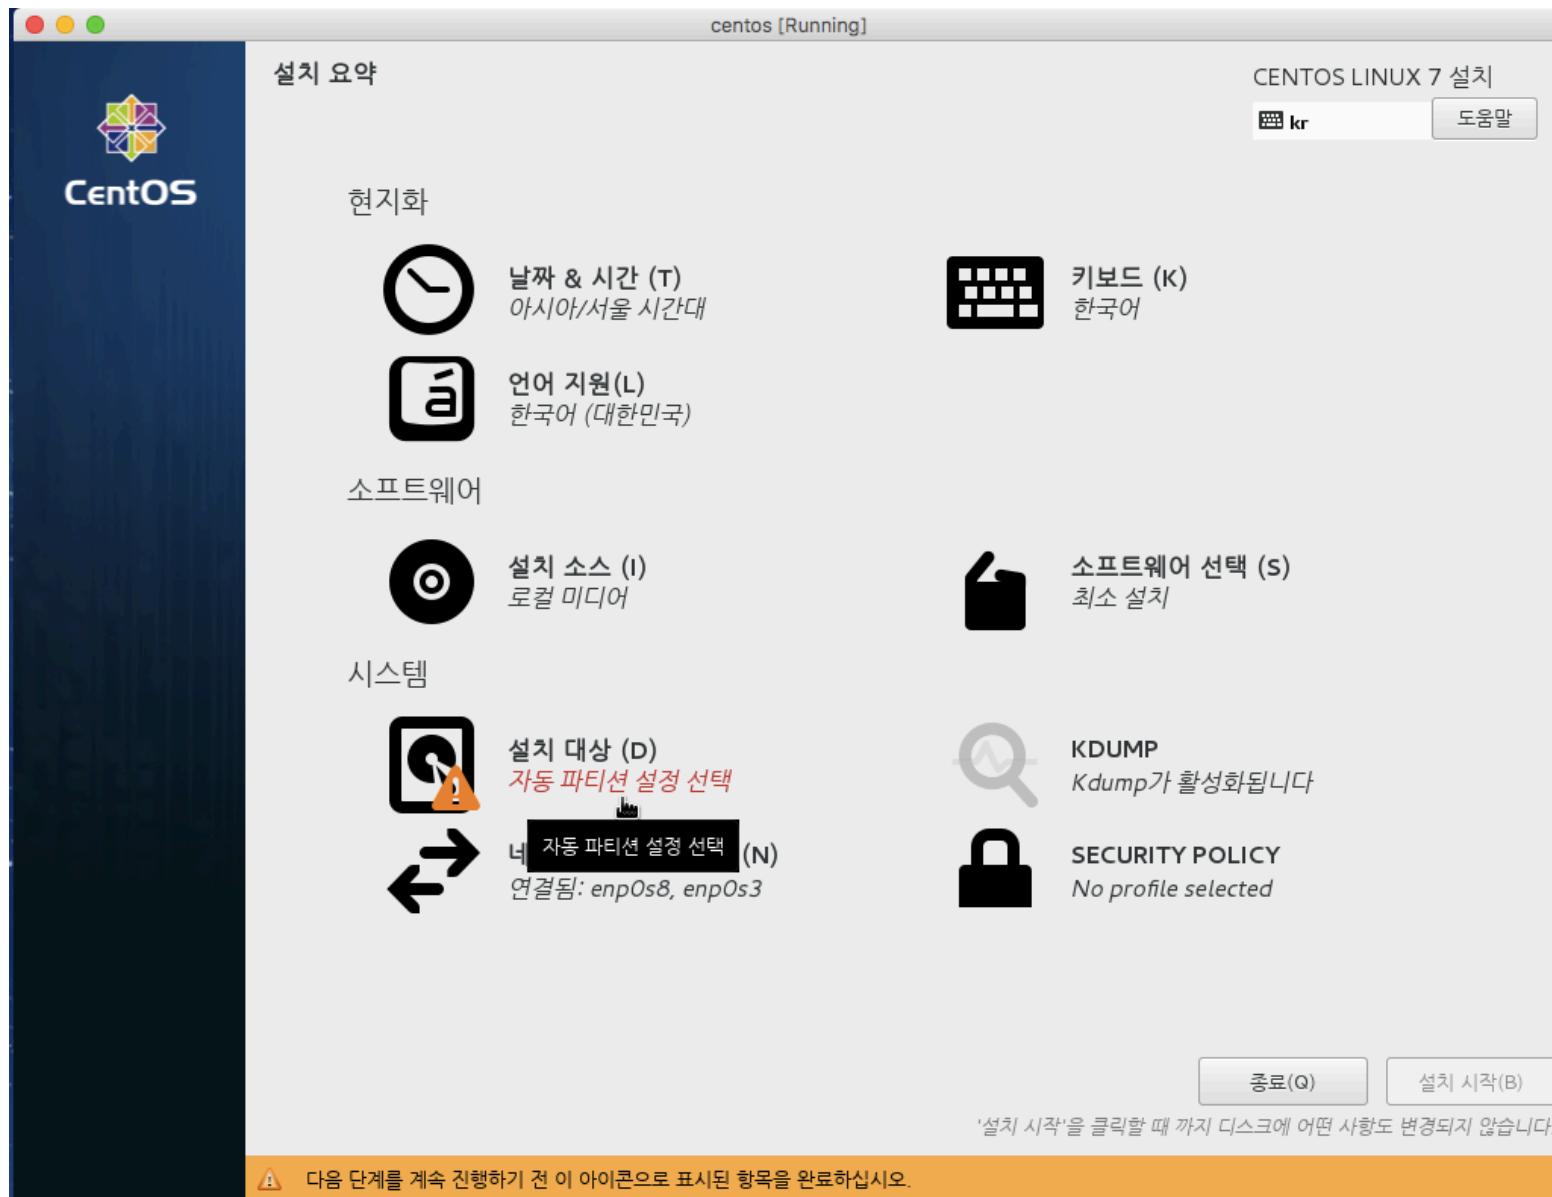


Vi. CentOS:

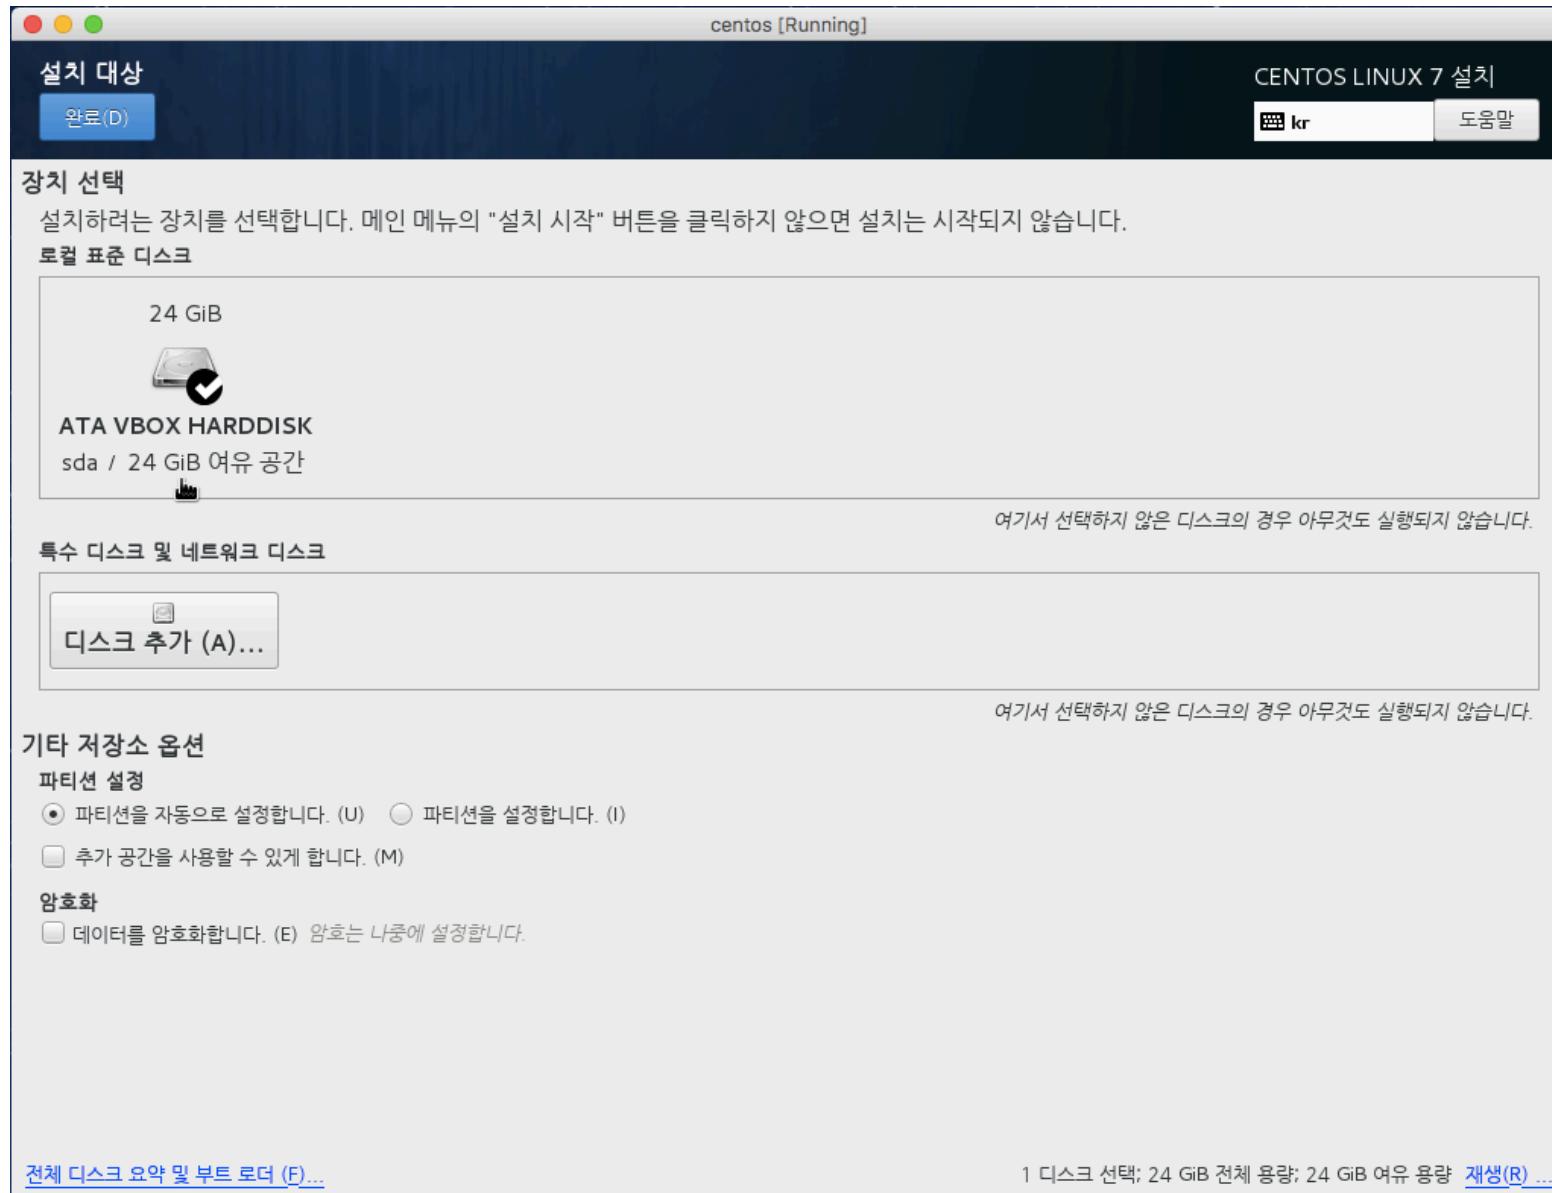


Vi. CentOS:




Vi. CentOS:

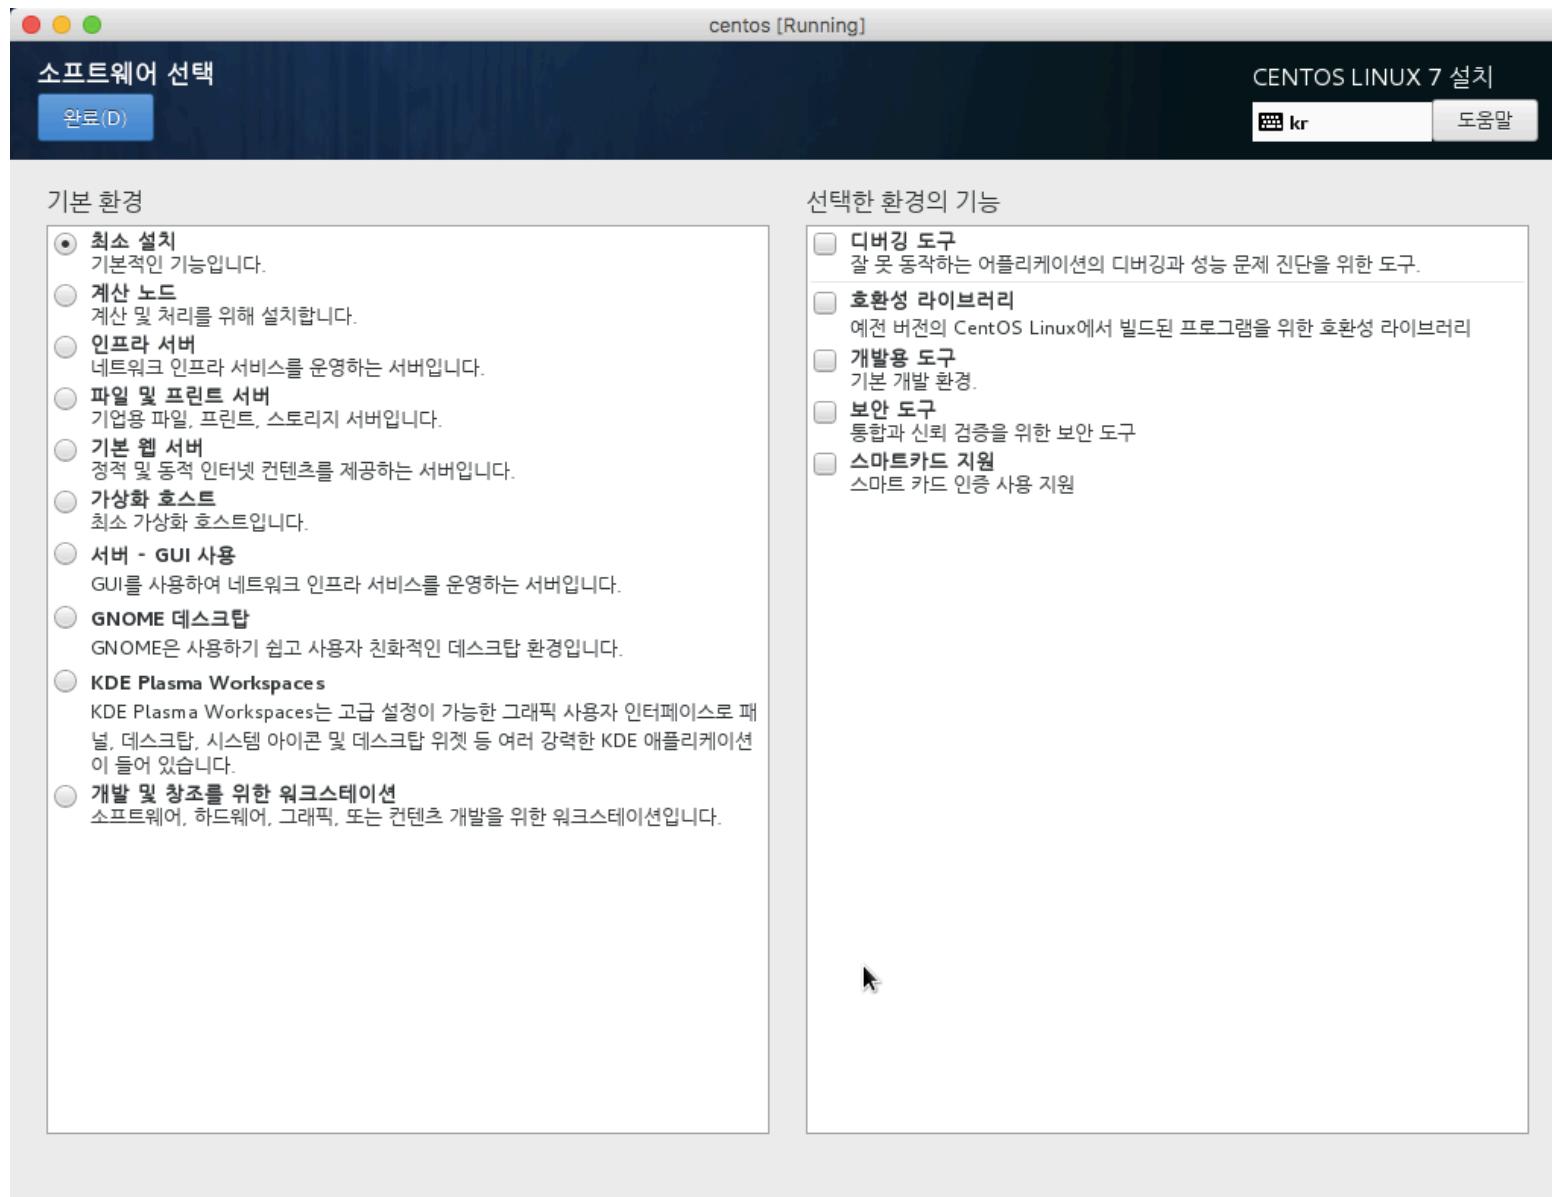


Vi. CentOS:

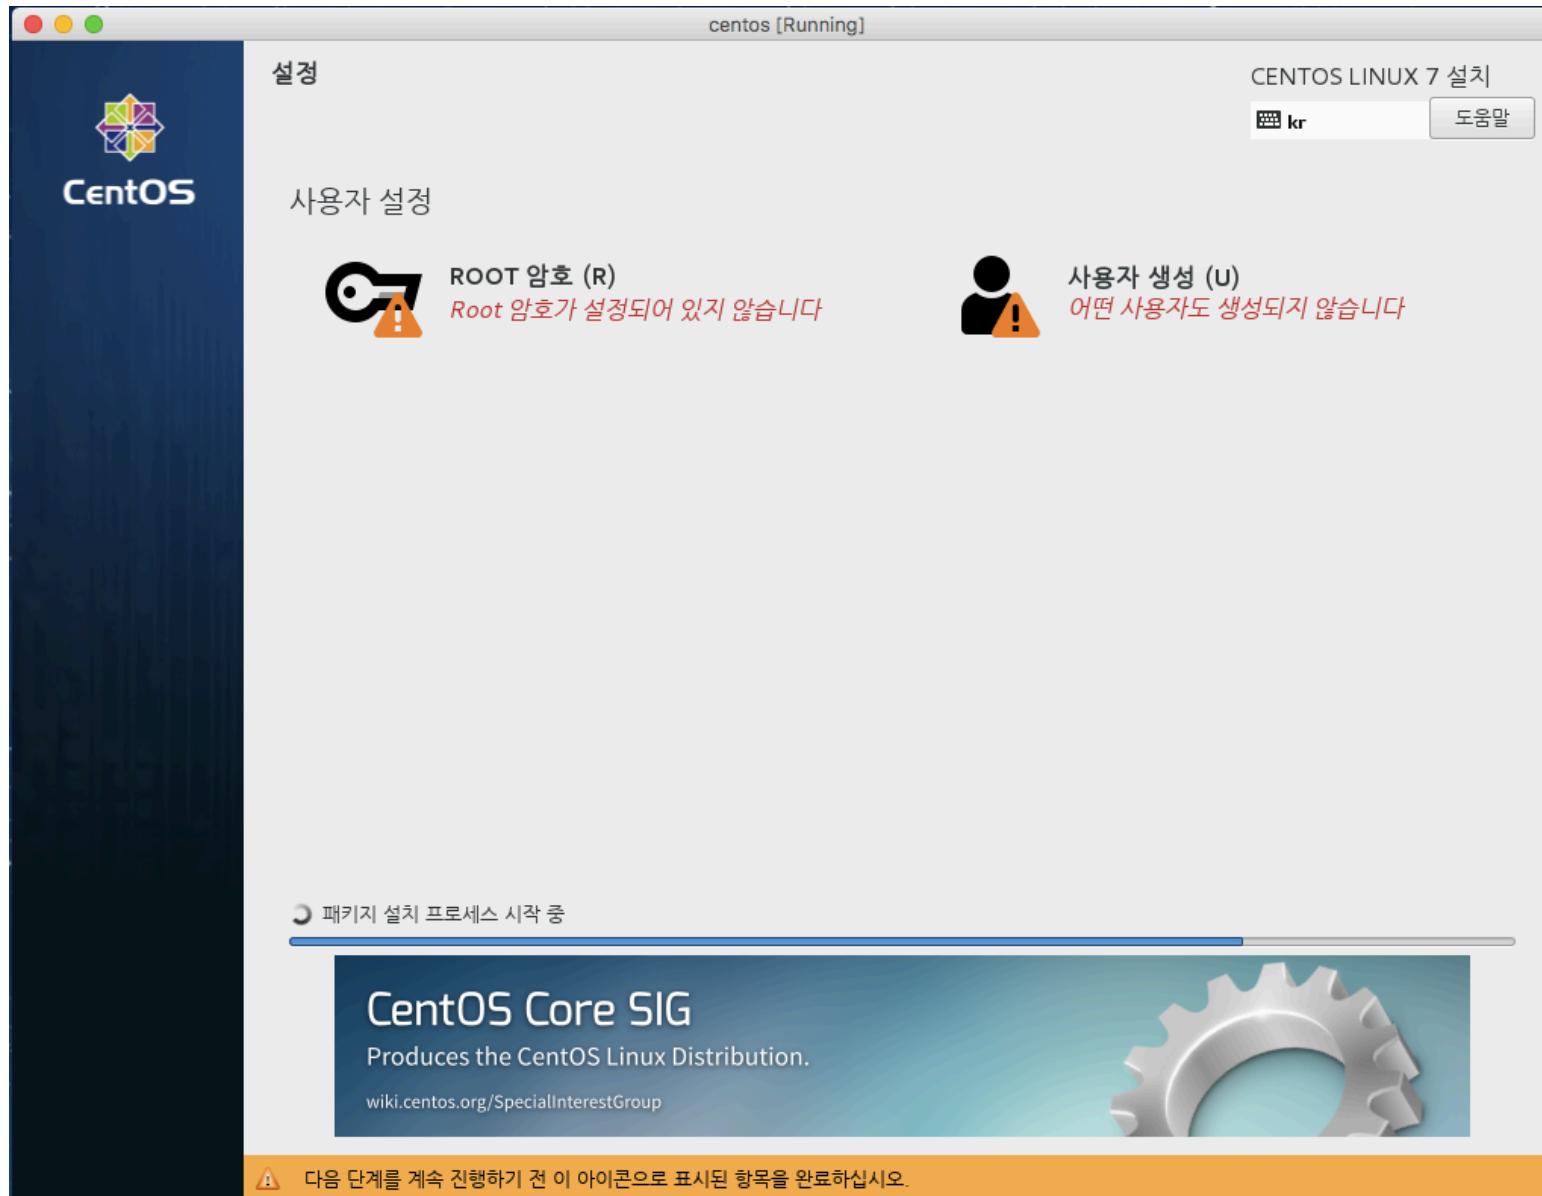


Vi. CentOS:

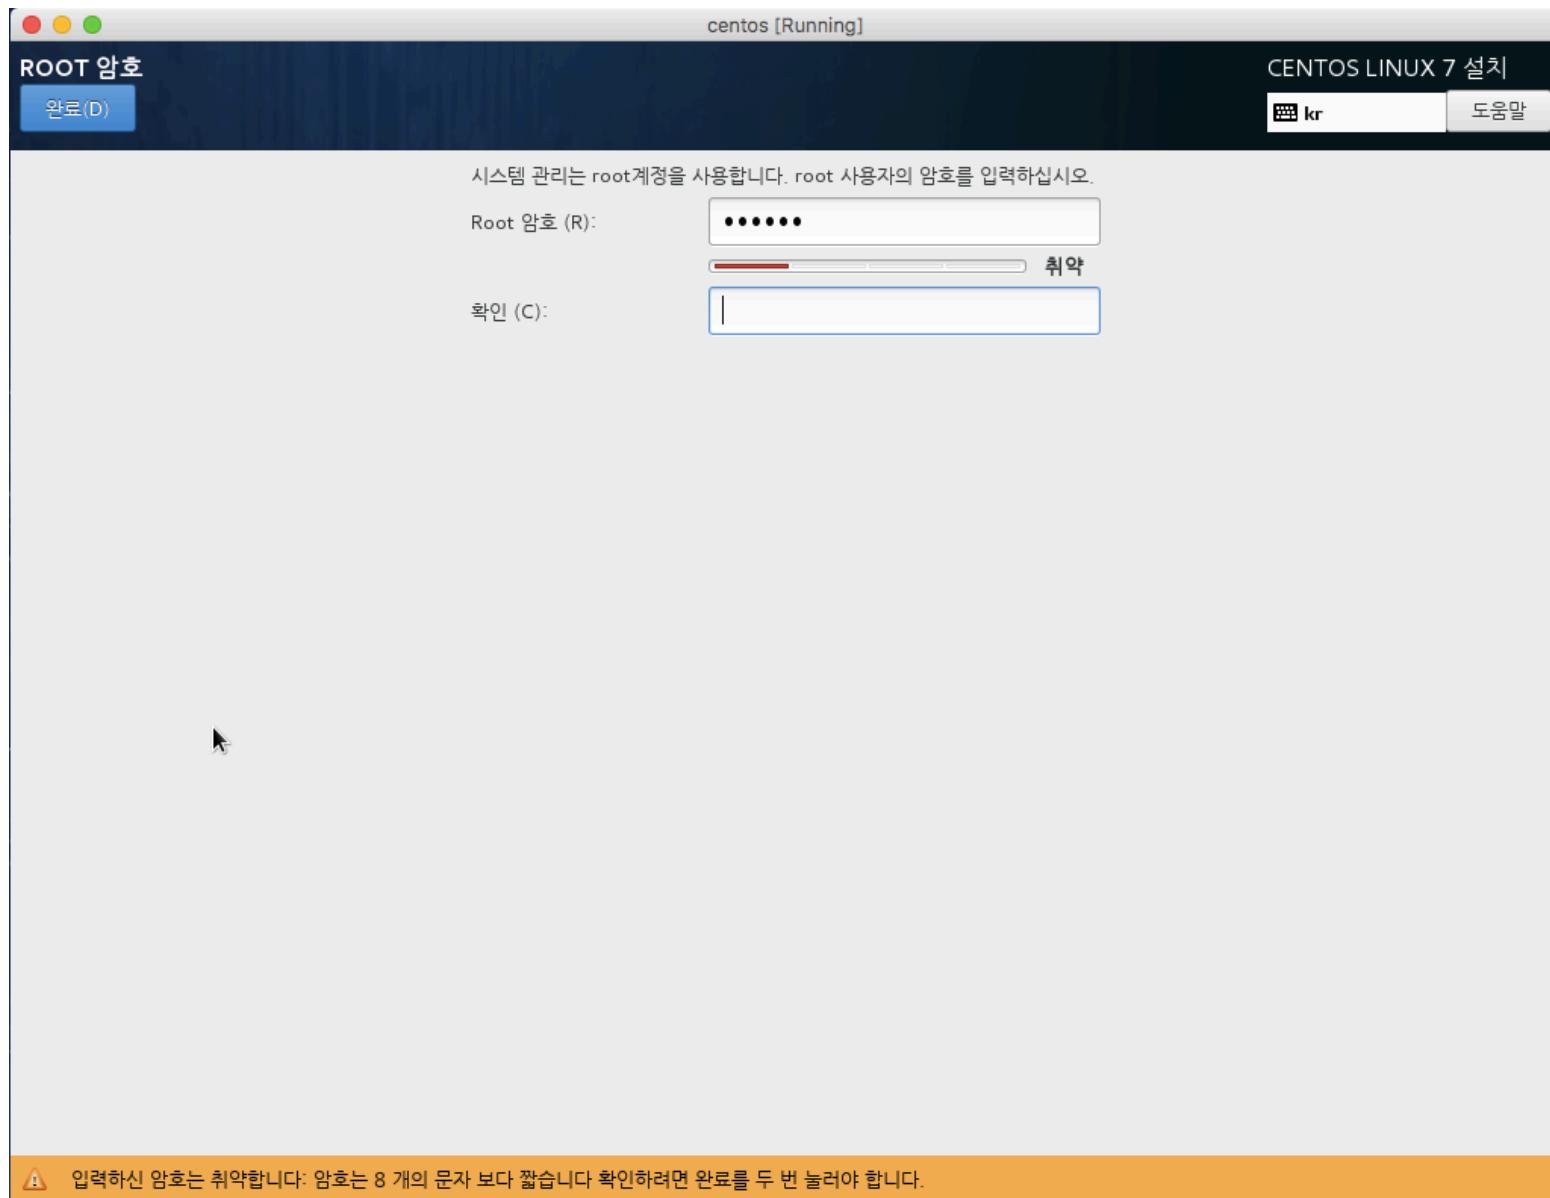


Vi. CentOS:

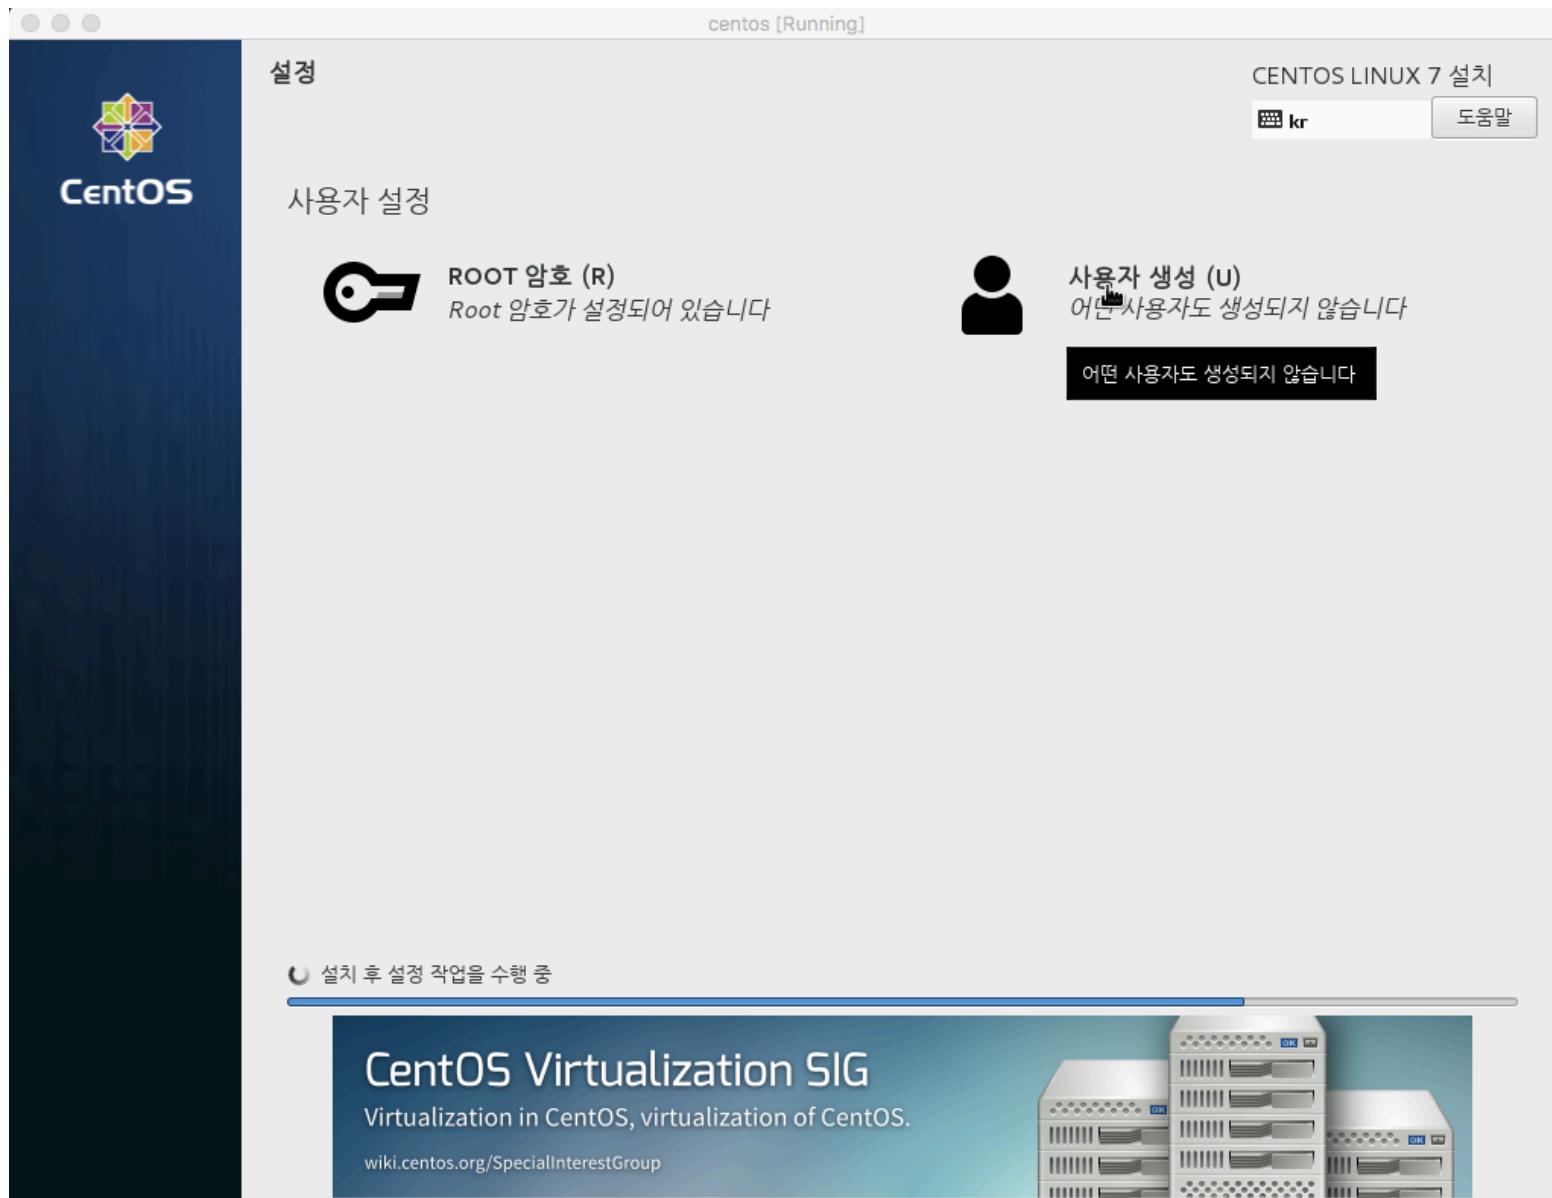


Vi. CentOS:

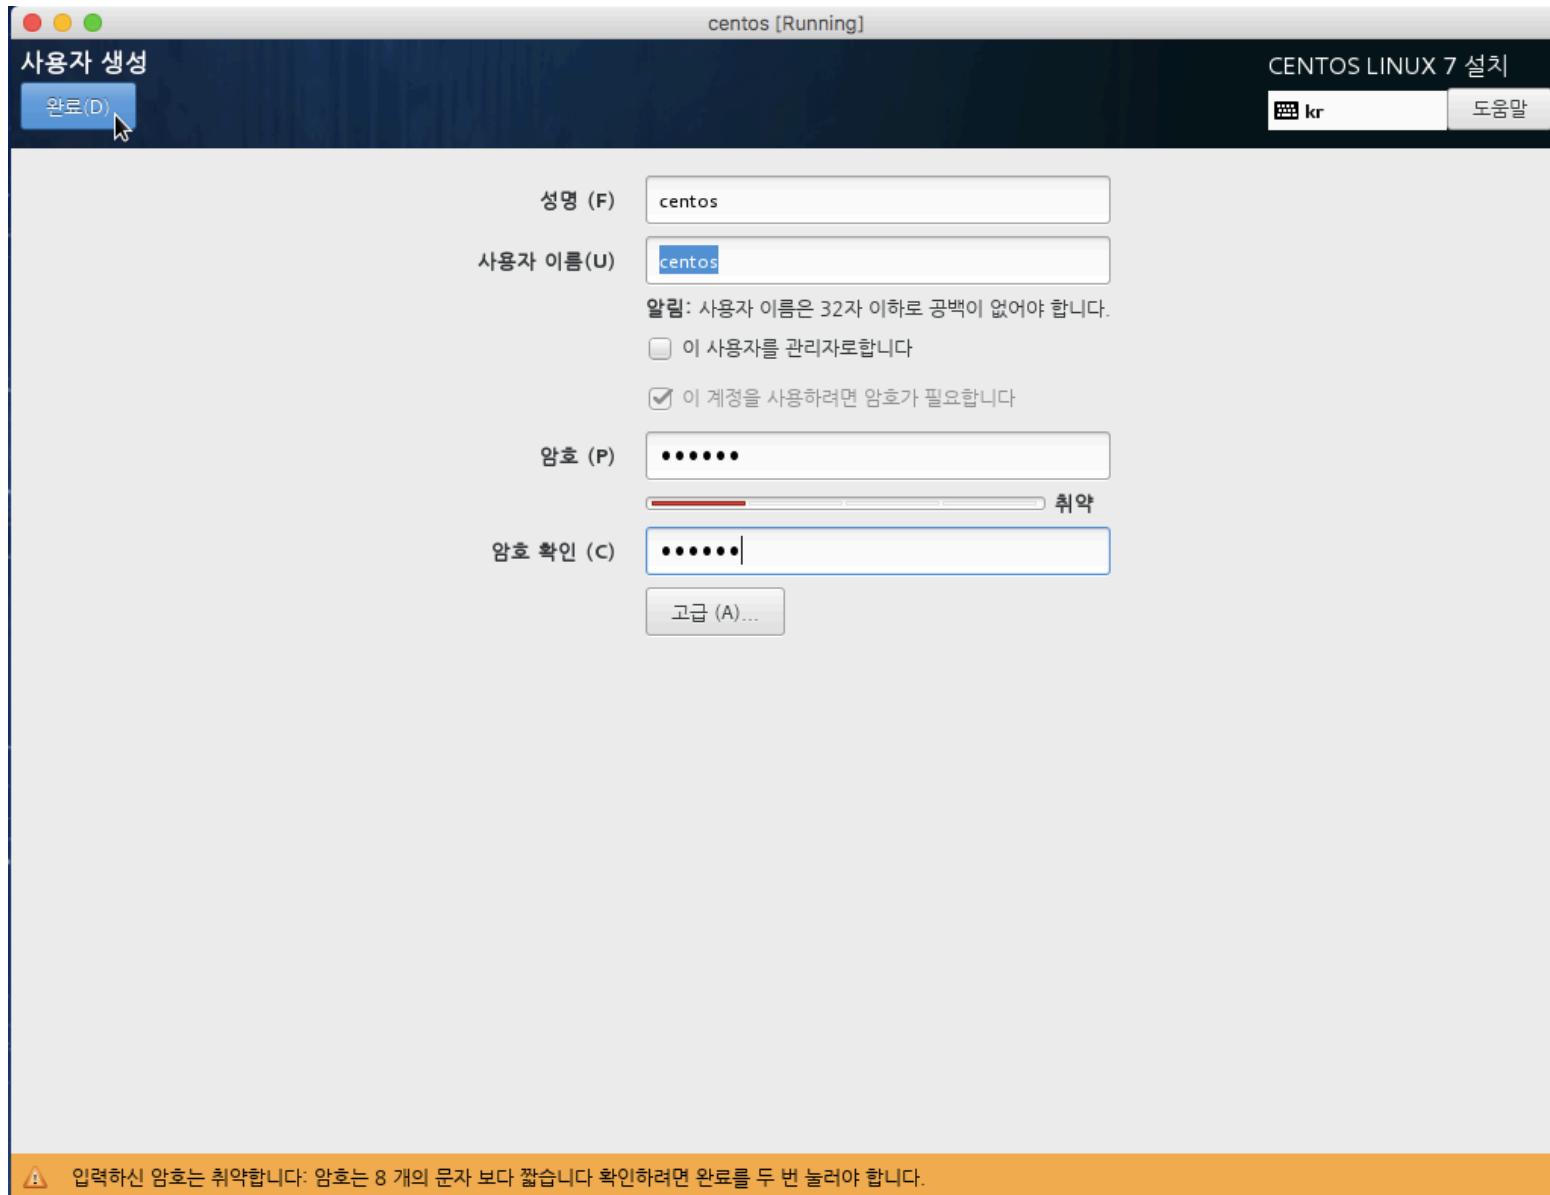

Vi. CentOS:

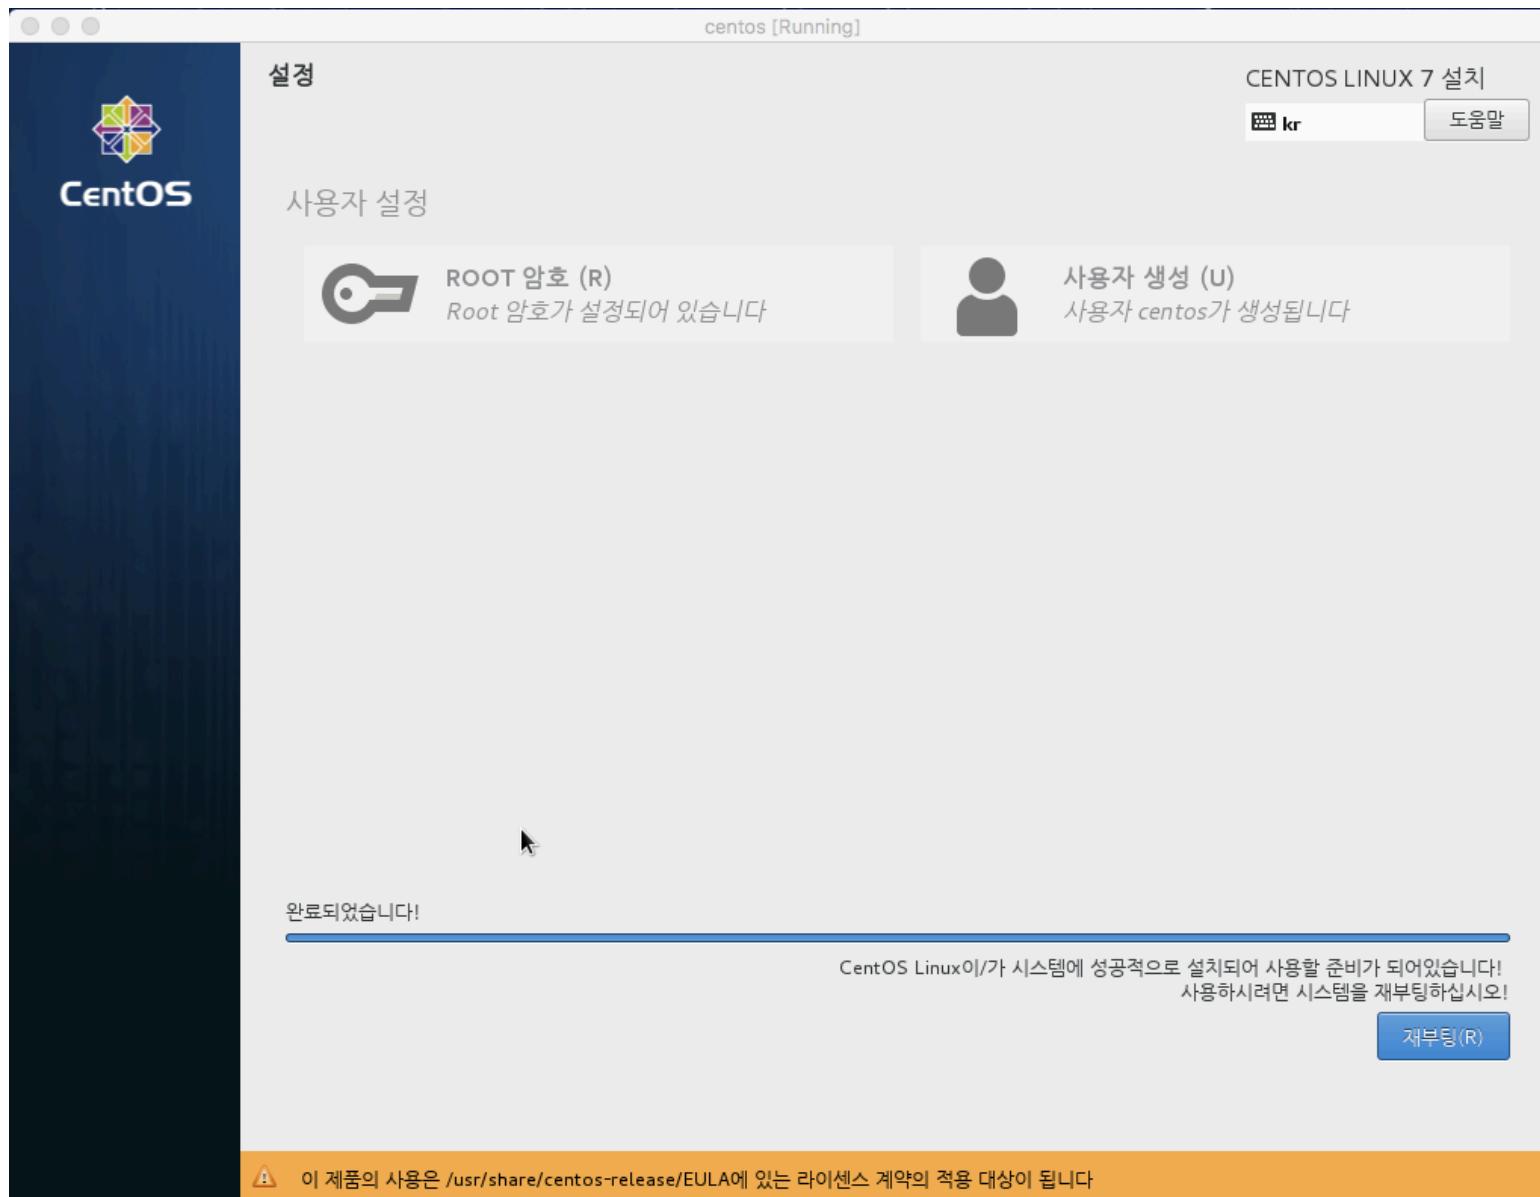

Vi. CentOS:

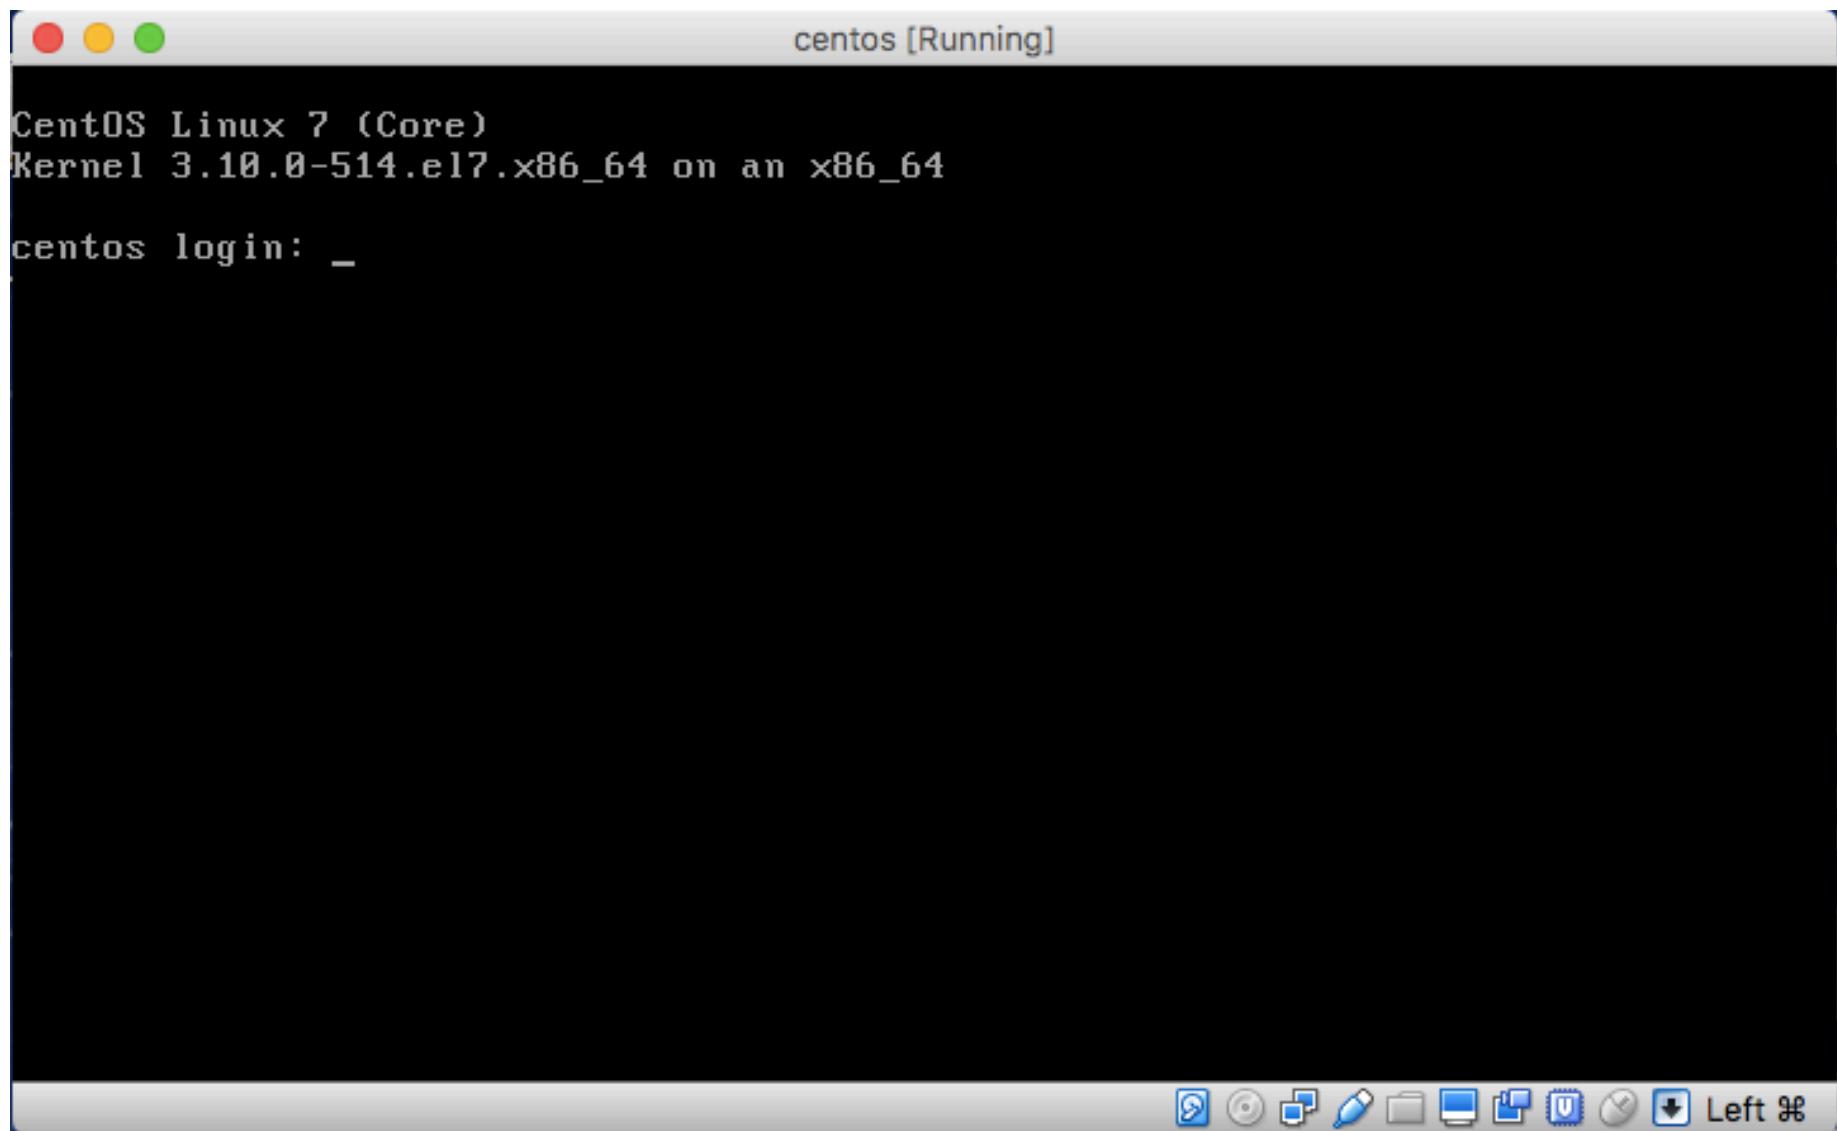

Vi. CentOS:

```
centos [Running]

CentOS Linux 7 (Core)
Kernel 3.10.0-514.el7.x86_64 on an x86_64

centos login: centos
Password:
Last login: Mon Jul 17 17:27:03 on ttym
[centos@centos ~]$ nmcli d
DEVICE  TYPE      STATE      CONNECTION
enp0s3  ethernet  connected  enp0s3
enp0s8  ethernet  disconnected  --
[centos@centos ~]$ nmcli c modify enp0s8 ipv4.addresses 192.168.56.10/24
[centos@centos ~]$ nmcli c down enp0s8 ; nmcli c up enp0s8
Error: 'enp0s8' is not an active connection.
Error: no active connection provided.
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/1)
[centos@centos ~]$ nmcli d
DEVICE  TYPE      STATE      CONNECTION
enp0s3  ethernet  connected  enp0s3
enp0s8  ethernet  connected  enp0s8
[centos@centos ~]$ _
```

Vi. CentOS:

```
[Air:~ mare$ ssh 192.168.56.10 -l centos
The authenticity of host '192.168.56.10 (192.168.56.10)' can't be established.
ECDSA key fingerprint is SHA256:6W9To+BXJG/z0e3V8pAM1x1nw4NdSc7tBXAhrTw8EuA.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added '192.168.56.10' (ECDSA) to the list of known hosts.
[centos@192.168.56.10's password:
Last login: Tue Jul 18 16:29:10 2017
[centos@centos ~]$ ]
```