Detecting and Repairing Silent Structural Errors in Structure-Aware Retrieval-Augmented Generation: A Robustness Study and a Learned Attachment-Error Detector

Minor Project (IT897) Report

Submitted in partial fulfillment of the requirements for the degree of

MASTER OF TECHNOLOGY

in

INFORMATION TECHNOLOGY

by

KSHITIJ KHEDE

(252IT010)

under the guidance of

Prof. ANANTHANARAYANA V. S.



DEPARTMENT OF INFORMATION TECHNOLOGY

NATIONAL INSTITUTE OF TECHNOLOGY KARNATAKA

SURATHKAL, MANGALURU – 575025

September 2026

DECLARATION

I hereby declare that the report of the P.G. Minor Project (IT897) work entitled **"Detecting and Repairing Silent Structural Errors in Structure-Aware Retrieval-Augmented Generation: A Robustness Study and a Learned Attachment-Error Detector"**, submitted to the National Institute of Technology Karnataka, Surathkal, in partial fulfillment of the requirements for the award of the degree of **Master of Technology in Information Technology**, is a bona fide record of the work carried out by me. The material in this report has not been submitted to any university or institution for the award of any degree.

Kshitij Khede (252IT010)
Dept. of Information Technology
NITK Surathkal, Mangaluru

Place: NITK, Surathkal
Date: September 2026

CERTIFICATE

This is to certify that the P.G. Minor Project (IT897) work entitled **"Detecting and Repairing Silent Structural Errors in Structure-Aware Retrieval-Augmented Generation: A Robustness Study and a Learned Attachment-Error Detector"**, submitted by **Kshitij Khede (252IT010)** as the record of the work carried out by him, is accepted as the P.G. Minor Project (IT897) work report submission in partial fulfillment of the requirements for the award of the degree of **Master of Technology in Information Technology** in the Department of Information Technology, NITK Surathkal, India. Duration of this minor project (IT897) is from JUNE 01, 2026 to AUGUST 15, 2026.

Prof. ANANTHANARAYANA V. S.

(Signature of the Guide with Date and Seal)

ACKNOWLEDGEMENT

I am thankful to my guide, **Prof. Ananthanarayana V. S.**, for his guidance and feedback throughout this minor project. His questions on whether the recovered document structure can be trusted directly shaped the research direction of this work. I also thank

the Department of Information Technology, NITK Surathkal, for the facilities and academic environment provided for this project.

Kshitij Khede

ABSTRACT

Retrieval-Augmented Generation (RAG) increasingly represents documents not as flat text chunks but as a hierarchy of sections, so that a retriever can attach the surrounding structural context of a passage. A growing family of systems — RAPTOR, TreeRAG, HiChunk, BookRAG and layout-aware retrievers — build such a hierarchy and then *assume it is correct*. Real documents, however, are parsed imperfectly: multi-column pages are mis-ordered and section headings are mis-detected. This project asks, for the first time, how sensitive structure-aware retrieval is to such errors, whether the errors can be detected from a per-node confidence signal, and whether they can be repaired at inference time without re-parsing.

The recovered hierarchy is treated as an instrument, and two controllable error sources are injected: reading-order noise (ρ) and heading-number dropout (δ). Structural fidelity is measured with three retrieval-relevant, model-free metrics: Parent-Assignment Accuracy (PAA), Ancestor-Path Accuracy (APA, the ancestor context a hierarchical retriever would attach), and Ancestor-Context Precision (ACP). A confidence-gated repair step reattaches low-confidence nodes to a safe structural prior.

On a corpus of eleven research-paper PDFs (five seeds per setting), reading-order noise is almost harmless (APA 96.8% $\rightarrow$ 96.4% at 50% noise) because numbering-primary attachment is inherently order-robust, whereas heading-number loss degrades structure steadily (PAA 97.7% $\rightarrow$ 92.7%, APA 96.8% $\rightarrow$ 89.2% at 50% loss). Attachment errors occur in lower-confidence nodes, but the built-in heuristic confidence predicts them only weakly (point-biserial $r = +0.16$), which caps the value of any confidence-gated mitigation.

Motivated by this, a *learned* attachment-error detector is introduced: a gradient-boosted classifier over fifteen per-node structural features, evaluated under leave-one-document-out cross-validation so that every score is on unseen documents. The learned detector raises error detection sharply over the heuristic (ROC-AUC 0.65 $\rightarrow$ 0.82, PR-AUC 0.10 $\rightarrow$ 0.36, correlation $r = 0.09 \rightarrow 0.38$), and its most informative signals are structural (sibling count, reading position, and the reading-order gap to the assigned parent) rather than the confidence score itself. Using the learned detector to gate the inference-time repair, at an equal repair budget, improves ancestor-context accuracy more than the heuristic gate does (APA 92.6% $\rightarrow$ 93.5% vs. 93.2%). The work thus provides the first robustness characterisation of structure-aware retrieval, a learned mechanism for detecting its silent errors, and an inference-time repair that acts on that signal.

Keywords: Retrieval-Augmented Generation; Structure-Aware Retrieval; Robustness; Document Structure; Confidence Estimation; Ancestor Context.

CONTENTS

LIST OF FIGURES **iv**

LIST OF TABLES **v**

ABBREVIATIONS **vi**

1 Introduction **1**

1.1 Background 1

1.2 The Gap: Structure is Assumed Correct 1

1.3 Motivation 1

1.4 Scope and Contributions 2

1.5 Organisation of the Report 2

2 Literature Review **3**

2.1 Flat and Adaptive Retrieval 3

2.2 Structure-Aware and Hierarchical Retrieval 3

2.3 Document Layout Analysis 4

2.4 Attribution and Faithfulness 4

2.5 Outcome of Literature Review 4

2.6 Problem Statement 4

2.7 Objectives 4

2.8 Summary 5

3 Methodology **6**

3.1 Overview 6

3.2 Instrument: Layout-Aware Structure Recovery 6

3.3 Perturbation Model 6

3.4 Retrieval-Relevant Metrics 7

3.5 Confidence-Gated Repair 7

3.6 Learned Attachment-Error Detector 7

3.6.1 Feature Engineering 8
3.6.2 Model and Leakage-Free Evaluation 8
3.6.3 Learned-Gated Repair 8
3.7 Summary 9

4 Work Done **10**
4.1 Implementation and Experimental Setup 10
4.2 Degradation Under Structural Error 10
4.3 Are Errors Predictable from Confidence? 11
4.4 Confidence-Gated Repair 11
4.5 Learned Attachment-Error Detection 12
4.6 Learned-Gated Repair 13
4.7 Summary 14

5 Conclusions and Future Work **15**
5.1 Conclusions 15
5.2 Limitations 15
5.3 Future Work 16

REFERENCES **17**

LIST OF FIGURES

3.1 Study pipeline. The recovered hierarchy is an instrument; the shaded blocks (the perturbation model, and the learned attachment-error detector with confidence-gated repair) are the research contributions. 6

4.1 (a) Structural fidelity degrades steadily with heading-number loss δ. (b) The same hierarchy is almost unaffected by reading-order noise ρ, showing that numbering-primary attachment confers reading-order robustness. 11

4.2 (a) The learned gradient-boosting detector greatly improves attachment-error detection over the KCE-confidence heuristic (leave-one-document-out). (b) Using the learned detector to gate the inference-time repair recovers more ancestor context than the heuristic gate at an equal repair budget. 13

LIST OF TABLES

2.1 Summary of the literature survey for the most relevant related works. . . 3

3.1 The fifteen per-node features used by the learned attachment-error detector. 8

4.1 Structural fidelity (%) vs. heading-number dropout δ (mean over 11 documents, 5 seeds). 10

4.2 Confidence-gated repair ablation at $\delta = 0.3$, $\tau = 0.60$ (mean over 11 documents, 5 seeds). 11

4.3 Attachment-error detection quality (leave-one-document-out, out-of-fold). A random detector has PR-AUC ≈ 0.055 (the error rate). 12

4.4 Most informative features of the learned detector (gradient-boosting importance). 12

4.5 Confidence-gated repair at $\delta = 0.3$ under an equal repair budget (mean over 11 documents, 10 seeds). Learned gates use out-of-fold LODO predictions. 13

ABBREVIATIONS

Abbreviation	Full Form
RAG	Retrieval-Augmented Generation
PDF	Portable Document Format
PAA	Parent-Assignment Accuracy
APA	Ancestor-Path Accuracy
ACP	Ancestor-Context Precision
PRE	Parent Ranking Engine
KCE	Knowledge Confidence Estimation
CPG	Candidate Parent Generation
TF–IDF	Term Frequency–Inverse Document Frequency
DFS	Depth-First Search
LLM	Large Language Model
OCR	Optical Character Recognition
ML	Machine Learning
GB	Gradient Boosting
ROC–AUC	Area Under the Receiver Operating Characteristic Curve
PR–AUC	Area Under the Precision–Recall Curve
LODO	Leave-One-Document-Out (cross-validation)

CHAPTER 1

INTRODUCTION

1.1 Background

Large Language Models answer fluently but can state untrue facts and cannot see knowledge created after training. Retrieval-Augmented Generation (RAG) addresses both by retrieving relevant text from an external store at query time and giving it to the model as context [1, 2]. The quality of a RAG answer therefore depends heavily on what is retrieved, which in turn depends on how the source document is represented before retrieval.

Early RAG splits a document into flat, fixed-size chunks [3, 4]. Recent systems instead represent a document as a *hierarchy* — title, sections, subsections — and retrieve along it, so that when a passage is returned its ancestor sections are attached as context [6, 7, 8]. This is now a large and active family of "structure-aware" methods.

1.2 The Gap: Structure is Assumed Correct

Structure-aware systems all share one assumption: that the recovered hierarchy is correct. In practice the hierarchy is produced by an imperfect parser. Two failures are common on real PDFs: (i) **reading-order errors**, where a multi-column page is read across columns, and (ii) **heading-detection errors**, where a section number is missed or garbled. When a section is attached to the wrong parent, a hierarchical retriever silently attaches the *wrong ancestor context* to the query — with no error flag. No prior work quantifies how damaging this is, whether it can be predicted, or whether it can be repaired.

1.3 Motivation

If structure-aware retrieval is fragile to ordinary parsing noise, then reported gains on clean documents may not transfer to real ones, and the errors are dangerous precisely because they are silent. Conversely, if the representation already carries a usable confidence signal, that signal could be used to detect and repair weak structure cheaply, at inference time. Establishing which of these holds is a prerequisite for trusting structure-aware RAG in practice.

1.4 Scope and Contributions

This work studies robustness of the *structural representation* that feeds a hierarchical retriever; it does not train or evaluate an end-to-end generator (that is left to future work). The contributions are:

1. A controlled perturbation framework that injects two realistic, independently tunable structural error sources (reading-order noise ρ, heading-number dropout δ) into a layout-aware document pipeline.

2. Three model-free, retrieval-relevant fidelity metrics — PAA, Ancestor-Path Accuracy (APA), and Ancestor-Context Precision (ACP) — that measure the context a hierarchical retriever would attach.

3. The first empirical robustness characterisation of structure-aware retrieval, including the finding that numbering-primary attachment is inherently robust to reading-order errors while being vulnerable to heading-number loss.

4. A **learned attachment-error detector** — a gradient-boosted classifier over fifteen per-node structural features, validated leave-one-document-out — that predicts wrong parent attachments far better than the built-in heuristic confidence, together with an analysis of which structural signals drive the prediction.

5. A confidence-gated repair mechanism that reattaches flagged nodes at inference time, driven by either the heuristic or the learned detector, with an equal-budget ablation quantifying the gain of learning.

1.5 Organisation of the Report

Chapter 2 reviews related work and states the problem and objectives. Chapter 3 describes the instrument, the perturbation model, the metrics, the learned attachment-error detector, and the repair. Chapter 4 reports the experiments and results. Chapter 5 concludes and lists future work.

CHAPTER 2

LITERATURE REVIEW

This chapter reviews retrieval and document-structure methods related to this project. Table 2.1 summarises the most relevant works and the gap each leaves open.

Table 2.1: Summary of the literature survey for the most relevant related works.

Work	Category	Main idea and limitation
Lewis et al. [1]	Flat RAG	Generator + dense passage retrieval; treats documents as flat passages.
Borgeaud et al. [3]	Flat RAG	Retrieval over trillions of tokens with fixed chunks; no document structure.
Sarthi et al. [6]	Tree RAG	Recursive clustering/summarisation tree; assumes clean inputs; no structural-error study.
Tao et al. [7]	Tree RAG	Tree-chunking along headings; needs correct heading markup; robustness untested.
Lu et al. [8]	Tree RAG	Hierarchical chunking via fine-tuned LLM; evaluated on clean structure.
Zhang et al. [9]	Hierarchical index	Tree + entity graph + agent for books; assumes reliable structure extraction.
Xu et al. [10]	Layout-aware	Symbolic layout graph + agent for visually-rich docs; does not study parser-error robustness.
Wallat et al. [11]	Attribution	Shows RAG citations can be correct yet unfaithful; faithfulness under noise unsolved.

2.1 Flat and Adaptive Retrieval

Lewis et al. [1] and Guu et al. [2] connect a language model to a document store; Borgeaud et al. [3] and Izacard et al. [4] scale and jointly train retrieval. Asai et al. [5] make retrieval selective. All operate over flat chunks and discard document structure.

2.2 Structure-Aware and Hierarchical Retrieval

Sarthi et al. [6] (RAPTOR) build a tree by clustering and summarising chunks; Tao et al. [7] (TreeRAG) chunk along headings; Lu et al. [8] (HiChunk) align chunk boundaries with a learned multi-level structure. Recent systems add richer indices: Zhang et

al. [9] (BookRAG) combine a hierarchical tree with an entity graph, and Xu et al. [10] (LAD-RAG) build a symbolic layout graph queried by an agent. All of these *construct* structure and evaluate on clean documents.

2.3 Document Layout Analysis

Geometric layout analysis [12, 13] and layout-aware transformers such as LayoutLMv3 [14] recover physical structure from PDFs, but target extraction/OCR rather than the robustness of downstream retrieval.

2.4 Attribution and Faithfulness

Wallat et al. [11] show that RAG citations can be correct yet not faithful, and that comprehensive faithfulness evaluation is still open — evidence that trusting what a RAG system retrieves and cites is an unsolved, active problem.

2.5 Outcome of Literature Review

Structure-aware retrieval is now mainstream, but every reviewed method assumes the recovered structure is correct. None reports how retrieval context degrades when the structure is wrong, none localises which nodes fail, and none repairs weak structure at inference time. This is the gap the present work addresses.

2.6 Problem Statement

To quantify the sensitivity of structure-aware retrieval context to document-structure errors, and to detect and repair such errors at inference time using per-node structural confidence.

2.7 Objectives

1. To define retrieval-relevant, model-free metrics of structural fidelity (PAA, APA, ACP).
2. To build a controlled harness that injects reading-order noise (ρ) and heading-number dropout (δ) into a layout-aware document pipeline.
3. To measure how structural fidelity degrades with each error source.
4. To test whether attachment errors are predictable from per-node confidence.

5. To build a *learned* attachment-error detector from per-node structural features and evaluate it, without leakage, against the heuristic confidence signal.

6. To design and evaluate a confidence-gated repair, driven by the heuristic and by the learned detector, that recovers structure at inference time.

2.8 Summary

The chapter reviewed flat, adaptive, tree, hierarchical and layout-aware retrieval and layout analysis, established that structural correctness is universally assumed, and stated the problem and objectives that follow from that gap.

CHAPTER 3

METHODOLOGY

3.1 Overview

The study has four parts: an instrument that recovers document structure, a perturbation model that corrupts it in a controlled way, retrieval-relevant metrics that score the result, and a confidence-gated repair. Figure 3.1 shows the flow; the two shaded blocks are the new research components.

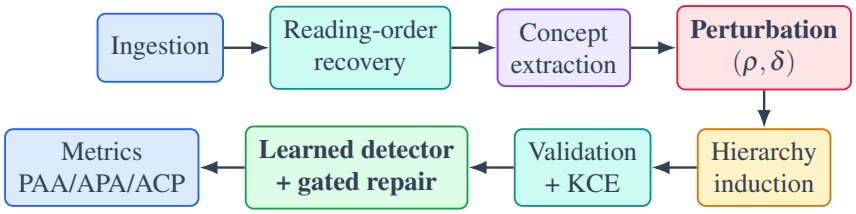


Figure 3.1: Study pipeline. The recovered hierarchy is an instrument; the shaded blocks (the perturbation model, and the learned attachment-error detector with confidence-gated repair) are the research contributions.

3.2 Instrument: Layout-Aware Structure Recovery

The instrument ingests a PDF with pdfplumber, recovers reading order with a column-gutter rule (blocks are split at the page gutter and sorted column by column with a vertical tolerance $\tau_y = 20$ pt), and classifies headings by section numbering or relative font size. Each heading becomes a concept node grounded to its source block. Attachment is *numbering-primary*: a number such as "3.1" attaches to "3"; unnumbered headings fall back to a Parent Ranking Engine (PRE) that scores candidates by reading-order proximity, TF–IDF similarity [15] and heading level. Every edge is validated by an upward DFS so the result is acyclic, single-parent and depth-bounded, and each node receives a Knowledge Confidence Estimation (KCE) score propagated in topological order via Kahn's algorithm [16]. This instrument is the author's prior implementation and is reused unchanged.

3.3 Perturbation Model

Two independent error sources model real parser failure. Reading-order noise swaps each adjacent pair of concepts in reading order with probability ρ. Heading-number

dropout removes a heading's section number with probability δ, forcing the semantic PRE fallback for that heading. Both are applied to copies of the extracted concepts, after which the hierarchy is rebuilt and re-scored.

3.4 Retrieval-Relevant Metrics

Let $\text{gold}(c)$ be the parent of concept c implied by its original numbering, and $\text{anc}(c)$ its gold ancestor chain to the root.

- **PAA** = fraction of nodes whose predicted immediate parent equals $\text{gold}(c)$.
- **APA** = fraction of nodes whose *entire* predicted ancestor set equals $\text{anc}(c)$; this is exactly the context a hierarchical retriever would attach.
- **ACP** = mean over nodes of $|\widehat{\text{anc}}(c) \cap \text{anc}(c)|/|\widehat{\text{anc}}(c)|$, the precision of the attached ancestor context.

No language model is used, so any change is attributable to structure alone.

3.5 Confidence-Gated Repair

Repair uses the existing KCE score as an error detector. For each non-root node c with $\text{conf}(c) < \tau$, the predicted (possibly corrupted) parent is discarded and c is reattached to the nearest earlier heading of shallower level — a safe structural prior — as in Algorithm 1. The step needs no re-parsing of the PDF.

Algorithm 1 Confidence-Gated Structural Repair

Require: concepts in reading order, confidence threshold τ
1: **for all** non-root concept c **do**
2: **if** $\text{conf}(c) < \tau$ **then**
3: $u \leftarrow$ nearest earlier concept with $\text{level}(u) < \text{level}(c)$
4: $\text{parent}(c) \leftarrow u$ (or root if none)
5: **end if**
6: **end for**

3.6 Learned Attachment-Error Detector

The heuristic KCE score carries error information, but weakly (Section 4.3). The central new component of this work therefore replaces the hand-crafted signal with a *learned* detector that predicts, for each node, whether its assigned parent is wrong. This turns error detection from a fixed rule into a trained model, and lets the repair act on a far stronger signal.

3.6.1 Feature Engineering

For every numbered node, after the hierarchy is rebuilt and re-scored under perturbation, fifteen features are computed from purely structural and layout cues (no document text is read by the model); they are listed in Table 3.1. The features fall into three groups: the pipeline's own confidence outputs (KCE and local confidence), the node's typographic and positional attributes (level, depth, font ratio, boldness, numbering flag, reading position), and *relational* cues that describe the predicted edge itself (the reading-order gap to the assigned parent, the parent's level and depth, whether it attaches to the root, and the out-degree and sibling count in the predicted tree).

Table 3.1: The fifteen per-node features used by the learned attachment-error detector.

Group	Features
Confidence	KCE confidence, local confidence
Typographic / positional	heading level, depth, font-size ratio, bold flag, numbering-present flag, normalised reading position
Relational (edge)	reading-order gap to assigned parent, parent level, parent depth, attaches-to-root flag, name word count, out-degree, sibling count

3.6.2 Model and Leakage-Free Evaluation

The detector is a gradient-boosted decision-tree classifier (scikit-learn), with logistic regression as a linear reference. The prediction target is binary: 1 if the node's predicted parent differs from its gold parent. Because the corpus is small, evaluation uses **leave-one-document-out (LODO) cross-validation**: to score the nodes of a document, the model is trained only on the nodes of the *other* ten documents. No node is ever scored by a model that has seen its own document, so the reported detection numbers contain no leakage. Training samples are pooled over heading-number dropout levels $\delta \in \{0.2, 0.3, 0.4\}$ and ten seeds, giving 5,880 node-samples at a natural error rate of 5.5%; the strong class imbalance is handled with balanced class weights, and detection quality is therefore reported with ROC-AUC and PR-AUC (not accuracy) plus the point-biserial correlation used for the heuristic.

3.6.3 Learned-Gated Repair

The learned detector is then substituted for the heuristic inside Algorithm 1: a node is repaired when its *predicted error probability* exceeds a threshold, rather than when its confidence falls below τ. To compare the two gates fairly, the learned threshold is set so that both repair the same fraction of nodes (equal repair budget). The learned scores

used for this comparison are the out-of-fold LODO predictions, so the repair evaluation is also leakage-free.

3.7 Summary

The methodology reuses a validated layout-aware instrument, corrupts its output in a controlled way, scores the result with retrieval-relevant metrics, learns an attachment-error detector from per-node structural features under leakage-free cross-validation, and repairs weak structure at inference time using either the heuristic or the learned signal.

CHAPTER 4

WORK DONE

4.1 Implementation and Experimental Setup

The instrument is implemented in Python (pdfplumber, scikit-learn, NumPy, Pydantic). The new perturbation harness, metrics and repair are implemented in a single evaluation module. Experiments use a corpus of eleven real research-paper PDFs from the RAG literature (RAPTOR, GraphRAG, TreeRAG, Self-RAG, HiChunk, RETRO, Atlas, T-RAG, REALM, HAT-RAG, and the original RAG paper); gold structure is derived from section numbering. The degradation, confidence and heuristic-repair experiments are averaged over five random seeds; the learned-detector experiments (Sections 4.4–4.5) use ten seeds and leave-one-document-out cross-validation with scikit-learn's gradient-boosting and logistic-regression classifiers. No language model is involved at any point, isolating the structural effect.

4.2 Degradation Under Structural Error

Table 4.1 and Figure 4.1 report structural fidelity as each error source increases. Reading-order noise has almost no effect (APA 96.8% $\rightarrow$ 96.4% at $\rho = 0.5$): because attachment is numbering-primary, the section number encodes the parent independently of order, so the hierarchy inherits robustness to reading-order errors. Heading-number loss degrades fidelity steadily (PAA 97.7% $\rightarrow$ 92.7%, APA 96.8% $\rightarrow$ 89.2%, ACP 97.3% $\rightarrow$ 91.2% at $\delta = 0.5$), because losing the number forces the weaker semantic fallback. This confirms H1 for heading-number loss and reveals that the dominant vulnerability is heading detection, not reading order.

Table 4.1: Structural fidelity (%) vs. heading-number dropout δ (mean over 11 documents, 5 seeds).

δ	0.0	0.1	0.2	0.3	0.4	0.5
PAA	97.7	96.3	95.1	94.7	93.8	92.7
APA	96.8	94.2	92.2	91.2	90.4	89.2
ACP	97.3	95.3	93.8	93.1	92.3	91.2

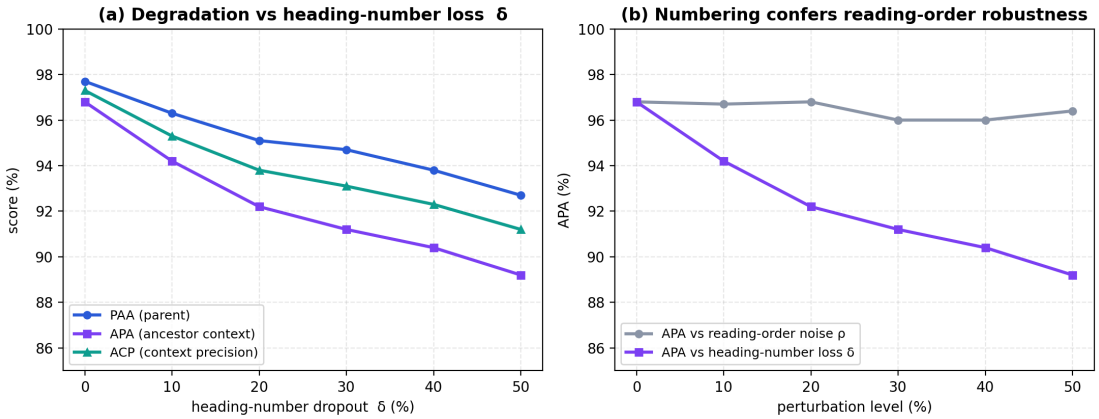


Figure 4.1: (a) Structural fidelity degrades steadily with heading-number loss δ. (b) The same hierarchy is almost unaffected by reading-order noise ρ, showing that numbering-primary attachment confers reading-order robustness.

4.3 Are Errors Predictable from Confidence?

At $\delta = 0.3$, correctly attached nodes have a mean KCE confidence of 0.611 and wrongly attached nodes 0.548 (gap $+0.062$); the point-biserial correlation between confidence and correctness is $r = +0.16$ over 980 nodes. Confidence is therefore a real but weak predictor of attachment error (partly supporting H2): the current heuristic KCE carries error information, but not strongly.

4.4 Confidence-Gated Repair

Table 4.2 shows the repair ablation at $\delta = 0.3$, $\tau = 0.60$. Gated repair improves ancestor-context accuracy (APA 92.8% $\rightarrow$ 93.3%) and precision (ACP 94.1% $\rightarrow$ 94.4%). The gain is positive but small, and is bounded by the weak confidence signal: the repair can only help where confidence correctly flags an error. This supports H3 while showing that the value of the mitigation is limited by confidence quality.

Table 4.2: Confidence-gated repair ablation at $\delta = 0.3$, $\tau = 0.60$ (mean over 11 documents, 5 seeds).

Setting	PAA (%)	APA (%)	ACP (%)
No repair	94.9	92.8	94.1
Gated repair	**95.1**	**93.3**	**94.4**

4.5 Learned Attachment-Error Detection

The weakness of the heuristic ($r \approx 0.16$) motivates the central new component: a learned detector. Following the leakage-free protocol of Section 3.6, a gradient-boosted classifier (with logistic regression as a linear reference) is trained on the fifteen per-node structural features over 5,880 node-samples ($\delta \in \{0.2, 0.3, 0.4\}$, ten seeds, error rate 5.5%) and scored leave-one-document-out. Table 4.3 compares the detectors, and Figure 4.2(a) shows the same result graphically.

Table 4.3: Attachment-error detection quality (leave-one-document-out, out-of-fold). A random detector has PR-AUC ≈ 0.055 (the error rate).

Detector	ROC-AUC	PR-AUC	Point-biserial r
Heuristic ($1 -$ KCE conf.)	0.647	0.103	0.089
Learned: Logistic Regression	0.567	0.164	0.089
Learned: Gradient Boosting	**0.817**	**0.362**	**0.384**

The gradient-boosted detector improves every measure decisively over the heuristic: ROC-AUC rises from 0.65 to 0.82, PR-AUC more than triples ($0.10 \rightarrow 0.36$, against a random baseline of 0.055), and the confidence–error correlation rises from 0.09 to 0.38. The linear model does not suffice (ROC-AUC 0.567), which shows the relationship between the structural cues and attachment error is non-linear and needs a non-linear learner. This directly overcomes the main limitation of the heuristic-only study.

Table 4.4: Most informative features of the learned detector (gradient-boosting importance).

Feature	Importance
Sibling count (in predicted tree)	0.359
Normalised reading position	0.260
Reading-order gap to assigned parent	0.230
Name word count	0.061
Font-size ratio	0.034
Heading level	0.012

Table 4.4 lists the detector's most informative features. The dominant signals are *structural* — how many siblings a node has under its assigned parent, where it sits in the document, and how far in reading order it is from that parent — while the pipeline's own KCE confidence contributes little. The learned model has thus discovered that

attachment errors are visible in the *shape* of the predicted tree, a cue the hand-crafted confidence heuristic ignored entirely. This is an interpretable, defensible explanation of *why* learning helps.

4.6 Learned-Gated Repair

Substituting the learned detector for the heuristic inside the repair (Section 3.6) and holding the repair budget equal ($\approx 37\%$ of nodes) gives Table 4.5 and Figure 4.2(b), at $\delta = 0.3$ over ten seeds. The learned gate improves the ancestor context beyond the heuristic gate on every metric, lifting APA from 92.6% (no repair) to 93.5% — half again the heuristic's gain — and giving the best PAA and ACP. Because the gate is more accurate, the same repair budget is spent on nodes that are genuinely wrong.

Table 4.5: Confidence-gated repair at $\delta = 0.3$ under an equal repair budget (mean over 11 documents, 10 seeds). Learned gates use out-of-fold LODO predictions.

Setting	PAA (%)	APA (%)	ACP (%)
No repair	94.6	92.6	93.9
Heuristic-gated (conf. < 0.60)	95.0	93.2	94.4
Learned-gated (Logistic Regression)	94.7	93.3	94.3
Learned-gated (Gradient Boosting)	**95.3**	**93.5**	**94.9**

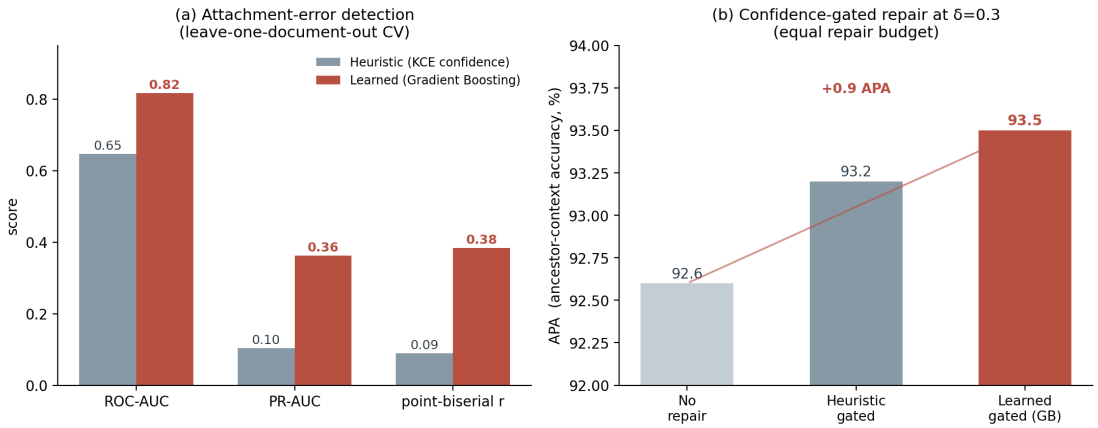


Figure 4.2: (a) The learned gradient-boosting detector greatly improves attachment-error detection over the KCE-confidence heuristic (leave-one-document-out). (b) Using the learned detector to gate the inference-time repair recovers more ancestor context than the heuristic gate at an equal repair budget.

4.7 Summary

Across the corpus, reading-order noise is almost harmless while heading-number loss degrades the retrieval context steadily. Attachment errors fall on lower-confidence nodes, but the heuristic confidence detects them only weakly; a *learned* gradient-boosted detector over structural features raises detection sharply (ROC-AUC $0.65 \rightarrow 0.82$, PR-AUC $0.10 \rightarrow 0.36$) and, used to gate the repair, recovers more ancestor context than the heuristic (APA $92.6 \rightarrow 93.5$). The learned detector relies chiefly on the shape of the predicted tree, explaining why it succeeds where the confidence heuristic does not.

CHAPTER 5

CONCLUSIONS AND FUTURE WORK

5.1 Conclusions

This project gives the first robustness characterisation of structure-aware retrieval and a learned mechanism for detecting its silent errors. Using a controlled perturbation of a validated layout-aware pipeline and three model-free, retrieval-relevant metrics, it shows that numbering-primary attachment is inherently robust to reading-order errors (APA $\approx 96\%$ across all ρ), while heading-number loss degrades the ancestor context that a hierarchical retriever would attach (APA $96.8\% \rightarrow 89.2\%$). The built-in heuristic confidence predicts these attachment errors only weakly ($r \approx 0.16$); the project therefore contributes a *learned* gradient-boosted detector over per-node structural features that, evaluated leave-one-document-out, raises detection sharply (ROC-AUC $0.65 \rightarrow 0.82$, PR-AUC $0.10 \rightarrow 0.36$, r up to 0.38) and relies chiefly on the shape of the predicted tree. Using the learned detector to gate an inference-time repair recovers more ancestor context than the heuristic at an equal budget (APA $92.6\% \rightarrow 93.5\%$), without re-parsing. The study turns a preprocessing pipeline into a research instrument and yields a design insight, a learned error detector, and an inference-time mitigation.

5.2 Limitations

1. Fidelity is measured with structural proxies (PAA/APA/ACP), not end-task question answering.
2. Although the learned detector greatly improves error prediction, its absolute PR-AUC (0.36) still leaves errors undetected, so the repair gain, while larger than the heuristic's, remains modest in absolute terms.
3. Gold structure is numbering-derived, so unnumbered-heading correctness is not directly graded.
4. The corpus is eleven academic PDFs; non-academic layouts are untested, and the learned detector is trained and evaluated within this corpus (leave-one-document-out).

5.3 Future Work

1. Scale the learned detector to a large cross-domain corpus and richer feature sets (e.g. learned text embeddings of the heading and its neighbourhood) to raise absolute detection further.
2. Add an LLM-in-the-loop evaluation to connect structural fidelity to answer quality and faithfulness.
3. Extend perturbation to the block level (before heading detection) and to larger public document-QA corpora.
4. Study robustness under heterogeneous and federated document sources.

These directions form the objectives of the Major Project, of which this robustness study is the first objective.

REFERENCES

[1] P. Lewis, E. Perez, A. Piktus, et al. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *NeurIPS*, vol. 33, pp. 9459–9474, 2020.

[2] K. Guu, K. Lee, Z. Tung, P. Pasupat, and M. Chang. REALM: Retrieval-augmented language model pre-training. In *ICML*, pp. 3929–3938, 2020.

[3] S. Borgeaud, A. Mensch, J. Hoffmann, et al. Improving language models by retrieving from trillions of tokens. In *ICML*, pp. 2206–2240, 2022.

[4] G. Izacard, P. Lewis, M. Lomeli, et al. Atlas: Few-shot learning with retrieval augmented language models. *JMLR*, 24(251):1–43, 2023.

[5] A. Asai, Z. Wu, Y. Wang, A. Sil, and H. Hajishirzi. Self-RAG: Learning to retrieve, generate, and critique through self-reflection. In *ICLR*, 2024.

[6] P. Sarthi, S. Abdullah, A. Tuli, et al. RAPTOR: Recursive abstractive processing for tree-organized retrieval. In *ICLR*, 2024.

[7] W. Tao, X. Xing, Y. Chen, L. Huang, and X. Xu. TreeRAG: Unleashing the power of hierarchical storage for enhanced knowledge retrieval in long documents. In *Findings of the ACL*, pp. 356–371, 2025.

[8] W. Lu, K. Chen, R. Qiao, and X. Sun. HiChunk: Evaluating and enhancing retrieval-augmented generation with hierarchical chunking. arXiv:2509.11552, 2025.

[9] Y. Zhang, et al. BookRAG: A hierarchical structure-aware index-based approach for retrieval-augmented generation on complex documents. arXiv:2512.03413, 2025.

[10] Z. Xu, et al. LAD-RAG: Layout-aware dynamic RAG for visually-rich document understanding. arXiv:2510.07233, 2025.

[11] J. Wallat, et al. Correctness is not faithfulness in retrieval-augmented generation attributions. In *ACM SIGIR ICTIR*, 2025.

[12] L. O'Gorman. The document spectrum for page layout analysis. *IEEE TPAMI*, 15(11):1162–1173, 1993.

[13] T. M. Breuel. Two geometric algorithms for layout analysis. In *Document Analysis Systems*, pp. 188–199, Springer, 2002.

[14] Y. Huang, T. Lv, L. Cui, Y. Lu, and F. Wei. LayoutLMv3: Pre-training for document AI with unified text and image masking. In *ACM Multimedia*, pp. 4083–4091, 2022.

[15] G. Salton and M. J. McGill. *Introduction to Modern Information Retrieval*. McGraw-Hill, 1983.

[16] A. B. Kahn. Topological sorting of large networks. *Communications of the ACM*, 5(11):558–562, 1962.