

*Todo list	
█ Todo Text:	
Abstract	i
█ Todo Text:	
State-Driven	7
█ Todo Text:	
Plugins	7
█ Todo Text:	
Rendering Stack	7
█ Todo Text:	
Novelties results	57
█ Todo Text:	
Future Work	57
█ Todo Text:	
Community Onboarding	58
█ Todo Text:	
Conclusion	58



MSc in Computer Science 2017-18

Project Dissertation

Project Dissertation title: Reflectance Transformation Imaging

Term and year of submission: Trinity Term 2018

Candidate Name: Johannes Bernhard Goslar

Title of Degree the dissertation is being submitted under: MSc in Computer Science

Abstract

Todo Text:
Abstract

Acknowledgements

I want to thank following people for being part of the journey that culminated in this project. Roland for starting everything by forcing me to work through that Visual Basic 2005 book. Olivier and Søren for their guidance and pushing me into international territories. Jassim and Stefano for rekindling my interest in Computer graphics. Taylor for providing real users. Christiane and Elsie for always being motivational and supportive.

Contents

1	Introduction	1
2	Related Work	1
2.1	RTI Theory and Workflows	2
2.2	Fileformats	3
2.3	RTI Viewers	4
3	Requirements	4
4	Design	6
4.1	Fileformat	6
4.2	Architecture	7
4.3	State-Driven	7
4.4	Plugins	7
4.5	Rendering Stack	7
5	Implementation	7
5.1	Overview	7
5.2	Libraries	9
5.3	Base	18
5.4	Hooks	18
5.5	BTF File	21
5.6	State Management	22
5.7	Renderer Stack	23
5.8	Texture Loader	26
5.9	Plugins	27
5.9.1	Base Plugin	30
5.9.2	BaseTheme, RedTheme and BlueTheme Plugin	31
5.9.3	TabView Plugin	32
5.9.4	SingleView Plugin	33
5.9.5	Converter Plugin	33
5.9.6	PTMConverter Plugin	36
5.9.7	Renderer Plugin	37
5.9.8	PTMRenderer Plugin	39
5.9.9	LightControl Plugin	41
5.9.10	Rotation Plugin	41
5.9.11	Zoom Plugin	42
5.9.12	QuickPan Plugin	42
5.9.13	Paint Plugin	42
5.9.14	Bookmarks Plugin	47
5.9.15	Notes Plugin	47
5.9.16	ImpExp Plugin	51
5.9.17	Settings Plugin	51
5.10	Targets	52
5.10.1	Electron	52

5.10.2	Web	52
5.10.3	Hosted	53
5.10.4	Embeddable	53
5.10.5	Mobile Phones	53
6	Results	54
6.0.6	Performance	54
6.1	Accuracy	55
6.2	Rollouts and Testing	56
7	Discussion	57
7.1	Novelties	57
7.2	Future Work	57
7.2.1	WebGL 2	57
7.3	Community Onboarding	58
8	Conclusion	58
A	BTF File Format	59
A.1	File Structure	59
A.2	Manifest	60
A.3	Textures	60
A.4	Options	61
A.5	Layers	62
A.6	State	62

List of Figures

1	RTI Workflow	2
2	RTI in Action	2
3	RTI Overview	3
4	Unpacked BTF file	6
5	Class and Component Overview	8
6	MobX Flow	12
7	WebGL compatibility	14
8	gl-react-cookbook example	15
9	Zoom Component	17
10	MobX actions	23
11	MobX state tree	24
12	View Comparison	33
13	Converter UI	34
14	Normal Rendering	41
15	LightControl Plugin	42
16	Zoom Plugin	43
17	Paint Plugin	48
18	Bookmark Plugin	49
19	Notes Plugin	50

20	Settings Plugin	51
21	Target Comparison	53
22	Load time comparison	54
23	Warrior Comparison	56
24	Tablet Comparison	57

List of Tables

1	Performance Comparison	55
2	RMSE for Accuracy Comparison	56

1 Introduction

Reflectance Transformation Imaging (RTI) was invented by Tom Malzbender, Dan Gelb and Hans Wolters, research scientists at Hewlett-Packard Labs[24]. It was originally termed Polynomial Texture Mapping (PTM). It is a method of computational photography with great potential for classical archaeology. RTI images (RTIs) are created from multiple digital photographs of an object. A fixed camera position is used in conjunction with a movable light source, or multiple immovable light sources, hitting the object from different positions. Different shadows and highlights result from each light position.

An RTI processing software takes these images and calculates the object's surface per pixel, essentially creating a 2D photograph with embedded reflectance information.

This file can then be viewed with the help of an RTI viewing software, allowing the object to be studied remotely via the user's computer, instead of needing physical access to the object. The software is also able to reveal enhanced or previously unobservable details, e.g. colour, shape, markings or depth of carved lines, which the naked eye could not pick up.

Ancient historians studying material objects benefit from RTI because this software shows how objects were created and subsequently changed. For example captured RTIs of the wooden remains of Roman wax tablets can reveal how they have been inscribed and reinscribed. For statues, particularly Roman imperial portraits RTI can provide evidence for deliberate re-carving of a condemned emperor into his successor.

For video examples and diagrams, the Cultural Heritage Imaging Institute provides a great overview[7].

Other applications of RTI are video games, where RTI can provide self-shadowing for objects, which normal maps could not, though more modern techniques largely replaced RTI in this context.

They are becoming increasingly relevant in a physical based rendering (PBR) context, where RTIs can provide better physical information for objects.

This dissertation is primarily focusing on the application of RTI for ancient historians, but makes provisions for relevance in a PBR context in the future.

oxrti in this document is referring to this project's implementation of an RTI viewer.

2 Related Work

This section explores the related work inside the RTI area and explains the underlying principles. The project is currently only concerned with the viewing part, so



Figure 1: RTI workflow, courtesy of CHI[8].

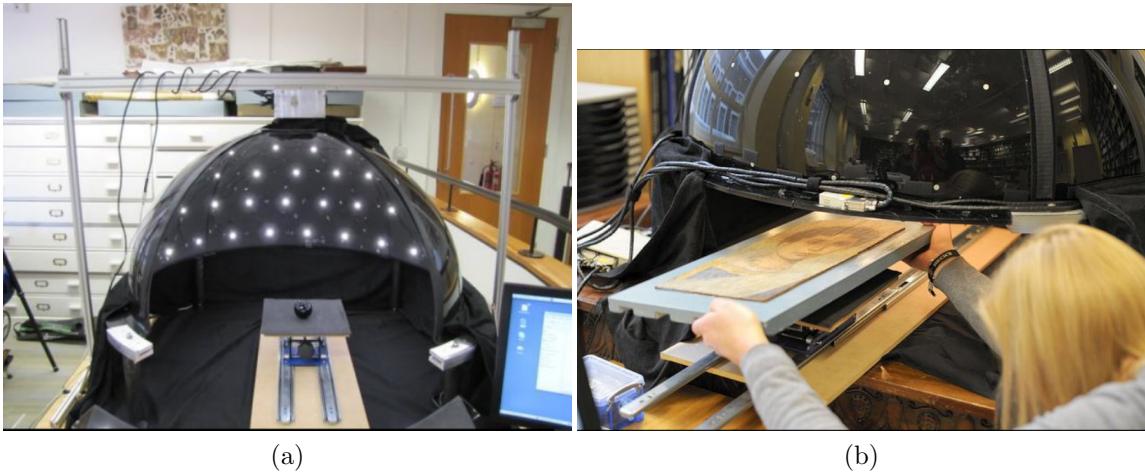


Figure 2: (a) shows the spread out light sources inside an RTI dome. (b) shows an object being positioned. Images from Piquette and Crowther.[29]

that will covered in most depth.

2.1 RTI Theory and Workflows

The RTI workflow contains three steps (see Figure 1) in our context (with the hunt for the physical object excluded). The object is placed centrally under some capturing device (like Figure 2). A camera is statically mounted on top. The lights are set up so that all captured images will have a different light position. From these images the RTI coefficients are calculated (see Figure 3).

For example the PTM LRGB format[24] stores 9 coefficients per texel: $a_0 - a_5$ for calculating the varying luminance and R, G, B for colours, the resulting rendering is calculated in the following way per pixel:

$$\begin{aligned} R(u, v) &= L(u, v)R_n(u, v); \\ G(u, v) &= L(u, v)G_n(u, v); \\ B(u, v) &= L(u, v)B_n(u, v); \end{aligned}$$

With u and v being the texture coordinates. R_n , G_n and B_n being the raw unscaled

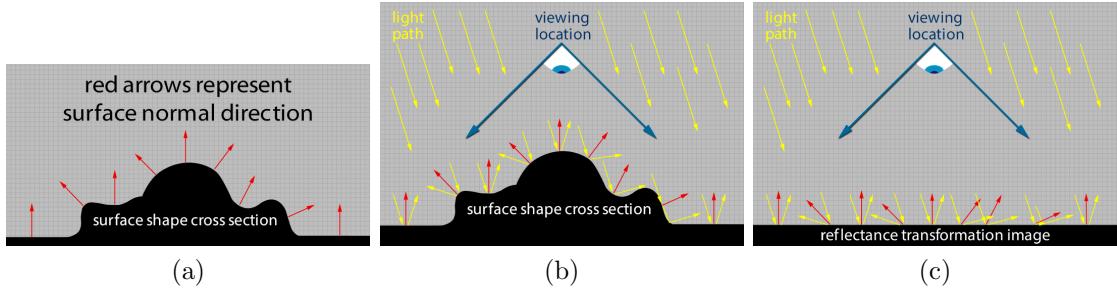


Figure 3: (a) shows the to be captured object’s normals. (b) shows the object with a single viewpoint and light source (in the capturing dome the eye would be camera). (c) visualizes the RTI viewing process. Images from CHI[7].

input colours and $L(u, v)$ calculated as following:

$$L(u, v, l_u, l_v) = a_0(u, v)l_u^2 + a_1(u, v)l_v^2 + a_2(u, v)l_u l_v + a_3(u, v)l_u + a_4(u, v)l_v + a_5(u, v)$$

Where a_0-a_5 are the previously fit coefficients and l_u and l_v are x and y components of the light vector projected into the texture plane. The coefficients are calculated as part of the RTIBuilder process, for details refer to [24]. Other file formats will have slightly different sets of coefficients, but the same principles hold, e.g. PTM RGB has 6 luminance coefficients per colour channel and no fixed colours.

2.2 Fileformats

The most comprehensive overview on the current state of the art is done by the American Library of Congress (LoC) as part of its digital preservation effort, with sections on the PTM[4] and RTI[5] formats. The current PTM specification by Malzbender et al[24] from 2001 specifies 9 different formats, of which “the most commonly used encoding formats are [...] PTM_FORMAT_LRGB (aka LRGB PTM) and PTM_FORMAT_RGB (aka RGB PTM)”[4], so most effort was spent to support these inside the oxrti implementation. Both formats begin with a metadata block consisting of 4 elements separated by newlines:

- The version prefix, which should be ‘PTM_1.2’ for recent files.
- The format string, e.g. PTM_FORMAT_LRGB.
- Image size, the dimensions in pixels.
- Scales and biases, to scale and bias the coefficients before calculation.

This metadata block is followed by the raw texel data in forms depending on the format All in reversed scanline order. PTM_FORMAT_RGB stores a_0-a_5 per texel in separated RGB blocks. PTM_FORMAT_LRGB stores a_0-a_5 per texel first, then followed by RGB blocks of a single coefficient per texel. The destructure of these is presented in detail in section 5.9.6. Different embedded JPEG compression styles are specified as well, but due to their relatively small popularity and increased complexity, the initial oxrti version has omitted them.

The RTI fileformat specification by Corsini et al.[6] is a newer format supporting Hemi-Spherical Harmonics (HSH) in addition to PTM’s biquadratic polynomials, as HSH “handles shiny surfaces and specular highlights (bright spots of light appearing on shiny objects) better than PTM, which yields matte images.”[5]. One additional difference is the support of metadata as an XMP packet at the end of the file. As most locally available data is in PTM format, support for the RTI format is initially omitted for this project, but it will be easy to add support in the future.

2.3 RTI Viewers

The following RTI Viewers are currently available:

PTM Viewer from HP. The initial viewer application, available at [18]. Downloads for Windows, MacOS, HP-UX and Linux. Only rudimentary functionality of changing the light direction. The MacOS version did not run on the author’s computer. No source code available.

RTIViewer available from the CHI at [8]. Most widely used viewer. Downloads for Windows and MacOS. Source code only available per request: “This software is available under the Gnu General Public License version 3. If you wish to receive a copy of the source code, please send email to info@c-h-i.org.” PTM and RTI formats supported. Features: Light control, multiple rendering modes, bookmarks.

InscriptiFact Viewer by the University of Southern California. Offered in two flavours, a downloadable Java program[20] and a embedded Java applet[21] (not working as of August 27, 2018). No source code available. Features: Light control, multiple rendering modes.

webRTIViewer by the Visual Computing Laboratory. Download at [32]. Support for a proprietary format, requiring pre-processing with a C++ command line utility. Source code included in the download. Features: Light control.

OxRTI SVG Viewer by Christopher Ramsey. SVG based web viewer available at [28], developed at the same time as this project. Requiring pre-processed PTMs. No source code available. Features: Light control, multiple rendering modes, comments and painting.

3 Requirements

In preparation for the project the author had multiple informal conversations with consenting RTI users from different Oxford departments in relation to their current usage of RTI viewing software and wishes for a modernized software. The prevailing wish was for a unification of the software that is used, most researchers had to export screenshots from the RTI software, to then add annotations and drawings in their graphical editing software. But in their graphical editing software all the

advantages of an RTI image were then lost. Following these discussions, the following requirements were decided upon. The assumption was made that this project be considered an exploratory piece of work to show possible new directions for RTI softwares.

The first overall goal is the main focus on web technologies. The new viewer should be available on as many platforms as possible and allow for easy distribution and usage, as well as a comfortable developer experience. Because of this, the next priority was a web-supported fileformat. No browser currently supports RTI or PTM files natively, so some conversion needs to take place. The requirement of an additional conversion software would be diametrical to the ‘everything web based’ goal though, so the browsers need to be able to also handle the conversion and then support some kind of export. The easiest way to do so was to develop a newer file format with following features:

1. Support for embedding/consuming the PTM[4] fileformat.
2. Future support for embedding/consuming the RTI[5] fileformat.
3. Extended metadata support.
4. Support for high resolutions.
5. Support for higher bitdepths per pixel than the 8 of PTM/RTI for future HDR applications.
6. Easy exchange between multiple researchers and computers.

For the viewer the following features were deemed essential:

7. Compatible with all major operating systems and/or web browsers.
8. Light Controls to change the position of the virtual light source.
9. Multiple rendering modes apart from plain LRGB or RGB.
10. Quick navigation functionality.
11. Annotations to allow for further textual information relating to a part of the viewer object.
12. Paintable layers to further clarify surface details.

In addition these non-functional requirements were decided upon:

13. Free Software, the implementation should be available for everyone to change and distribute. No email-walling, instead embracing jump-in interactions between multiple parties.
14. Suitable for new developers: for scientists for research purposes, or students for educational purposes.
15. Plugin support to allow independent additions or modifications to the core software.
16. Good developer experience.



Figure 4: Unpacked BTF file, manifest.json is the standardised data description, oxrti_* are extensions. The L folder contains textures for the single coefficients in grey scale format.

17. Adequate performance, at least keeping up with current implementations.
18. Easy installation for researchers.
19. Fast responses to user interactions.
20. Reasonable file sizes for instant transfer/viewing.
21. Preservable software and BTF files.

4 Design

4.1 Fileformat

Although the LoC deems the PTM format “relatively transparent. It can be viewed in plain text editors. [...] A very simple program would present these numbers in a human-readable form.”[4] the author thinks that another implementation could be even more transparent and easy for people to understand. One simple initial step is to move to multiple files for representing the coefficients, each being a valid image (BMP or PNG) themselves. This allows for easy human inspection, simplifies texture loading in a web context (as PNG textures are supported) and allows easy interactions with other tools. Having multiple files anyway, the textual data description and metadata can also be stored in an extra plain text file, making it editable with standard tools. How to easily distribute multiple files though - just archive (zip) them and distribute as one. Web browsers do not unpack zips inside their JavaScript run times natively, but libraries[22] exist for that functionality. All this multi file handling is abstracted away from the user, he will just handle a single *.btf.zip* file, but provides access if interested. Having the ability to add extra files to the archive also allows for easy extensions, for example oxrti adds the layer and state saving functionalities, which are stored as extra entries. For an unpacked example see Figure 4. Having the web as first target, JSON files are the natural match to describe the contained data. The full specification is available standalone at the end of this document (Appendix A) to accommodate easy redistribution and improve accessibility.

4.2 Architecture

4.3 State-Driven

Todo Text:
State-Driven

4.4 Plugins

Todo Text:
Plugins

4.5 Rendering Stack

Todo Text:
Rendering Stack

5 Implementation

5.1 Overview

Since this section explains the current implementation of the developed tool set, it not only aims to fulfill the dissertation's requirements, but also to help users who want to understand the underlying systems and prepare them for potentially joining the development effort. Although abridged code extracts are of their current state for thesis submission, and the main principles will remain, nevertheless future readers are welcome to consult the actual source code if any discrepancies arise or reexport the document.

Firstly the main libraries are briefly explained where they are relevant to the program. Secondly, the mostly abstract plugin architecture is shown. Thirdly the main plugins are presented and last the delivery processes to the end users are described.

All implementation files are contained and delivered inside a single git repository, which is freely available online: <https://github.com/ksjogo/oxrti>. All following file paths are relative to that repository's root. All future development will be immediately available there and the current compiled software version is always fed automatically from it into the hosted version at <https://oxrtimaster.azurewebsites.net/api/azurestatic>.

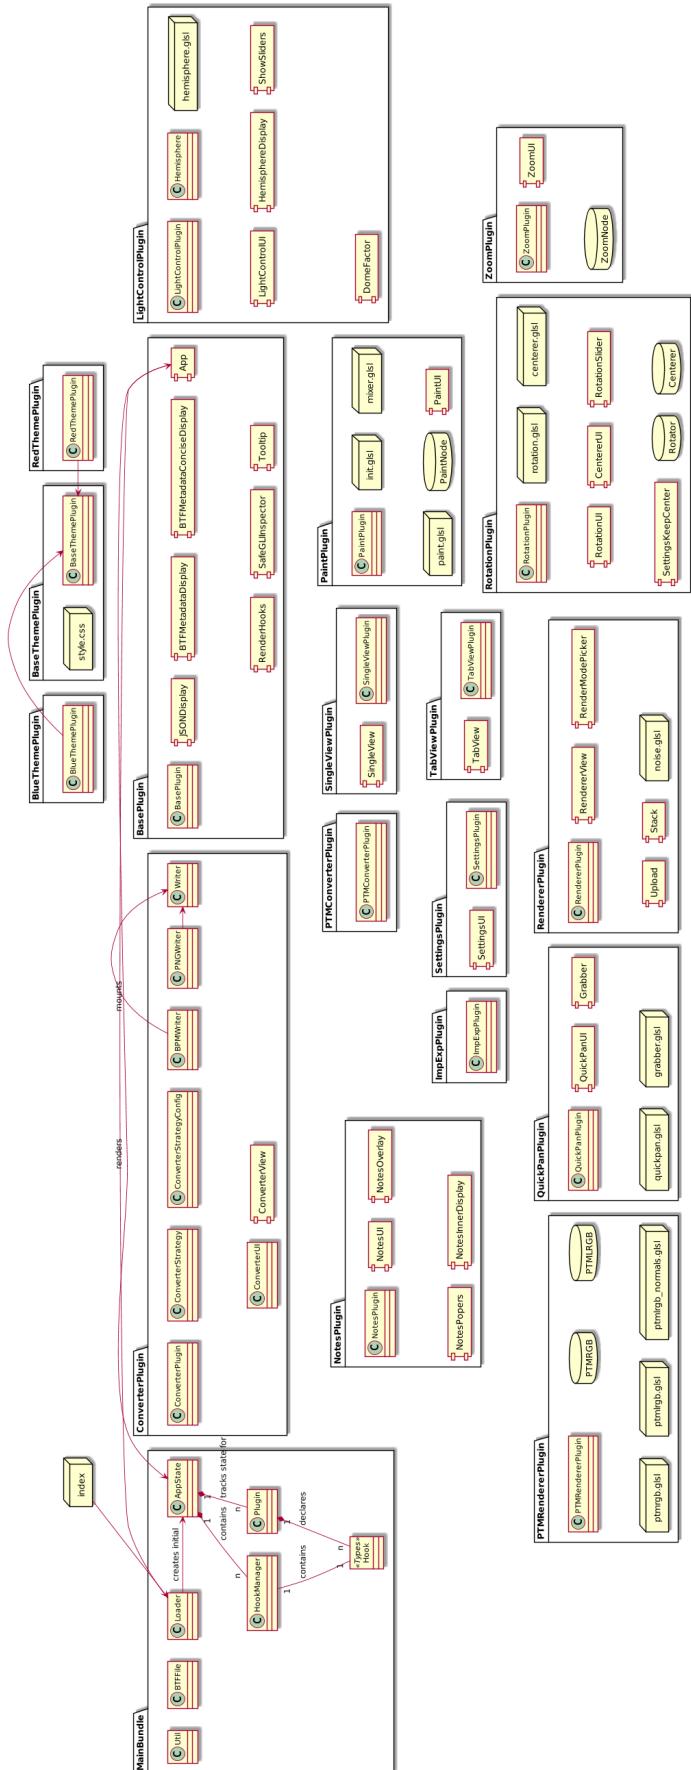


Figure 5: All classes and components of the implementation. Inheritance arrows from each Plugin to the Plugin base class omitted for clarity. Boxes are files, usually `html/css/gsl`. Cylinders are rendering stack nodes. Rectangles with two connectors on the left are user interface components.

5.2 Libraries

TypeScript

The official header line of TypeScript gives reasons why it was picked for this project: “TypeScript is a typed superset of JavaScript that compiles to plain JavaScript. Any browser. Any host. Any OS. Open source.”[38] Which fits requirements 13, 7. Whereas plain JavaScript would have allowed slightly easier initial on-boarding and maybe easier immediate code ‘hacks’, TypeScript will provide better stability in the long term and a quite improved developer experience (requirement 16) in the long run. With the full typed hook system (compare section 5.4) it ensures that a compiled plugin will not have runtime type problems, reducing the amount of switching between code editor and the running software. The whole project is set up in a way to fully embrace editor tooling. Visual Studio Code[39] and Emacs[14] are the ‘officially’ tested editors of the project. Code is recommended as it will support all developer features out of the box. The installation of the tslint[36] plugin[37] is recommended to keep a consistent code style, which is configured within the *tslint.json* file. Most importantly TypeScript adds type declarations (and inference) to JavaScript, e.g.:

```
1 const thing = function (times: number, other: (index: number) =>
  ↵  boolean) { ... }
```

would define *thing* as a function, taking a numbers as first argument and another function (taking a number as first parameter and returning a boolean) as second argument. The other most used TypeScript features inside the codebase are Classes[2], Decorators[9] and Generics[12], which will be discussed at their first appearance inside the code samples.

React

The two main points on React’s official website are “Declarative” and “Component Based”[30], which is best shown by an extended example from their website, which exemplifies multiple patterns found through the oxrti implementation. The most important concept is the jump from having a stateful HTML document, which the JavaScript code is manipulating directly, e.g.:

```
1 document.getElementById('gsr').innerHTML=<p>You shouldn't do
  ↵  this</p>"
```

Which is diametric to requirements 14 and 16 as it would require developers to manually keep track of all data cross-references (e.g. the pan values having to automatically adapt to the current zoom level). A declarative approach instead allows much better and easier implemented reactivity and better performance (requirements 17 and 19) as the necessary changes can be tracked and components can be updated selectively.

```

1 // a class represents a single component
2 class Timer extends React.Component {
3     // the parent component can pass on props to it
4     constructor(props) {
5         super(props);
6         this.state = { seconds: 0 };
7     }
8
9     tick() {
10        // the state is updated and the component is automatically
11        // re-rendered
12        this.setState(prevState => ({
13            seconds: prevState.seconds + 1
14        }));
15    }
16
17    // called after the component was created/added to the browser
18    // window
19    componentDidMount() {
20        this.interval = setInterval(() => this.tick(), 1000);
21    }
22
23    // called before the component will be deleted/removed from the
24    // browser window
25    componentWillUnmount() {
26        clearInterval(this.interval);
27    }
28
29    // the actual rendering code
30    // html can be directly embedded into react components
31    // {} blocks will be evaluated when the render method is called
32    // which will happen any time the props or its internal states
33    // updates
34    render() {
35        return (
36            <div>
37                Seconds: {this.state.seconds}
38            </div>
39        );
40    }
41
42    // mountNode is a reference to a DOM Node
43    // the component will be mounted inside that node
44    ReactDOM.render(<Timer />, mountNode);

```

In conjunction with mobx and TypeScript no classes are used for React components though, but instead Stateless Functional Components ('SFCs'[19]). These SFCs are plain functions, only depending on their passed properties:

```
1 function SomeComponent(props: any) {  
2   return <p>{props.first} {props.first}</p>  
3 }
```

This component could then be used by:

```
1 <SomeComponent first="Hello" second="World"/>
```

This component systems allows the plugins to define some components and then 'link' them into the program via the hook system, which will be explored later.

MobX

Its main tagline is "Simple, scalable state management"[26]. An introductory overview is shown in Figure 6. Broadly speaking MobX introduces observable objects. Instead of the aforementioned DOM handling or property passing inside React trees, components can just retrieve their values from the observable objects and will be automatically refreshed if the read values change. This for example makes the implementation of the QuickPan plugin extremely easy, as it can just read the zoom, pan, etc. values of the other plugins and will automatically receive all updates without any further manual observation handling.

mobx-state-tree

"Central in MST (mobx-state-tree) is the concept of a living tree. The tree consists of mutable, but strictly protected objects"[27] This allows the implementation to have one shared state tree which can be used to safely access all data. All nodes inside the state tree are MobX observables. A simple tree with plain MST would look like this:

```
1 // define a model type  
2 const Todo = types  
3   .model("Todo", {  
4     // state of every model  
5     title: types.string,  
6     done: false  
7   })  
8   .actions(self => {  
9     //methods bounds to the current model instance  
10    toggle() {  
11      self.done = !self.done  
12    }  
13  }))
```

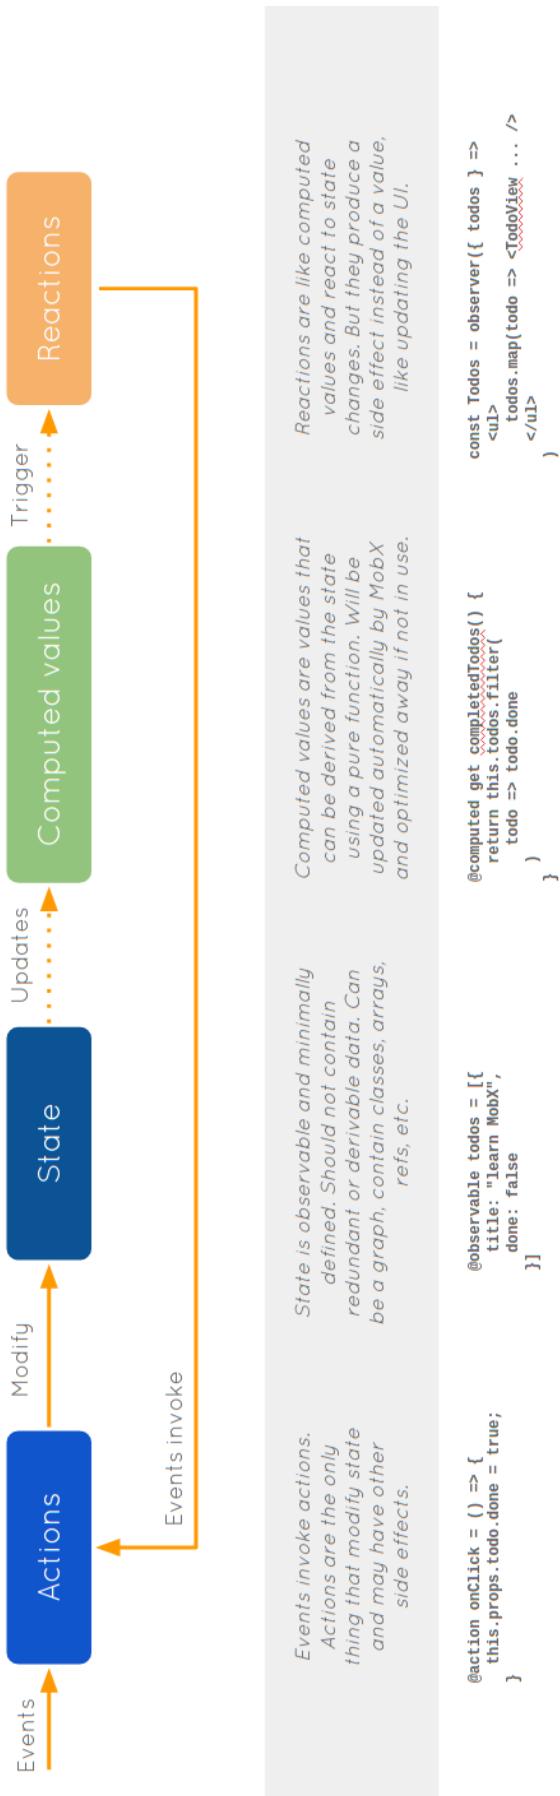


Figure 6: Taken from Weststrate[26]. Actions in the oxrti context are most often initially user actions, which are then calling into plugins to change the state. The state is mostly encapsulated on a plugin basis with usage of the mobx-state-tree library, which also encapsulates most computed values. Reactions are most often the previously discussed React components.

```

14 // create a tree root, with a property todos
15 const Store = types.model("Store", {
16   todos: types.array(Todo)
17 })

```

This syntax was deemed to be convoluted, as it is a lot more complex than standard JavaScript/TypeScript classes, which were introduced by the ES6 version, as shown in the React description above and thus being in conflict with requirement 14.

classy-mst

There is an option to use a more traditional syntax instead though, with the classy-mst library, with which the example above becomes[3]:

```

1 const TodoData = types.model({
2   title: types.string,
3   done: false
4
5 });
6
7 class TodoCode extends shim(TodoData) {
8   @action
9   toggle() {
10     this.done = !this.done;
11   }
12 }
13
14 const Todo = mst(TodoCode, TodoData, 'Todo');

```

Weststrate, the original author of MobX initially was sceptic of this syntax[1] as it was changing the semantics of ES6 classes, as classy-mst's methods will be automatically bound to the instance. This boundness is an advantage for this implementation though, as the hook configurations can just refer to `this.someMethod` instead of `this.someMethod.bind(this)`. The `@action` is a decorator, enabling the following method to change the state/properties of the model, as MST prohibits that by default. Reactions/View updates will only happen after the outermost action finished executing.

WebGL

The increasing support of the WebGL stack is the main reason why it is now feasible to implement a full RTI software stack with plain web technologies, as it “enables web content to use an API based on OpenGL ES 2.0 to perform 3D rendering in an HTML <canvas> in browsers that support it without the use of plug-ins.”[43] OpenGL ES 2.0 likeness means that (most importantly) shaders are supported, allowing the implementation to be split up into multiple shaders with

Desktop		Mobile						
Feature		Chrome	Edge	Firefox (Gecko)	Internet Explorer		Opera	Safari
Basic support	9	(Yes)		4.0 (2.0)	11		12	5.1
WebGL 2	56		No support	51 (51)	No support		43	No support

Desktop		Mobile					
Feature		Chrome for Android	Edge	Firefox Mobile (Gecko)	IE Mobile	Opera Mobile	Safari Mobile
Basic support	25		(Yes)	4	No support	12	8.1
WebGL 2	?		?	?	?	?	?

Figure 7: WebGL compatibility as from the Mozilla Developer network[35].

single responsibilities. For details refer to section 5.7. While preserving compatibility and requirement 7 WebGL 2 support is sadly not widespread enough to fully rely on yet (compare Figure 7), as it is currently estimated at 50% of all devices[41]. Potential improvements when WebGL 2 is more widely supported or in conditional plugins are discussed in section 7.2.1. One notable limitation of WebGL is MAX_TEXTURE_IMAGE_UNITS, the maximum amount of bound textures inside a single shader, which in most implementations is 16[42], whereas the standard OpenGL implementations are likely to have a limit of 32. This is influencing the BTF file format, as for example in the PTM RGB use case a total of 18 coefficients exist, which now need to be bundled up somehow into maximum 16 textures, if the calculations should be done inside a single shader. It is also limiting the amount of layers of the Paint plugin, as these also consist of bound textures. Apart from the shaders, which are written in the OpenGL ES Shading Language[40] and the texture loader (section 5.8), no direct WebGL code is necessary nor used anywhere inside the implementation, as the gl-react library is abstracting it neatly for use from the MobX/React environment.

gl-react

“Implement complex effects by composing React components.”[33] is the main use of the gl-react library. A minimal component, adapted from the gl-react-cookbook looks like[33]:

```

1 const shaders = Shaders.create({
2   helloGL: {
3     frag: GLSL`  

4       precision highp float;  

5       varying vec2 uv;  

6       void main() {  

7         gl_FragColor = vec4(uv.x, uv.y, 0.5, 1.0);  

8       }`  

9   }
10 });
11
12 export default class Example extends Component {

```

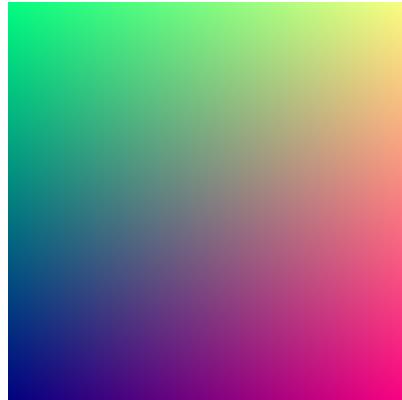


Figure 8: RGBA texture, with R and G according to their respective u or v texture coordinate. From [13].

```
13     render() {
14       return (
15         <Surface width={300} height={300}>
16           <Node shader={shaders.helloGL} />
17         </Surface>
18       );
19     }
20 }
```

Which would result in a display like Figure 8. gl-react’s is not a 3D engine, so no objects are to be created or scene graph managed, instead the oxrti implementation can concentrate on solely providing the necessary shaders. gl-react’s default node size is taken from the parent surface size. The surface size will be dependent on the user running the program and his browser windows, which makes it undesirable as details would be lost, if the BTF provided more detail, so the processing Node sizes are usually set to the BTF resolution or higher.

Webpack

Webpack is used to bundle the implementation into single files as it is “a bundler for javascript and friends. Packs many modules into a few bundled assets.”[44] A more detailed discussion on the targets is in section 5.10. Broadly speaking Webpack loads the source code inside the *src* directory according to the loaders defined inside the *webpack.config.js* file, analyses their dependencies and then bundles them together. This makes it possible to have a dependency tree spanning 26184 packages from npm, but still providing a single bundled application file only 1.5 megabyte large (data as of August 27, 2018). It also allows the dynamic plugin structure by bundling the plugins into a dynamic ‘context’ from which single plugins can be loaded at runtime.

Electron

Electron is used to “build cross-platform desktop apps with JavaScript, HTML, and CSS” [10] While theoretically not necessary to fulfill most requirements, as the implementation is compatible with all modern web browsers, an additional standalone executable provides some advantages:

- It is possible to add a more traditional menu-based interface, which the browser version could not support.
- Stable development environment, as electron-devtools-installer is used to provide relevant extensions (React devtools, MobX devtools) by default and the hot reloading is reliably tested, which together form a good developer experience (requirement 16)
- It allows to preserve the software in a usable, contained state, not relying on the user also having a compatible web browser in the future.
- It allows future development to more directly access resources of the host machine, e.g. the normal OpenGL stack could be used for calculating the coefficients, as it is less resource constrained compared to the WebGL stack.

MaterialUI

MaterialUI is succinctly described by “React components that implement Google’s Material Design.” [25]. MaterialUI’s component are used throughout the app for styling the components, making the use of custom CSS largely unnecessary apart from minor positioning fixes. For example the Zoom component is defined as:

```
1 // Card, CardContent, Tooltip and Button are all components
  ↵ provided by MaterialUI.
2 // this refers to the Zoom Plugin's controller which
3 // the content will be automatically refreshed if the referred
  ↵ values change
4 const Zoom = Component(function ZoomSlider (props) {
5   return <Card style={{ width: '100%' }} >
6     <CardContent>
7       <Tooltip title='Reset'>
8         <Button onClick={this.resetZoom} style={{ marginLeft:
  ↵   '-8px' }}>Zoom</Button>
9       </Tooltip>
10      <Tooltip title={this.scale}>
11        <Slider value={this.scale} onChange={this.onSlider}
  ↵   min={0.01} max={30} />
12      </Tooltip>
13      <Tooltip title='Reset'>
14        <Button onClick={this.resetPan} style={{ marginLeft:
  ↵   '-11px' }}>Pan</Button>
```

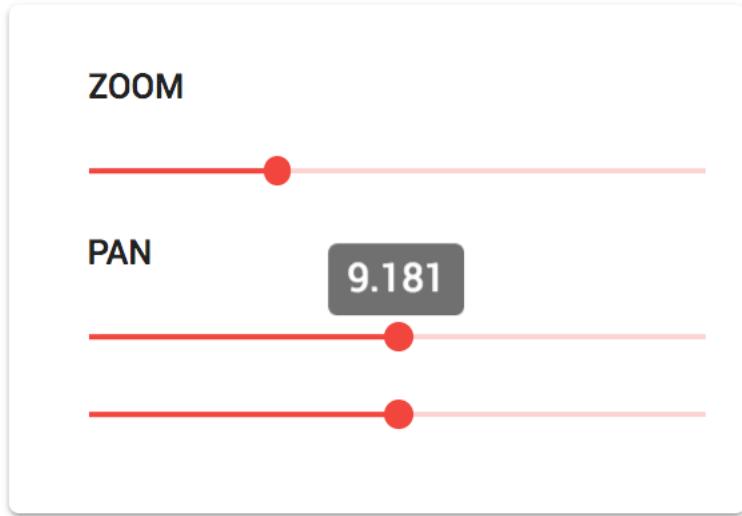


Figure 9: Zoom Component, the user is dragging the zoom slider currently, the mouse pointer is not depicted.

```

15      </Tooltip>
16      <Tooltip title={this.panX}>
17          <Slider value={this.panX} onChange={this.onSliderX}
18              ↳ min={-1 * this.scale} max={1 * this.scale} />
19      </Tooltip>
20      <Tooltip title={this.panY}>
21          <Slider value={this.panY} onChange={this.onSliderY}
22              ↳ min={-1 * this.scale} max={1 * this.scale} />
23      </Tooltip>
24  </CardContent>
25 </Card>
26 })

```

It would result in a display like Figure 9.

Misc

Further libraries of note are:

electron-webpack[11] is providing the bridging between Webpack and Electron, its config is expanded by the *webpack.renderer.additions.js* and *webpack.renderer.shared.js* files.

pngjs[34] is providing in-browser bitwise png manipulation, required in the converter.

jszip[22] is providing in-browser zip file manipulations, which are fundamental for the BTF fileformat.

5.3 Base

The implementation is making a distinction between plugin and non-plugin files. The amount of non-plugin files was aimed for to be as low as possible, as they are inflexible in all output configurations and will have slightly different behaviour while developing in regard to reloads. The files not contained in plugins are the following:

- *AppState.tsx*, the mobx-state-tree root node representing the whole application state in its leafs, detailed in section 5.6.
- *BTFFFile.tsx*, containing the fileformat implementation and utility functions, described in section 5.5.
- *Hook.tsx* and *HookManager.tsx* which provide the whole dynamic interaction system between the different plugins, shown in section 5.4.
- *Loader.tsx*, *electron/index.tsx*, *renderer/index.tsx* and *web/index.tsx*, providing the loading functionality. The Electron application has two entry points, one for the main process, which is *electron/index.tsx* and one for the in-browser content, which is *renderer/index.tsx*. The in-browser one and the plain browser entry point *web/index.tsx* both call the *Loader.tsx* to initialise the state management and mount the root React component, so the user can interact finally. The Loader also handles hot-reloading, it will receive the changed source code from Webpack and update the plugins accordingly.
- *Plugin.tsx* defining the base class for a plugins, further explained in section 5.9.
- *types.d.ts* is providing the custom ambient type declarations for software dependencies, which are not providing TypeScript types on their own. In case new dependencies are added, they are likely to require and addition there.
- *Util.tsx* providing general helper functions, largely related to some math functions for texture coordinate handling.
- *loaders/glsify-loader/index.js* is the custom Webpack loader for *.glsl* files, allowing e.g. the `import zoomShader from './zoom.glsl'` statement and setting up Webpack to contain the shader source in the final bundle.
- *loaders/oxrtidatatest/OxrtiDataTextureLoader.tsx* is providing direct texture loading from in-memory BTF files, discussed in section 5.8.

5.4 Hooks

The hook system allows stable and prioritized interactions between the different plugins. All available hooks are declared inside the *Hook.tsx* file, which offers 3 different types of hooks:

```

1 // Hooks are sorted in descending priority order in their
2   ↪   respective `HookManager`
3 export type HookBase = { priority?: number }
4
5 // Generic single component hook, usually used for rendering a
6   ↪   dynamic list of components
7 export type ComponentHook<P = PluginComponentType> = HookBase & {
8   ↪   component: P
9
10 // Generic single component hook, usually used for notifications
11 export type FunctionHook<P = (...args: any[]) => any> = HookBase & {
12   ↪   func: P
13
14 // Generic hook config, requiring more work at the consumer side
15 export type ConfigHook<P = any> = HookBase & P
16
17 // union of all hooks to allow for manual hook distinction
18 export type UnknownHook = ComponentHook & FunctionHook & ConfigHook
19
20 // object of named hooks
21 type Hooks<P> = { [key: string]: P }
22
23 // collection of unknown hooks
24 export type UnknownHooks = Hooks<UnknownHook>
25
26 // hook configuration inside plugins:
27   ↪   1-Hookname->*-LocalName->1-HookConfig
28 export type HookConfig = { [P in keyof HookTypes]: 
29   ↪   Hooks<HookTypes[P]> }
30
31 // all hooknames
32 export type HookName = keyof HookConfig
33
34 // map one hookname to its type
35 export type HookType<P extends HookName> = HookTypes[P]
36
37 // list of hooknames inside hook collection T, having hooktype U
38 type LimitedHooks<T, U> = ({ [P in keyof T]: T[P] extends U ? P :
39   ↪   never })[keyof T]
40
41 // limit hookname parameters to a type conforming subset, e.g.
42   ↪   LimitedHook<ComponentHook>
43 export type LimitedHook<P> = LimitedHooks<HookConfig, Hooks<P>>

```

These types are used to first declare single hook types (which will be discussed within the plugins consuming them) and then construct the whole hook configuration tree for all plugins:

```

1 type HookTypes = {
2   ActionBar?: ConfigHook<ActionBar>,
3   AfterPluginLoads?: FunctionHook,
4   AppView?: ComponentHook,
5   ...
6 }

```

A plugin then can link itself into these hooks with its hooks method, for example:

```

1 get hooks () {
2   return {
3     // register things for the ViewerSide hook / add components to
4     // the side bar
5     ViewerSide: {
6       // a plugin can register itself multiple times with different
7       // names and configurations
8       Metadata: {
9         component: BTFMetadataConciseDisplay,
10        // hooks will be sorted internally in priority order,
11        // highest first
12        priority: -110,
13      },
14      Open: {
15        component: Upload,
16        priority: 100,
17      },
18    },
19  }
20 }

```

The state manager (section 5.6) collects all hooks and merges them into the respective HookManagers, which are then used to iterate/map over these:

```

1 /** type definitions for the different iterators */
2 export declare type HookIterator<P extends HookName> = (hook:
3   → HookType<P>, fullName: string) => boolean | void;
4 export declare type AsyncHookIterator<P extends HookName> = (hook:
5   → HookType<P>, fullName: string) => Promise<boolean | void>;
6 export declare type HookMapper<P extends HookName, S> = (hook:
7   → HookType<P>, fullName: string) => S;
8 export declare type HookFind<P extends HookName, S> = (hook:
9   → HookType<P>, fullName: string) => S;
10 /**
11  * Manage one named hook */
12 export declare class HookManagerCode extends ShimHookManager {
13   /**
14    * Add some hook into the managed stack
15    * @param name in `PluginNameHooknameEntryname` form
16  }

```

```

11     * @param priority higher will be treated first with the
12     *   iterators
13
14     insert(name: string, priority?: number): void;
15     /** Iterate with iterator over all registered hooks, stop
16       iteration if the iterator is returning true, name is
17       redundant as it could be inferred from ourselves, but
18       allows for easy typesafe calling, AppState is needed to
19       retrieve the current plugin instance */
20     forEach<P extends HookName>(iterator: HookIterator<P>, name: P,
21       AppState: IAppState): void;
22     /** iterate over all hooks, but wait for asynchronous hooks to
23       finish before executing the next one */
24     asyncForEach<P extends HookName>(iterator: AsyncHookIterator<P>,
25       name: P, AppState: IAppState): Promise<void>;
26     /** iterate in reverse order */
27     forEachReverse<P extends HookName>(iterator: HookIterator<P>,
28       name: P, AppState: IAppState): void;
29     /** map over all hooks */
30     map<S, P extends HookName>(mapper: HookMapper<P, S>, name:
31       HookName, AppState: IAppState): S[];
32     /** get the concrete hook at index number */
33     pick<P extends HookName>(index: number, name: P, AppState:
34       IAppState): HookType<P>;
35   }

```

5.5 BTF File

The full standalone BTF file format specification can be found inside Appendix A. The implementation in *BTFFile.tsx* is an in-memory implementation of that file with following interface, it is mainly a ‘dumb’ data container.

```

1  export default class BTFFile {
2    /** running id numbers to allow easy cache busts */
3    id: number;
4    /** JSON object of the included oxrti state */
5    oxrtiState: object;
6    /** default data representation */
7    data: Data;
8    /** reference to annotation layers */
9    layers: AnnotationLayer[];
10   /** user visible name */
11   name: string;
12   /** manifest can come from an unpacked zip, usually typed as any
13     */
14   constructor(manifest?: BTFFile);

```

```

14     /** canonical zip name for name and id */
15     zipName(): string;
16     /** return true if no data is contained/is dummy object */
17     isDefault(): boolean;
18     /** export the JSON data of the manifest.json file */
19     generateManifest(): string;
20     /** export user visible shortened metadata */
21     conciseManifest(): string;
22     /**
23      * Generate a unique tex container which the gl-react loader
24      → will cache
25      * @param channel reference to the named channel
26      * @param coefficient reference to the named child coefficient of
27      → channel
28      */
29     texForRender(channel: string, coefficient: string): TexForRender;
30     /**
31      * Generate a tex configuration for a layer
32      * @param id of the layer, must be found in this.layers
33      */
34     annotationTexForRender(id: string): TexForRender;
35     /** aspect ratio of the contained data */
36     aspectRatio(): number;
37     /** package the current data into a zip blob */
38     generateZip(): Promise<Blob>;
39   }
40   /**
41    * unpackage a zip blob into a BTFFile */
42   export declare function fromZip(zipData: Blob | ArrayBuffer):
43     → Promise<BTFFile>;

```

Notable is the `PreDownload` hook which is called before the `generateZip` function is called, to allow the `ImpExp` plugin and the `Paint` plugin to fill the `BTF` with their respective data. This hook is called by the `AppState` though, as the `BTFFile` implementation is fully standalone (apart from the `jszip` dependency), in case other software wishes to re-use the implementation.

5.6 State Management

The `AppState.tsx` file is the root of the applications state tree, but itself only contains limited data:

```

1 // types referring to MST types
2 const AppStateData = types.model({
3   // keep references to loaded plugins
4   plugins: types.late(() => types.optional(types.map(Plugin), {})),
5   // have a HookManager for each HookName

```

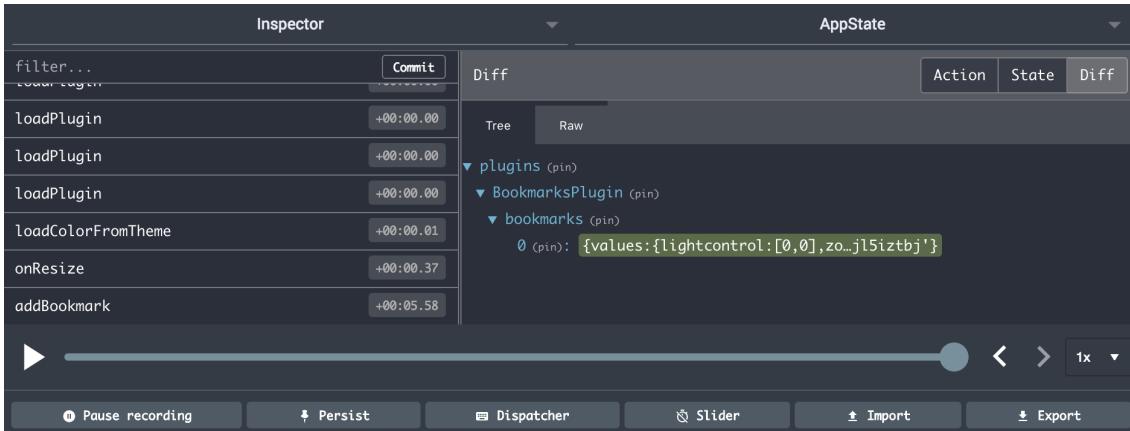


Figure 10: Run MobX at application startup and after one click on ‘Add Bookmark’. The differential of that action is on the right.

```

6   hooks: types.optional(types.map(HookManager), {}),
7   // currently opened BTF file, name is the key for the BTFCache
8   currentFile: '',
9 }

```

Its main function is to load all plugins and then let them share data between each other via the hook system. The set of plugins to be loaded is defined inside *oxrti.plugins.json*, the plugins defined there will be loaded in order. The state tree after initial plugin load is shown in Figure 11. As only `@actions` can modify the state, it is easy to follow the changing app state, as shown in Figure 10.

5.7 Renderer Stack

Even though the renderer stack is fully contained in the plugins, its principles span most of them, thus an overview is in order. All WebGL rendering is done through the gl-react library. If a plugin wants to register a node inside the stack, it is using the hook system, e.g. the Rotation plugin:

```

1 // register two nodes inside the rendering stack
2 // higher priority will be run first
3 ViewerRender: {
4     // first center the underlying texture
5     Centerer: {
6         component: CentererUI,
7         inversePoint: this.undoCurrentCenterer,
8         forwardPoint: this.doCurrentCenterer,
9         priority: 11,
10    },
11    // then rotate it
12    Rotation: {
13        component: RotationUI,

```

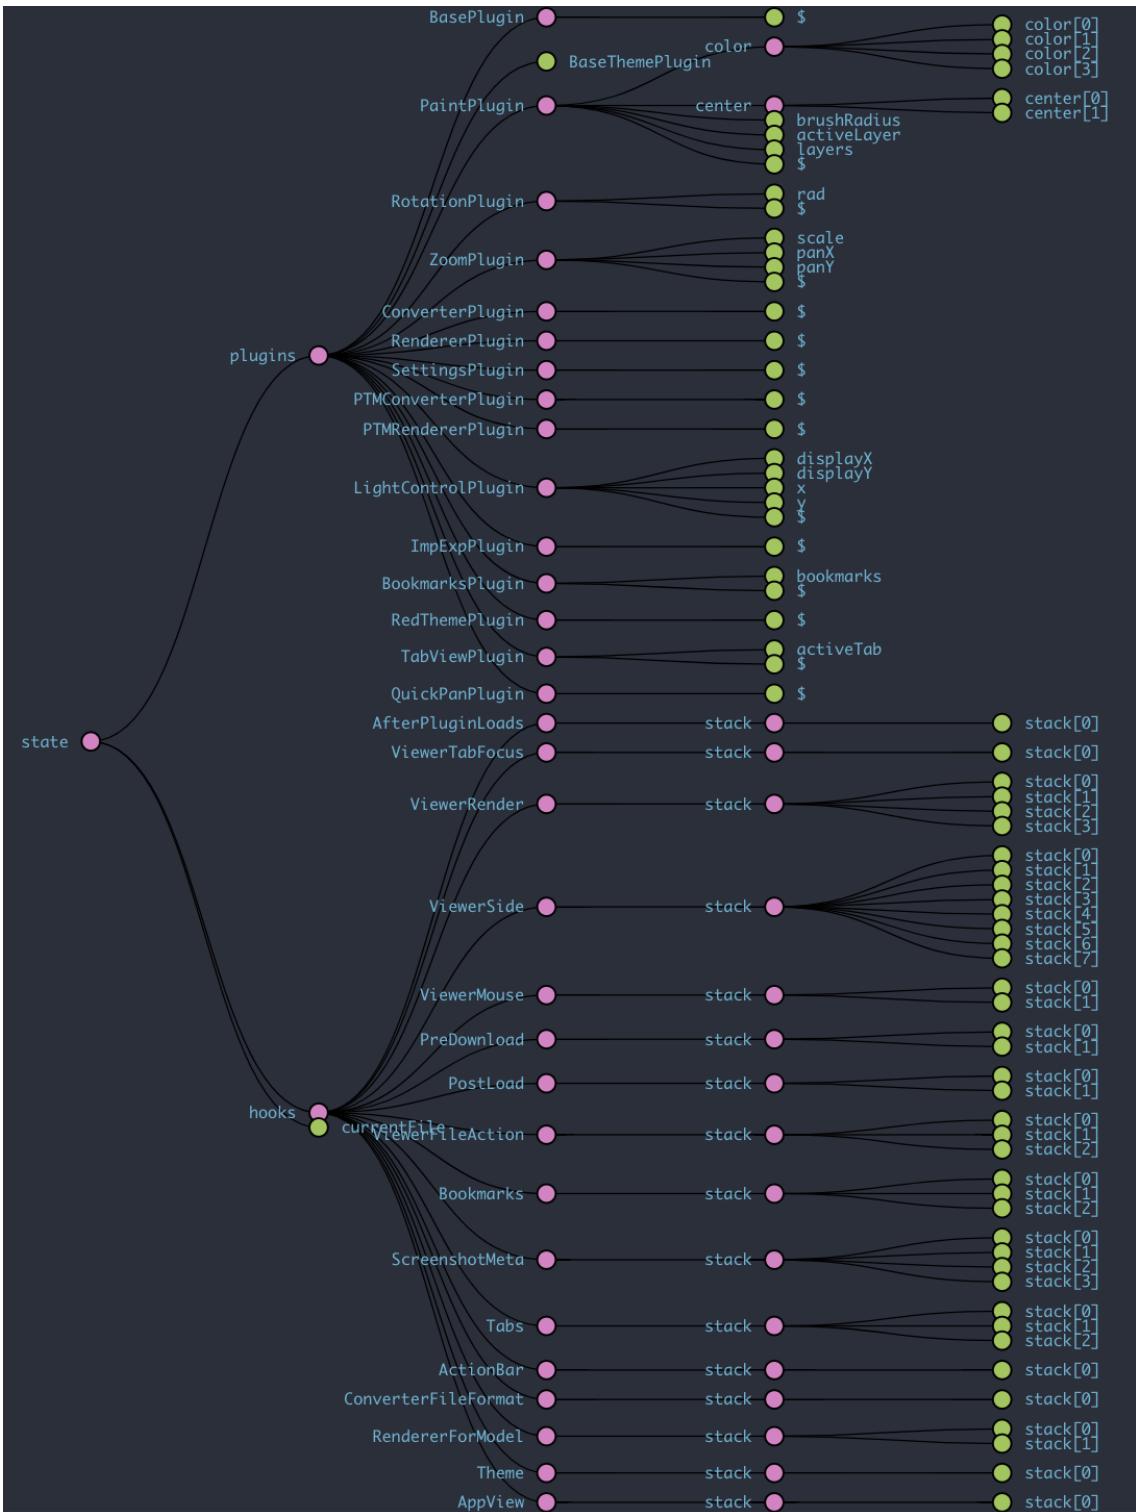


Figure 11: State tree after initial application load. All plugins are initialized and their hooks are registered. Visualized with redux dev tools.[31]

```

14     inversePoint: this.undoCurrentRotation,
15     forwardPoint: this.doCurrentRotation,
16     priority: 10,
17   },
18 },

```

The registered nodes are components again, which will link them into the automated mobx reactions, for example the Centerer node:

```

1 export const CentererUI = Component(function CentererNode (props) {
2   // dynamic sizes depending on the loaded btf
3   // if the btf changes, the uniforms will be updated
4   // → automatically
5   let [width, height] = this.centererSizes
6   let maxDims = this.maxDims
7   // create one gl-react Node
8   return <Node
9     width={maxDims}
10    height={maxDims}
11    shader={{
12      // shader from import centerShader from
13      // → './centerer.gls'
14      frag: centerShader,
15    }}
16    // uniforms will be automatically type-converted to the
17    // → appropriate WebGL types
18    uniforms={{
19      // referring to rendering output one step before
20      children: props.children,
21      inputHeight: height,
22      inputWidth: width,
23      maxDim: maxDims,
24    }} />
25  })

```

For the currently delivered default configuration the following nodes are registered:

1. PaintNode
2. CentererNode
3. RotationNode
4. ZoomNode

The Renderer plugin will start by picking the proper base rendering node depending on the channel format of the currently loaded BTF file (btf inside the code):

```

1 props.appState.hookForEach('RendererForModel', (Hook) => {
2   if (Hook.channelModel === btf.data.channelModel) {

```

```

3   current = <Hook.node
4     key={btf.id}
5     lightPos={lightControl.lightPos}
6     renderingMode={this.renderMode}
7   />
8 }
9 })

```

This initial node will then be wrapped by the registered nodes:

```

1 props.appState.hookForEach('ViewerRender', (Hook) => {
2   current = <Hook.component
3     key={btf.id}
4   >{current}</Hook.component>
5 })

```

5.8 Texture Loader

The bridge between the loaded BTF files and the WebGL contexts needs to be closed with custom code, as gl-react was not supporting the load of PNG textures from memory. An abridged version of the code follows, as it is a good example of the Promise pattern used in some following parts.

```

1 loadTexture(config: TexForRender) {
2   // keep track of the amount of currently loading textures
3   appState.textureIsLoading()
4   // shortcut for the WebGL reference
5   let gl = this.gl
6   // access the raw data buffer from the texture configuration
7   let data = config.data
8   // create a Promise, that basically is chaining callbacks
   ↳ together and then asynchronously executing each step
9   let promise =
10    // first create an ImageBitmap object, we need to flipY as
   ↳ the textures
11    are orientated naturally inside the BTF file but WebGL is
   ↳ expecting them bottom row first
12    createImageBitmap(data, { imageOrientation: 'flipY' })
13    // the catch step is called if the previous part failed
14    .catch((reason) => {
15      // some browsers do not like loading a lot of big
   ↳ textures in parallel and will garbage collect them
   ↳ in between and thus fail, as a fallback the limiter
   ↳ function is used to limit concurrency of that part
16      return limiter(() => createImageBitmap(data))
17    })
18    // the then part is called when the previous step succeeded

```

```

19   .then(img => {
20     // create and bind a new WebGL texture
21     let texture = gl.createTexture()
22     gl.bindTexture(gl.TEXTURE_2D, texture)
23     let type: number
24     // map the type from the BTF file to a WebGL texture
25     // → type
26     switch (config.format) {
27       case 'PNG8':
28         type = gl.LUMINANCE
29         break
30       // ...
31       case 'PNG32':
32         type = gl.RGBA
33         break
34     }
35     // load the imageBitmap into the texture
36     gl.texImage2D(gl.TEXTURE_2D, 0, type, type,
37       // → gl.UNSIGNED_BYTE, img)
38     gl.texParameteri(gl.TEXTURE_2D, gl.TEXTURE_MIN_FILTER,
39       // → gl.NEAREST)
40     gl.texParameteri(gl.TEXTURE_2D, gl.TEXTURE_MAG_FILTER,
41       // → gl.NEAREST)
42     // finished and return
43     appState.textureLoaded()
44     return { texture, width: img.width, height: img.height }
45   })
46   .catch((reason) => {
47     // a null texture will be empty
48     alert('Texture failed to load' + reason)
49     appState.textureLoaded()
50     return { texture: null, width: config.width, height:
51       // → config.height }
52   })
53   // the calling code will have its own catch/then logic
54   return promise
55 }

```

5.9 Plugins

All plugins extend the relatively limited abstract plugin class in *Plugin.tsx* and have no preserved state:

```

1  /** General Plugin controller, will be loaded into the MobX state
2   * → tree */
3  export declare class PluginController extends PluginShim {

```

```

3  /** referential access to app state, will be set by the plugin
4   → loader */
5  AppState: IAppState;
6  /** called when the plugin is initially loaded from file */
7  load(appState: IAppState): void;
8  /** all hooks the plugin is using */
9  readonly hooks: HookConfig;
10 /** get a single typed hook */
11 hook<P extends HookName>(name: P, instance: string): HookType<P>;
12 /** called before the plugin will be deleted from the state
13   → tree, usually used for volatile state fixes, e.g. paint
14   → layers */
15 hotUnload(): void;
16 /** called after the plugin was restored in the state tree */
17 hotReload(): void;
18 /** convenience function to inverse a rendering point from
19   → surface coordinates into texture coordinates */
20 inversePoint(point: Point): Point;
21 /** some components need references to their actual DOM nodes,
22   → these are stored outside the plugins scope to allow
23   → hot-reloads */
24 handleRef(id: string): (ref: any) => void;
25 /** return a stored ref */
26 ref(id: string): any;
27 }

```

The most important function is the `PluginCreator`, which merges the mobx-state-tree model with the classy-mst controller code and provides a wrapper function to create components bound to the containing plugin:

```

1 /**
2  * Create Subplugins
3  * @param Code is the controller
4  * @param Data is the model
5  * @param name must be the same as the folder and filename
6 */
7 function PluginCreator<S extends ModelProperties, T, U> (Code: new () => U, Data: IMModelType<S, T>, name: string) {
8   // create the resulting plugin class
9   let SubPlugin = mst(Code, Data, name)
10  // higher-order-component
11  // inner is basically (props, classes?) => ReactElement
12  // inner this will be bound to the SubPlugin instance
13  type innerType<P, C extends string> = (this: typeof SubPlugin.Type, props: ComponentProps & { children?: ReactNode } & P, classes?: ClassNameMap<C>) => ReactElement<any>

```

```

14 // P are they freely definable properties of the embedded react
15   ↵ component
16 // C are the inferred class keys for styling, usually no need
17   ↵ to manually pass them
18 function SubComponent<P = {}, C extends string = ''> (inner:
19   ↵ innerType<P, C>, styles?: StyleRulesCallback<C>):
20   ↵ PluginComponentType<P> {
21     // wrapper function to extract the corresponding plugin
22       ↵ from props into plugin argument typedly
23     let innerMost = function (props: any) {
24       let plugin = (props.appState.plugins.get(name)) as typeof
25         ↵ SubPlugin.Type
26       // actual rendering function
27       // allow this so all code inside a plugin can just
28         ↵ refer to this
29       let innerProps = [props]
30       // append styles
31       if (styles)
32         innerProps.push(props.classes)
33       // call the embedded component
34       return inner.apply(plugin, innerProps)
35     };
36     // set a nice name for the MobX/redux dev tools
37     (innerMost as any).displayName = inner.name
38     // use MobX higher order functions to link into the state
39       ↵ tree
40     let func: any = inject('AppState')(observer(innerMost))
41     // wrap with material-ui styles if provided
42     if (styles)
43       func = withStyles(styles)(func);
44     // also name the wrapped function for dev tools
45     (func as PluginComponentType<P>).displayName =
46       ↵ `PluginComponent(${inner.name})`
47     return func
48   }
49   // allow easier renaming in the calling module
50   return { Plugin: SubPlugin, Component: SubComponent }
51 }

```

A minimal example would be:

```

1 const BasePluginModel = Plugin.props({
2   greeting: 'In the beginning was the deed!',
3 })
4
5 class BasePluginController extends shim(BasePluginModel, Plugin) {
6   @action

```

```

7     onGreeting (event: any) {
8         this.greeting += '!'
9     }
10 }
11
12 // general plugin template code
13 const { Plugin: BasePlugin, Component } =
14     → PluginCreator(BasePluginController, BasePluginModel,
15     → 'BasePlugin')
16 export default BasePlugin
17 // export the type to allow other plugins to retrieve this plugin
18 export type IBasePlugin = typeof BasePlugin.Type
19
20 // CSS styles, classnames will be mangled, so styles is passed to
21 // the component
22 const styles = (theme: Theme) => createStyles({
23     hello: {
24         color: 'red',
25     },
26 })
27
28 // props are standard react props, classes contains the mangled
29 // names
30 const HelloWorld = Component(function HelloWorld (props, classes) {
31     return <p className={classes.hello}
32         → onClick={this.onGreeting}>{this.greeting}</p>
33 }, styles)

```

The rest of the plugins are presented on a higher conceptual level, as their internal APIs are most times used only by themselves. Their hooks will be discussed though.

5.9.1 Base Plugin

The base plugin is containing no further internal logic, but only is providing some shared display components. These could theoretically have been implemented outside of any plugin, but putting them into the Base plugin simplifies the distinction between components bound to plugins and unbound plugins, by having no unbound plugins at all. It also simplifies the code loading, as just the Base plugin can be (re-)loaded like all other plugins. The provided components are:

- JSONDisplay, showing a JSON object in a prettified form, used for displaying different metadata objects
- BTFFMetadataDisplay, showing the currently loaded BTF's data
- RenderHooks, to render all components attached to a hook

- SafeGLInspector, wrapping the secondary WebGL surfaces and disabling theme, if WebGL debug tools are used, which can handle only one surface.
- Tooltip, wrapping the material-ui tooltip component to fix styling errors

5.9.2 BaseTheme, RedTheme and BlueTheme Plugin

The BaseTheme plugin is having two essential properties:

```

1  /** app wide theme definitions */
2  themeBase: ThemeOptions = {
3      palette: {
4          },
5      overrides: {
6          MuiTooltip: {
7              tooltip: {
8                  fontSize: 16,
9              },
10             tooltipPlacementBottom: {
11                 marginTop: 5,
12             },
13             tooltipPlacementTop: {
14                 marginBottom: 5,
15             },
16         },
17     },
18 }
19
20 /** per theme plugin overridable definitions */
21 themeExtension: ThemeOptions = {}
```

Concrete themes (at the moment RedTheme and BlueTheme plugins) extend this BaseTheme and then set their themeExtension according to their modifications. To pick a theme to be used the ThemeConfig hook exists:

```

1 type ThemeConfig = {
2     controller: { theme: Theme },
3 }
```

Concrete themes register with:

```

1 get hooks (): HookConfig {
2     return {
3         Theme: {
4             Red: {
5                 priority: 100,
6                 controller: this,
7             },
8         },
9     },
10 }
```

```
9     }
10 }
```

If multiple plugins are registering themes, the appState will pick the theme with the highest priority to apply to the app.

5.9.3 TabView Plugin

The TabView plugin is providing the full app experience and is targeted at the Electron output and the online hosted version. As a tabbed container will occasionally delete the content of non-active tabs, some hooks are needed to ensure graceful behaviour of all displayed tabs:

```
1 // register a new tab
2 type Tab = {
3     // component to be the base of the tab
4     content: PluginComponentType
5     tab: TabProps,
6     padding?: number,
7     // async functions to allow customisation before/after tabs
8     // → change
9     beforeFocusGain?: () => Promise<void>,
10    afterFocusGain?: () => Promise<void>,
11    beforeFocusLose?: () => Promise<void>,
12    afterFocusLose?: () => Promise<void>,
13 }
14
15 // action buttons on the top rights
16 type ActionBar = {
17     onClick: () => void,
18     title: string,
19     enabled: () => boolean,
20     tooltip?: string,
21 }
22
23 // notifications if the tab changes for sub-components which are
24 // → not being a tab themselves
25 type ViewerTabFocus = {
26     beforeGain?: () => void,
27     beforeLose?: () => void,
28 }
```

This view is depicted in Figure 12.



Figure 12: Only changes are two lines in *oxrти.plugins.json*.

5.9.4 SingleView Plugin

The SingleView plugin is aimed to provide a contained viewer experience, e.g. on a museum’s website, it is just displaying the tab with the highest priority, see Figure 12.

5.9.5 Converter Plugin

The Converter plugin consists of multiple parts:

- The converter user interface, as shown in Figure 13.
- BMPWriter and PNGWriter, both extending Writer to write the converted textures. The BMPWriter is customised as no current package is offering the required functionality. The PNGWriter is wrapping pngjs.
- An abstract base converter strategy, to be extended by plugins providing a concrete converter with the following interface:

```

1  export default abstract class ConverterStrategy {
2      /** raw file buffer */
3      fileBuffer: ArrayBuffer;
4      /** wrapped file buffer */
5      inputBuffer: Buffer;
6      /** UI delegate for status updates */
7      ui: IConverterUI;
8      /** pixelData buffer, pointing into fileBuffer+metadata length
9       * */
10     pixelData: Buffer;
11     /** extracted width and height */
12     width: number;

```

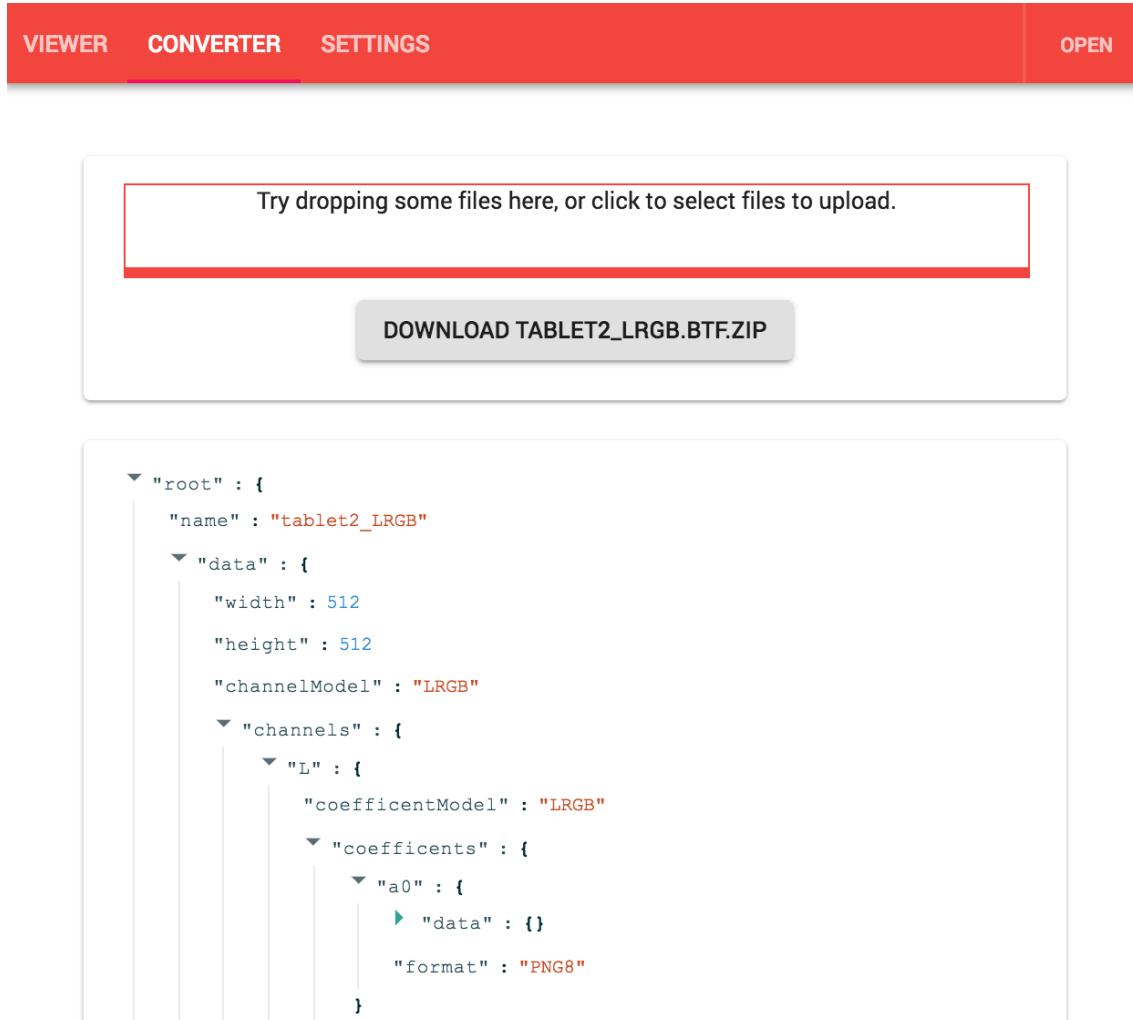


Figure 13: Converter user interface, with display of the extract manifest.

```

12     height: number;
13     /** concrete BTF output */
14     output: BTFFile;
15     /** freeform format depending JSON object, e.g. biases for PTMs
16      → */
16     formatMetadata: object;
17     /** current channelModel as defined in the BTF specification */
18     channelModel: ChannelModel;
19     /** total pixel count */
20     readonly pixels: number;
21     /** started from the converter ui */
22     constructor(content: ArrayBuffer, ui: IConverterUI);
23     /** pointer into the raw file buffer */
24     currentIndex: number;
25     /** read metadata till newline */
26     readTillNewLine(): string;
27     /** read one item, usually byte */
28     readOne(): number;
29     /** prepare pixeldata buffer */
30     preparePixelData(): Promise<void>;
31     /** run the actual conversion */
32     process(): Promise<BTFFile>;
33     /** only these need to implemented by concrete converters */
34     /** read the metadata block */
35     abstract parseMetadata(): Promise<void>;
36     /** read the pixel block */
37     abstract readPixels(): Promise<void>;
38     /** read potential suffix after pixel block */
39     abstract readSuffix(): Promise<void>;
40     /** bundle the read pixels into channels according to the
41      → channelModel */
41     abstract bundleChannels(): Promise<Channels>;
42 }

```

If a plugin wants to register a concrete converter it would use following hook:

```

1 ConverterFileFormat: {
2   PTM: {
3     fileEndings: ['.ptm'],
4       // referring to the class extending the base strategy
5     strategy: PTMConverterStrategy,
6   },
7 },

```

5.9.6 PTMConverter Plugin

The PTM Converter plugin is converting *.ptm* files, as they are described in section 2.2. Currently the RGB and LRGB light models are supported. Their main interesting part is the pixel data reader:

```

1  async readPixelsLRGB () {
2      // allocate output buffers for ['a_0', 'a_1', 'a_2', 'a_3',
3      //   ↵ 'a_4', 'a_5', 'R', 'G', 'B']
4      this.coeffData = this.coeffNames.map(e =>
5          ↵ Buffer.alloc(this.pixels))
6      // this.pixelData contains pixels * [a_0, a_1, a_2, a_3, a_4,
7      //   ↵ a_5] and then pixels * [R, G, B]
8      for (let y = 0; y < this.height; ++y)
9          for (let x = 0; x < this.width; ++x) {
10             // iterate over pixels
11             let originalIndex = ((y * this.width) + x)
12             // flip the Y index, as PTM is bottom-row first,
13             // whereas BTF is top-row first
14             let targetIndex = ((this.height - 1 - y) * this.width) +
15                 ↵ x
16             // read from the coefficient block
17             for (let i = 0; i <= 5; i++)
18                 this.coeffData[i][targetIndex] =
19                     ↵ this.pixelData[originalIndex * 6 + i]
20             // read from RGB block by skipping over the coefficient
21             // block and then iterating colors
22             for (let i = 0; i <= 2; i++)
23                 this.coeffData[i + 6][targetIndex] =
24                     ↵ this.pixelData[this.pixels * 6 + originalIndex *
25                         ↵ 3 + i]
26             // update the progress bar
27             if (originalIndex % (this.pixels / 100) === 0) {
28                 await this.ui.setProgress(originalIndex / this.pixels
29                     ↵ * 100 + 1)
30             }
31         }
32     }
33
34     async readPixelsRGB () {
35         // allocate output buffers for ['R0R1R2', 'R3R4R5', 'G0G1G2',
36         //   ↵ 'G3G4G5', 'B0B1B2', 'B3B4B5']
37         this.coeffData = this.coeffNames.map(e =>
38             ↵ Buffer.alloc(this.pixels * 3))
39         // this.pixelData contains a block of pixels * [a_0, a_1, a_2,
40         //   ↵ a_3, a_4, a_5] for each color
41         for (let y = 0; y < this.height; ++y) {
42             for (let x = 0; x < this.width; ++x) {
43                 let originalIndex = ((y * this.width) + x)
44                 let targetIndex = ((this.height - 1 - y) * this.width) +
45                     ↵ x
46                 for (let i = 0; i < 3; i++) {
47                     this.coeffData[i][targetIndex] =
48                         ↵ this.pixelData[originalIndex * 3 + i]
49                 }
50             }
51         }
52     }
53 }
```

```

29     for (let x = 0; x < this.width; ++x) {
30         for (let color = 0; color <= 2; color++) {
31             // iterate over pixels and colors
32             let inputIndex = (((y * this.width) + x) +
33                               ↳ this.pixels * color) * 6
34             // flip the Y index, as PTM is bottom-row first,
35             // whereas BTF is top-row first
36             let targetIndex = (((this.height - 1 - y) *
37                               ↳ this.width) + x) * 3
38             // iterate over the coefficents for the given
39             // pixel/inputIndex */
40             for (let i = 0; i <= 5; i++) {
41                 let bucket = color * 2 + Math.floor(i / 3)
42                 this.coeffData[bucket][targetIndex + (i % 3)] =
43                     ↳ this.pixelData[inputIndex + i]
44             }
45         }
46     }
47 }

```

5.9.7 Renderer Plugin

The Renderer plugin is providing the main user interface, which is split into two parts, on the left the rendered object and on the right further controls. As such it is using a comprehensive set of hooks:

```

1 // specific channelModel renderers can register their base node
2 type BaseNodeConfig = {
3     channelModel: ChannelModel,
4     // a basenode can declare that it supports multiple rendering
5     // modes e.g. default, surface normals, specular enhancement,
5     // etc.
6     renderingModes: string[],
7     node: PluginComponentType<BaseNodeProps>,
8 }
9
9 // hook for a node in the renderer stack
10 type RendererNode = {
11     component: PluginComponentType,
12     // if the node is transforming the texture coordinates, and
12     // inverse method needs to be provided

```

```

13     inversePoint?: (point: Point) => Point,
14     forwardPoint?: (point: Point) => Point,
15   }
16
17 // hook for listening to mouse event inside the main renderer
18 type MouseConfig = {
19   dragger: (oldTex: Point, nextTex: Point, oldScreen: Point,
20             → nextScreen: Point, dragging: boolean) => boolean,
21   mouseUp?: (nextScreen: Point, nextTex: Point) => boolean,
22   mouseLeft?: () => void,
23 }
24
25 // hook for adding file actions/buttons below the upload field
26 type ViewerFileAction = {
27   tooltip: string,
28   text: string,
29   action: () => Promise<void>,
30 }
31
32 // hook for adding information to the metadata file when shots are
33 // exported
34 type ScreenshotMeta = {
35   key: string,
36   fullshot?: () => (string | number)[] | string | number,
37   snapshot?: () => (string | number)[] | string | number,
38 }
39
40 // components to be rendered inside the drawer
41 type ViewerSide = ComponentHook
42
43 // notifications, that a btf file will be exported and plugins
44 // should update their respective data inside the current
45 // in-memory version
46 type PreDownload = FunctionHook
47
48 // notification that a btf file was loaded, plugins can import
49 // extra data
50 type PostLoad = FunctionHook
51
52 // components to be rendered around the surface
53 type ViewerSurfaceAttachment = ComponentHook

```

The actual object rendering is done by the stack as described in section 5.7, the Renderer plugin is only providing a dynamically resized and centered surface for the stack to be drawn in. The surface is always kept square, even if the loaded BTF is not, to streamline and simplify texture coordinate handling.

5.9.8 PTMRenderer Plugin

The PTMRenderer Plugin is rendering the RGB and LRGB channel models. Here only the RGB is covered, as the principles for LRGB are the same. Most channel renderers will be split in two parts, one node for the rendering stack:

```
1 const coeffs = ['a0a1a2', 'a3a4a5']
2 // return a texture configuration array for the given coefficient
3 function mapper (btf: BTFFFile, name: string) {
4     return coeffs.map(c => {
5         return btf.texForRender(name, c)
6     })
7 }
8
9 // render a RGB object
10 const PTMRGB = Component<BaseNodeProps>(function PTMRGB (props) {
11     let btf = props.appState.btf()
12     return <Node
13         // from ./ptmrgb.gsls
14         shader={shaders.ptmrgb}
15         // adaptive sizing if wanted
16         width={props.width || btf.data.width}
17         height={props.height || btf.data.height}
18         uniforms={}
19         // usually coming from the lightcontrol plugin, is
20         // → [x:number, y:number, z:number]
21         lightPosition: props.lightPos,
22         // texture arrays
23         texR: mapper(btf, 'R'),
24         texG: mapper(btf, 'G'),
25         texB: mapper(btf, 'B'),
26         // retrieve the untyped formatExtra
27         biases: (btf.data.formatExtra as
28             // → PTMFormatMetadata).biases,
29         scales: (btf.data.formatExtra as
30             // → PTMFormatMetadata).scales,
31     }>
32 })
33 }
```

And one shader, implementing the light model described in section 2.2.

```
1 precision highp float;
2 varying vec2 uv;
3 // higher and lower coefficients per color
4 uniform sampler2D texR[2];
5 uniform sampler2D texG[2];
6 uniform sampler2D texB[2];
7 uniform float biases[6];
```

```

8  uniform float scales[6];
9  uniform vec3 lightPosition;
10
11 float channelLum(sampler2D[2] coeffsTexs, vec3 toLight) {
12     // would be unrolled by the GLSL compiler anyway
13     float a0 = texture2D(coeffsTexs[0], uv).x;
14     float a1 = texture2D(coeffsTexs[0], uv).y;
15     float a2 = texture2D(coeffsTexs[0], uv).z;
16     float a3 = texture2D(coeffsTexs[1], uv).x;
17     float a4 = texture2D(coeffsTexs[1], uv).y;
18     float a5 = texture2D(coeffsTexs[1], uv).z;
19
20     a0 = (a0 * 255.0 - biases[0]) * scales[0];
21     a1 = (a1 * 255.0 - biases[1]) * scales[1];
22     a2 = (a2 * 255.0 - biases[2]) * scales[2];
23     a3 = (a3 * 255.0 - biases[3]) * scales[3];
24     a4 = (a4 * 255.0 - biases[4]) * scales[4];
25     a5 = (a5 * 255.0 - biases[5]) * scales[5];
26
27     float Lu = toLight.x;
28     float Lv = toLight.y;
29
30     float lum = (
31         a0 * Lu * Lu +
32         a1 * Lv * Lv +
33         a2 * Lu * Lv +
34         a3 * Lu +
35         a4 * Lv +
36         a5
37     )/255.0;
38     return lum;
39 }
40
41 void main() {
42     // spotlight behaviour at the moment
43     vec3 pointPos = vec3(0,0,0);
44     vec3 toLight = normalize(lightPosition - pointPos);
45
46     float R = channelLum(texR, toLight);
47     float G = channelLum(texG, toLight);
48     float B = channelLum(texB, toLight);
49
50     gl_FragColor = vec4(R,G,B,1.0);
51 }
```

In addition to the default rendering mode the PTMRenderer plugin is also supporting a Normals rendering mode for LRGB ptms. See Figure 14 for a visual example.

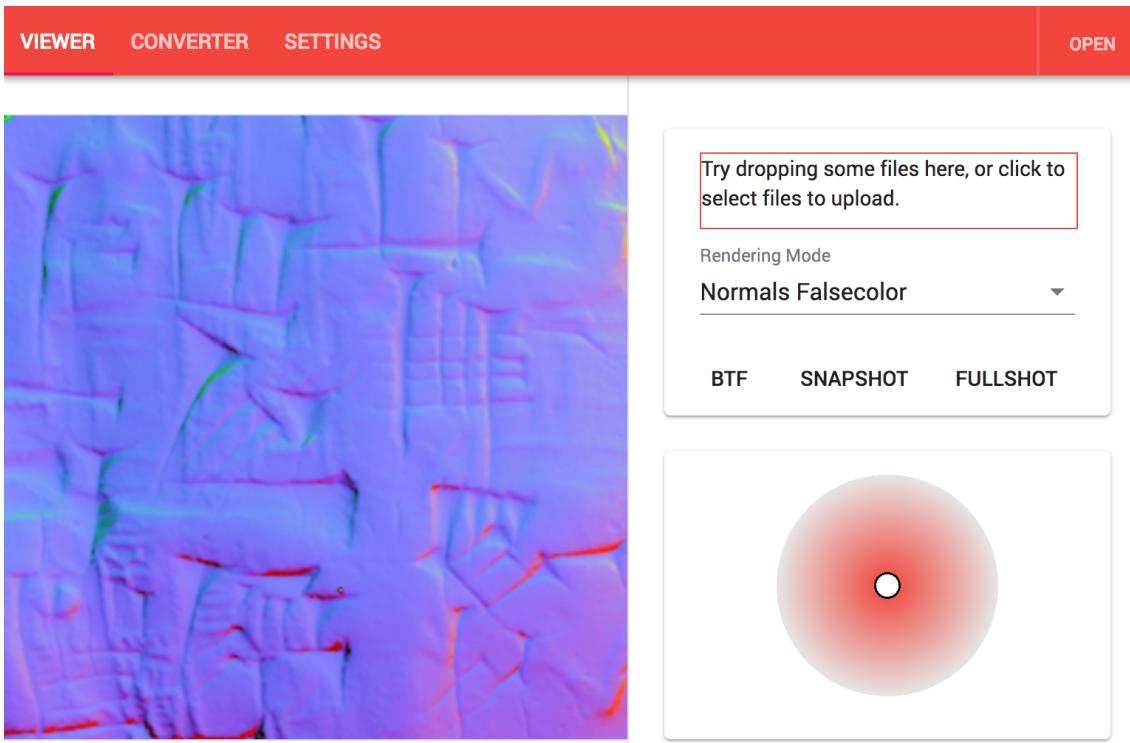


Figure 14: The Tablet ptm rendered with false color normals. The user can change the mode with the ‘Rendering Mode’ drop down on the top right.

It is based on the proposal by MacDonald and Robson[23] and currently supports 4 extra rendering modes: X-Normal, Y-Normal, Z-Normal and False-Color-Normal. The first three render the respective value of the normal of the pixel as grey scale, the false color one maps X to R, Y to G and Z to B.

5.9.9 LightControl Plugin

The LightControl plugin is providing a visual way to control the position of the light source. The user interface is shown in Figure 15. The linear xy coordinates are transformed into hemispherical coordinates, which are then passed onto the current Base node from the Renderer plugin.

5.9.10 Rotation Plugin

The Rotation plugin allows the rotation of the viewed object (and other lower rendering nodes). It does so by first centering the object inside a large square node of the maximal spanning length when rotated ($width * Math.cos(Math.PI/4) + height * Math.sin(Math.PI/4)$), so no part will be cut off for the rendering layers on top, and then applying a simple rotation matrix on the texture coordinates on the next node. Even though the whole renderer is rotated, the use of rotation slider will dynamically adapt the pan values to keep the previous center centered.

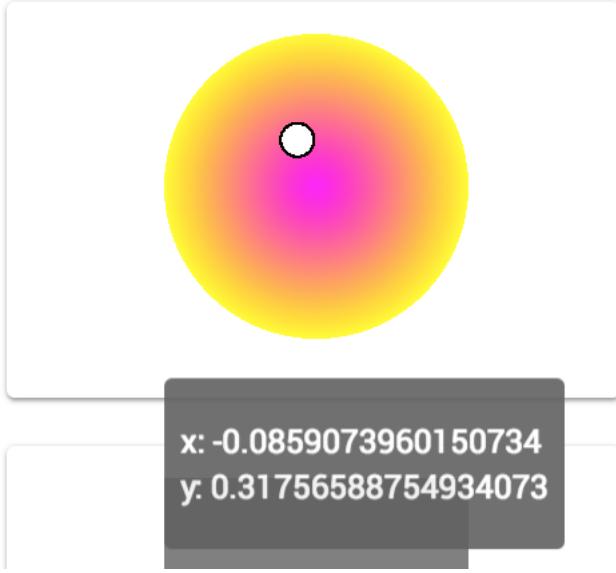


Figure 15: The user can drag around on the imaginary dome and change the light position.

5.9.11 Zoom Plugin

The Zoom plugin is providing zoom and pan functionality (pan would not be necessary without zoom), an example is Figure 16. All zooming and panning is implemented as a special shader in the render stack.

5.9.12 QuickPan Plugin

The QuickPan plugin is responsible for rendering the small view box on the top right inside Figure 16. It is doing so by rendering injecting a temporary node inside the rendering stack, waiting for an object's first render and then preserving that texture in a lower resolution, by setting the `width` and `height` properties of the nodes (compare the component in section 5.9.8). It then uses the `RectRender` component to render the semi-transparent rectangle of the current visible part over the captured texture. To do so, it is using the `inversePoint` function on $[0, 0]$, $[0, 1]$, $[1, 1]$, $[0, 1]$ to transform the bounds of the currently rendered (main) surface into texture coordinates of the object. With these coordinates a simple point-in-rectangle check can be done to highlight the desired area.

5.9.13 Paint Plugin

The Paint plugin adds the functionality to have overlays on the object to allow for annotations in a research context. All painting is happening as part of the renderer stack, with one node for each layer and one mixer node to combine these with the

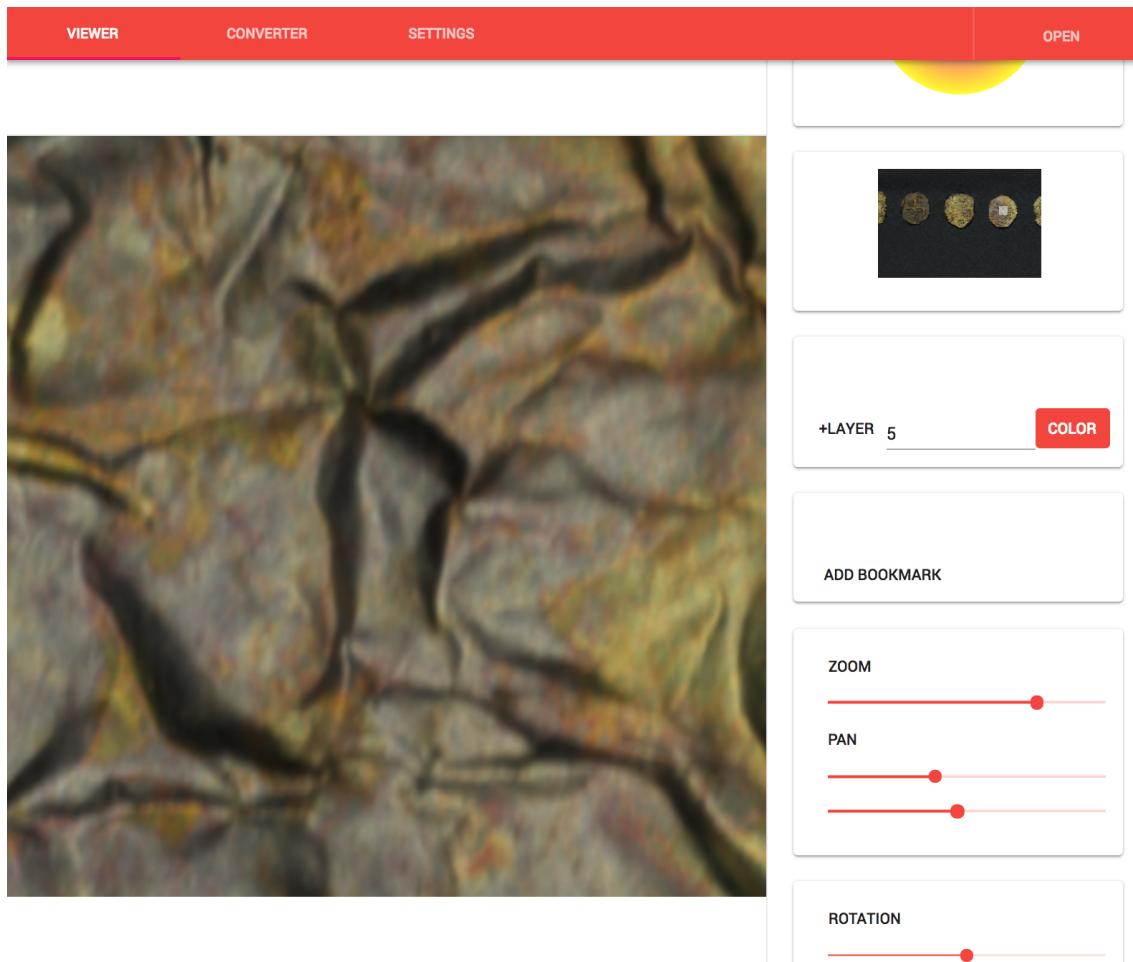


Figure 16: Applied zoom, note the small part of the actual object being shown. The shader architecture allows for seamless and performant zooming between nearest viewpoints and more removed ones.

object. As the Paint plugin is interesting in terms of implementation, it is presented in more detail. The main Paint node:

```

1  /**
2   * Actual painting node inside the render stack
3  */
4  const PaintNode = Component(function PaintNode (props) {
5      let btf = props.appState.btf()
6      let width = btf.data.width
7      let height = btf.data.height
8      let brush = this.brushRadiusTex
9      // just render the input texture if we got no other layers to
10     ↪ put on top
11     if (this.layers.length === 0)
12         return <Node
13             ref={this.handleRef('mixer')}
14             width={width}
15             height={height}
16             key={this.key}
17             shader={{
18                 frag: initShader,
19             }}
20             uniforms={{
21                 children: props.children,
22             }} />
23     else
24         // return one mixer node, which stiches the underlying
25         ↪ rendered object and the annotations together
26     return <Node
27         ref={this.handleRef('mixer')}
28         width={width}
29         height={height}
30         key={this.key}
31         onDraw={this.initialized ? null : this.onDraw}
32         shader={{
33             // dynamic shader for the current amount of layers
34             frag: this.mixerShader(),
35         }}
36         uniforms={{
37             children: props.children,
38             layerVisibility: this.layers.map(l => l.visible),
39             // convert mobx array to WebGL compatible one
40             center: this.center.slice(0, 3),
41             brushRadius: brush,
42             showBrush: this.drawing === DrawingState.Hovering,
43         }}
44     >
```

```

43      {// map all layers into the `layer` uniform of the mixer
44      ↳ shader
45      this.layers.map((layer, index) => {
46          // only change uniforms of currently drawn layer
↳ to not trigger redraws on stable layers
47          let drawThis = this.drawing ===
48              DrawingState.Drawing && this.activeLayer ===
49              index
50
51          return <Bus uniform={'layer'} key={`${layer.id}`}
52              index={index} ><Node
53                  // keep track of node refs for export
54                  ref={this.handleRef(layer.id)}
55                  width={width}
56                  height={height}
57                  shader={{
58                      frag: this.initialized ? paintShader :
59                          initShader,
60                  }}
61                  clear={null}
62                  uniforms={this.initialized ?
63                  {
64                      drawing: drawThis,
65                      color: drawThis ? this.color.slice(0,
66                          4) : [0, 0, 0, 0],
67                      center: drawThis ?
68                          this.center.slice(0, 3) : [0, 0],
69                      brushRadius: drawThis ? brush : 0,
70                  } : {
71                      // clear is null, so we initially
↳ just render the loaded texture
72                      children:
73                          ↳ btf.annotationTexForRender(layer.id),
74                  }} />
75          </Bus>
76      })}
77      </Node >
78  })

```

The shaders are comparatively simple. Paint first:

```

1 precision highp float;
2 varying vec2 uv;
3 uniform bool drawing;
4 uniform vec4 color;
5 uniform vec2 center;
6 uniform float brushRadius;

```

```

7 // the texture is permanent/not-cleared, if the shader discards,
   ↵ the old value is kept
8 void main() {
9     if (drawing) {
10         // only do changes if we are drawing currently
11         vec2 d = uv - center;
12         // paint if our point is near enough to the brush center
13         if (length(d) < brushRadius) {
14             gl_FragColor = color;
15         } else {
16             discard;
17         }
18     } else {
19         discard;
20     }
21 }
```

Then mixer, which is run through a string replacement first, as the WebGL compiler is not supporting loops with unfixed amounts of maximal iterations.

```

1 // Adapted shader to have fixed unrollable loops
2 mixerShader () {
3     return mixerShader.replace(/\[X\]/gi,
   ↵   `[$this.layerCount}`).replace('< layerCount', `<
   ↵   ${this.layerCount}`)
4 }
```

Mixer source:

```

1 precision highp float;
2 varying vec2 uv;
3 uniform sampler2D children;
4 uniform bool layerVisibility[X];
5 uniform sampler2D layer[X];
6 uniform vec2 center;
7 uniform bool showBrush;
8 uniform float brushRadius;
9
10 void main() {
11     vec4 base = texture2D(children, uv);
12     // iterate over all layers
13     for (int i=0; i < layerCount; i++) {
14         if (layerVisibility[i]) {
15             vec4 paint = texture2D(layer[i], uv);
16             // and mix their color into the current color according
   ↵   to the layer's transparency
17             base = mix(base, paint, paint.a);
18             // the result should always be opaque
```

```

19         base.a = 1.0;
20     }
21 }
22
23 // preview brush rendering to visualize the brush size (and
24 // rendering lag)
24 if (showBrush) {
25     vec2 d = uv - center;
26     if (length(d) < brushRadius) {
27         base = mix(base, vec4(0.5, 0.5, 0.5, 0.5), 0.5);
28     }
29 }
30
31 gl_FragColor = base;
32 }
```

The user interface is shown in Figure 17. Up to 15 layers are supported currently, as the max texture limit is usually 16.

5.9.14 Bookmarks Plugin

The Bookmarks plugin allows bookmarks to be set for light and view configurations. Bookmarks are controlled via the following hook:

```

1 type BookmarkSaver = {
2     // key inside the bookmarks config
3     key: string,
4     // called when a new bookmark is created, any returned string
4     // or number combination is stored
5     save: () => (string | number)[],
6     // called when a bookmark ought to be restored, the saved
6     // combination is passed on
7     restore: (values: (string | number)[]) => void,
8 }
```

5.9.15 Notes Plugin

The Notes plugin implements notes, which are attached to a specific point of the viewed object. Each note consists of two parts: One indicator which is linked to the texture and whose position is transformed like the texture and one popup, which calculates its absolute screen coordinates to show the note's name and text. See Figure 19 for an example.

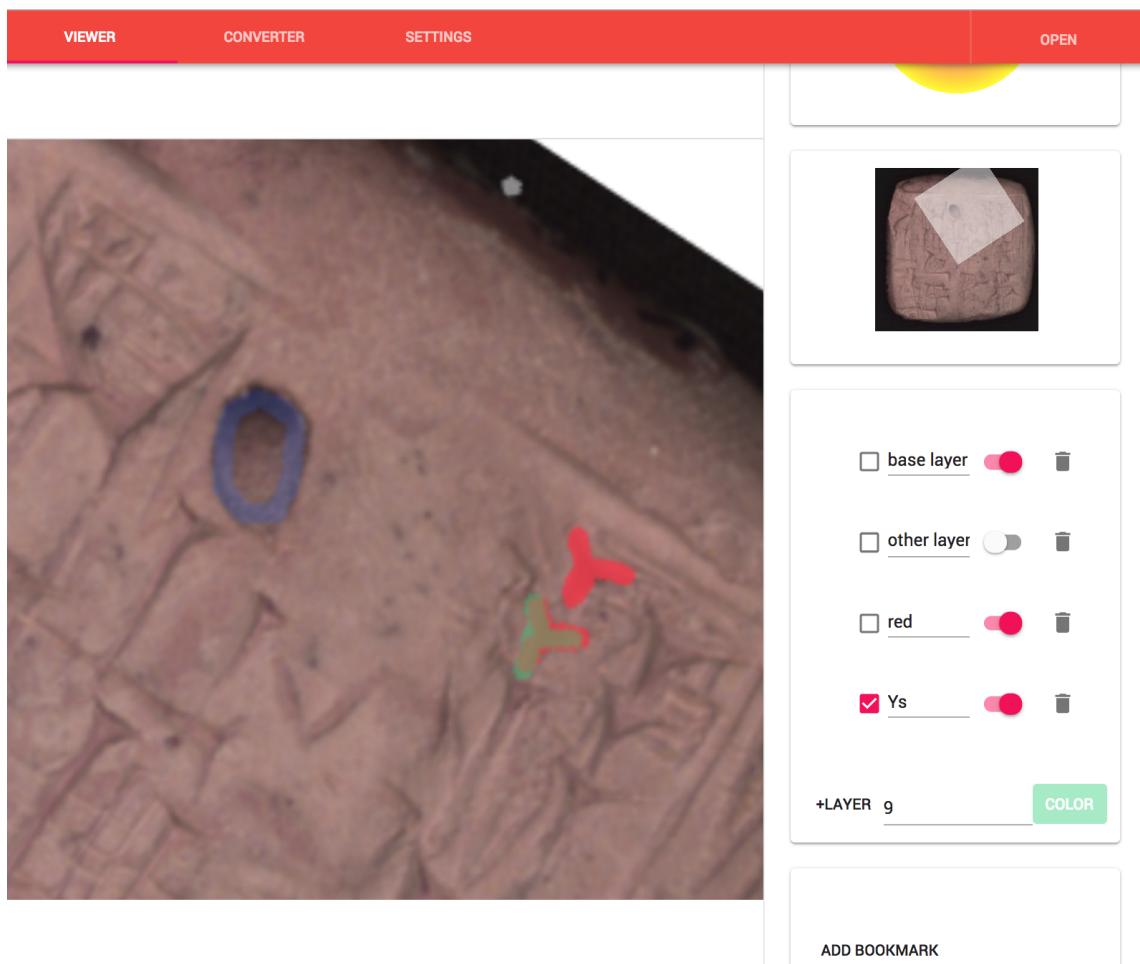


Figure 17: Paint plugin user interface. The check mark in front indicates the layer is currently drawn on. Names are freely changeable. The toggle toggles visibility of the layer. The trash icon deletes the corresponding layer. +Layer adds another layer on top. The number is the brush size. Clicking color shows a color picker.

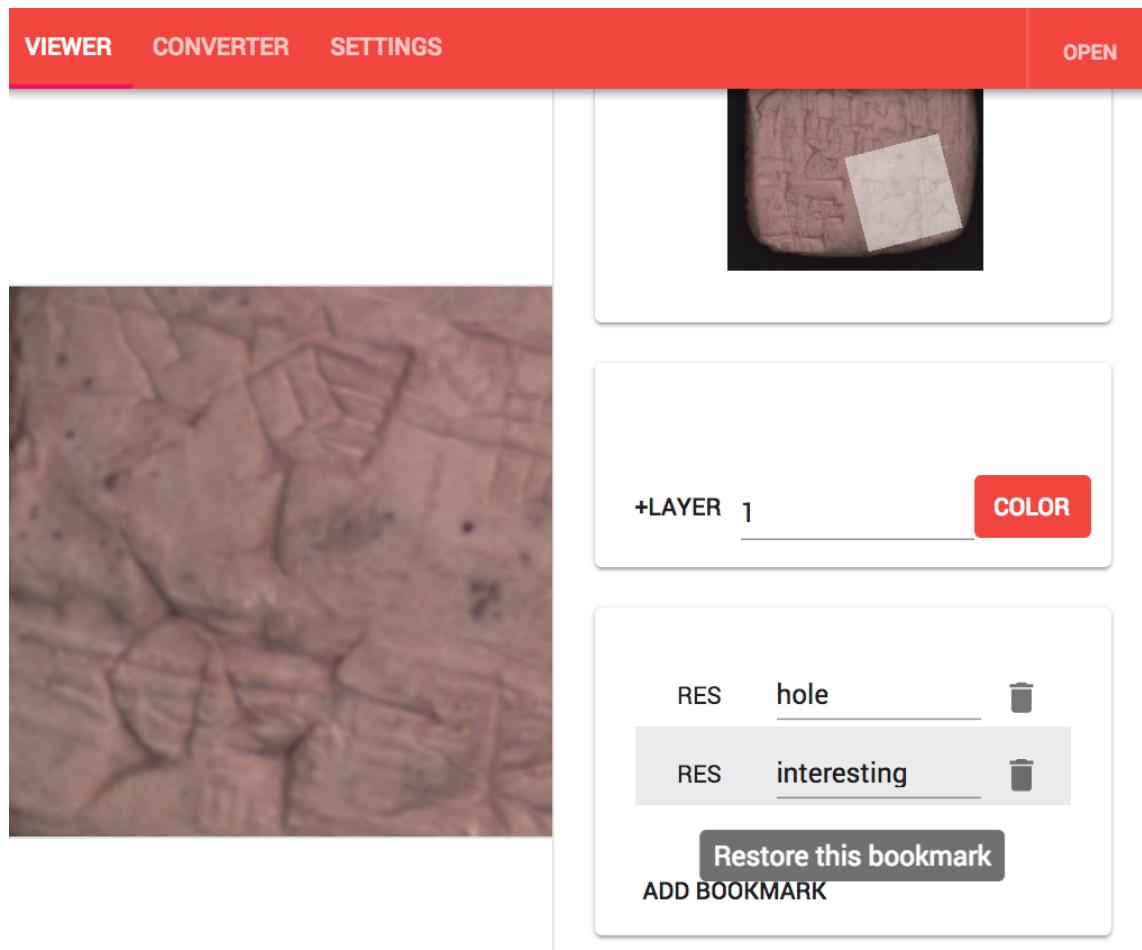


Figure 18: A click on ‘Add Bookmark’ will preserve the current light and camera positions and create an unnamed entry in the bookmark list. Clicking ‘RES’ restores this configuration. They are automatically exported when saving the current BTF.

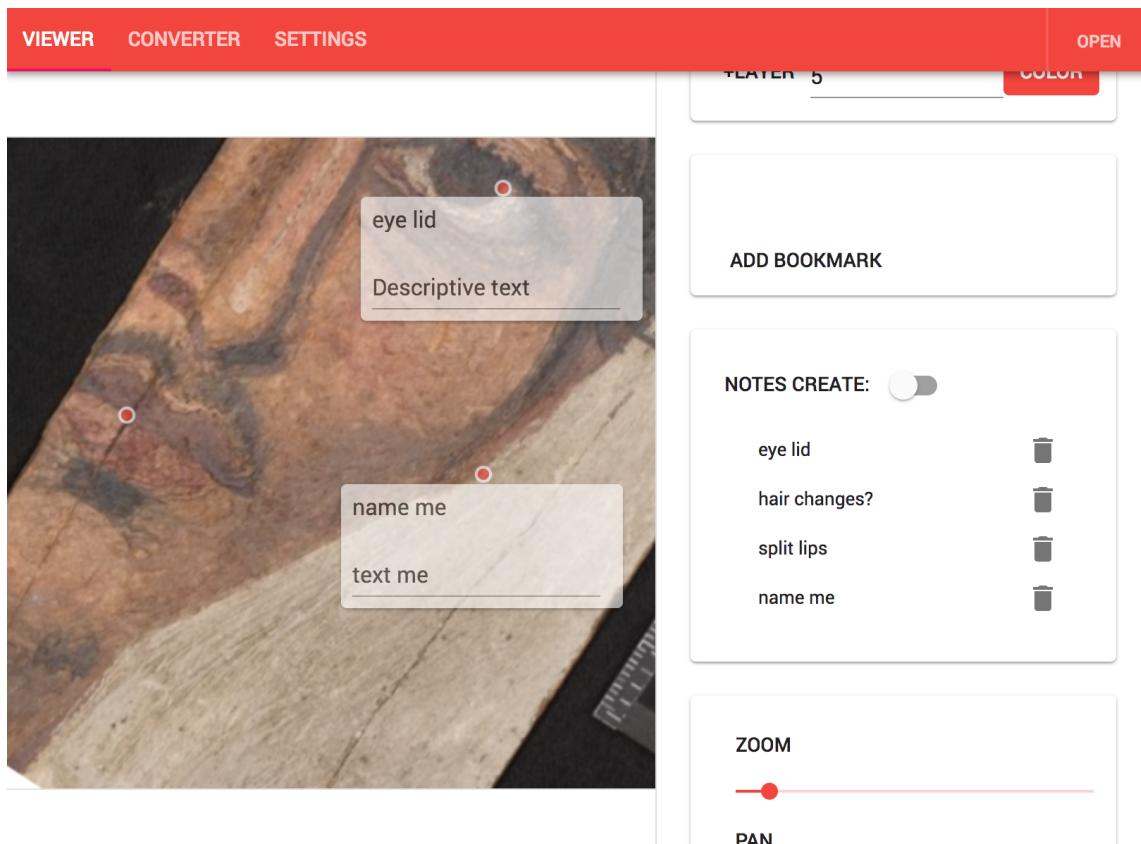


Figure 19: Notes are created by switching the ‘Notes Create:’ toggle and then clicking anywhere on the texture. The red and white dots indicate the presence of a note at that point, clicking it will toggle the display of the note. Clicking the note’s name on the right side, will center that note’s indicator.

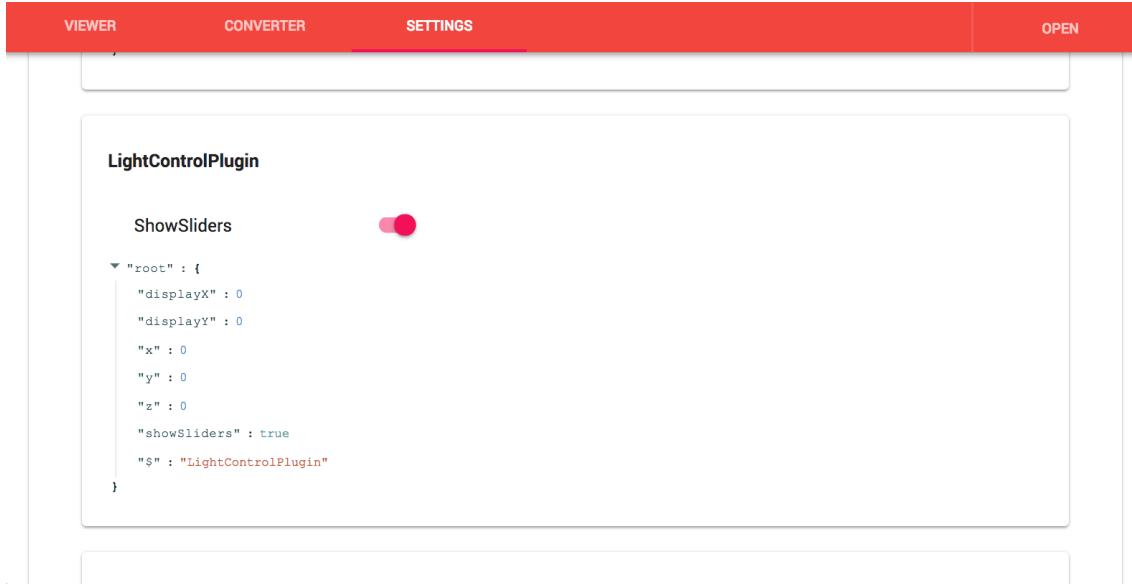


Figure 20: The LightControl plugin registers a toggle for enabling/disabling a slider based light control.

5.9.16 ImpExp Plugin

The ImpExp plugin is implementing the import and export of the current application state into/from a BTF file. For export the whole state tree is just exported as:

```
1 btf.oxrtiState = (this.appState as any).toJSON()
```

And for import the state is simply assigned as

```
1 for (let key in snapshot)
2     (this.appState as any)[key] = snapshot[key]
```

The simpleness of this plugin is a big payoff for using mobx-state-tree and classy-mst. mobx-state-tree wil take the partial snapshots and classy-mst will turn these into fresh instances of the respective plugins. All future plugins will be automatically supported, as long as they are using their models in the default way.

5.9.17 Settings Plugin

The Settings plugin provides the user with introspection into the currently loaded plugins and their configuration options. Plugins use the the SettingsConfig hook to register configuration values:

```
1 type SettingsConfig = ComponentHook & {
2     title: string,
3 }
```

The Settings plugin registers a tab and will show the configuration components, see Figure 20.

5.10 Targets

The multiple targets are configured via two mechanisms: Webpack configuration files, which are configuring the compilation and bundling of the source code and other resources. And the *oxrti.plugins.json*, which has following form:

```
1  {
2      "enabled": [
3          "BasePlugin",
4          "BaseThemePlugin",
5          // ...
6          "ZoomPlugin"
7      ],
8      "disabled": [
9          "SingleViewPlugin",
10         "UndoPlugin",
11         "TestPlugin",
12         // ...
13     ]
14 }
```


The disabled block is not used within the implementation, but it is convenient for a configurator to see which plugins could be included. The loader is then only loading the configured plugins when starting the app.

5.10.1 Electron

Most of the electron compilation is controlled by the electron-webpack package, with additions in *webpack.renderer.additions.js* and *webpack.renderer.shared.js*. The main process entry point is *src/electron/index.tsx*, which contains no further modification at this point, but could be extended in the future for more native application features. The web process' entry point is *src/renderer/index.tsx*, which is installing the electron extensions and the referring to the Loader for the rest of the application startup. Compilation is started by executing `npm run-script electronbuild` on the command line, the resulting artifacts will be in the *dist* folder, in the MacOS use case it will be *dist/oxrti-*.dmg*. The development version can be started with `npm start` on the CLI.

5.10.2 Web

The pure web target is controlled by *webpack.config.js* and *webpack.renderer.shared.js*. `npm run-script startweb` will start the local development server listening on `http://localhost:3000`. `npm run-script build` will build it statically, with *index.html* and *dist/bundle.js* referring to the latest built versions. A zip containing both files with fixed relative links is also automatically generated

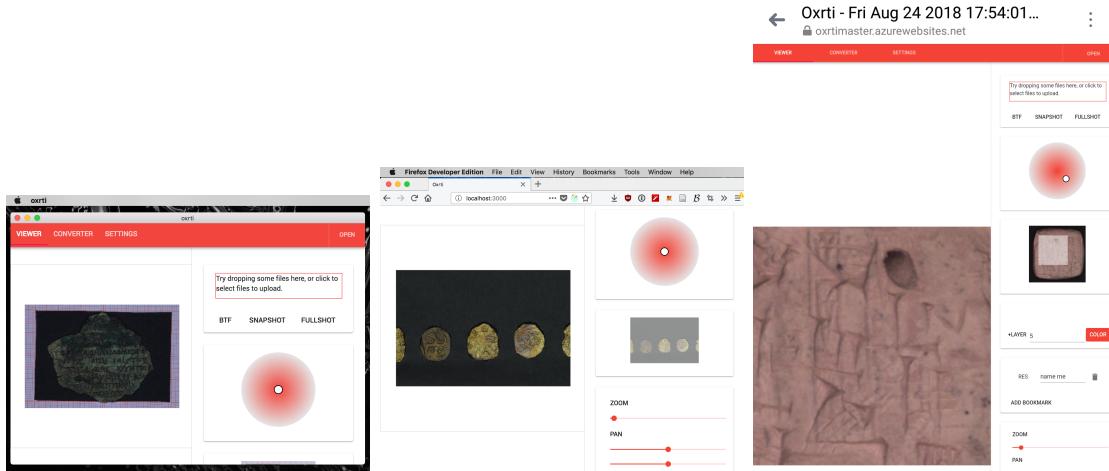

(a) The bundled Electron app. (b) Embedded web version, (c) Implementation running on Later versions will add some with SingleView plugin and a Huawei P10 mobile phone kind of native menu.

without Converter, Bookmarks with the Chrome browser.

and Paint.

Opening a BTF is done through clicking the upload area.

Figure 21: Target Comparison

under `dist/oxrti.zip`. This zip can be transferred to any computer and a modern web browser should be able to run the contained implementation.

5.10.3 Hosted

The build scripts are also generating a hosted version on each commit. On push the git repository[16] is automatically feeding this to an Azure Functions instance, reachable at <https://oxrtimaster.azurewebsites.net/api/azurestatic>. This process is controlled by `webpack.functions.js` and the files in `azurejs` and `azurestatic`, which are basically creating two endpoints on the azure site, each hosting the compiled `.js` file or `.html` file.

5.10.4 Embeddable

There is currently no provisioning for a more automated handling of multiple `oxrti.plugin.json` files, so it needs to be exchanged manually before building. A proposed embedded configuration for e.g. object galleries is provided by `oxrti.plugins.embedded.json`.

5.10.5 Mobile Phones

Mobile phones are supported, but currently might have problems with the distinction between `touch` and `click` events and currently have no specialized layout.

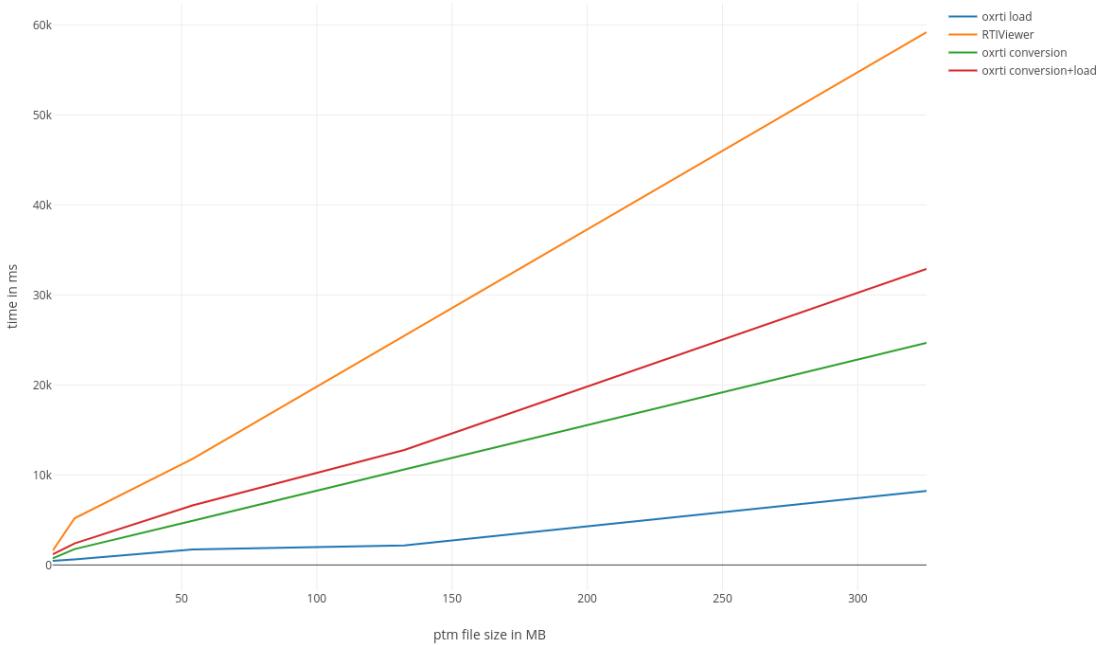


Figure 22: Load time comparison.

6 Results

This section summarises the results of the project and adds some quantitative analysis of the implementation. The feature set is fully reflected inside the implementation section (or the table of contents), so no additional summarization is done here. Data *file names* refer to the files distributed as [17].

6.0.6 Performance

Currently Cultural Heritage Imaging provides the most frequently used RTI viewer[8]. As a result, the performance comparisons have been made with that implementation as the reference. The data is shown in Table 1. The BTF files are about 50% the size of the ptm files, and the larger the ptm file, the better the compression benefits are. The same pattern is evident in the load time as Figure 22 shows. The bigger the files are, the more profitable the shader implementation, especially after the one-time conversion is done.

File	Pixel	Conv	Load	Load RTI	ptm size	btf size
<i>AK1A_LRGB</i>	3008x2000	4906	1713	11800	54.1	30
<i>Coin_LRGB</i>	7360x4912	24674	8224	59200	325.4	136
<i>Mummy_RGB</i>	583x1000	1769	627	5200	10.5	5.6
<i>tablet2_LRGB</i>	512x512	732	462	1600	2.4	1.2
<i>Warrior_RGB</i>	2299x3200	10590	2184	25500	132.4	50.2

Table 1: *Pixel* are the dimensions as width x height. *Conv* is the time taken by the implementation to convert the ptm file to the btf format. *Load* is the time taken by the oxrti implementation from receiving the btf file to do a complete render. *Load RTI* is the approximate time taken by the RTIViewer from opening the file to finishing the loading. Time was stopped by screenrecording, as no performance measurements are provided. The time for the processing of mipmaps and normal maps was excluded, as the oxrti implementation is not doing these steps. The time to a full first render would be even longer. *ptm size* is the file size in megabytes. *btf size* is the file size of a plain BTF file (no extra oxrti state and/or layers). Test runs done on a “MacBook Pro (Retina, 13-inch, Early 2015); 2.9 GHz Intel Core i5; 16 GB 1867 MHz DDR3; Intel Iris Graphics 6100 1536 MB”

6.1 Accuracy

The next thing to verify is the accuracy; it is necessary to determine whether the implemented rendering is actually giving the ‘right’ image. To quantify that, the Root Mean Square Error as presented by Happa and Gogosio[15] was picked, as the RTIViewer version can be considered the gold standard for this comparison, the pixel dimensions are equal and all pixel values are calculated with no cross interactions. The formulae used is:

$$RMSE(X, \bar{X}) = \sqrt{\frac{\sum_{i=1}^N (X_i - \bar{X}_i)^2}{N}}$$

Where X are the reference pixels, \bar{X} are the exported pixels, and N represents the total number of pixels. As each image is an RGB png with 8-bit per channel; this calculation is done for each channel. Pixel values are in range [0, 255]. The images to compare are generated by setting equal light positions within the LightControl plugin and the RTIViewer and then using the respective export function. For the oxrti implementation the ‘fullshot’ export was used, which is exporting after base node rendering in full resolution, without any further transformation. For the RTIViewer the ‘Snapshot’ button was used. Due to some bug inside the the RTIViewer implementation some of the exported images have the wrong dimensions, e.g. the *Mummy_RGB* is exported as 583x999 pixels, even though it has 583x1000 pixels. These files were only compared visually. For *tablet2_LRGB* and *Warrior_RGB* the right dimensions were exported by the RTIViewer. Oxrti exports the right sizes in all cases. Having one RGB and LRGB file covers all currently implemented Visuals comparisons are shown in Figure 23 and Figure 24, the results are tabulated in Table 2. Visual inspection reveals that the images virtually look the same and the



(a) Warrior from RTIViewer

(b) Warrior from oxrti

Figure 23: Comparison of RGB rendering between oxrti and RTIViewer. Light position set in both applications to $x = 0.7071, y := -0.7071$, so a light from bottom right.

RMSE is confirming this, with less than one discrete step mean difference between the versions per channel. A comparison of a completely black with a completely white image would show a RMSE of 15.96 per channel. The small differences are likely related to shader architecture. The RTIViewer implementation can operate with pure integers, whereas the oxrti shaders use floats and their inaccuracies in addition to some potential texture filtering happening internally.

File	RMSE(R)	RMSE(G)	RMSE(B)	SUM
<i>tablet2_LRGB</i>	0.649	0.677	0.674	2.000
<i>Warrior_RGB</i>	0.627	0.612	0.610	1.849

Table 2: RMSE for Accuracy Comparison

6.2 Rollouts and Testing

All versions talked about in section 5.10 are readily available for public use. Some external testing of these releases has began with participants from the Oxford Centre for the Study of Ancient Documents (CSAD) and the Institute of Archaeology.



(a) Tablet from RTIVViewer

(b) Tablet from oxrti

Figure 24: Comparison of LRGB rendering between oxrti and RTIVViewer. Light position set in both applications to $x = -1, y = 0$, so a light from the left.

Initial feedback indicates approval of the implementation and will be reported on in detail at a later point.

7 Discussion

7.1 Novelties

Todo Text:

Novelties results

7.2 Future Work

The future work can be split into two parts. Improvements of the current system, including better performance and bug fixes, and further extensions with new functionality.

7.2.1 WebGL 2

Todo Text:

Future Work

7.3 Community Onboarding

Todo Text:

Community Onboarding

8 Conclusion

Todo Text:

Conclusion

This is the specification of the BTF fileformat, as of version 1.0 on August 27, 2018. It was developed by co-supervisor Stefano Gogioso, with input from and extensions by the author of the enclosing thesis in relation to the oxrti viewer.

A BTF File Format

This section describes the BTF file format. The aim of this file format is to provide a generic container for BTF data to be specified using a variety of common formats. Files shall have the `.btf.zip` extension.

A.1 File Structure

A BTF file is a ZIP file containing the following:

- A **manifest** file in JSON format, named `manifest.json`. The manifest contains all information about the BRDF/BSDF model being used, including the names for the available **channels** (e.g. R, G and B for the 3-channel RGB), the names of the necessary **coefficients** (e.g. bi-quadratic coefficients) and the **image file format** for each channel.
- A single folder named **data**, with sub-folders having names in 1-to-1 correspondence with the channels specified in the manifest.
- Within each channel folder, greyscale image files having names in 1-to-1 correspondence with the coefficients specified in the manifest, each in the image file format specified in the manifest for the corresponding channel. For example, if one is working with RGB format (3-channels named R, G and B) in the PTM model (five coefficients a_2 , b_2 , a_1 , b_1 and c , specifying a bi-quadratic) using 16-bit greyscale bitmaps, the file `/data/B/a2.bmp` is the texture encoding the a_2 coefficient for the blue channel of each point in texture space.
- The datafiles are all in reversed scanline order (meaning from bottom to top), to keep aligned with the original PTM format and allow easier loading into WebGL.

In case of usage with the oxrti viewer, following files can be present in addition to those mentioned above:

- A **Layers** file in JSON format, named `oxrti_layers.json`. In addition a **layers** folder should be present, containing the textures for the layers.
- A **State** file in JSON format, named `oxrti_state.json`.

A.2 Manifest

The manifest for the BTF file format is a JSON file with root dictionary. The **root** element has two mandatory child elements: one named **data**, and one named **name** with the option of additional child elements (with different names) left open to future extensions of the format.

- The **name** element is a string with a name of the contained object.
- The **data** element has for entries, named **width**, **height**, **channels** and **channel-model**. The **width** and **height** attributes have values in the positive integers describing the dimensions of the BTDF. The **channel-model** attribute has value a non-empty alphanumeric string uniquely identifying the BRDF/BSDF colour model used by the BTF file (see the Options section below). The **channels** element has an arbitrary amount of named **channel** entries, according to the **channel-model**.
- Additionally the **data** element has one untyped entry named **formatExtra**, where format implementation specific data can be stored.
- Each **channel** has an **coefficients** child consisting of an arbitrary number of **coefficient** entries, as well as one **coefficient-model** attribute. The **coefficient-model** attribute has value a non-empty alphanumeric string uniquely identifying the BRDF/BSDF approximation model used by the BTF file (see the Options section below).
- Each **coefficient** element has one attribute: **format**. The **format** attribute has value a non-empty alphanumeric string uniquely identifying the image file format used to store the channel values (see the Options section below).

A.3 Textures

Each image file `/data/CHAN/COEFF.EXT` has the same dimensions specified by the **width** and **height** attributes of the **data** element in the manifest, and is encoded in the greyscale image file format specified by the **format** attribute of the unique **coefficient** element with attribute **name** taking the value **COEFF** (the extension `.EXT` is ignored). The colour value of a pixel (u, v) in the image is the value for coefficient **COEFF** of channel **CHAN** in the BRDF/BSDF for point (u, v) , according to the model jointly specified by the values of the attribute **model** for element **channels** (colour model) and the attribute **model** for element **coefficients** (approximation model).

In case of collated coefficients, the texture will not be greyscale, but RGB or RGBA and the coefficients are split into the RGBA channels in order of their appearance inside the **coefficient**'s name.

A.4 Options

At present, the following values are defined for attribute `channel-model` of element `channels`.

- `RGB`: the 3-channel RGB colour model, with channels named `R`, `G` and `B`. This colour model is currently under implementation.
- `LRGB`: the 4-channel LRGB colour model, with channels named `L`, `R`, `G` and `B`. This colour model is currently under implementation.
- `SPECTRAL`: the spectral radiance model, with an arbitrary non-zero number of channels named either all by wavelength (format `--nm`, with `--` an arbitrary non-zero number) or all by frequency format `--Hz`, with `--` an arbitrary non-zero number. This colour model is planned for future implementation.

At present, the following values are defined for attribute `model` of element coefficients, where the ending character `*` is to be replaced by an arbitrary number greater than or equal to 1.

- `flat`: flat approximation model (no dependence on light position). This approximation model is currently under implementation.
- `RTIpoly*`: order-* polynomial approximation model for RTI (single view-point BRDF). This approximation model is currently under implementation.
- `RTIharmonic*`: order-* hemispherical harmonic approximation model for RTI (single view-point BRDF). This approximation model is currently under implementation.
- `BRDFpoly*`: order-* polynomial approximation model for BRDFs. This approximation model is planned for future implementation.
- `BRDFharmonic*`: order-* hemispherical harmonic approximation model for BRDFs. This approximation model is planned for future implementation.
- `BSDFpoly*`: order-* polynomial approximation model for BSDFs. This approximation model is planned for future implementation.
- `BSDFharmonic*`: order-* spherical harmonic approximation model for BSDFs. This approximation model is planned for future implementation.

At present, the following values are defined for attribute `format` of elements tagged `coefficient`, where the ending character `*` is the bit-depth, to be replaced by an allowed positive multiple of 8.

- `BMP*`: greyscale BMP file format with the specified bit-depth (8, 16, 24 or 32). Support for this format is currently under implementation.
- `PNG*`: PNG file format encoding the specified bit-depth (8, 16, 24, 32, 48 or 64). Support for this format is currently under implementation. Different PNG colour options are used to support different bit-depths:
- `Grayscale` with 8-bit/channel to encode 8-bit bit-depth.

- `Grayscale` with 16-bit/channel to encode 16-bit bit-depth.
- `Truecolor` with 8-bit/channel to encode 24-bit bit-depth.
- `Truecolor and alpha` with 8-bit/channel to encode 32-bit bit-depth.
- `Truecolor` with 16-bit/channel to encode 48-bit bit-depth.
- `Truecolor and alpha` with 16-bit/channel to encode 64-bit bit-depth.

A.5 Layers

The layer file is a JSON file with a root array, containing a sorted list of layer information dictionaries, which consist of 3 attributes each:

- A `name` JSON string. It is also the prefix of the layer's texture inside the `layers` folder, where the corresponding `name.png` file resides.
- A `texture` object with no further attributes, to be replaced at runtime with the actual texture data.
- A `id` JSON string, to be changed each time a layer texture is exported.

A.6 State

The state file is a JSON file with oxrти implementation details and is unlikely to be of further use for other software, it basically stores the state of all loaded plugins.

References

- [1] *Alternative syntax madness · Issue #487 · mobxjs/mobx-state-tree*. GitHub. URL: <https://github.com/mobxjs/mobx-state-tree/issues/487> (visited on 08/21/2018).
- [2] *Classes · TypeScript*. URL: <https://www.typescriptlang.org/docs/handbook/classes.html> (visited on 08/20/2018).
- [3] *classy-mst: ES6-like syntax for mobx-state-tree*. Aug. 11, 2018. URL: <https://github.com/charto/classy-mst> (visited on 08/13/2018).
- [4] Library of Congress. *Polynomial Texture Map (PTM) File Format*. June 14, 2018. URL: <https://www.loc.gov/preservation/digital/formats//fdd/fdd000487.shtml> (visited on 08/10/2018).
- [5] Library of Congress. *Reflectance Transformation Imaging (RTI) File Format*. June 9, 2018. URL: <https://www.loc.gov/preservation/digital/formats//fdd/fdd000486.shtml#notes> (visited on 08/10/2018).
- [6] Massimiliano Corsini, Prabath Gunawardane, and Carla Schroer. “RTI Format – Draft 0.9”. In: *Cultural Heritage Imaging Forum* (2010). URL: http://forums.culturalheritageimaging.org/index.php?app=core&module=attach§ion=attach&attach_id=81.
- [7] *Cultural Heritage Imaging | Reflectance Transformation Imaging (RTI)*. URL: <http://culturalheritageimaging.org/Technologies/RTI/> (visited on 08/24/2018).
- [8] *Cultural Heritage Imaging | View: RTIViewer Download*. URL: http://culturalheritageimaging.org/What_We_Offer/Downloads/View/ (visited on 08/26/2018).
- [9] *Decorators · TypeScript*. URL: <https://www.typescriptlang.org/docs/handbook/decorators.html> (visited on 08/20/2018).
- [10] *electron: Build cross-platform desktop apps with JavaScript, HTML, and CSS*. Aug. 21, 2018. URL: <https://github.com/electron/electron> (visited on 08/21/2018).
- [11] *electron-userland/electron-webpack: Scripts and configurations to compile Electron applications using webpack*. URL: <https://github.com/electron-userland/electron-webpack> (visited on 08/21/2018).
- [12] *Generics · TypeScript*. URL: <https://www.typescriptlang.org/docs/handbook/generics.html> (visited on 08/20/2018).
- [13] *gl-react cookbook*. URL: <https://gl-react-cookbook.surge.sh/hellogl> (visited on 08/21/2018).
- [14] *GNU Emacs - GNU Project*. URL: <https://www.gnu.org/software/emacs/> (visited on 08/17/2018).
- [15] Stefano Gogioso and Jassim Happa. “PBR: Image Synthesis Validation”. Physical Based Rendering course, Oxford University., Nov. 24, 2017.
- [16] Johannes Goslar. *oxrti: Reflectance Transformation Imaging Toolset*. Aug. 15, 2018. URL: <https://github.com/ksjogo/oxrti> (visited on 08/17/2018).
- [17] Johannes Goslar. *oxrti_data: public data test files for the oxrti project*. Aug. 26, 2018. URL: https://github.com/ksjogo/oxrti_data (visited on 08/26/2018).

- [18] *HP Labs : Research : Polynomial texture mapping : Downloads*. URL: <http://www.hpl.hp.com/research/ptm/downloads/download.html> (visited on 08/27/2018).
- [19] Takahiro Ethan Ikeuchi. *React Stateless Functional Component with TypeScript*. Medium. Apr. 5, 2017. URL: https://medium.com/@ethan_ikt/react-stateless-functional-component-with-typescript-ce5043466011 (visited on 08/20/2018).
- [20] *InscriptiFact*. URL: <http://www.inscriptifact.com/index.shtml> (visited on 08/27/2018).
- [21] *InscriptiFact :: Instructions ::* URL: <http://ruth.usc.edu:7060/index.jsp> (visited on 08/27/2018).
- [22] *JSZip*. URL: <https://stuk.github.io/jszip/> (visited on 08/21/2018).
- [23] Lindsay MacDonald and Stuart Robson. “Polynomial texture mapping and 3d representations”. In: *International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences 38* 5 (2010), p. 6.
- [24] Thomas Malzbender, Dan Gelb, and Hans Wolters. “Polynomial texture maps”. In: *Proceedings of the ACM SIGGRAPH Conference on Computer Graphics*. Vol. 2001. Jan. 1, 2001, pp. 519–528. DOI: [10.1145/383259.383320](https://doi.org/10.1145/383259.383320).
- [25] *material-ui: React components that implement Google’s Material Design*. Aug. 21, 2018. URL: <https://github.com/mui-org/material-ui> (visited on 08/21/2018).
- [26] *mobx: Simple, scalable state management*. Aug. 13, 2018. URL: <https://github.com/mobxjs/mobx> (visited on 08/13/2018).
- [27] *mobx-state-tree: Model Driven State Management*. Aug. 20, 2018. URL: <https://github.com/mobxjs/mobx-state-tree> (visited on 08/21/2018).
- [28] *OxRTI SVG Viewer*. URL: <https://c14.arch.ox.ac.uk/oxrti/OxRTIViewer.html?file=https://c14.arch.ox.ac.uk/oxrti/example/info.json> (visited on 08/27/2018).
- [29] Kathryn Piquette and Charles Crowther. *Developing a Reflectance Transformation Imaging (RTI) System for Inscription Documentation in Museum Collections and the Field: Case studies on ancient Egyptian and Classical material*. 2011.
- [30] *React - A JavaScript library for building user interfaces*. URL: <https://reactjs.org/index.html> (visited on 08/13/2018).
- [31] *Redux DevTools*. URL: <https://chrome.google.com/webstore/detail/redux-devtools/lmhkpmbekcpmknklioeibfkpmffibljd> (visited on 08/22/2018).
- [32] *Reflectance Transformation Imaging - WebRTIViewer*. URL: <http://vcg.isti.cnr.it/rti/webviewer.php> (visited on 08/27/2018).
- [33] Gaëtan Renaudeau. *gl-react – React library to write and compose WebGL shaders*. Aug. 13, 2018. URL: <https://github.com/gre/gl-react> (visited on 08/13/2018).
- [34] Arian Stolwijk. *pngjs: Pure JavaScript PNG decoder*. July 20, 2018. URL: <https://github.com/arian/pngjs> (visited on 08/21/2018).
- [35] *The WebGL API: 2D and 3D graphics for the web*. MDN Web Docs. URL: https://developer.mozilla.org/en-US/docs/Web/API/WebGL_API (visited on 08/21/2018).

- [36] *TSLint*. URL: <https://palantir.github.io/tslint/> (visited on 08/17/2018).
- [37] *TSLint - Visual Studio Marketplace*. URL: <https://marketplace.visualstudio.com/items?itemName=eg2 tslint> (visited on 08/17/2018).
- [38] *TypeScript is a superset of JavaScript that compiles to clean JavaScript output*. Aug. 13, 2018. URL: <https://github.com/Microsoft/TypeScript> (visited on 08/13/2018).
- [39] *Visual Studio Code - Code Editing. Redefined*. URL: <http://code.visualstudio.com/> (visited on 08/17/2018).
- [40] *WebGL Specification*. URL: <https://www.khronos.org/registry/webgl/specs/1.0/> (visited on 08/21/2018).
- [41] *WebGL Stats*. URL: <http://webglstats.com/> (visited on 08/21/2018).
- [42] *WebGL Stats Texture Units*. URL: http://webglstats.com/webgl/parameter/MAX_TEXTURE_IMAGE_UNITS (visited on 08/21/2018).
- [43] *WebGL tutorial*. MDN Web Docs. URL: https://developer.mozilla.org/en-US/docs/Web/API/WebGL_API/Tutorial (visited on 08/21/2018).
- [44] *webpack/webpack: A bundler for javascript and friends. Packs many modules into a few bundled assets. Code Splitting allows to load parts for the application on demand. Through "loaders," modules can be CommonJs, AMD, ES6 modules, CSS, Images, JSON, Coffeescript, LESS, ... and your custom stuff.* URL: <https://github.com/webpack/webpack> (visited on 08/21/2018).