

Ex: 34D/1511/FDIS

COMMITTEE DRAFT (CD)

	PROJECT NUMBER:		
	DATE OF CIRCULATION:		CLOSING DATE FOR VOTING: 2019-12-06
	Supersedes document	s:	
IEC SC 4: CEREALS AND PULSES IEC TC 34: FOOD PRODUCTS			
Secretariat:		SECRETARY: Ms Shanti Conn	
OF INTEREST TO THE FOLLOWING COMMITTEES:			
FUNCTIONS CONCERNED:	MENT	Quality assurance	Safety
SUBMITTED FOR CENELEC PARALLEL VOTING		□ NOT SUBMITTED FOR	CENELEC PARALLEL VOTING
Attention IEC-CENELEC parallel voting			
The CENELEC members are invited to vote t online voting system.	hrough the CENELEC		
This document is still under study and subject Recipients of this document are invited to saware and to provide supporting document	ubmit, with their com		
T			
TITLE: Cereals and pulses — Specifications a	nd test methods — I	Rice	
NOTE FROM TC/SC OFFICERS:			

Copyright © **2019 International Electrotechnical Commission, IEC**. All rights reserved. It is permitted to download this electronic file, to make a copy and to print out the content for the sole purpose of preparing National Committee positions. You may not copy or "mirror" the file or printed version of the document, or any part of it, for any other purpose without permission in writing from IEC.

CONTENTS

FOR	EWORD .			4
INT	RODUCTI	ON		6
1	Scope			7
2	Normat	ive Refere	ences	7
3	Terms a	and definit	tions	7
4				
•	4.1		, organoleptic and health characteristics	
	4.2		l and chemical characteristics	
5		-	and chemical characteristics	
6	•	O		
U	6.1		e content	
	6.2		ce content	
		-		
	6.3	•	n content and crude protein content	
	6.4		zation time	
	6.5		rice yield	
		6.5.1	Determination	
7	T	6.5.2	Precision	
7				
8	J	J		
9	_			
Ann	ex A (norn	native) Det	termination of defects	13
	A.1	Principle	e	13
	A.2	Apparat	us	13
		A.2.1	Sample divider,	13
		A.2.2	Sieve,	13
		A.2.3	Tweezers	13
		A.2.4	Scalpel	13
		A.2.5	Paintbrush	13
		A.2.6	Steel bowls,	13
		A.2.7	Balance,	13
	A.3	Samplin	ıg	13
	A.4	Procedu	ıre	13
		A.4.1	Preparation of test sample	13
	A.5	Determi	nation	14
	A.6	Calculat	ion	14
	A.7	Test rep	oort	14
Ann	ex B (infor	rmative) De	etermination of the waxy rice content of parboiled rice	15
	B.1	Principle	e	15
	B.2	Apparat	us	15
		B.2.1	Balance,	15
		B.2.2	Glass beaker,	15
		B.2.3	Small white colour bowls,	15
		B.2.4	Wire sieve,	
		B.2.5	Stirrer rod	15

	B.2.6	Tweezers or forceps	15
	B.2.7	Tissue paper	15
B.3	Reagents		15
	B.3.1	Deionized water,	15
	B.3.2	lodine stock solution,	15
	B.3.3	Iodine working solution,	
B.4	Sampling		
B.5	Determin	ation	16
B.6	Calculati	on	16
B.7	Test repo	rt	16
Annex C (info	rmative) Ge	atinization	17
Annex D (info	rmative) Re	sults of interlaboratory test for husked rice	yields21
Annex E (infor	rmative) Ext	raneous information	22
Append	ix 1		22
Bibliography	′		23
Figure A.1 – S	plit-it-right	sample divider	14
Figure C.1 – T	ypical gelat	nization curve	17
		s: No grains are fully gelatinized (ungelatinized	
Figure C.2-2 –	Intermedia	e stages: Some fully gelatinized kernels are vis	ible 19
Figure C.2-3 –	Final stage:	: All kernels are fully gelatinized	20
Figure C.2 – S	tages of gel	atinization	18
Table 1 – Max	imum perm	ssible mass fraction of defects	10
Table D.1 – Re	epeatability	and reproducibility of husked rice yield	21

- 4 - © IEC:2016

INTERNATIONAL ELECTROTECHNICAL COMMISSION

CEREALS AND PULSES — SPECIFICATIONS AND TEST METHODS —

Part 1: Rice

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 17301 has been prepared by subcommittee 4: Cereals and pulses, of IEC technical committee 34:Food products.

This second edition cancels and replaces the first edition published in 2009. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) updated normative references;
- b) deletion of 4.3.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
XX/XX/FDIS	XX/XX/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

© IEC:2016 – 5 –

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- · withdrawn,
- replaced by a revised edition, or
- amended.

WARNING – The National Committees are requested to note that for this document the stability date is 2025.

THIS TEXT IS INCLUDED FOR THE INFORMATION OF THE NATIONAL COMMITTEES AND WILL BE DELETED AT THE PUBLICATION STAGE.

-6- © IEC:2016

INTRODUCTION

This document was developed in response to worldwide demand for minimum specifications for rice traded internationally, since most commercial bulks of grain, which have not been screened or aspirated, contain a proportion of other grains, weed seeds, chaff, straw, stones, sand, etc. The vegetable materials can have physical and biological properties which differ from those of the main constituent and can therefore affect the storage behaviour.

Rice is a permanent host to a considerable microflora; most of these microorganisms are cosmopolitan, the majority are innocuous, but some produce harmful by-products. Microflora communities present on freshly harvested rice include many types of bacteria, moulds and yeasts. While the rice is ripening and its moisture content is falling, the number of field microorganisms, mainly bacteria, diminishes. When the rice is harvested, it is invaded by storage microorganisms and the field microflora gradually dies out. If the mass fraction of moisture (formerly expressed as moisture content) is less than 18 %, the microflora does not multiply, whereas above 18 % it does so rapidly. Thus, at harvest, the qualitative and the quantitative composition of the microflora depends more upon ecological factors than upon the variety of the rice. During transport and storage, additions to the microfloral population occur. Microorganisms on the rice at harvest tend to die out during storage and are replaced by microorganisms adapted to storage conditions.

Storage losses have been estimated as being an average of 5 %, and as much as 30 %, especially in countries with climates favourable to the rapid development of agents of deterioration and where storage techniques are poorly developed, such as developing countries in the damp tropics. The magnitude of these figures highlights the need to promote throughout the world a rapid improvement in techniques of conservation.

The International Organization for Standardization (ISO) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent concerning sample dividers given in Annex A and shown in Figure A.1.

ISO takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured ISO that he/she is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with ISO. Information may be obtained from:

Vache Equipment Fictitious World gehf@vacheequipment.fic

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ISO shall not be held responsible for identifying any or all such patent rights.

© IEC:2016 – 7 –

CEREALS AND PULSES — SPECIFICATIONS AND TEST METHODS —

Part 1: Rice

1 Scope

This document specifies minimum requirements and test methods for rice (Oryza sativa L.).

It is applicable to husked rice, husked parboiled rice, milled rice and milled parboiled rice, suitable for human consumption, directly or after reconditioning.

It is not applicable to cooked rice products.

2 Normative References

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 712 (all parts), Cereals and cereal products – Determination of moisture content

ISO 6646 (all parts), Rice - Determination of the potential milling yield from paddy and from husked rice

ISO 8351-1:1994, Packaging — Method of specification for sacks — Part 1: Paper sacks

ISO 8351-2, Packaging — Method of specification for sacks — Part 2: Sacks made from thermoplastic flexible film

ISO 16634:—1, Cereals, pulses, milled cereal products, oilseeds and animal feeding stuffs—Determination of the total nitrogen content by combustion according to the Dumas principle and calculation of the crude protein content

ISO 20483:2013, Cereals and pulses — Determination of the nitrogen content and calculation of the crude protein content — Kjeldahl method

ISO 24333:2009, Cereals and cereal products—Sampling

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1 paddy paddy rice rough rice

¹ Under preparation. (Stage at the time of publication ISO/DIS 16634)

- 8 - © IEC:2016

rice retaining its husk after threshing

[SOURCE: ISO 7301:2011, Clause 3.1]

3.2

husked rice

DEPRECATED: cargo rice

paddy (3.1) from which the husk only has been removed

[SOURCE: ISO 7301:2011, Clause 3.2, modified — The term "cargo rice" is shown as deprecated, and Note 1 to entry is not included here]

3.3

milled rice

white rice

husked rice (3.2) from which almost all of the bran and embryo have been removed by milling

[SOURCE: ISO 7301:2011, Clause 3.3]

3.4

parboiled rice

rice whose starch has been fully gelatinized by soaking *paddy* (3.1) rice or *husked rice* (3.2) in water followed by a heat treatment and a drying process

3.5

waxy rice

<ri>ce>variety of rice whose kernels have a white and opaque appearance

organic and inorganic components other than whole or broken kernels

ΕM

EXAMPLE Foreign seeds, husks, bran, sand, dust.

3.6

HDK

heat-damaged kernel

kernel, whole or broken, which has changed its normal colour as a result of heating

Note 1 to entry: This category includes whole or broken kernels that are yellow due to alteration. Parboiled rice in a batch of non-parboiled rice is also included in this category.

3.7

damaged kernel

kernel, whole or broken, showing obvious deterioration due to moisture, pests, disease or other causes, but excluding *HDK* (3.6)

3.8

immature kernel

unripe kernel

kernel, whole or broken, which is unripe and/or underdeveloped

3 9

husked rice yield

amount of husked rice obtained from paddy

[SOURCE: ISO 6646, Clause 3.1]

© IEC:2016 – 9 –

3.10

nitrogen content

quantity of nitrogen determined after application of the procedure described

Note 1 to entry: It is expressed as a mass fraction of dry product, as a percentage.

[SOURCE: ISO 20483:2013, Clause 3.1]

3.11

crude protein content

quantity of crude protein obtained from the nitrogen content as determined by applying the specified method, calculated by multiplying this content by an appropriate factor depending on the type of cereal or pulse

Note 1 to entry: It is expressed as a mass fraction of dry product, as a percentage.

[SOURCE: ISO 20483:2013, Clause 3.1]

3.12

gelatinization

hydration process conferring the jelly-like state typical of the coagulated colloids, which are named gels, on kernels

Note 1 to entry: See Figure C.1.

[SOURCE: ISO 14864:1998, Clause 3.1]

3.13

gel state

condition reached as a consequence of *gelatinization* (3.12), when the kernel is fully transparent and absolutely free from whitish and opaque granules after being pressed between two glass sheets

[SOURCE: ISO 14864:1998, Clause 3.1]

3.14

gelatinization time

 t_{90}

time necessary for 90 % of the kernels to pass from their natural state to the *gel state* (3.13)

[SOURCE: ISO 14864:1998, Clause 3.1]

4 Specifications

4.1 General, organoleptic and health characteristics

Kernels of rice, whether parboiled, husked or milled, and whether whole or broken, shall be sound, clean and free from foreign odours or odour which indicates deterioration.

The levels of additives and pesticide residues and other contaminants shall not exceed the maximum limits permitted in the country of destination.

The presence of living insects which are visible to the naked eye is not permitted. This should be determined before separating the bulk sample into test samples.

4.2 Physical and chemical characteristics

4.2.1

The mass fraction of moisture, determined in accordance with ISO 712, using an oven complying with the requirements of IEC 61010-2-010 RLV, shall not be greater than 15%.2

The mass fraction of extraneous matter and defective kernels in husked and milled rice, whether or not parboiled, determined in accordance with Annex A, shall not be greater than the values specified in Table 1.

NOTE Lower mass fractions of moisture are sometimes needed for certain destinations depending on the climate, duration of transport and storage. For further details, see ISO 6322-1, ISO 6322-2 and ISO 6322-3.

4.2.2

The defect tolerance for the categories considered, and determined in accordance with the method given in Annex A, shall not exceed the limits given in Table 1.

Table 1 — Maximum permissible mass fraction of defects

	Max	imum permissible mass fr $w_{ m T}$	raction of defects in husk max	ed rice
Defect	in husked rice	in milled rice (non-glutinous)	in husked parboiled rice	in milled parboiled rice
Extraneous matter: organica	1,0	0,5	1,0	0,5
Extraneous matter: inorganic ^b	0,5	0,5	0,5	0,5
Paddy	2,5	0,3	2,5	0,3
Husked rice, non-parboiled	Not applicable	1,0	1,0	1,0
Milled rice, non-parboiled	1,0	Not applicable	1,0	1,0
Husked rice, parboiled	1,0	1,0	Not applicable	1,0
Milled rice, parboiled	1,0	1,0	1,0	Not applicable
Chips	0,1	0,1	0,1	0,1
HDK	2,0°	2,0	2,0°	2,0
Damaged kernels	4,0	3,0	4,0	3,0
Immature and/or malformed kernels	8,0	2,0	8,0	2,0
Chalky kernels	5,0c	5,0	Not applicable	Not applicable
Red kernels and red- streaked kernels	12,0	12,0	12,0°	12,0
Partly gelatinized kernels	Not applicable	Not applicable	11,0°	11,0
Pecks	Not applicable	Not applicable	4,0	2,0
Waxy rice	1,0°	1,0	1,0°	1,0

Live insects shall not be present. Dead insects shall be included in extraneous matter.

NOTE 1 This table is based on ISO 7301:2011, Table 1.

NOTE 2 Some commercial contracts require information in addition to that provided in this table.

NOTE 3 Only full red husked (cargo) rice is considered in this table.

- Organic extraneous matter includes foreign seeds, husks, bran, parts of straw, etc.
- b Inorganic extraneous matter includes stones, sand, dust, etc.
- ^c The maximum permissible mass fraction of defects shall be determined with respect to the mass fraction obtained after milling.

² Formerly denoted as 15 % (m/m).

© IEC:2016 – 11 –

5 Sampling

Sampling shall be carried out in accordance with ISO 24333:2009, Clause 5

6 Test methods

6.1 Moisture content

Determine the mass fraction of moisture in accordance with the method specified in ISO 712.

6.2 Waxy rice content

Determine the mass fraction of waxy rice. Annex B gives an example of a suitable method.

6.3 Nitrogen content and crude protein content

Determine the nitrogen content and crude protein content in accordance with either ISO 16634:--, Clause 9, or ISO 20483:2013. For details on the determination of protein content using the Kjeldahl method, see Reference [10] in the Bibliography. For details concerning the use of the Dumas method, see References [15] and [16].

Calculate the crude protein content of the dry product by multiplying the value of the nitrogen content by the conversion factor specified in ISO 20483:2013, Annex C and Table C.1, that is adapted to the type of cereals or pulses [11][12] and to their use.

6.4 Gelatinization time

Determine the gelatinization time, t_{90} , for rice kernels during cooking. An example of a typical curve is given in Figure C.1. Three typical stages of gelatinization are shown in Figure C.2.

Report the results as specified in Clause 7.

6.5 Husked rice yield

6.5.1 Determination

CAUTION - Only use paddy or parboiled rice for the determination of husked rice yield.

Determine the husked rice yield in accordance with ISO 6646.

6.5.2 Precision

6.5.2.1 Interlaboratory test

The results of an interlaboratory test are given in Annex D for information

6.5.2.2 Repeatability

The absolute difference between two independent single test results, obtained using the same method on identical test material in the same laboratory by the same operator using the same equipment within a short interval of time, shall not exceed the arithmetic mean of the values for r obtained from the interlaboratory study for husked rice in more than 5 % of cases:

$$r = 1\% \tag{1}$$

where

r is the repeatability limit.

- 12 - © IEC:2016

6.5.2.3 Reproducibility

The absolute difference between two single test results, obtained using the same method on identical test material in different laboratories by different operators using different equipment, shall not exceed the arithmetic mean of the values for R obtained from the interlaboratory study in more than 5 % of cases:

$$R = 3\% \tag{2}$$

where

R is the reproducibility limit.

7 Test report

For each test method, the test report shall specify the following:

- a) all information necessary for the complete identification of the sample;
- b) a reference to this document (i.e. ISO 17301-1);
- c) the sampling method used;
- d) the test method used;
- e) the test result(s) obtained or, if the repeatability has been checked, the final quoted result obtained;
- f) all operating details not specified in this document, or regarded as optional, together with details of any incidents which may have influenced the test result(s);
- g) any unusual features (anomalies) observed during the test;
- h) the date of the test.

8 Packaging

The packaging shall not transmit any odour or flavour to the product and shall not contain substances which may damage the product or constitute a health risk.

If bags are used, they shall comply with the requirements of ISO 8351-1:1994, Clause 9, or ISO 8351-2, as appropriate.

9 Marking

The packages shall be marked or labelled as required by the country of destination.

© IEC:2016 – 13 –

Annex A

(normative)

Determination of defects

A.1 Principle

Extraneous matter, broken kernels, damaged kernels and other kinds of rice are separated manually according to the following types: husked rice, milled rice, husked parboiled rice and milled parboiled rice. Each type is then weighed.

A.2 Apparatus

The usual laboratory apparatus and, in particular, the following.

- **A.2.1 Sample divider,** consisting of a conical sample divider or multiple-slot sample divider with a distribution system, e.g. "Split-it-right" sample divider, such as that shown in Figure A.1.
- **A.2.2 Sieve,** with round perforations of diameter 1,4 mm.
- A.2.3 Tweezers.
- A.2.4 Scalpel.
- A.2.5 Paintbrush.
- **A.2.6 Steel bowls,** of diameter 100 mm \pm 5 mm; seven per test sample.
- **A.2.7 Balance,** which can be read to the nearest 0,01 g.

A.3 Sampling

See Clause 5.

A.4 Procedure

A.4.1 Preparation of test sample

Carefully mix the laboratory sample to make it as uniform as possible, then proceed to reduce it, using a divider (A.2.1), until a quantity of about 30 g is obtained.

All parts of kernels which get stuck in the perforations of a sieve should be considered to be retained by the sieve.

- 14 - © IEC:2016

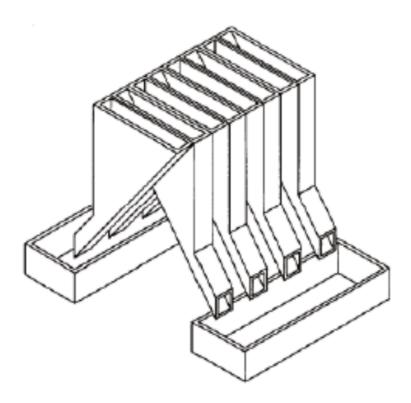


Figure A.1 — Split-it-right sample divider

A.5 Determination

Weigh, to the nearest 0,1 g, one of the test samples obtained in accordance with A.4.1 and separate the different defects into the bowls (A.2.6). When a kernel has several defects, classify it in the defect category for which the maximum permissible value is the lowest (see Table 1).

Weigh, to the nearest 0,01 g, the fractions so obtained.

A.6 Calculation

Express the mass fraction of each defect using Equation (A.1):

$$w = \frac{m_D}{m_S} \tag{A.1}$$

where

w is the mass fraction of grains with a particular defect in the test sample;

 $m_{D}\,\,$ is the mass, in grams, of grains with that defect;

 m_S is the mass, in grams, of the test sample.

A.7 Test report

Report the results as specified in Clause 7.

© IEC:2016

Annex B

(informative)

Determination of the waxy rice content of parboiled rice

B.1 Principle

Waxy rice kernels have a reddish brown colour when stained in an iodine solution, while non-waxy rice kernels show a dark blue colour.

B.2 Apparatus

The usual laboratory apparatus and, in particular, the following.

- **B.2.1 Balance,** capable of weighing to the nearest 0,01 g.
- **B.2.2** Glass beaker, of capacity 250 ml.
- **B.2.3 Small white colour bowls,** or any white colour container of a suitable size.
- **B.2.4** Wire sieve, with long rounded apertures of $(1 \text{ mm} + 0.02 \text{ mm}) \times (20 \text{ mm} + 2 \text{ mm})$.
- B.2.5 Stirrer rod.
- **B.2.6** Tweezers or forceps.
- **B.2.7** Tissue paper.

B.3 Reagents

WARNING - Direct contact of iodine with skin can cause lesions so care should be taken in handling iodine. Iodine vapour is very irritating to eyes and mucous membranes.

- **B.3.1 Deionized water,** Grade 3 quality as specified in ISO 3696:1987.
- **B.3.2 Iodine stock solution,** containing a mass fraction of 4,1 % iodine and 6,3 % potassium iodide in deionized water such as Lugols.³
- **B.3.3 Iodine working solution,** obtained by diluting the stock solution (B.3.2) two times (by volume) with deionized water (B.3.1).

Prepare fresh daily.

B.4 Sampling

Sampling shall be carried out in accordance with Clause 5.

³ Lugols is an example of a suitable product available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO of this product.

- 16 - © IEC:2016

B.5 Determination

B.5.1

Weigh a portion of about 100 g of milled rice and put it into a glass beaker (B.2.2).

B.5.2

Add enough iodine working solution (B.3.3) to soak the kernels, and stir (B.2.5) until all the kernels are submerged under the solution. Let the kernels soak in the solution for 30 s.

B.5.3

Pour the rice and solution into a wire sieve (B.2.4), and shake the basket slightly in order to drain out the solution. Then place the wire sieve on a piece of tissue paper (B.2.7) to absorb the excess liquid.

B.5.4

Pour the stained kernels into a bowl (B.2.3). Using tweezers or forceps (B.2.6), separate the reddish brown kernels of waxy rice from the dark blue kernels of non-waxy rice.

B.5.5

Weigh the waxy rice portion (m_1) and the non-waxy rice portion (m_2) to the nearest 0,1 g.

B.6 Calculation

Calculate the mass fraction, expressed as a percentage, of the waxy rice, w_{wax} , using Equation (B.1):

$$w_{wax} = \frac{m_1}{m_1 + m_2} \times 100 \tag{B.1}$$

where

 m_1 is the mass, expressed in grams, of the waxy rice portion;

 m_2 is the mass, expressed in grams, of the non-waxy rice portion.

B.7 Test report


Report the results as specified in Clause 7, giving the results calculated using B.6, Equation (B.1).

© IEC:2016 – 17 –

Annex C (informative)

Gelatinization

Figure C.1 gives an example of a typical gelatinization curve. Figure C.2 shows the three stages of gelatinization.

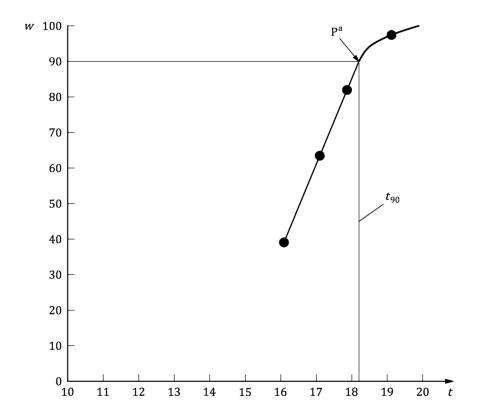

Key

w mass fraction of gelatinized kernels, expressed in per cent

t cooking time, expressed in minutes

 t_{90} $\,\,$ time required to gelatinize 90 % of the kernels

P point of the curve corresponding to a cooking time of t_{90}

The time t_{90} was estimated to be 18,2 min for this example.

 ${\tt NOTE} \qquad {\tt These} \ {\tt results} \ {\tt are} \ {\tt based} \ {\tt on} \ {\tt a} \ {\tt study} \ {\tt carried} \ {\tt out} \ {\tt on} \ {\tt three} \ {\tt different} \ {\tt types} \ {\tt of} \ {\tt kernel}.$

 $\ \ \, \textbf{Figure C.1} - \textbf{Typical gelatinization curve} \\$

– 18 – © IEC:2016

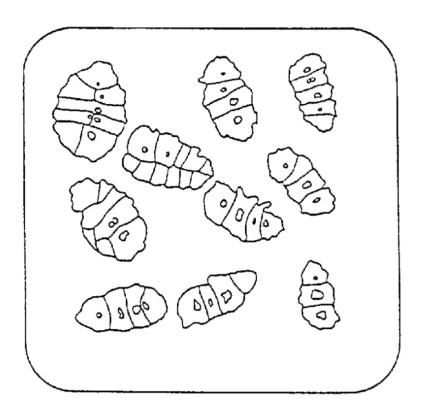


Figure C.2-1 — Initial stages: No grains are fully gelatinized (ungelatinized starch granules are visible inside the kernels)

© IEC:2016 - 19 -

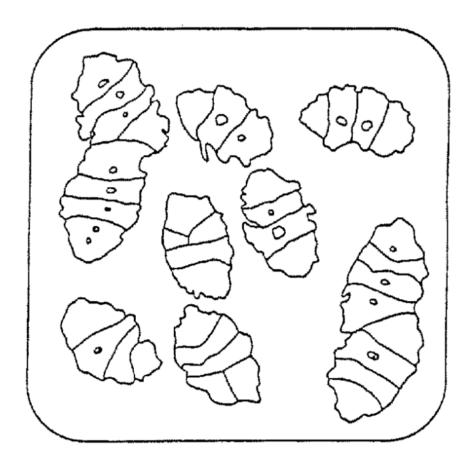


Figure C.2-2 - Intermediate stages: Some fully gelatinized kernels are visible

– 20 – © IEC:2016

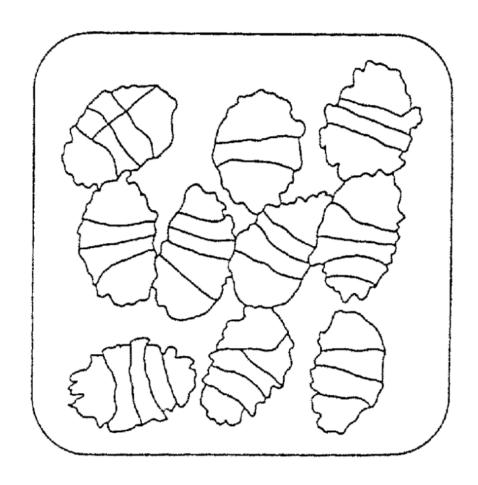


Figure C.2-3 — Final stages: All kernels are fully gelatinized $\mbox{Figure C.2} - \mbox{Stages of gelatinization}$

© IEC:2016 – 21 –

Annex D

(informative)

Results of interlaboratory test for husked rice yields

An interlaboratory test [14] was carried out by the ENR [Rice Research Centre (Italy)] in accordance with ISO 5725-1 and ISO 5725-2, with the participation of 15 laboratories. Each laboratory carried out three determinations on four different types of kernel. The statistical results are shown in Table D.1.

Table D.1 - Repeatability and reproducibility of husked rice yield

Parantotico.	Rice sample			
Description	Arborio	Dragoa	Balilla	Thaibonnet
Number of laboratories retained after eliminating outliers	13	11	13	13
Mean value, g/100 g	81,2	82,0	81,8	77,7
Standard deviation of repeatability, $s_{ec{r}}$, g/100 g	0,41	0,15	0,31	0,53
Coefficient of variation of repeatability, %	0,5	0,2	0,4	0,7
Repeatability limit, $r = 2,83 s_r$	1,16	0,42	0,88	1,50
Standard deviation of reproducibility, s_R , g/100 g	1,02	0,20	0,80	2,14
Coefficient of variation of reproducibility, %	1,3	0,2	1,0	2,7
Reproducibility limit, $R = 2,83 s_R$	2,89	0,57	2,26	6,06

- 22 - © IEC:2016

Annex E

(informative)

Extraneous information

This appendix is not in the original Rice model document, and is inserted to illustrate elements absent from that document: block quotes, source code, and examples.

This International Standard gives the minimum specifications for rice (*Oryza sativa* L.) which is subject to international trade. It is applicable to the following types: husked rice and milled rice, parboiled or not, intended for direct human consumption. It is neither applicable to other products derived from rice, nor to waxy rice (glutinous rice).

— ISO, ISO 7301:2011, Clause 1

Appendix 1 Appendix 1

```
EXAMPLE — Sample Code

puts "Hello, world."
%w{a b c}.each do |x| <1>
  puts x
end
<1> This is an annotation
```

© IEC:2016 – 23 –

Bibliography

ISO 3696:1987, Water for analytical laboratory use — Specification and test methods

ISO 5725-1, Accuracy (trueness and precision) of measurement methods and results — Part 1: General principles and definitions

ISO 5725-2, Accuracy (trueness and precision) of measurement methods and results—Part 2: Basic method for the determination of repeatability and reproducibility of a standard measurement method

ISO 6322-1, Storage of cereals and pulses — Part 1: General recommendations for the keeping of cereals

ISO 6322-2, Storage of cereals and pulses — Part 2: Practical recommendations

ISO 6322-3, Storage of cereals and pulses—Part 3: Control of attack by pests

ISO 7301:2011, Rice — Specification

ISO 14864:1998, Rice — Evaluation of gelatinization time of kernels during cooking

IEC 61010-2-010 RLV, Safety requirements for electrical equipment for measurement, control and laboratory use —Part 2-010: Particular requirements for laboratory equipment for the heating of materials

Berner D.L., & Brown J. Protein nitrogen combustion method collaborative study I. Comparison with Smalley total Kjeldahl nitrogen and combustion results. *J. Am. Oil Chem. Soc.* 1994, **71** (11) pp 1291-1293

BUCKEE G.K. Determination of total nitrogen in barley, malt and beer by Kjeldahl procedures and the Dumas combustion method—Collaborative trial. *J. Inst. Brew.* 1994, **100** (2) pp 57-64

FRISTER H. Direct determination of nitrogen content by Dumas analysis; Interlaboratory study on precision characteristics. AOAC International, Europe Section 4th International Symposium, Nyon, Switzerland, 1994, 33 pp

Nitrogen-ammonia-protein modified Kjeldahl method — Titanium oxide and copper sulfate catalyst. *Official Methods and Recommended Practices of the AOCS* (ed. Firestone, D.E.), AOCS Official Method Ba Ai 4-91, 1997, AOCS Press, Champaign, IL

RANGHINO F. Evaluation of rice resistance to cooking, based on the gelatinization time of kernels. *Il Riso*. 1966, **XV** pp 117-127

Standard No I.C.C 167. Determination of the protein content in cereal and cereal products for food and animal feeding stuffs according to the Dumas combustion method (see http://www.icc.or.at)

TKACHUK R. Nitrogen-to-protein conversion factors for cereals and oilseed meals. *Cereal Chem.* 1969, **46** (4) pp 419-423