


C / DISPLAY SCULPT

Actual FreeCAD TechDraw projections; drawing dimensions, not a fit certification.

FRONT / face towards -Y

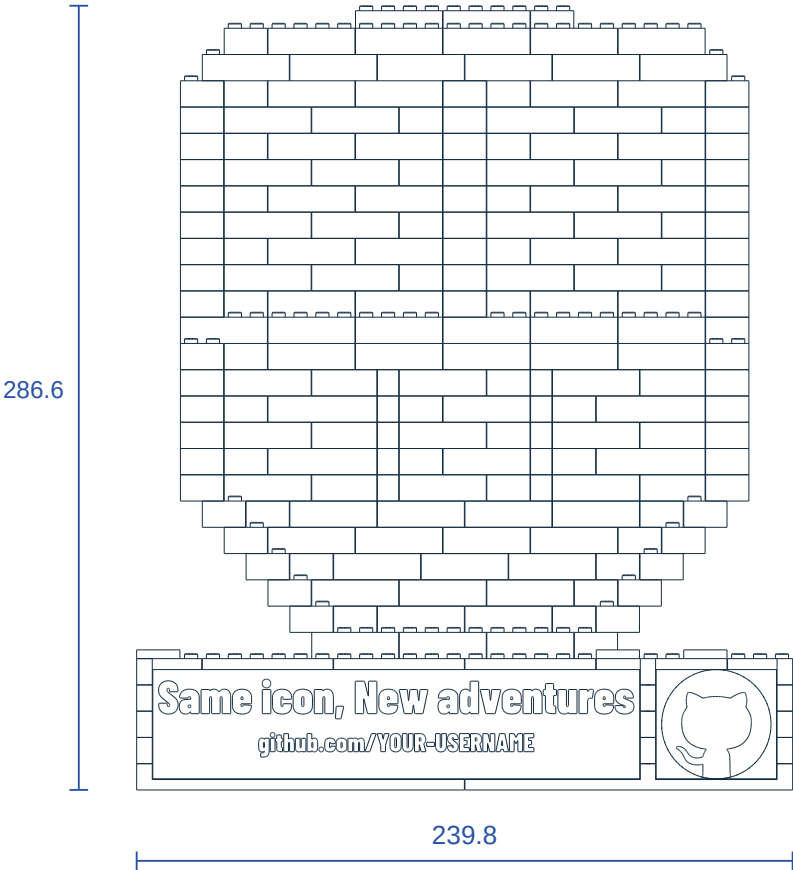


228 assembled parts / 33 numbered stages


Target: 240 x 112 x 288.4 (approx. height)

Measured CAD envelope: 239.8 x 111.8 x 286.6 incl. top studs

RIGHT SIDE

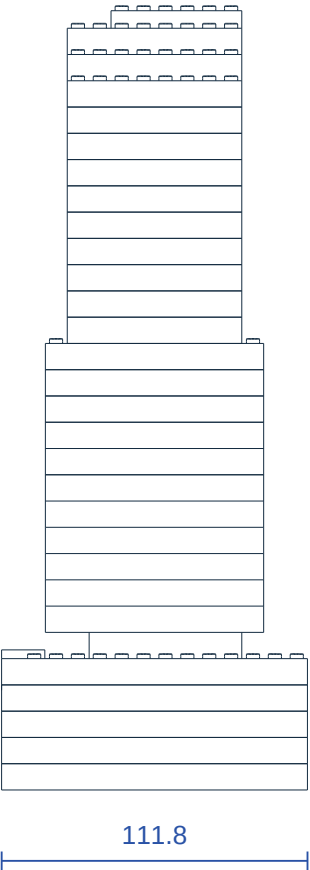


TOP / front at bottom

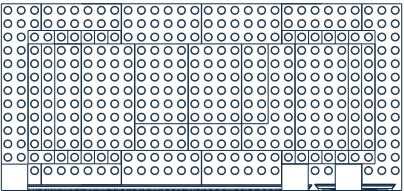

C / EXPLODED ASSEMBLY

CAD-derived exploded view; displacement is illustrative, dimensions are not changed.

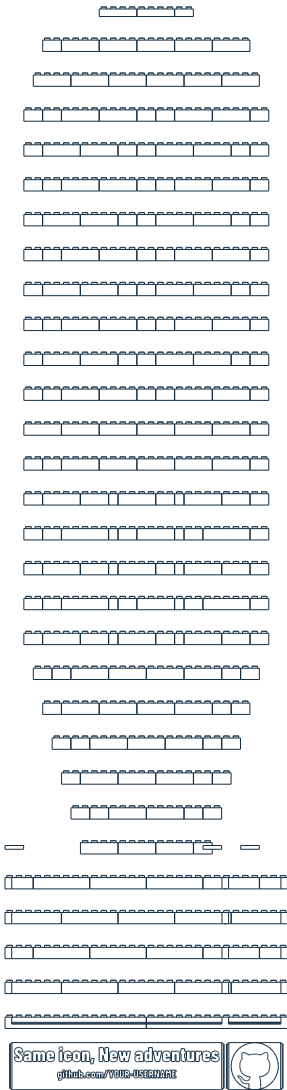

EXPLODED FRONT

Actual solids, displaced only for this view.

Exact WebGL 100% offsets, centered up/down.

Do not measure assembly height here.

Use overview for final outside dimensions.

Insert parts downward in numbered order.


Front modules release before spreading.

Stud engagement != verified physical clutch.

TEXT / flat printing view




RIGHT LOGO / supported relief



INTERFACE / SECTION & CLEARANCE


Project design candidates, NOT a proprietary tolerance standard. Geometry from FreeCAD planar sections.

SECTION: Y = 4.00 / TWO 2x2 BRICKS

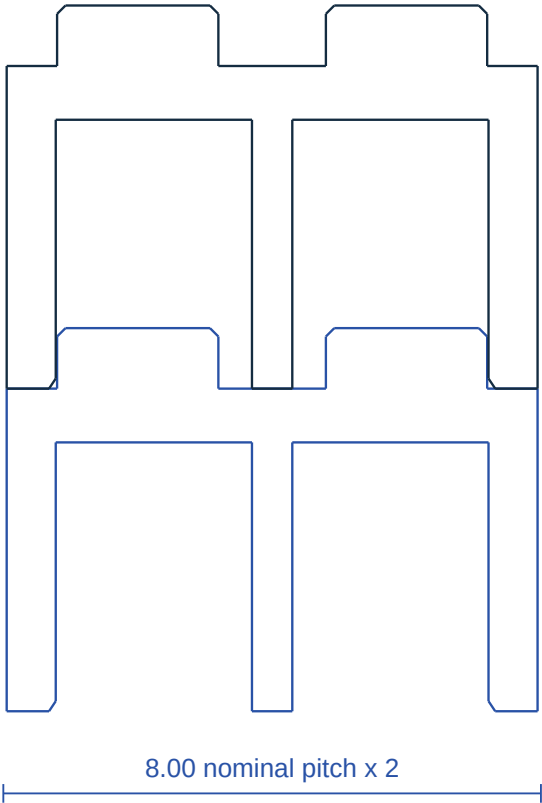

JOINT SECTION: Z = 10.50

Actual wall, tube, rib + mating stud outlines

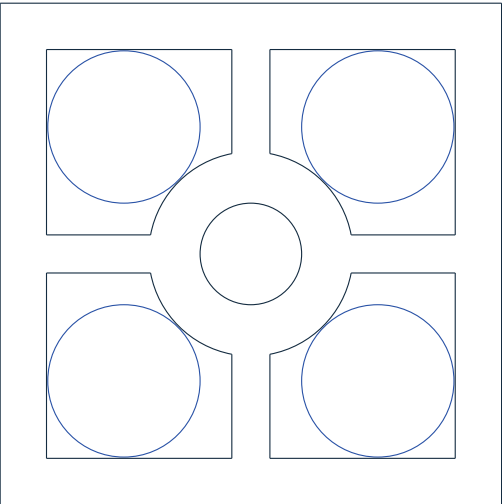

Blue: lower brick / black: upper socket

Reference stud dia 4.80; candidate height 1.80

Radial clearance $c=+0.04$ (default; untested)

Inside wall offset 1.56 / wall thickness 1.46

Tube OD 6.433708 / ID 3.20; grid rib 1.20

Tip lead-in 0.25 / female lead-in 0.20 x 0.30

Roof 1.60; thin plate roof 1.00


Thin plate / keeper: nominal headroom 0.40

No forced fit. Tune male and female separately.


NP3 / BASE-FRONT CAPTURE & REMOVAL

Actual BREP sections; precise dimensions apply to the nominal model, not guaranteed printed fit.

B / HORIZONTAL SECTION Z=24 / FRONT 8mm BAND

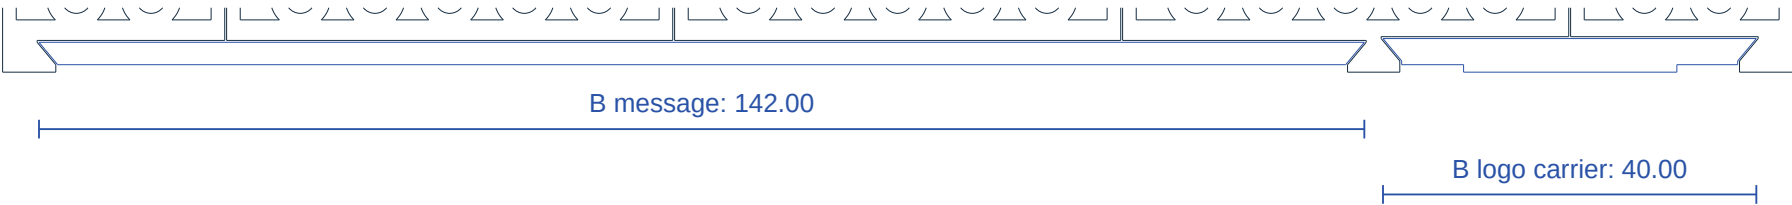

VERTICAL SECTION X=40

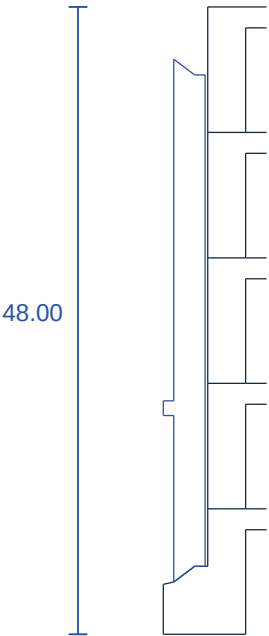

Blue: installed modules; black: actual receiver / keepers

Carrier thickness2.40 / rear flat0.80 / edge relief1.20

Rear width -> front width: 2.00 inset on each X side

Default side clearance0.20; coupon candidates0.15/0.20/0.25

Text backY=3.30; logo backY=3.70; relief frontY=0.10

Both front modules fit in Z=4.00..44.00, inside48mm base

3 separate up-stops: text2 / logo1; stud-grid mounting

Remove: up-stops up6, forward>=32; module up45

Thread / glue / magnet / purchased fastener not required

Physical clutch, retention, flatness and stability NOT tested

C / COLOR BOM / 1

One STL geometry may be printed in several colors. Use the quantities for this model only.

PART ID	COLOR	QTY	PRINT FILE
BASE3-03x14-T-08700f	black	2	parts/BASE3-03x14-T-08700f.stl
BASE3-03x14-T-d96cba	black	2	parts/BASE3-03x14-T-d96cba.stl
BASE3-06x14-T-26e6b0	black	2	parts/BASE3-06x14-T-26e6b0.stl
BASE3-06x14-T-5258a8	black	2	parts/BASE3-06x14-T-5258a8.stl
BASE3-06x14-T-72d551	black	2	parts/BASE3-06x14-T-72d551.stl
BASE3-06x14-T-afd244	black	2	parts/BASE3-06x14-T-afd244.stl
BASE3-06x14-T-f6d8b7	black	10	parts/BASE3-06x14-T-f6d8b7.stl
BASE3-15x14-B-2f9fc1	black	1	parts/BASE3-15x14-B-2f9fc1.stl
BASE3-15x14-B-65597c	black	1	parts/BASE3-15x14-B-65597c.stl
BR-01x06-H096	green	10	parts/BR-01x06-H096.stl
BR-02x06-H064	magenta	1	parts/BR-02x06-H064.stl
BR-02x06-H096	black	36	parts/BR-02x06-H096.stl
BR-02x07-H096	magenta	1	parts/BR-02x07-H096.stl
BR-02x08-H096	cyan	29	parts/BR-02x08-H096.stl
BR-02x10-H096	magenta	22	parts/BR-02x10-H096.stl
BR-03x06-H096	black	6	parts/BR-03x06-H096.stl
BR-04x06-H064	magenta	2	parts/BR-04x06-H064.stl
BR-04x06-H096	black	68	parts/BR-04x06-H096.stl
BR-04x07-H096	magenta	3	parts/BR-04x07-H096.stl
BR-04x08-H096	cyan	17	parts/BR-04x08-H096.stl
BR-05x06-H096	black	4	parts/BR-05x06-H096.stl
NP3-KEEPER	black	3	parts/NP3-KEEPER.stl
NP3-LOGO-C	black	1	parts/NP3-LOGO-C.stl
NP3-TEXT-C	black	1	parts/NP3-TEXT-C.stl

TEXT: black -> white at 2.4mm; LOGO: black -> white at 2.8mm. Separate plates.

Assembly: 228 pieces, including 2 front modules + 3 keepers. Coupons separate.

C / STEP 01 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color


ADD 2 PART(S)

C-001 BLACK

BASE3-15x14-B-2f9fc1 @ 0,0,0

C-002 BLACK

BASE3-15x14-B-65597c @ 120,0,0

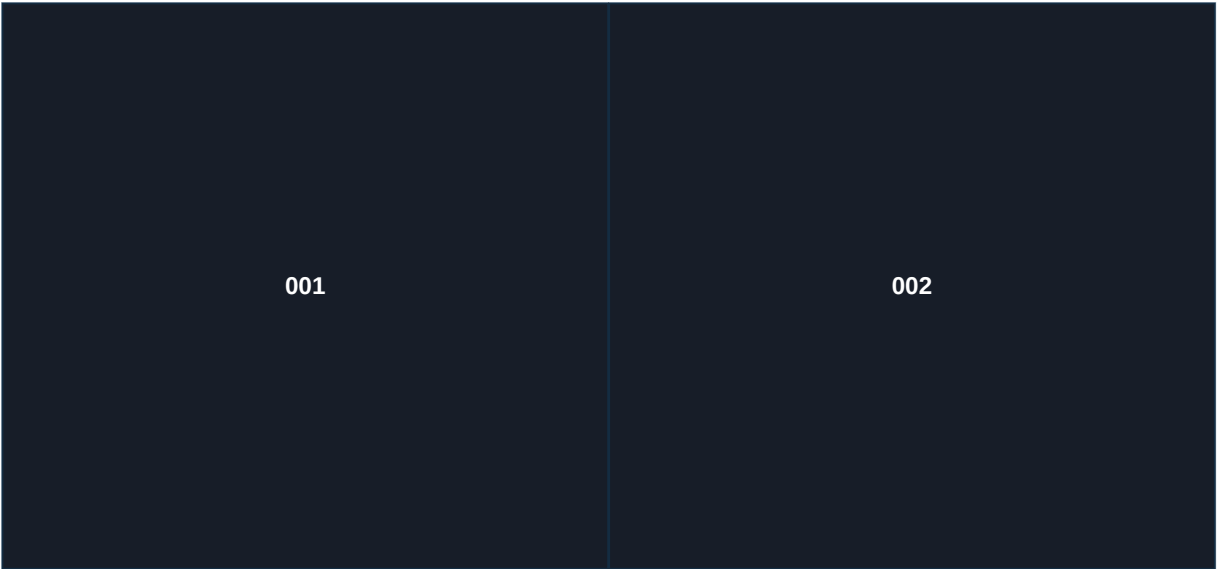

Arrange two halves side-by-side.
Next course spans the center seam.


nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

C / STEP 02 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

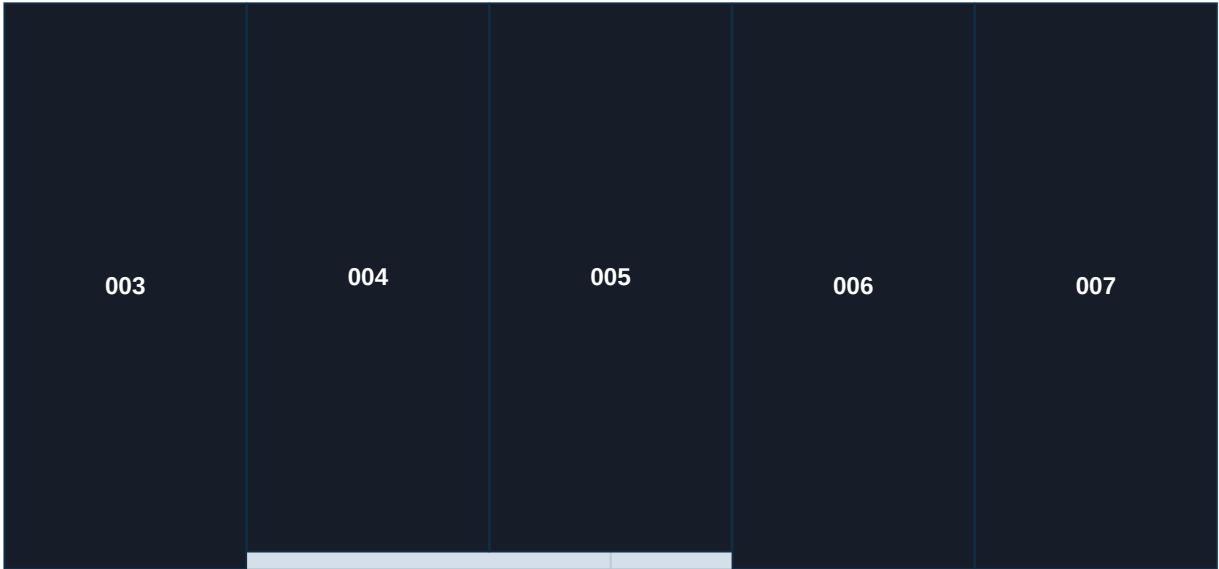

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 5 PART(S)

C-003 BLACK

BASE3-06x14-T-72d551 @ 0,0,9.6

C-004 BLACK

BASE3-06x14-T-f6d8b7 @ 48,0,9.6

C-005 BLACK

BASE3-06x14-T-f6d8b7 @ 96,0,9.6

C-006 BLACK

BASE3-06x14-T-afd244 @ 144,0,9.6


C-007 BLACK

BASE3-06x14-T-26e6b0 @ 192,0,9.6

C / STEP 03 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

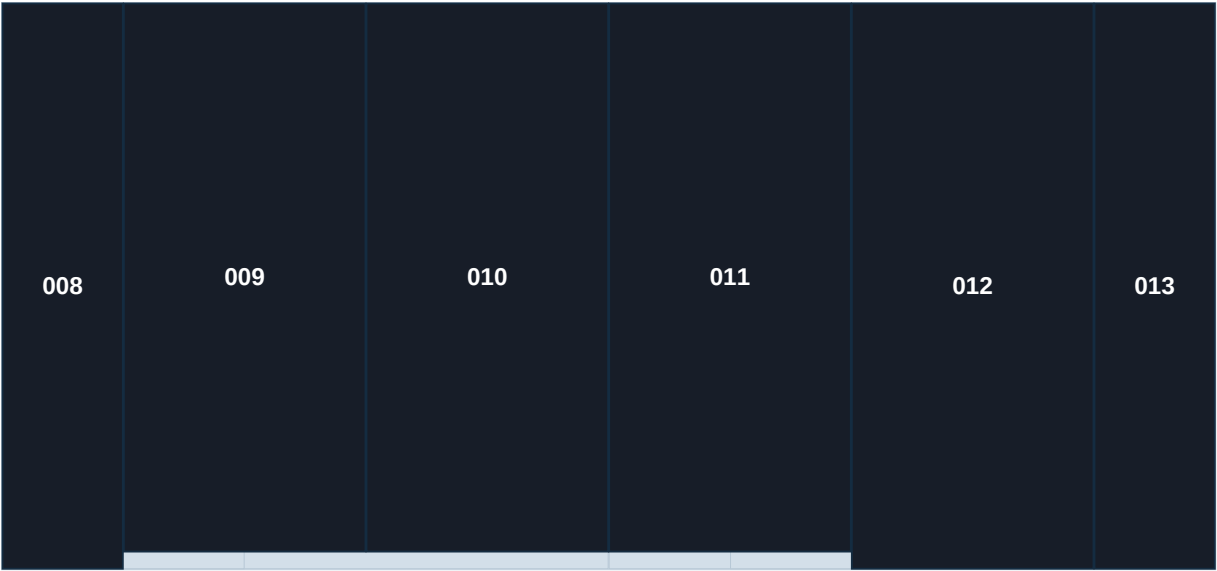

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 6 PART(S)

C-008 BLACK

BASE3-03x14-T-08700f @ 0,0,19.2

C-009 BLACK

BASE3-06x14-T-f6d8b7 @ 24,0,19.2

C-010 BLACK

BASE3-06x14-T-f6d8b7 @ 72,0,19.2

C-011 BLACK

BASE3-06x14-T-f6d8b7 @ 120,0,19.2

C-012 BLACK

BASE3-06x14-T-5258a8 @ 168,0,19.2


C-013 BLACK

BASE3-03x14-T-d96cba @ 216,0,19.2

C / STEP 04 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

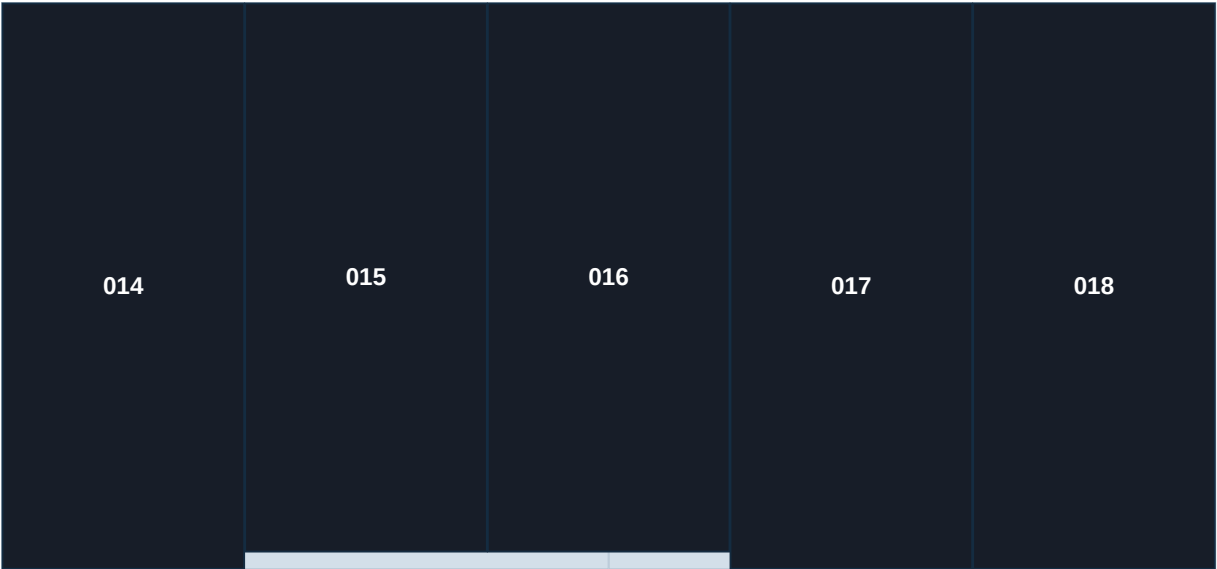

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 5 PART(S)

C-014 BLACK

BASE3-06x14-T-72d551 @ 0,0,28.8

C-015 BLACK

BASE3-06x14-T-f6d8b7 @ 48,0,28.8

C-016 BLACK

BASE3-06x14-T-f6d8b7 @ 96,0,28.8

C-017 BLACK

BASE3-06x14-T-afd244 @ 144,0,28.8


C-018 BLACK

BASE3-06x14-T-26e6b0 @ 192,0,28.8

C / STEP 05 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

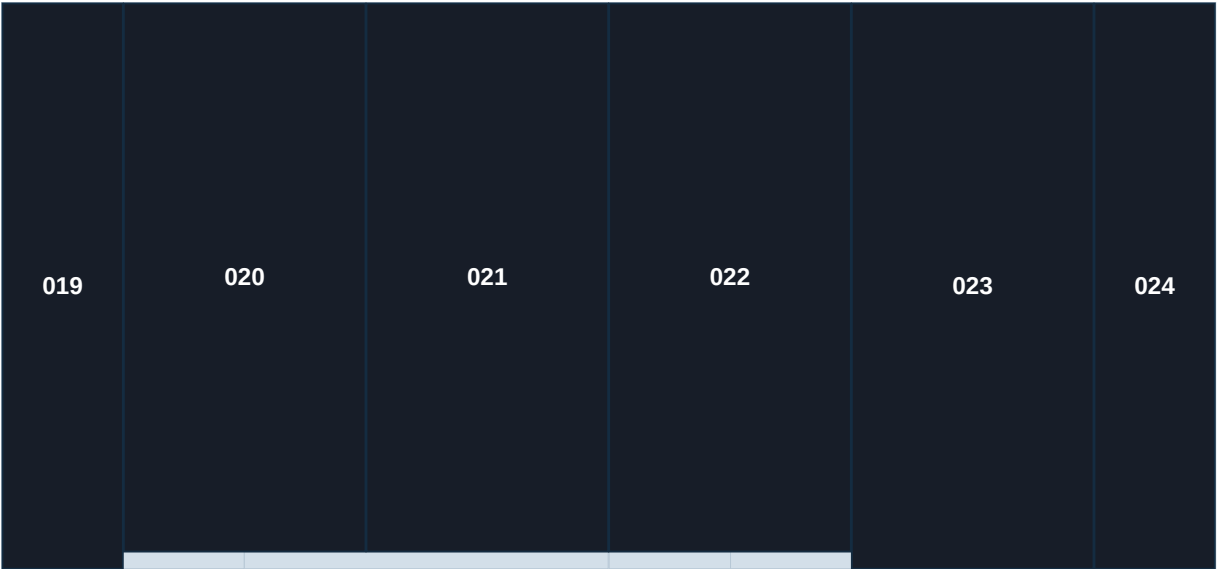

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 6 PART(S)

C-019 BLACK

BASE3-03x14-T-08700f @ 0,0,38.4

C-020 BLACK

BASE3-06x14-T-f6d8b7 @ 24,0,38.4

C-021 BLACK

BASE3-06x14-T-f6d8b7 @ 72,0,38.4

C-022 BLACK

BASE3-06x14-T-f6d8b7 @ 120,0,38.4

C-023 BLACK

BASE3-06x14-T-5258a8 @ 168,0,38.4

C-024 BLACK

BASE3-03x14-T-d96cba @ 216,0,38.4

C / STEP 06 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color


ADD 2 PART(S)

C-025 BLACK

NP3-TEXT-C @ 4,3,3,4

C-026 BLACK

NP3-LOGO-C @ 188,3,7,4

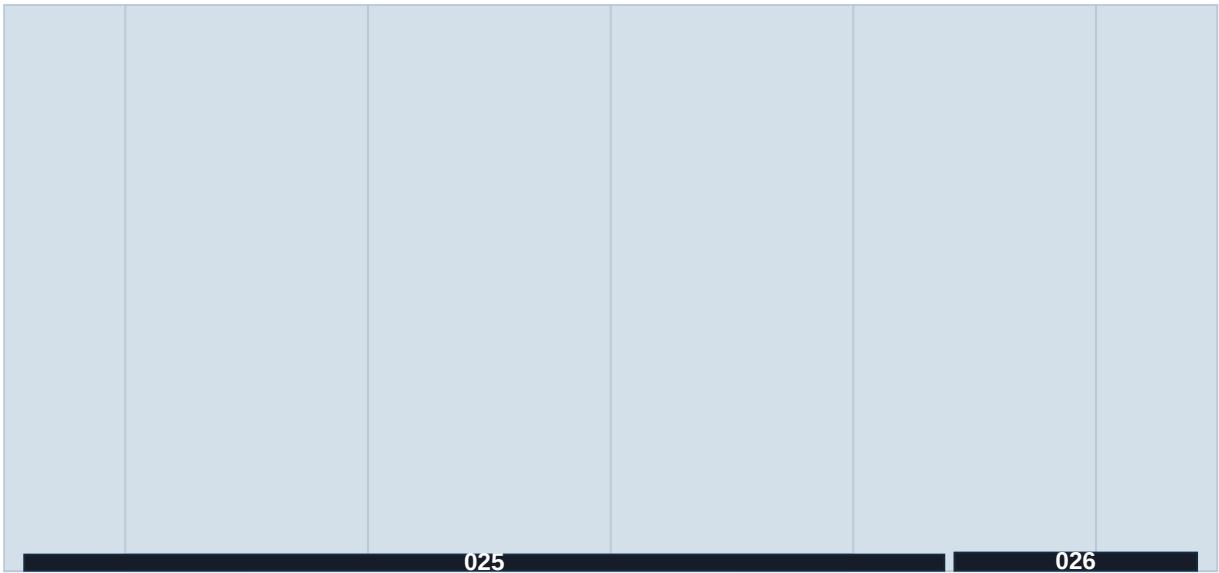

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

C / STEP 07 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 3 PART(S)

C-027 BLACK


NP3-KEEPER @ 0,0,48

C-028 BLACK

NP3-KEEPER @ 168,0,48

C-029 BLACK

NP3-KEEPER @ 200,0,48

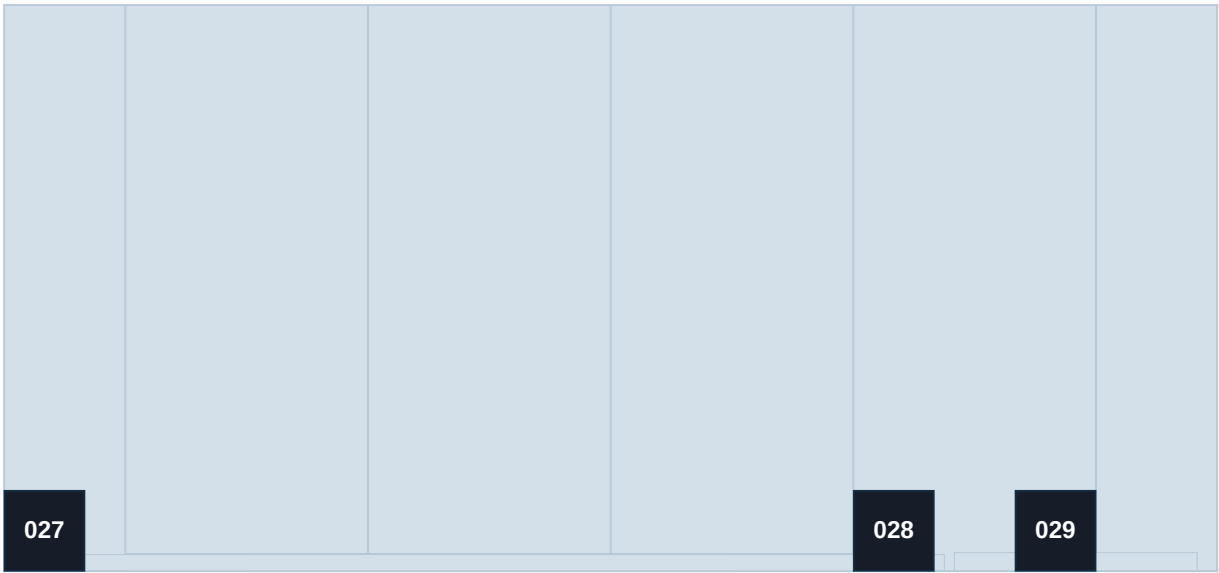


nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

C / STEP 08 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

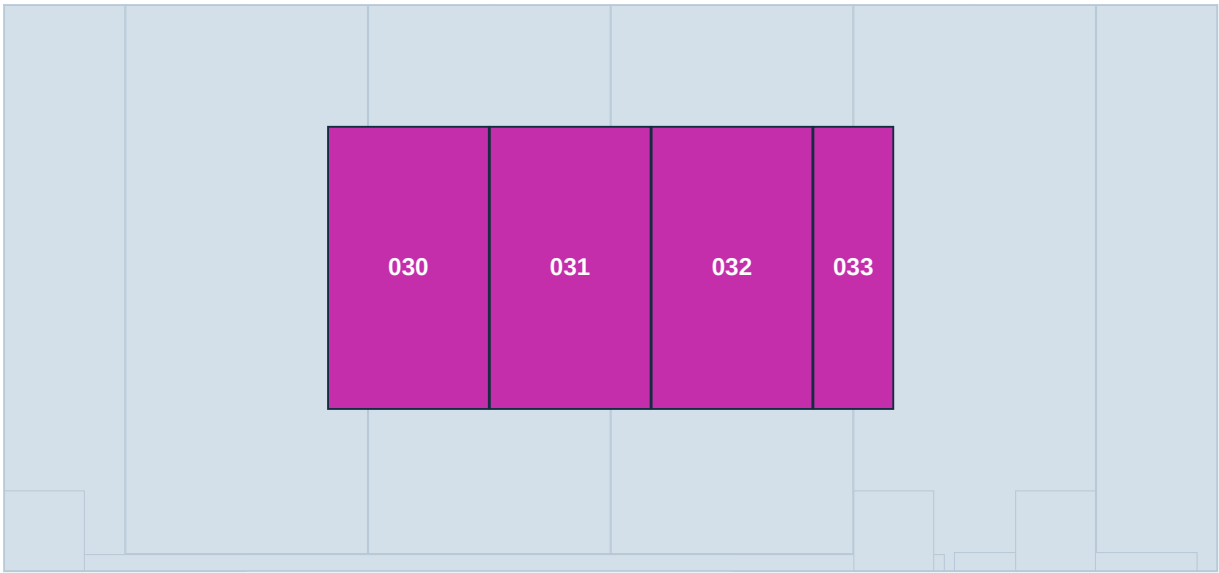

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 4 PART(S)

C-030 MAGENTA

BR-04x07-H096 @ 64,32,48

C-031 MAGENTA

BR-04x07-H096 @ 96,32,48

C-032 MAGENTA

BR-04x07-H096 @ 128,32,48


C-033 MAGENTA

BR-02x07-H096 @ 160,32,48

C / STEP 09 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

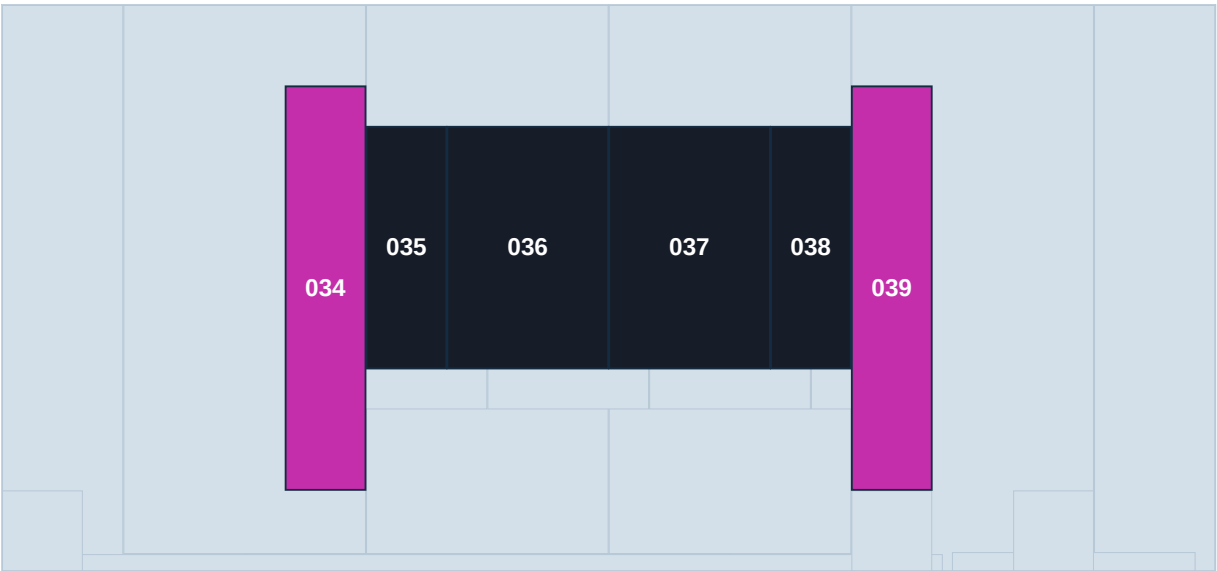

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 6 PART(S)

C-034 MAGENTA

BR-02x10-H096 @ 56,16,57.6

C-035 BLACK

BR-02x06-H096 @ 72,40,57.6

C-036 BLACK

BR-04x06-H096 @ 88,40,57.6

C-037 BLACK

BR-04x06-H096 @ 120,40,57.6

C-038 BLACK

BR-02x06-H096 @ 152,40,57.6

C-039 MAGENTA

BR-02x10-H096 @ 168,16,57.6

C / STEP 10 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color



nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 6 PART(S)

C-040 MAGENTA

BR-02x10-H096 @ 48,16,67.2

C-041 BLACK

BR-04x06-H096 @ 64,40,67.2

C-042 BLACK

BR-04x06-H096 @ 96,40,67.2

C-043 BLACK

BR-04x06-H096 @ 128,40,67.2

C-044 BLACK

BR-02x06-H096 @ 160,40,67.2


C-045 MAGENTA

BR-02x10-H096 @ 176,16,67.2

C / STEP 11 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

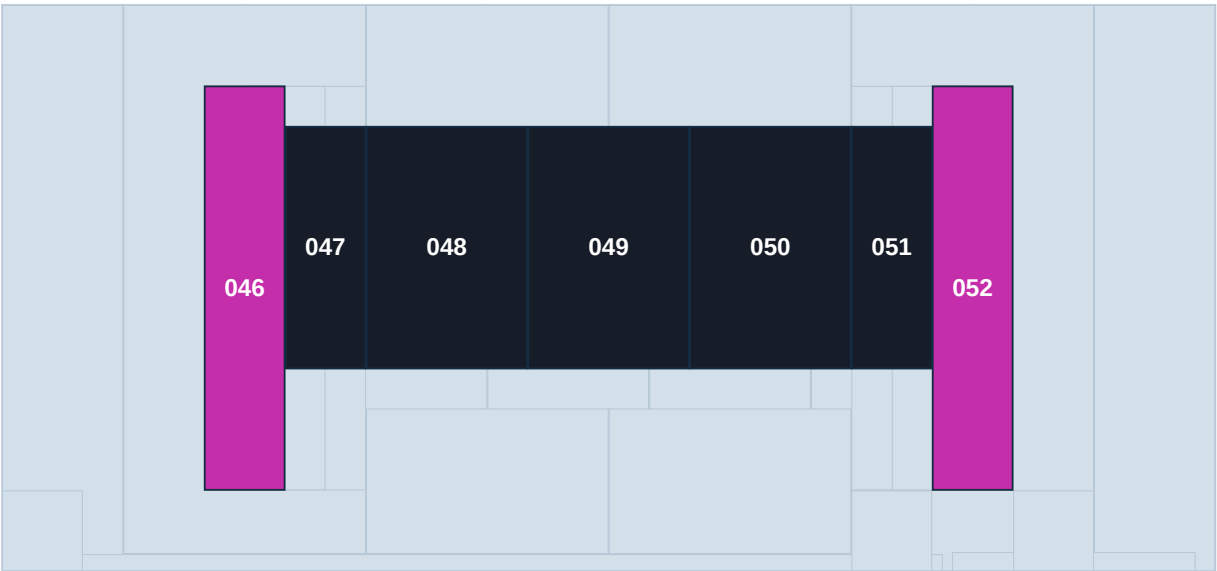

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

C-046 MAGENTA
BR-02x10-H096 @ 40,16,76.8

C-047 BLACK
BR-02x06-H096 @ 56,40,76.8

C-048 BLACK
BR-04x06-H096 @ 72,40,76.8

C-049 BLACK
BR-04x06-H096 @ 104,40,76.8

C-050 BLACK
BR-04x06-H096 @ 136,40,76.8


C-051 BLACK
BR-02x06-H096 @ 168,40,76.8

C-052 MAGENTA
BR-02x10-H096 @ 184,16,76.8

C / STEP 12 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

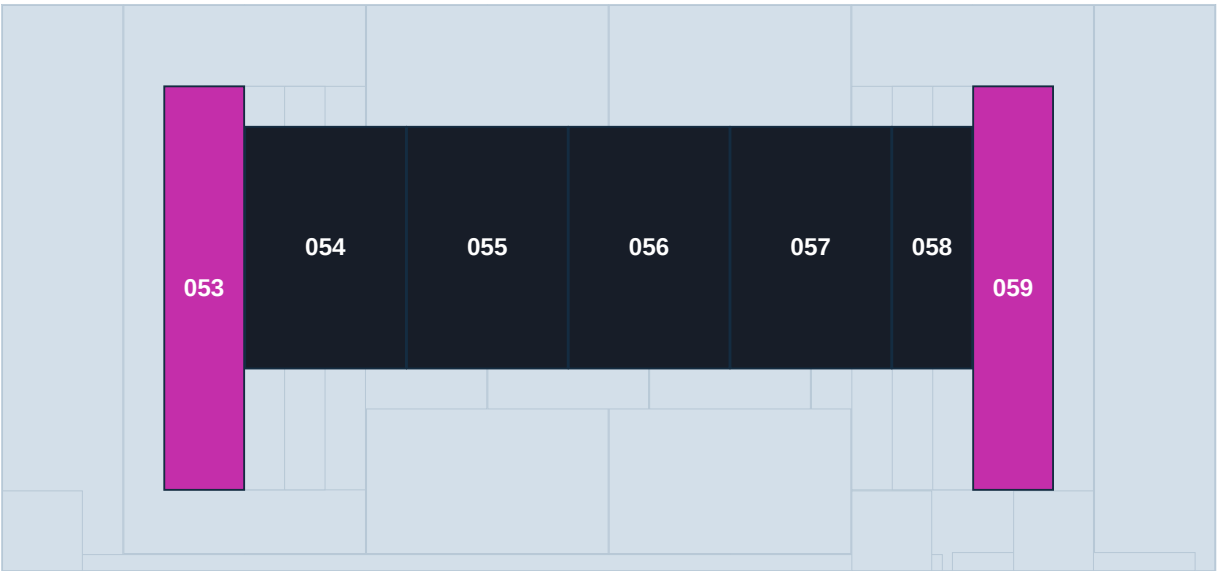

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

C-053 MAGENTA

BR-02x10-H096 @ 32,16,86.4

C-054 BLACK

BR-04x06-H096 @ 48,40,86.4

C-055 BLACK

BR-04x06-H096 @ 80,40,86.4

C-056 BLACK

BR-04x06-H096 @ 112,40,86.4

C-057 BLACK

BR-04x06-H096 @ 144,40,86.4

C-058 BLACK

BR-02x06-H096 @ 176,40,86.4


C-059 MAGENTA

BR-02x10-H096 @ 192,16,86.4

C / STEP 13 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

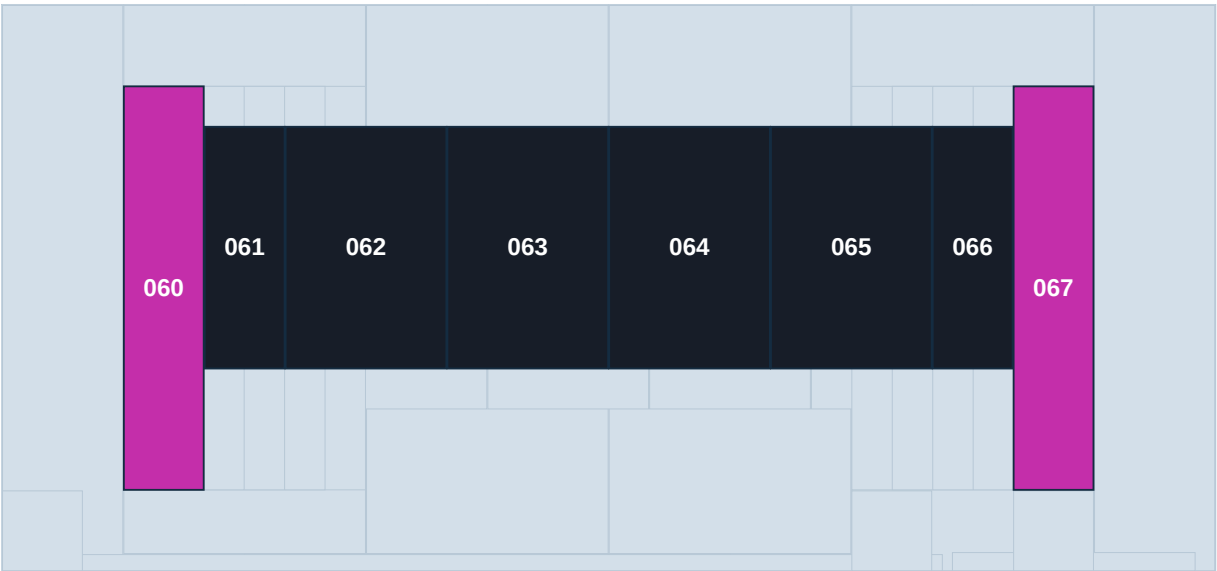

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 8 PART(S)

C-060 MAGENTA

BR-02x10-H096 @ 24,16,96

C-061 BLACK

BR-02x06-H096 @ 40,40,96

C-062 BLACK

BR-04x06-H096 @ 56,40,96

C-063 BLACK

BR-04x06-H096 @ 88,40,96

C-064 BLACK

BR-04x06-H096 @ 120,40,96

C-065 BLACK

BR-04x06-H096 @ 152,40,96

C-066 BLACK

BR-02x06-H096 @ 184,40,96


C-067 MAGENTA

BR-02x10-H096 @ 200,16,96

C / STEP 14 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

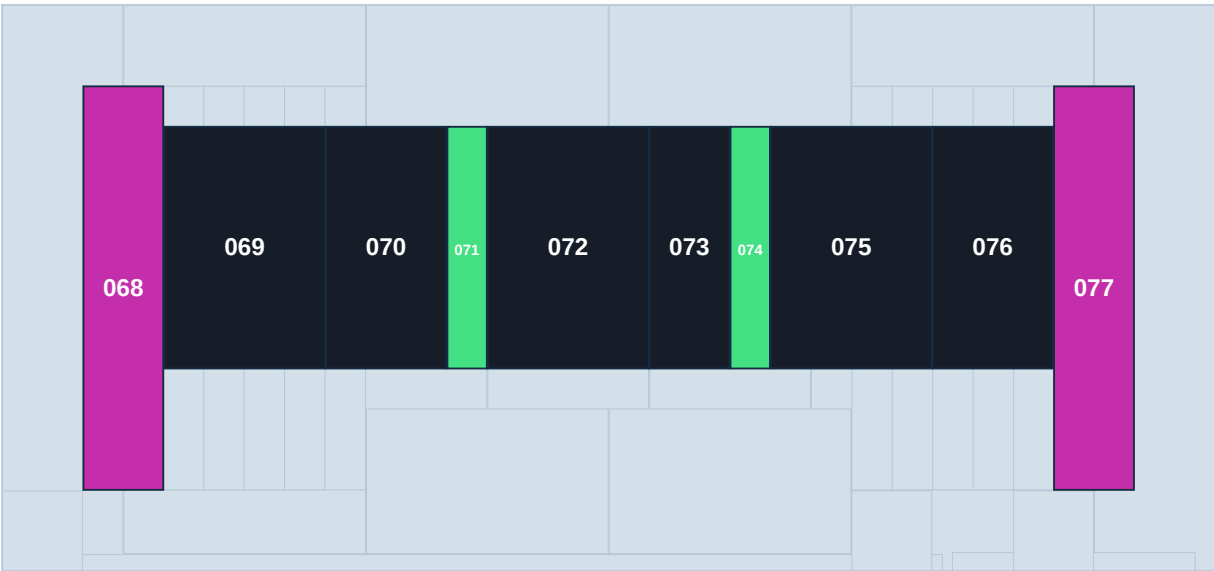

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 10 PART(S)

C-068 MAGENTA

BR-02x10-H096 @ 16,16,105.6

C-069 BLACK

BR-04x06-H096 @ 32,40,105.6

C-070 BLACK

BR-03x06-H096 @ 64,40,105.6

C-071 GREEN

BR-01x06-H096 @ 88,40,105.6

C-072 BLACK

BR-04x06-H096 @ 96,40,105.6

C-073 BLACK

BR-02x06-H096 @ 128,40,105.6

C-074 GREEN

BR-01x06-H096 @ 144,40,105.6

C-075 BLACK

BR-04x06-H096 @ 152,40,105.6

C-076 BLACK

BR-03x06-H096 @ 184,40,105.6


C-077 MAGENTA

BR-02x10-H096 @ 208,16,105.6

C / STEP 15 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

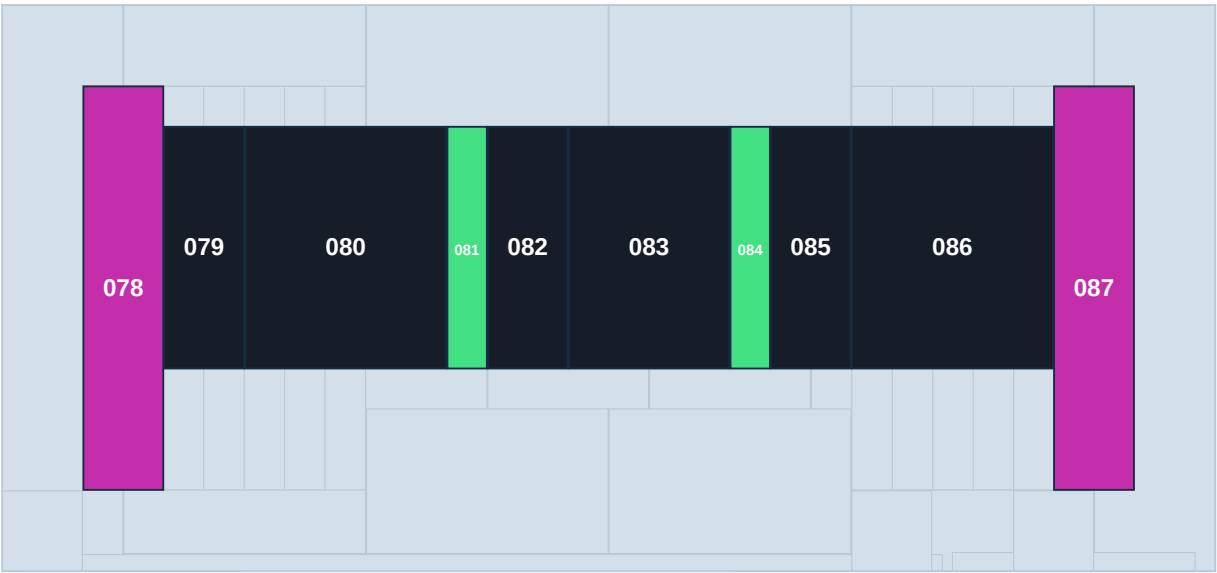

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)


ADD 10 PART(S)

- C-078 MAGENTA**
BR-02x10-H096 @ 16,16,115.2
- C-079 BLACK**
BR-02x06-H096 @ 32,40,115.2
- C-080 BLACK**
BR-05x06-H096 @ 48,40,115.2
- C-081 GREEN**
BR-01x06-H096 @ 88,40,115.2
- C-082 BLACK**
BR-02x06-H096 @ 96,40,115.2
- C-083 BLACK**
BR-04x06-H096 @ 112,40,115.2
- C-084 GREEN**
BR-01x06-H096 @ 144,40,115.2
- C-085 BLACK**
BR-02x06-H096 @ 152,40,115.2
- C-086 BLACK**
BR-05x06-H096 @ 168,40,115.2
- C-087 MAGENTA**
BR-02x10-H096 @ 208,16,115.2

C / STEP 16 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

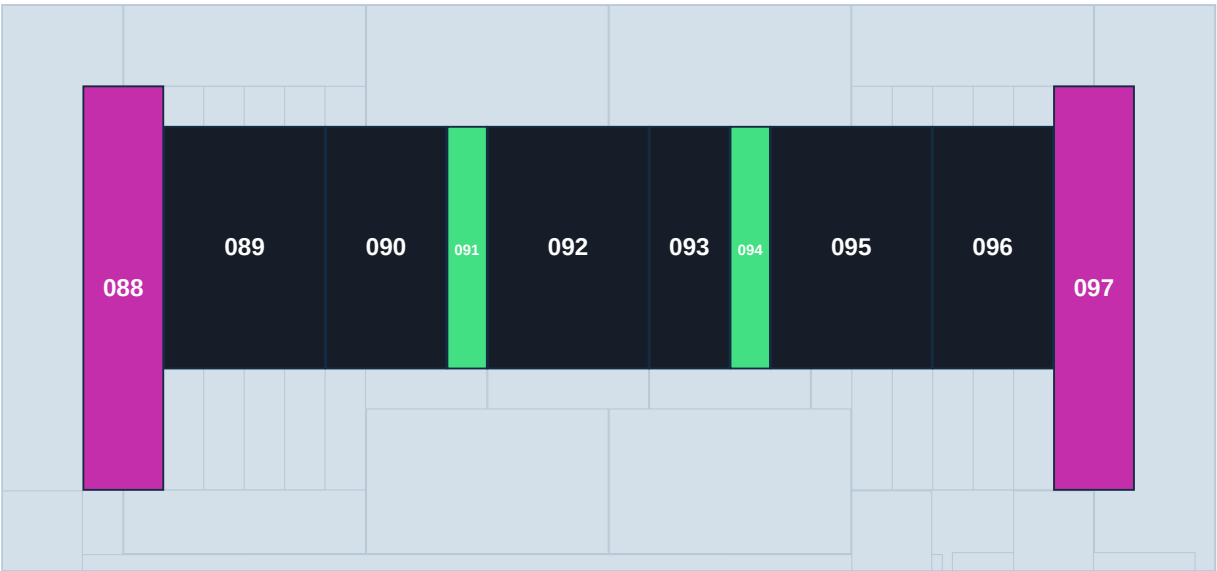

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 10 PART(S)

C-088 MAGENTA

BR-02x10-H096 @ 16,16,124.8

C-089 BLACK

BR-04x06-H096 @ 32,40,124.8

C-090 BLACK

BR-03x06-H096 @ 64,40,124.8

C-091 GREEN

BR-01x06-H096 @ 88,40,124.8

C-092 BLACK

BR-04x06-H096 @ 96,40,124.8

C-093 BLACK

BR-02x06-H096 @ 128,40,124.8

C-094 GREEN

BR-01x06-H096 @ 144,40,124.8

C-095 BLACK

BR-04x06-H096 @ 152,40,124.8

C-096 BLACK

BR-03x06-H096 @ 184,40,124.8


C-097 MAGENTA

BR-02x10-H096 @ 208,16,124.8

C / STEP 17 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

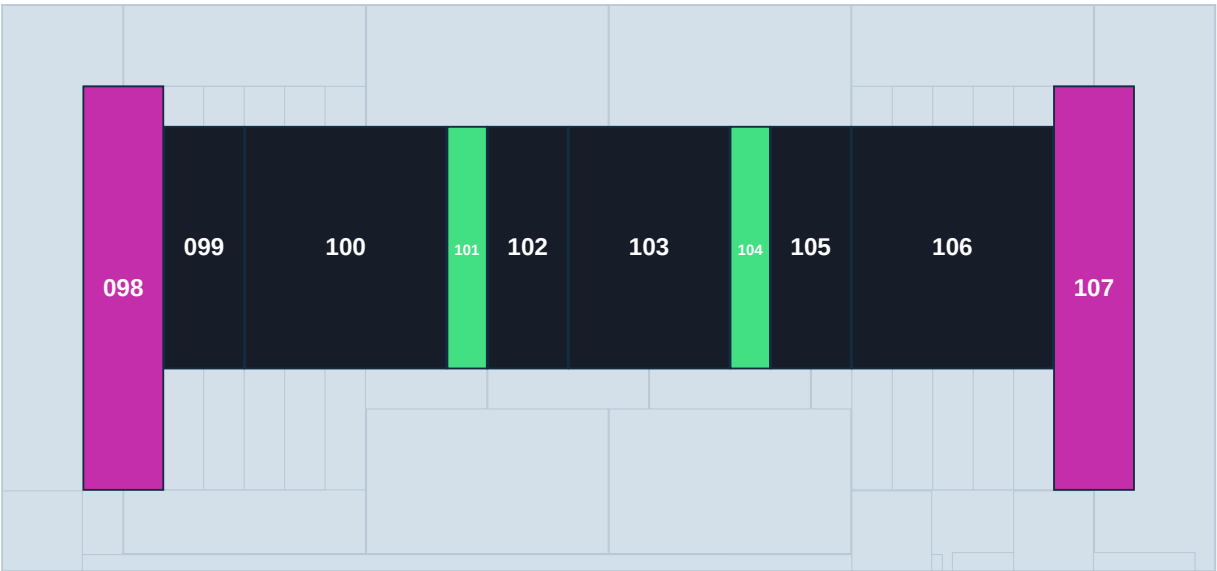

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 10 PART(S)

C-098 MAGENTA

BR-02x10-H096 @ 16,16,134.4

C-099 BLACK

BR-02x06-H096 @ 32,40,134.4

C-100 BLACK

BR-05x06-H096 @ 48,40,134.4

C-101 GREEN

BR-01x06-H096 @ 88,40,134.4

C-102 BLACK

BR-02x06-H096 @ 96,40,134.4

C-103 BLACK

BR-04x06-H096 @ 112,40,134.4

C-104 GREEN

BR-01x06-H096 @ 144,40,134.4

C-105 BLACK

BR-02x06-H096 @ 152,40,134.4

C-106 BLACK

BR-05x06-H096 @ 168,40,134.4


C-107 MAGENTA

BR-02x10-H096 @ 208,16,134.4

C / STEP 18 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

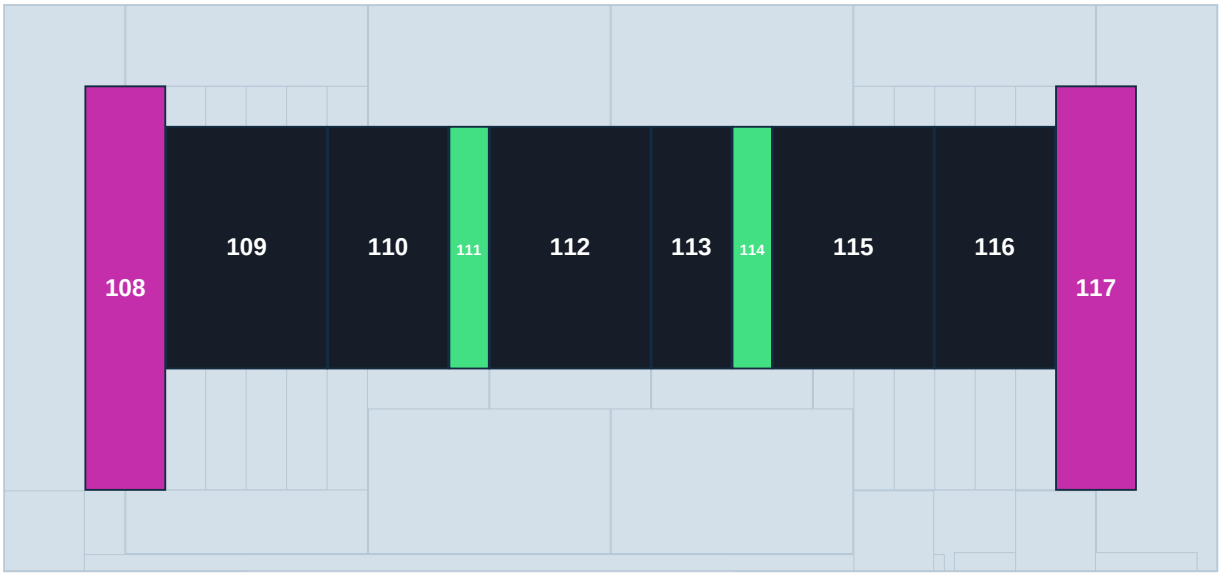

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)


ADD 10 PART(S)

- C-108 MAGENTA**
BR-02x10-H096 @ 16,16,144
- C-109 BLACK**
BR-04x06-H096 @ 32,40,144
- C-110 BLACK**
BR-03x06-H096 @ 64,40,144
- C-111 GREEN**
BR-01x06-H096 @ 88,40,144
- C-112 BLACK**
BR-04x06-H096 @ 96,40,144
- C-113 BLACK**
BR-02x06-H096 @ 128,40,144
- C-114 GREEN**
BR-01x06-H096 @ 144,40,144
- C-115 BLACK**
BR-04x06-H096 @ 152,40,144
- C-116 BLACK**
BR-03x06-H096 @ 184,40,144
- C-117 MAGENTA**
BR-02x10-H096 @ 208,16,144

C / STEP 19 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

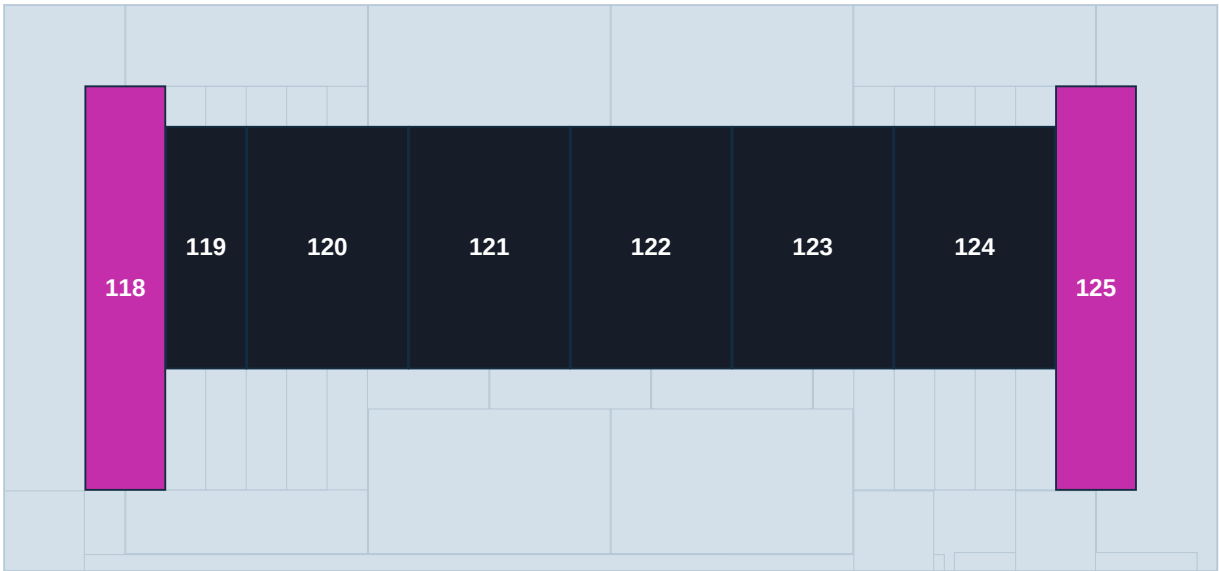

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 8 PART(S)

C-118 MAGENTA

BR-02x10-H096 @ 16,16,153.6

C-119 BLACK

BR-02x06-H096 @ 32,40,153.6

C-120 BLACK

BR-04x06-H096 @ 48,40,153.6

C-121 BLACK

BR-04x06-H096 @ 80,40,153.6

C-122 BLACK

BR-04x06-H096 @ 112,40,153.6

C-123 BLACK

BR-04x06-H096 @ 144,40,153.6

C-124 BLACK

BR-04x06-H096 @ 176,40,153.6


C-125 MAGENTA

BR-02x10-H096 @ 208,16,153.6

C / STEP 20 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

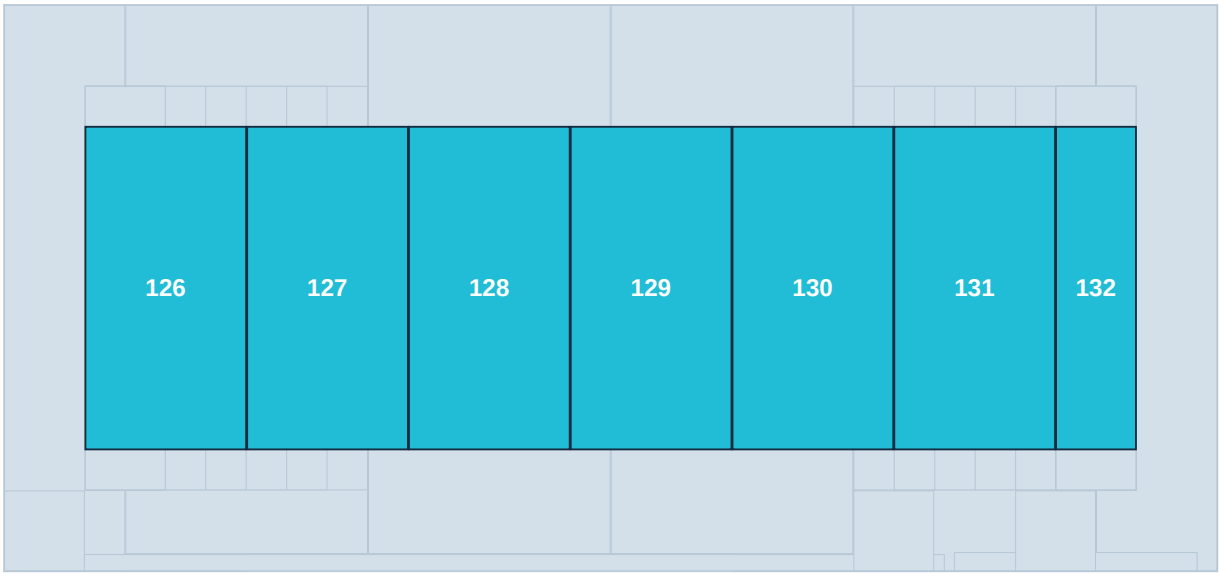

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 7 PART(S)

C-126 CYAN

BR-04x08-H096 @ 16,24,163.2

C-127 CYAN

BR-04x08-H096 @ 48,24,163.2

C-128 CYAN

BR-04x08-H096 @ 80,24,163.2

C-129 CYAN

BR-04x08-H096 @ 112,24,163.2

C-130 CYAN

BR-04x08-H096 @ 144,24,163.2

C-131 CYAN

BR-04x08-H096 @ 176,24,163.2


C-132 CYAN

BR-02x08-H096 @ 208,24,163.2

C / STEP 21 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

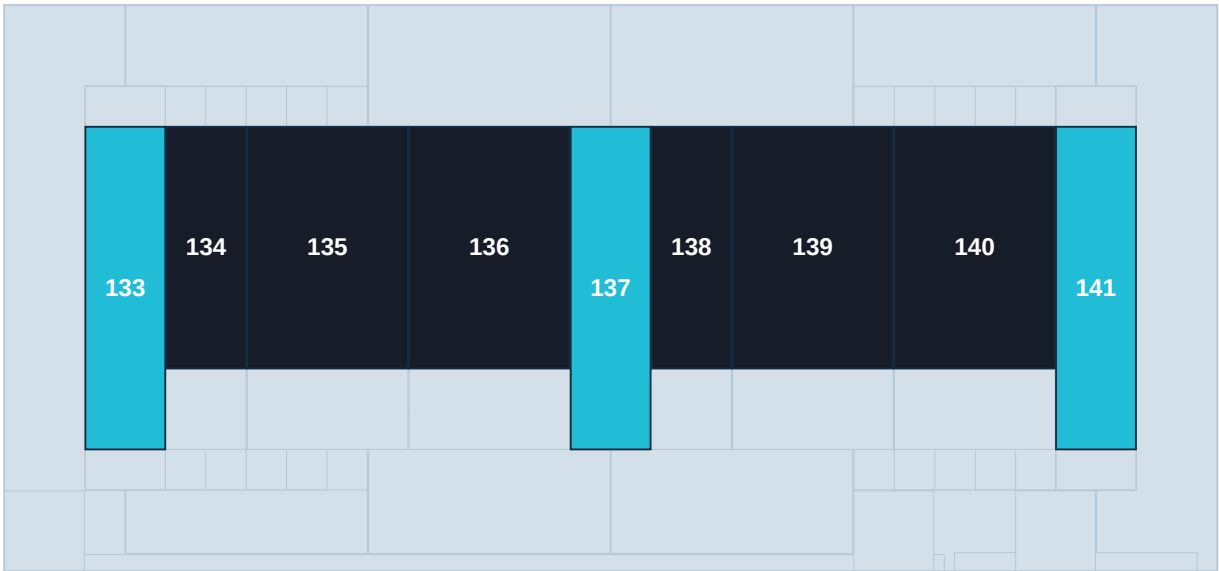

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 9 PART(S)

C-133 CYAN

BR-02x08-H096 @ 16,24,172.8

C-134 BLACK

BR-02x06-H096 @ 32,40,172.8

C-135 BLACK

BR-04x06-H096 @ 48,40,172.8

C-136 BLACK

BR-04x06-H096 @ 80,40,172.8

C-137 CYAN

BR-02x08-H096 @ 112,24,172.8

C-138 BLACK

BR-02x06-H096 @ 128,40,172.8

C-139 BLACK

BR-04x06-H096 @ 144,40,172.8

C-140 BLACK

BR-04x06-H096 @ 176,40,172.8


C-141 CYAN

BR-02x08-H096 @ 208,24,172.8

C / STEP 22 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

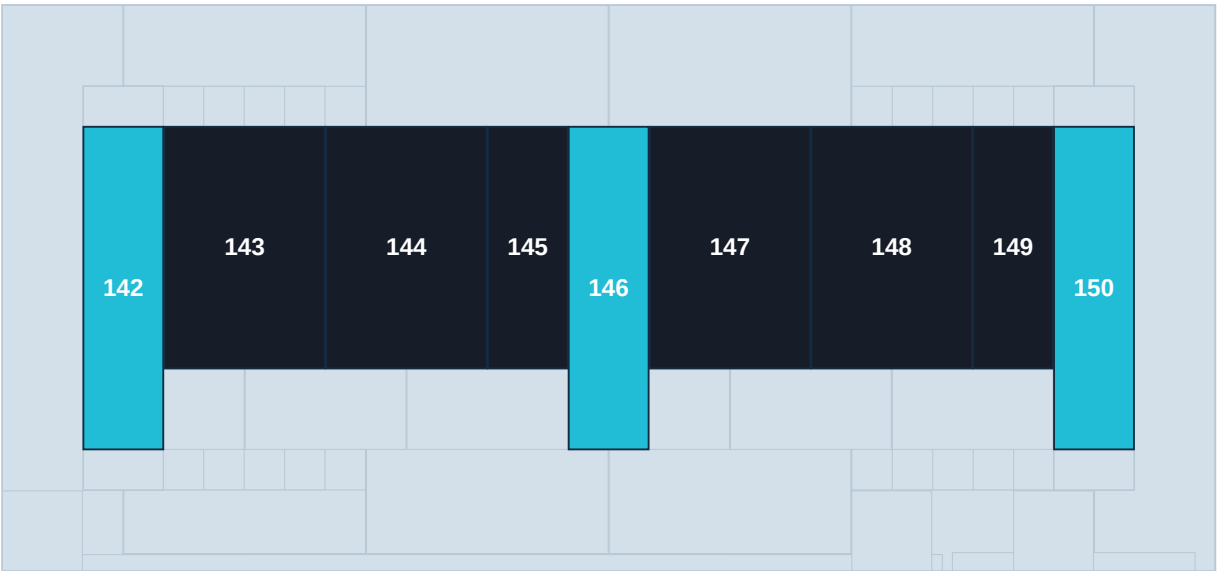

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 9 PART(S)

C-142 CYAN

BR-02x08-H096 @ 16,24,182.4

C-143 BLACK

BR-04x06-H096 @ 32,40,182.4

C-144 BLACK

BR-04x06-H096 @ 64,40,182.4

C-145 BLACK

BR-02x06-H096 @ 96,40,182.4

C-146 CYAN

BR-02x08-H096 @ 112,24,182.4

C-147 BLACK

BR-04x06-H096 @ 128,40,182.4

C-148 BLACK

BR-04x06-H096 @ 160,40,182.4

C-149 BLACK

BR-02x06-H096 @ 192,40,182.4


C-150 CYAN

BR-02x08-H096 @ 208,24,182.4

C / STEP 23 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

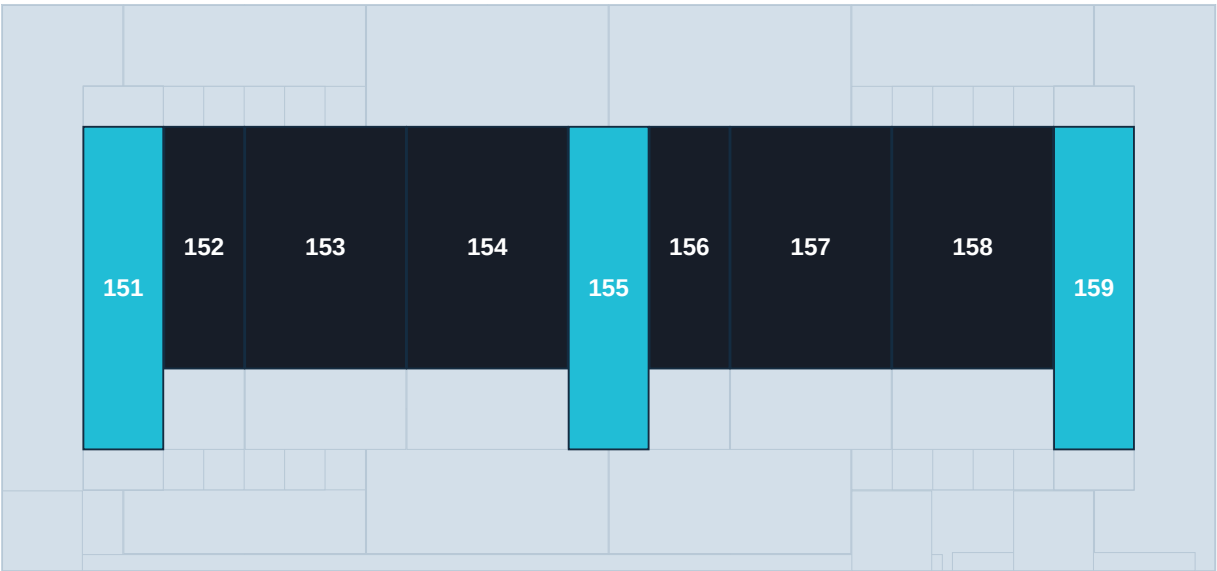

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)


ADD 9 PART(S)

- C-151 CYAN**
BR-02x08-H096 @ 16,24,192
- C-152 BLACK**
BR-02x06-H096 @ 32,40,192
- C-153 BLACK**
BR-04x06-H096 @ 48,40,192
- C-154 BLACK**
BR-04x06-H096 @ 80,40,192
- C-155 CYAN**
BR-02x08-H096 @ 112,24,192
- C-156 BLACK**
BR-02x06-H096 @ 128,40,192
- C-157 BLACK**
BR-04x06-H096 @ 144,40,192
- C-158 BLACK**
BR-04x06-H096 @ 176,40,192
- C-159 CYAN**
BR-02x08-H096 @ 208,24,192

C / STEP 24 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

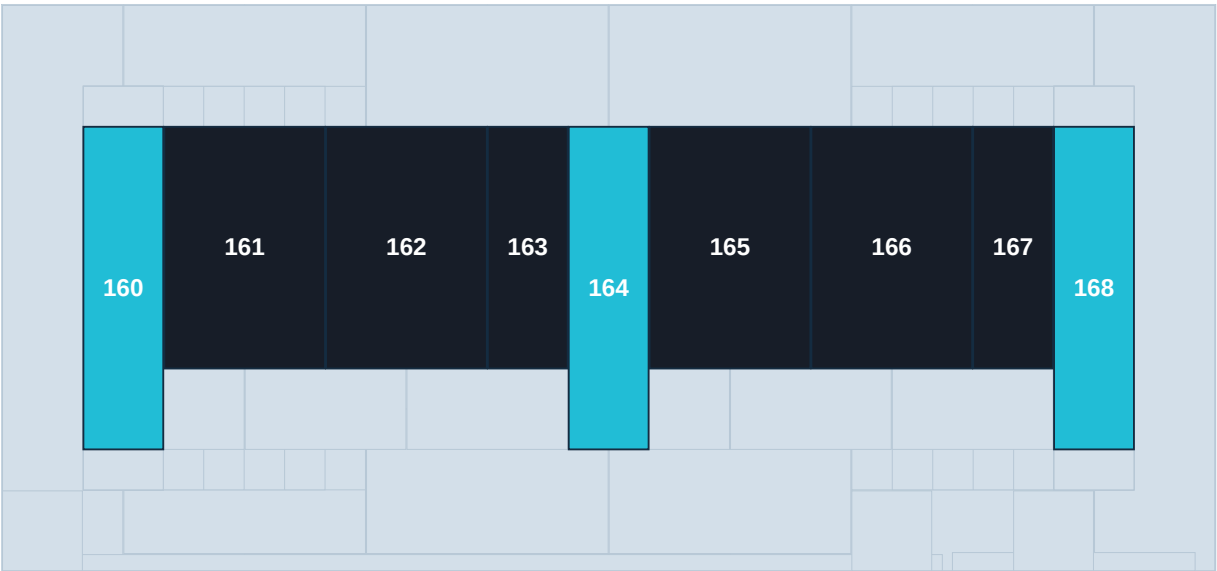

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 9 PART(S)

C-160 CYAN

BR-02x08-H096 @ 16,24,201.6

C-161 BLACK

BR-04x06-H096 @ 32,40,201.6

C-162 BLACK

BR-04x06-H096 @ 64,40,201.6

C-163 BLACK

BR-02x06-H096 @ 96,40,201.6

C-164 CYAN

BR-02x08-H096 @ 112,24,201.6

C-165 BLACK

BR-04x06-H096 @ 128,40,201.6

C-166 BLACK

BR-04x06-H096 @ 160,40,201.6

C-167 BLACK

BR-02x06-H096 @ 192,40,201.6


C-168 CYAN

BR-02x08-H096 @ 208,24,201.6

C / STEP 25 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

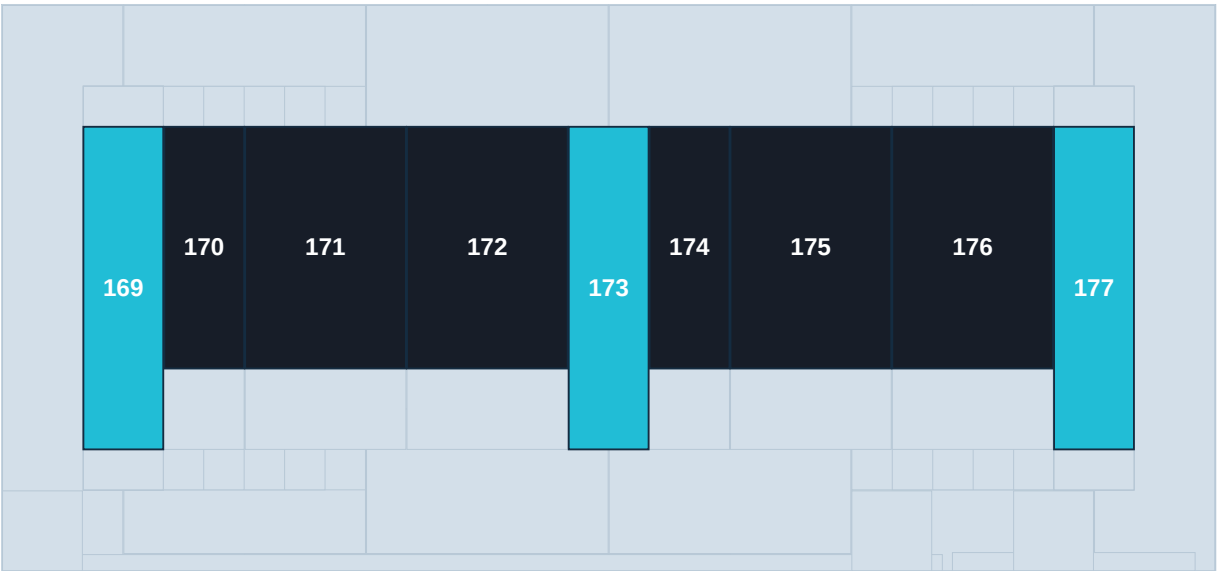

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 9 PART(S)

C-169 CYAN

BR-02x08-H096 @ 16,24,211.2

C-170 BLACK

BR-02x06-H096 @ 32,40,211.2

C-171 BLACK

BR-04x06-H096 @ 48,40,211.2

C-172 BLACK

BR-04x06-H096 @ 80,40,211.2

C-173 CYAN

BR-02x08-H096 @ 112,24,211.2

C-174 BLACK

BR-02x06-H096 @ 128,40,211.2

C-175 BLACK

BR-04x06-H096 @ 144,40,211.2

C-176 BLACK

BR-04x06-H096 @ 176,40,211.2


C-177 CYAN

BR-02x08-H096 @ 208,24,211.2

C / STEP 26 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

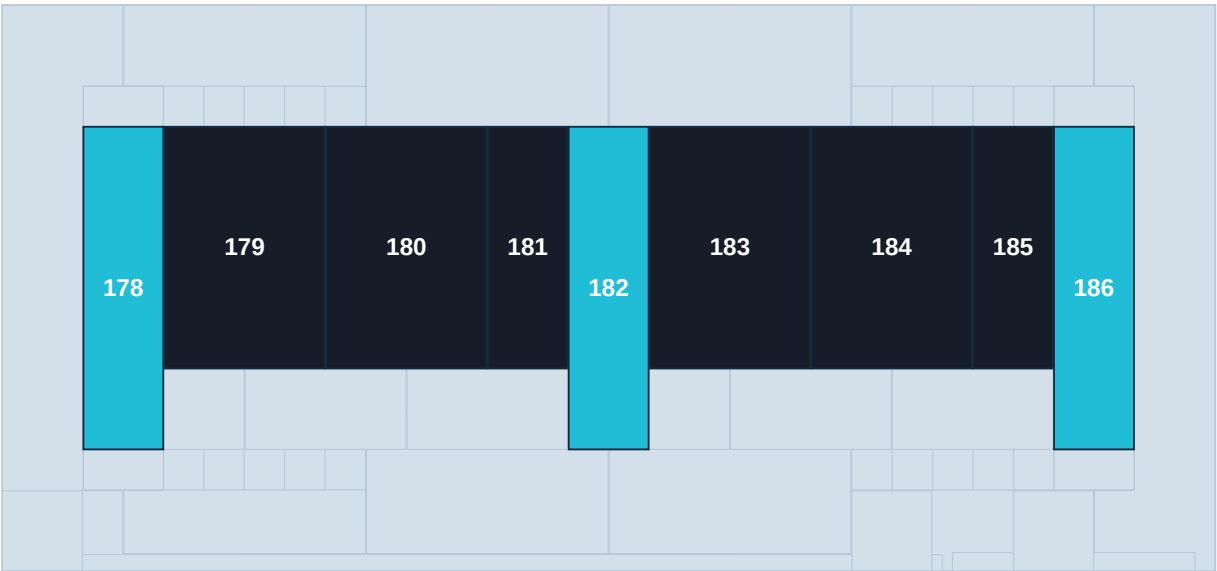

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 9 PART(S)

C-178 CYAN

BR-02x08-H096 @ 16,24,220.8

C-179 BLACK

BR-04x06-H096 @ 32,40,220.8

C-180 BLACK

BR-04x06-H096 @ 64,40,220.8

C-181 BLACK

BR-02x06-H096 @ 96,40,220.8

C-182 CYAN

BR-02x08-H096 @ 112,24,220.8

C-183 BLACK

BR-04x06-H096 @ 128,40,220.8

C-184 BLACK

BR-04x06-H096 @ 160,40,220.8

C-185 BLACK

BR-02x06-H096 @ 192,40,220.8


C-186 CYAN

BR-02x08-H096 @ 208,24,220.8

C / STEP 27 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

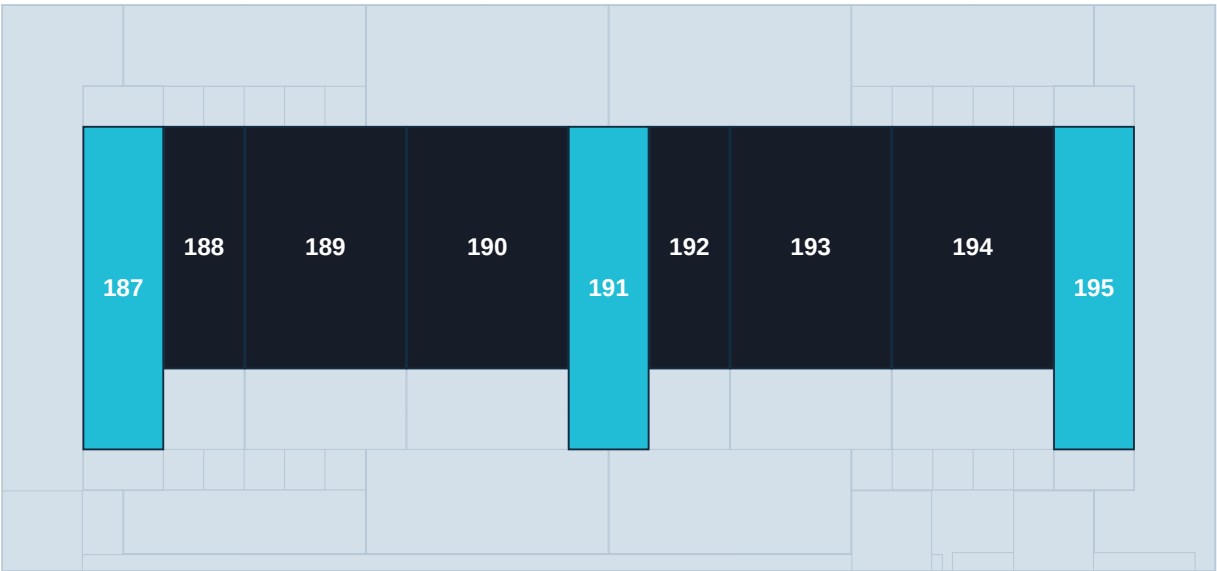

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 9 PART(S)

C-187 CYAN

BR-02x08-H096 @ 16,24,230.4

C-188 BLACK

BR-02x06-H096 @ 32,40,230.4

C-189 BLACK

BR-04x06-H096 @ 48,40,230.4

C-190 BLACK

BR-04x06-H096 @ 80,40,230.4

C-191 CYAN

BR-02x08-H096 @ 112,24,230.4

C-192 BLACK

BR-02x06-H096 @ 128,40,230.4

C-193 BLACK

BR-04x06-H096 @ 144,40,230.4

C-194 BLACK

BR-04x06-H096 @ 176,40,230.4


C-195 CYAN

BR-02x08-H096 @ 208,24,230.4

C / STEP 28 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

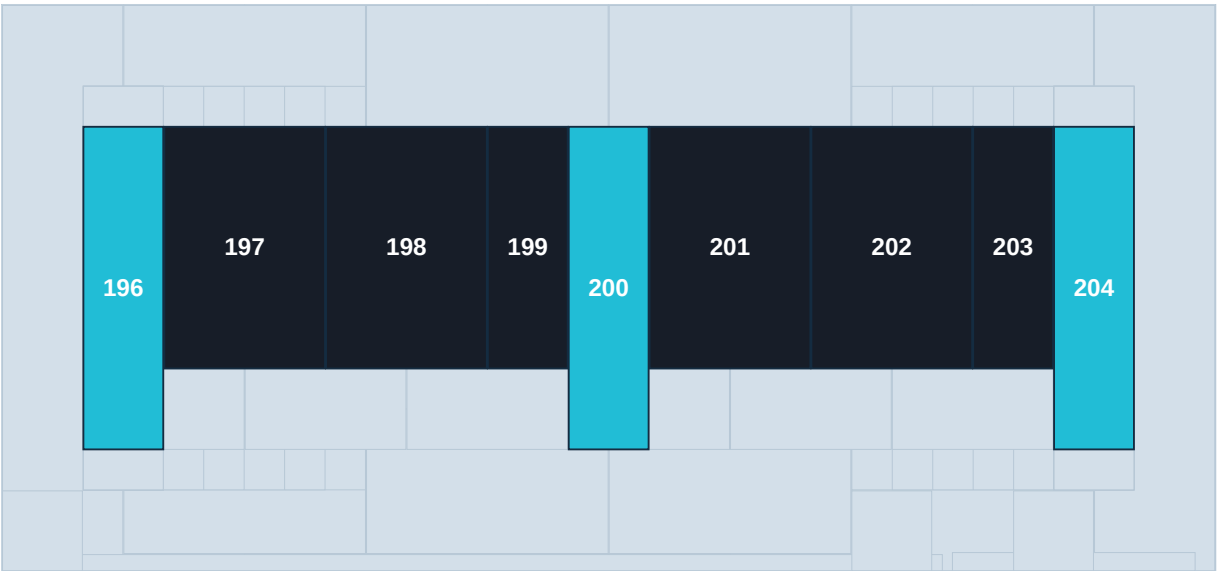

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)


ADD 9 PART(S)

- C-196 CYAN**
BR-02x08-H096 @ 16,24,240
- C-197 BLACK**
BR-04x06-H096 @ 32,40,240
- C-198 BLACK**
BR-04x06-H096 @ 64,40,240
- C-199 BLACK**
BR-02x06-H096 @ 96,40,240
- C-200 CYAN**
BR-02x08-H096 @ 112,24,240
- C-201 BLACK**
BR-04x06-H096 @ 128,40,240
- C-202 BLACK**
BR-04x06-H096 @ 160,40,240
- C-203 BLACK**
BR-02x06-H096 @ 192,40,240
- C-204 CYAN**
BR-02x08-H096 @ 208,24,240

C / STEP 29 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

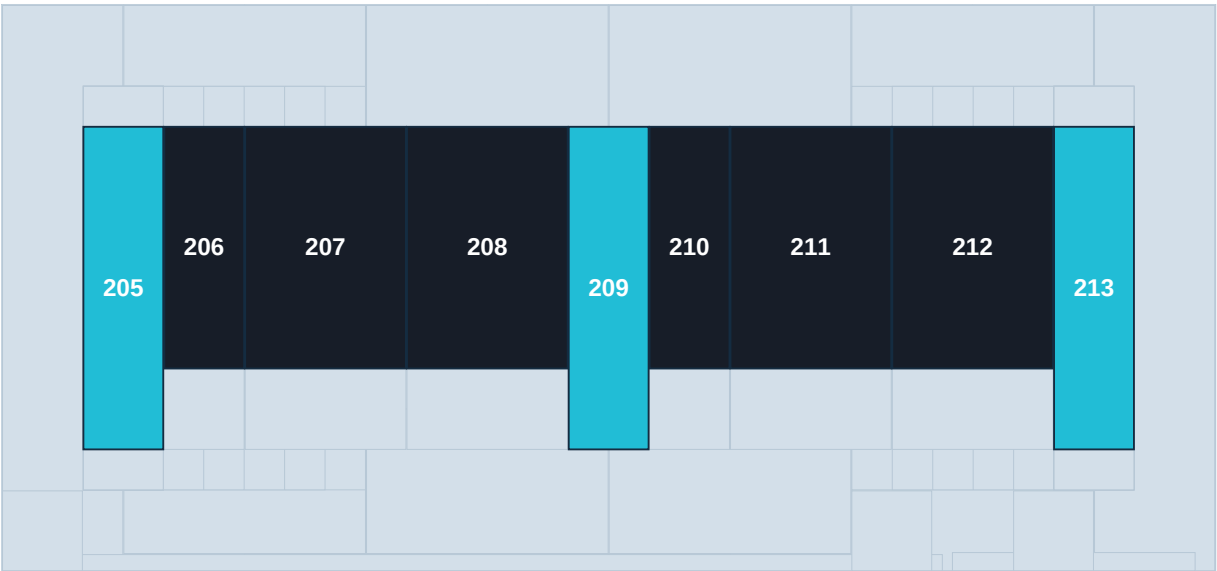

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 9 PART(S)

C-205 CYAN

BR-02x08-H096 @ 16,24,249.6

C-206 BLACK

BR-02x06-H096 @ 32,40,249.6

C-207 BLACK

BR-04x06-H096 @ 48,40,249.6

C-208 BLACK

BR-04x06-H096 @ 80,40,249.6

C-209 CYAN

BR-02x08-H096 @ 112,24,249.6

C-210 BLACK

BR-02x06-H096 @ 128,40,249.6

C-211 BLACK

BR-04x06-H096 @ 144,40,249.6

C-212 BLACK

BR-04x06-H096 @ 176,40,249.6


C-213 CYAN

BR-02x08-H096 @ 208,24,249.6

C / STEP 30 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

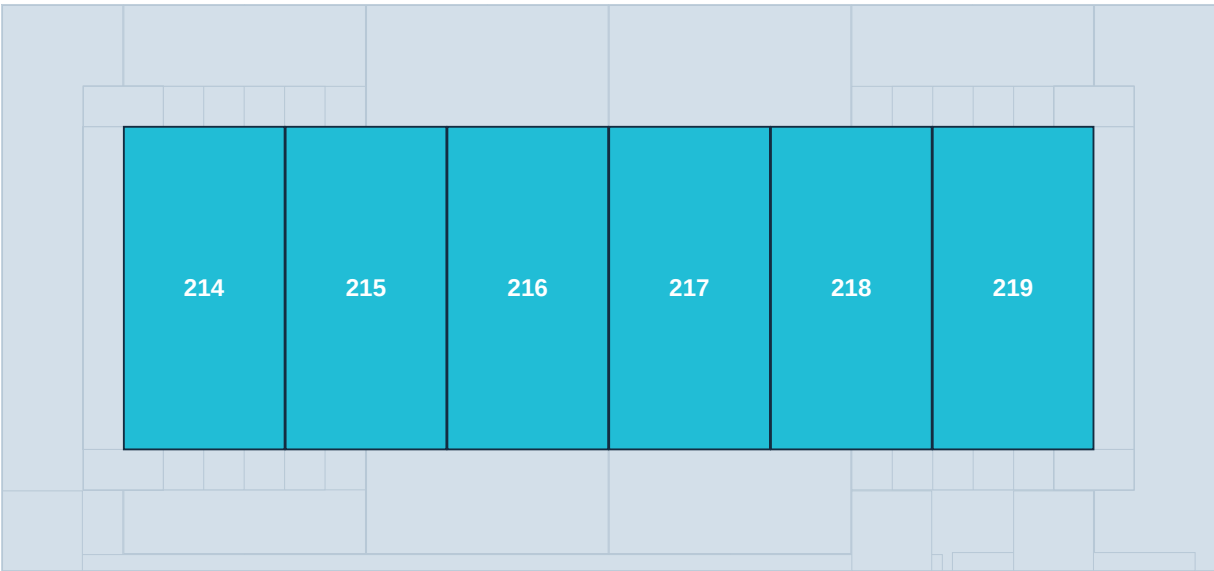

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 6 PART(S)

C-214 CYAN

BR-04x08-H096 @ 24,24,259.2

C-215 CYAN

BR-04x08-H096 @ 56,24,259.2

C-216 CYAN

BR-04x08-H096 @ 88,24,259.2

C-217 CYAN

BR-04x08-H096 @ 120,24,259.2

C-218 CYAN

BR-04x08-H096 @ 152,24,259.2


C-219 CYAN

BR-04x08-H096 @ 184,24,259.2

C / STEP 31 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

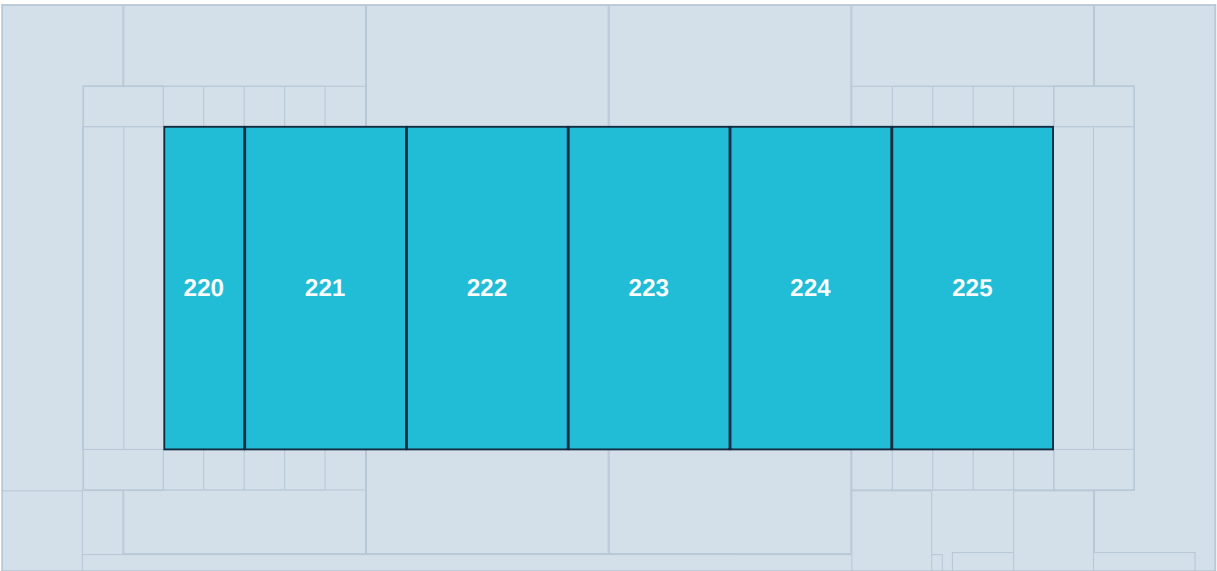

nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

ADD 6 PART(S)

C-220 CYAN

BR-02x08-H096 @ 32,24,268.8

C-221 CYAN

BR-04x08-H096 @ 48,24,268.8

C-222 CYAN

BR-04x08-H096 @ 80,24,268.8

C-223 CYAN

BR-04x08-H096 @ 112,24,268.8

C-224 CYAN

BR-04x08-H096 @ 144,24,268.8

C-225 CYAN

BR-04x08-H096 @ 176,24,268.8

C / STEP 32 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 3 PART(S)

C-226 MAGENTA


BR-04x06-H064 @ 80,40,278.4

C-227 MAGENTA

BR-04x06-H064 @ 112,40,278.4

C-228 MAGENTA

BR-02x06-H064 @ 144,40,278.4

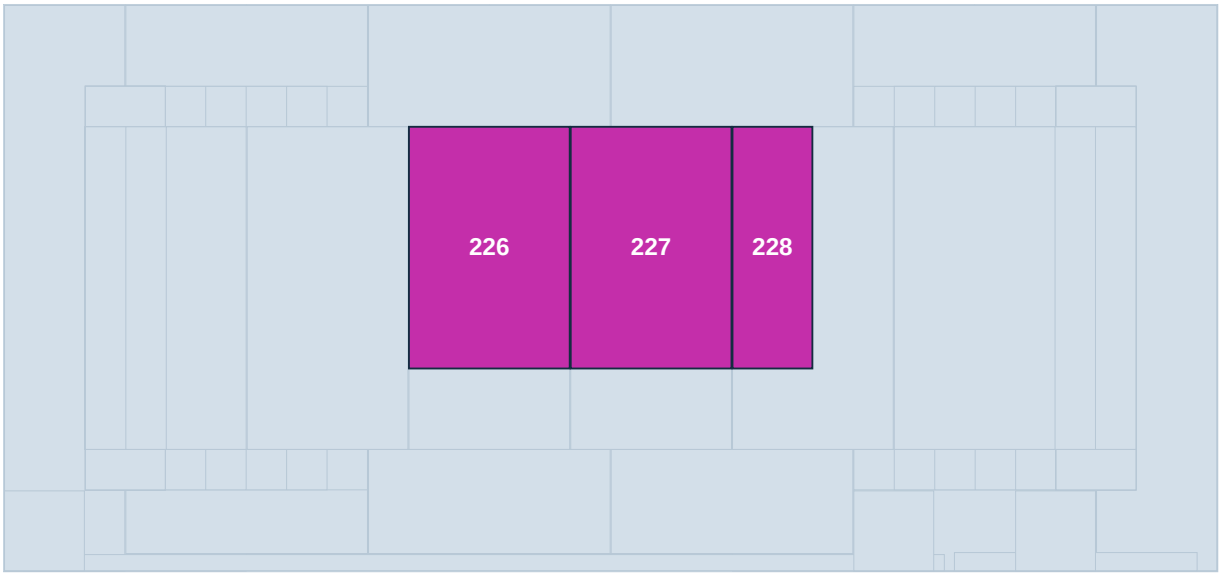

nominal 240 / grid 8.00


FRONT (-Y) / new parts enter from above (+Z)

C / STEP 33 OF 33

Placement diagram from canonical part bounds. IDs match native CAD, BOM, viewer and animation.

PLAN VIEW / front at bottom / NEW parts in color

ADD 0 PART(S)

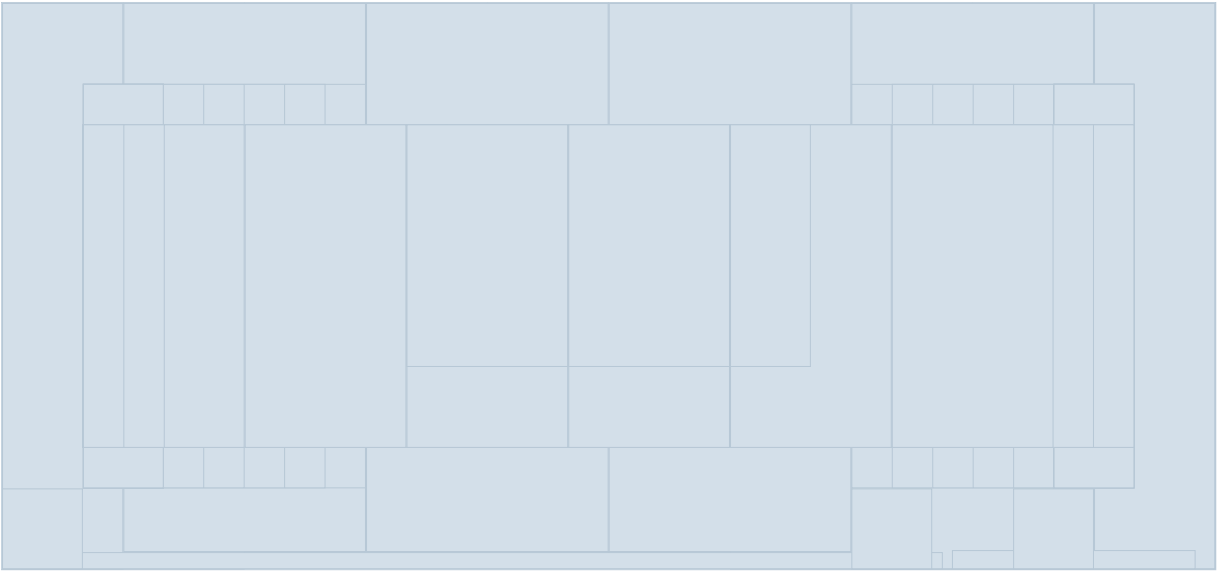


nominal 240 / grid 8.00

FRONT (-Y) / new parts enter from above (+Z)

BASE3-03x14-T-08700f

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT




SIDE




Kind: front_base
STL: BASE3-03x14-T-08700f.stl
STL units: mm / scale 100%
Grid: 3 x 14 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80
Front row reserved (no stud/socket)
NP3 dovetail side allowance: 0.20
See front-interface.svg for sections

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES




BASE3-03x14-T-d96cba

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT




TOP / PRINT ORIENTATION



SIDE



BOTTOM / REAL CAVITIES



Kind: front_base

STL: BASE3-03x14-T-d96cba.stl

STL units: mm / scale 100%

Grid: 3 x 14 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

BASE3-06x14-T-26e6b0

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION

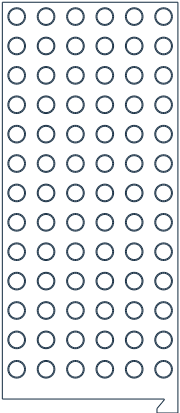

BOTTOM / REAL CAVITIES



Kind: front_base

STL: BASE3-06x14-T-26e6b0.stl

STL units: mm / scale 100%

Grid: 6 x 14 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

BASE3-06x14-T-5258a8

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES

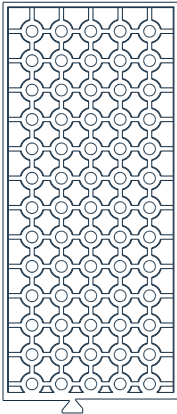

Kind: front_base

STL: BASE3-06x14-T-5258a8.stl

STL units: mm / scale 100%

Grid: 6 x 14 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

BASE3-06x14-T-72d551

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: front_base

STL: BASE3-06x14-T-72d551.stl

STL units: mm / scale 100%

Grid: 6 x 14 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)


Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

TOP / PRINT ORIENTATION

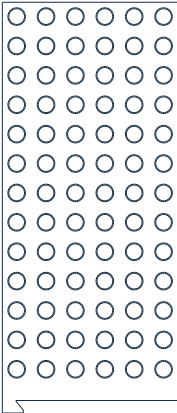


BOTTOM / REAL CAVITIES



BASE3-06x14-T-afd244

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT




SIDE




Kind: front_base
STL: BASE3-06x14-T-afd244.stl
STL units: mm / scale 100%
Grid: 6 x 14 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80
Front row reserved (no stud/socket)
NP3 dovetail side allowance: 0.20
See front-interface.svg for sections

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES

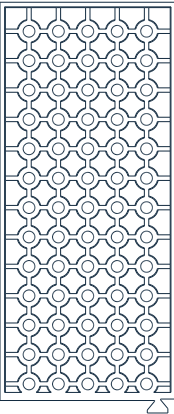


BASE3-06x14-T-f6d8b7

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




TOP / PRINT ORIENTATION



SIDE



BOTTOM / REAL CAVITIES



Kind: front_base

STL: BASE3-06x14-T-f6d8b7.stl

STL units: mm / scale 100%

Grid: 6 x 14 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)

NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

BASE3-15x14-B-2f9fc1

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT




SIDE



TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES

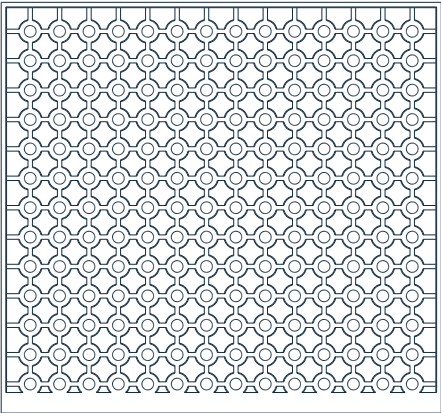

Kind: front_base

STL: BASE3-15x14-B-2f9fc1.stl

STL units: mm / scale 100%

Grid: 15 x 14 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)

NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

BASE3-15x14-B-65597c

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION

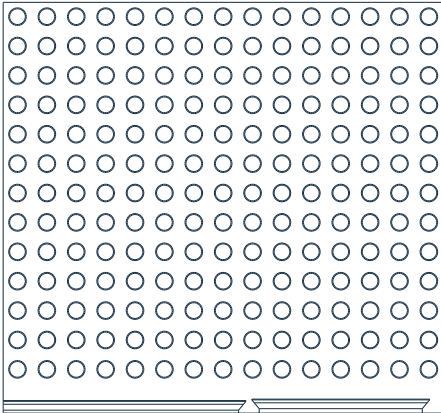

BOTTOM / REAL CAVITIES

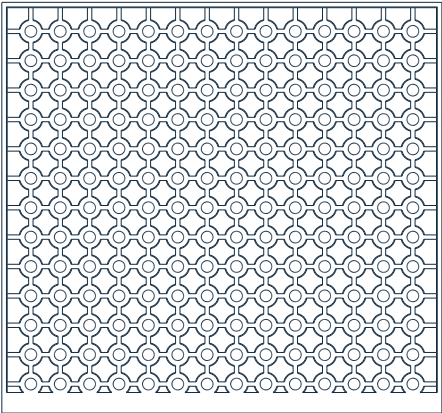

Kind: front_base

STL: BASE3-15x14-B-65597c.stl

STL units: mm / scale 100%

Grid: 15 x 14 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

Front row reserved (no stud/socket)


NP3 dovetail side allowance: 0.20

See front-interface.svg for sections

BR-01x06-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: brick
STL: BR-01x06-H096.stl
STL units: mm / scale 100%
Grid: 1 x 6 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES




BR-02x06-H064

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE

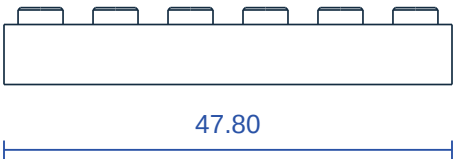

Kind: brick

STL: BR-02x06-H064.stl

STL units: mm / scale 100%

Grid: 2 x 6 @ 8.00

Body height: 6.40

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial


Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES



BR-02x06-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: brick

STL: BR-02x06-H096.stl

STL units: mm / scale 100%

Grid: 2 x 6 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial


Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES



BR-02x07-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: brick

STL: BR-02x07-H096.stl

STL units: mm / scale 100%

Grid: 2 x 7 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial


Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES




BR-02x08-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE

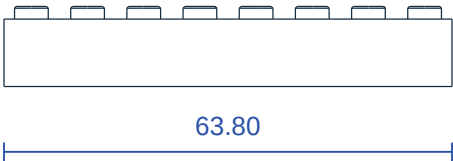

Kind: brick

STL: BR-02x08-H096.stl

STL units: mm / scale 100%

Grid: 2 x 8 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial


Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES




BR-02x10-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: brick

STL: BR-02x10-H096.stl

STL units: mm / scale 100%

Grid: 2 x 10 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

TOP / PRINT ORIENTATION




BOTTOM / REAL CAVITIES



BR-03x06-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT

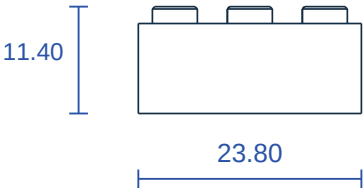

SIDE



Kind: brick

STL: BR-03x06-H096.stl

STL units: mm / scale 100%

Grid: 3 x 6 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial


Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES




BR-04x06-H064

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE

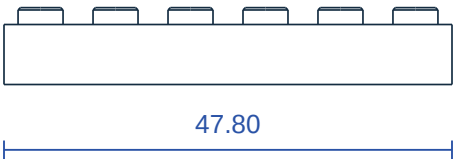

TOP / PRINT ORIENTATION

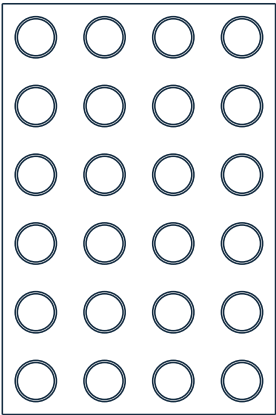

BOTTOM / REAL CAVITIES

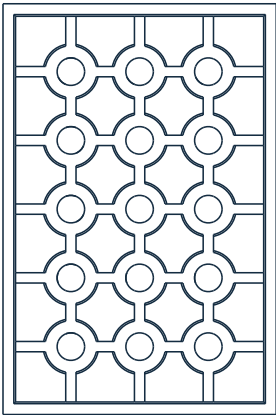

Kind: brick

STL: BR-04x06-H064.stl

STL units: mm / scale 100%

Grid: 4 x 6 @ 8.00

Body height: 6.40

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46

Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

BR-04x06-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION

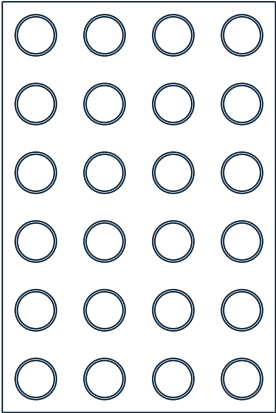

BOTTOM / REAL CAVITIES

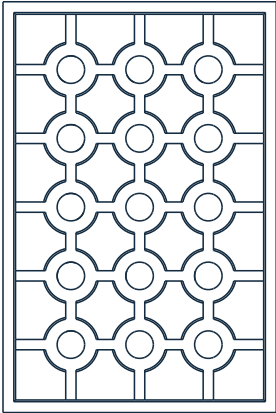

Kind: brick

STL: BR-04x06-H096.stl

STL units: mm / scale 100%

Grid: 4 x 6 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80

BR-04x07-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT

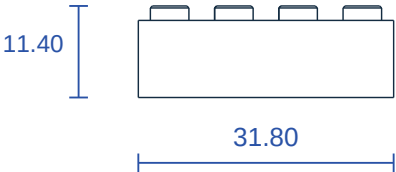


SIDE




Kind: brick
STL: BR-04x07-H096.stl
STL units: mm / scale 100%
Grid: 4 x 7 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80

TOP / PRINT ORIENTATION

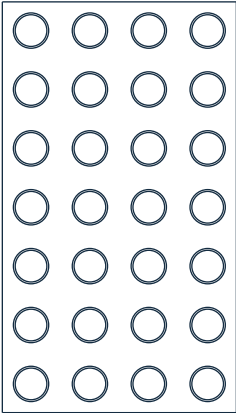

BOTTOM / REAL CAVITIES

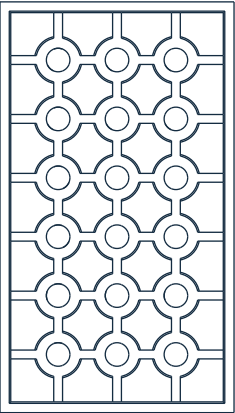


BR-04x08-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE

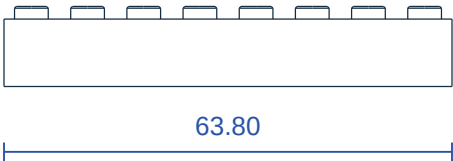

TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES




Kind: brick
STL: BR-04x08-H096.stl
STL units: mm / scale 100%
Grid: 4 x 8 @ 8.00
Body height: 9.60
Stud: dia 4.80 x 1.80 high
Tip lead-in: 0.25 high / radial
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80

BR-05x06-H096

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT

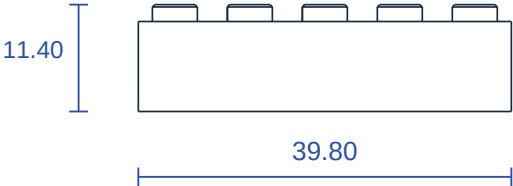


SIDE



TOP / PRINT ORIENTATION

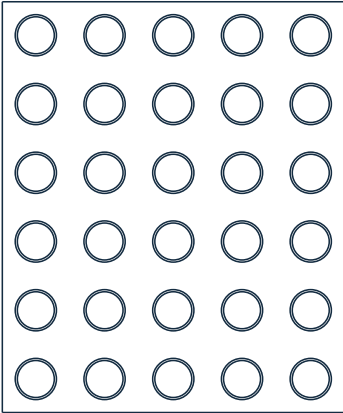

BOTTOM / REAL CAVITIES

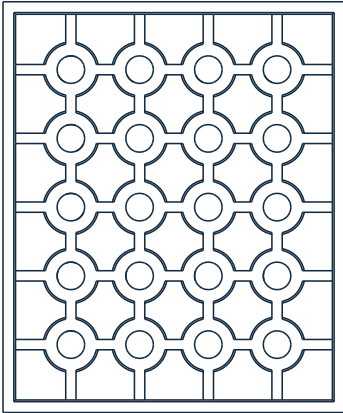

Kind: brick

STL: BR-05x06-H096.stl

STL units: mm / scale 100%

Grid: 5 x 6 @ 8.00

Body height: 9.60

Stud: dia 4.80 x 1.80 high

Tip lead-in: 0.25 high / radial

Female radial c: +0.04

Outer wall: 1.46


Tube bore: 3.20 (not accessory fit)

Roof ribs: 1.20; bridge gap <=6.80


NP3-KEEPER

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.


FRONT




SIDE



TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES




Kind: front_keeper
STL: NP3-KEEPER.stl
STL units: mm / scale 100%
Grid: 2 x 1 @ 8.00
Body height: 3.20
Female radial c: +0.04
Outer wall: 1.46
Tube bore: 3.20 (not accessory fit)
Roof ribs: 1.20; bridge gap <=6.80
Socket row at local Y=12.00
Flat front stop covers module top
Lift 6mm, then forward >=32mm and aside


NP3-LOGO-C

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT




SIDE



Kind: front_logo
STL: NP3-LOGO-C.stl
STL units: mm / scale 100%
Flat rear on bed / relief up
Carrier 2.40; side taper 2.00
Black to white after 2.80
White relief: 0.80; do not scale
Overall installed Z: 4.00 .. 44.00

TOP / PRINT ORIENTATION

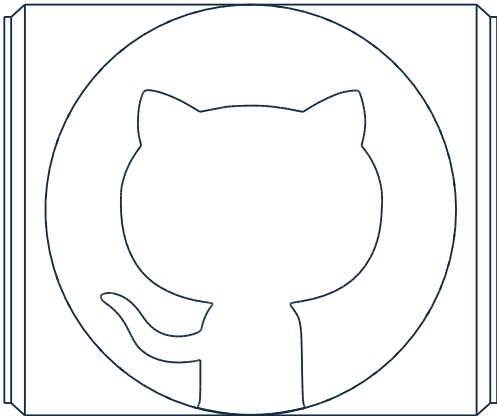

BOTTOM / REAL CAVITIES



NP3-TEXT-C

Three orthographic views + underside from the actual solid. Exterior heights include studs / text.

FRONT



SIDE



Kind: front_plaque
STL: NP3-TEXT-C.stl
STL units: mm / scale 100%
Flat rear on bed / relief up
Carrier 2.40; side taper 2.00
Black to white after 2.40
White relief: 0.80; do not scale
Overall installed Z: 4.00 .. 44.00
Same icon, New adventures
github.com/YOUR-USERNAME

TOP / PRINT ORIENTATION



BOTTOM / REAL CAVITIES

