

guest@wired.net ~ \$ npx slidev ./presentation.md

SLIDEV ADDON GOOGLE CHARTS

Add interactive Google Charts to your Slidev.

01. INTRODUCTION

SlidevはMarkdownでスライドを作成できる開発者向けのWebベースプレゼンテーションツールです。

- テキストファイルにMarkdown形式で書き込むだけで簡単にスライドを構築できます
- HTMLやVueコンポーネントを埋め込み、インタラクティブで動きのある表現が可能です
- 綺麗なコードハイライト、PDFエクスポート、ライブコーディングなどを標準搭載しています

SlidevでGoogle Chartsを利用するためのアドオン [`slidev-addon-google-charts`](#) を作成しました。

- Google Chartsの様々な種類のチャートに対応しています
- スライド表示中に対話的な操作が可能です
- アドオンを `npm install` で導入できます

02. SETUP

1. プロジェクトフォルダを作成します



```
mkdir slidev-workspace  
cd slidev-workspace
```

➤ **slidev-workspace** – プロジェクトフォルダ

2. Slidevを初期化します



```
npm init -y && npm install @slidev/cli
```

➤ **@slidev/cli** – Slidev パッケージ

3. アドオンをインストールします



```
npm install -allow-git=root \  
  ktkr3d/slidev-addon-google-charts
```

➤ **slidev-addon-google-charts** – アドオン

03. HOW TO USE

```
<GoogleCharts
  type="GeoChart"
  :options="{
    region: 'JP',
    resolution: 'provinces',
  }"
  :data="[
    ['都道府県', '値'],
    ['北海道', 100]
  ]"
/>
```

- **GoogleCharts** – コンポーネント名
- **type** – チャート種別
- **:options** – オプション
- **:data** – データ


04. CHART TYPE

- CoreChart
 - AreaChart
 - BarChart
 - BubbleChart
 - CandlestickChart
 - ColumnChart
 - ComboChart
 - PieChart
 - ScatterChart
 - SteppedAreaChart
 - AnnotationChart 注釈付きタイムライン
 - Calendar
 - Gantt ガントチャート
 - Gauge
 - GeoChart
 - Map Google マップ地図表示
 - Orgchart 組織図
 - Sankey サンキー・ダイアグラム
 - Table データ表
 - Timeline スケジュールタイムライン
 - TreeMap ツリーマップ
 - WordTree テキストワードツリー


05. CORECHART – PIECHART

```
<GoogleCharts
  type="PieChart"
  :options="{ title: 'My Daily Activities' }"
  :data="[
    ['Task', 'Hours per Day'],
    ['Work', 11],
    ['Commute', 4],
    ['Sleep', 9]
  ]"
```

My Daily Activities

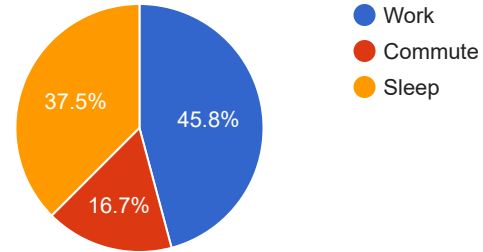


06. CORECHART - LINECHART

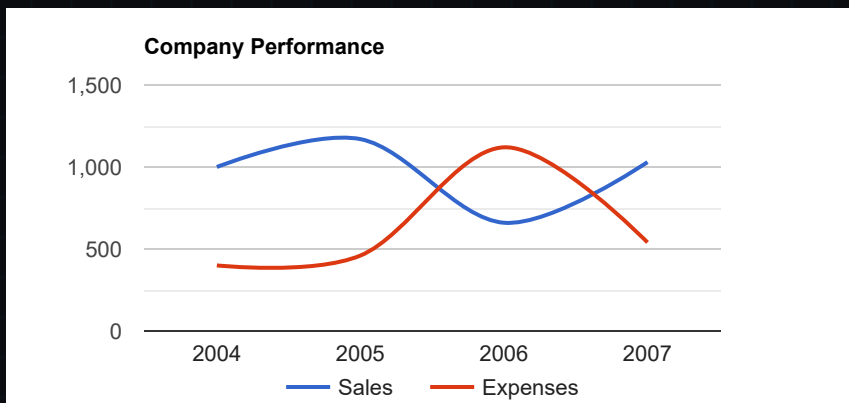

07. CORECHART – (UNTESTED)

- CoreChart
 - AreaChart
 - BarChart
 - BubbleChart
 - CandlestickChart
 - ColumnChart
 - ComboChart
 - ScatterChart
 - SteppedAreaChart


08. ANNOTATIONCHART

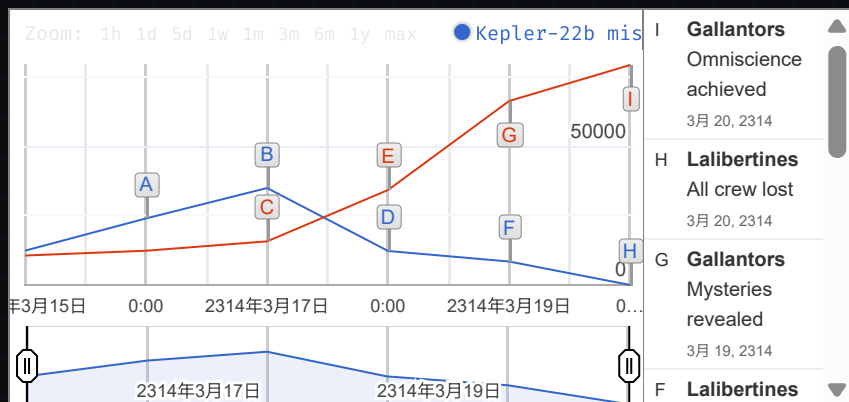

09. CALENDAR


Concerns regarding load

10. GANTT

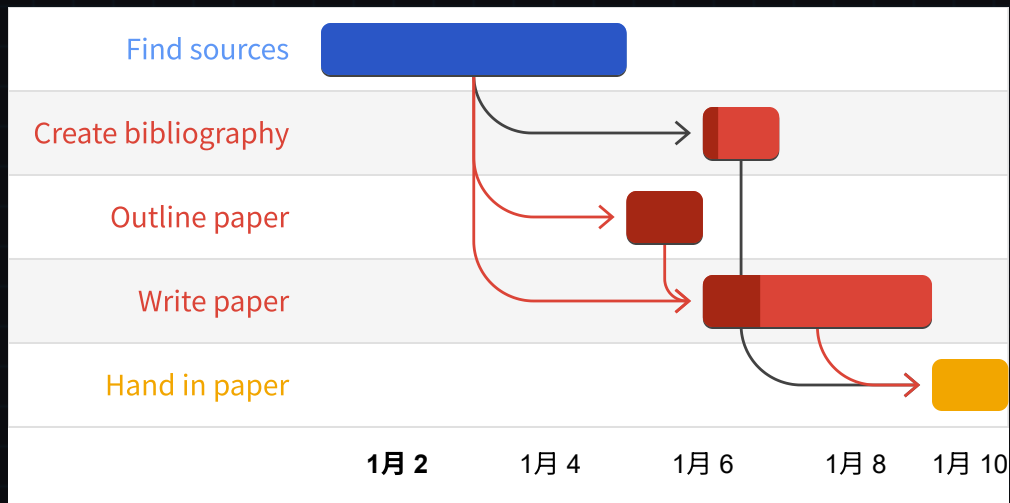


11. GAUGE

```
<GoogleCharts
  type="Gauge"
  :data="[
    ['Label', 'Value'],
    ['CPU', 85]
  ]"
/>
```

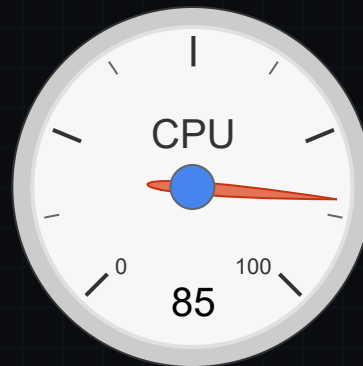

12. GEOCHART

```
<GoogleCharts
  type="GeoChart"
  :options="{
    region: 'JP',
    resolution: 'provinces',
  }"
  :data="[
    ['都道府県', '値'],
    ['北海道', 100]
  ]"
/>
```

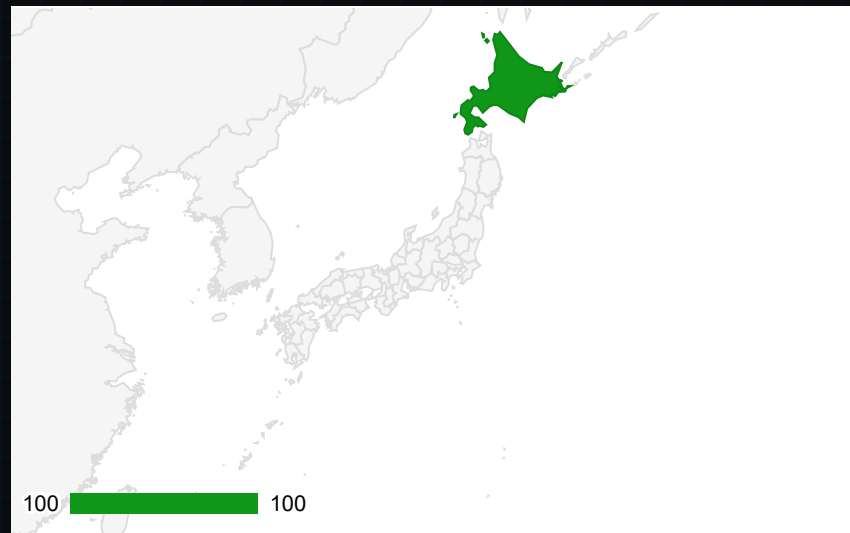


13. MAP


No data points to show on map ✕

Need a mapsApiKey

14. ORGCHART

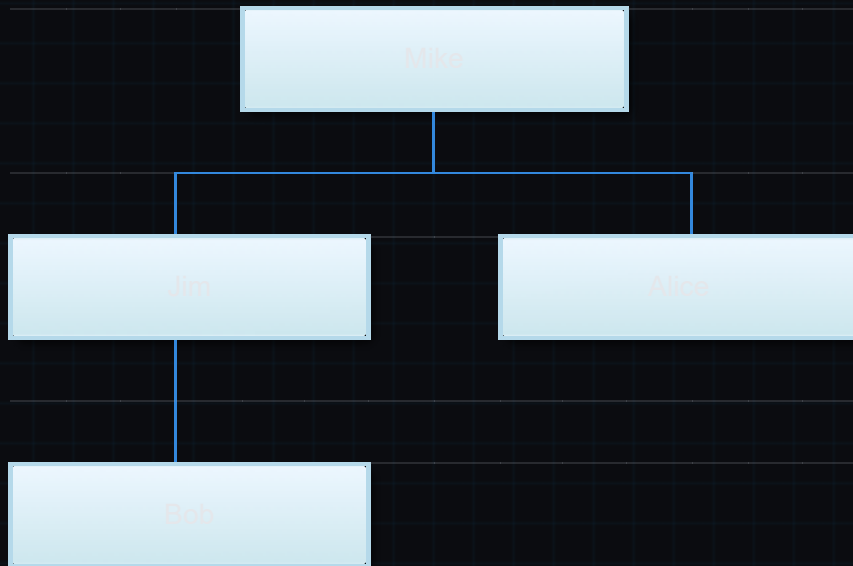

15. SANKEY

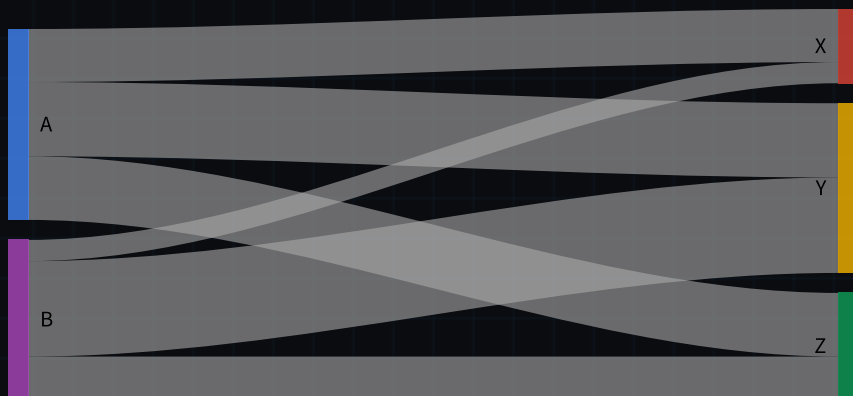


16. TABLE

```
<GoogleCharts
  type="Table"
  :options="{ title: 'My Daily Activities' }"
  :data="[
    ['Name', 'Salary', 'Full Time Employee']
    ['Mike', {v: 10000, f: '$10,000'}, true]
    ['Jim', {v: 8000, f: '$8,000'}, false]
    ['Alice', {v: 12500, f: '$12,500'}, true]
  ]"
```


	Name	Salary	Full Time Employee
1	Mike	\$10,000	✓
2	Jim	\$8,000	X
3	Alice	\$12,500	✓

17. TIMELINE

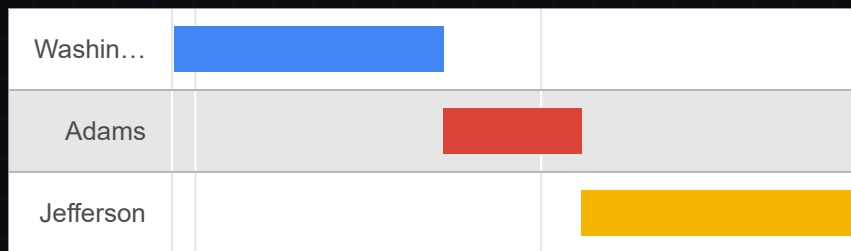

1800


18. TREEMAP

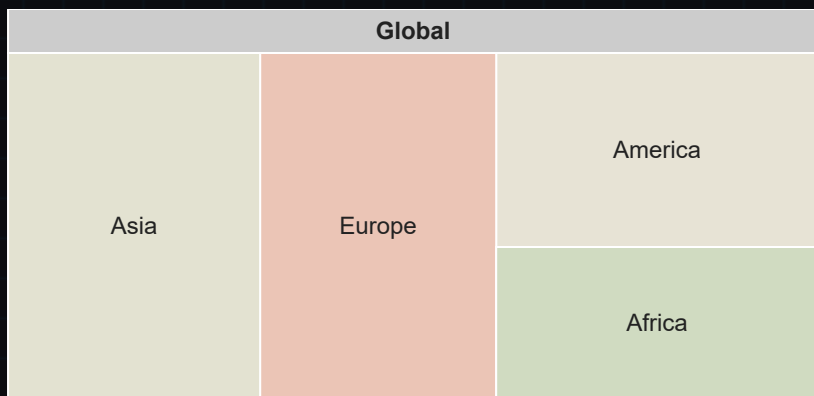

左クリック 末端へ進む

右クリック 上位へ戻る

19. WORDTREE

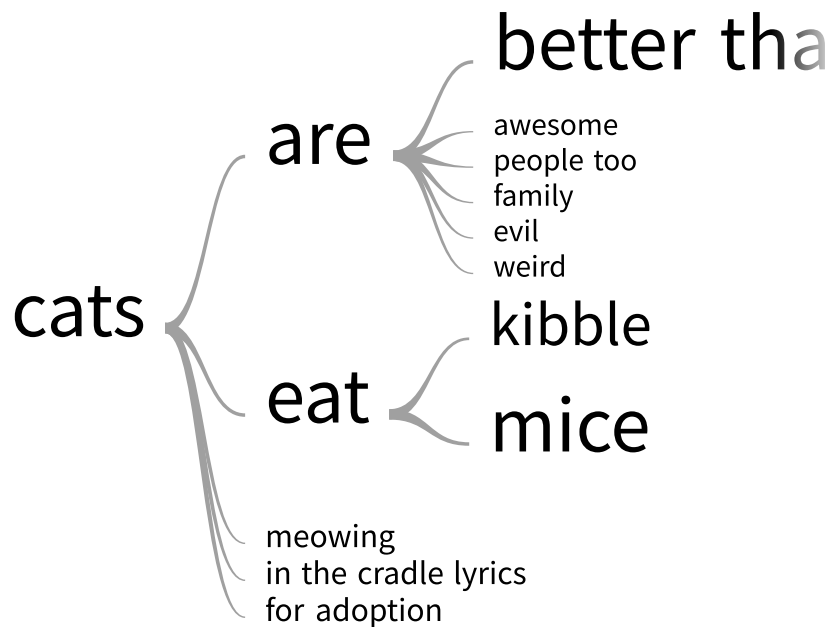

```
root@archiso ~ # ./start_presentation
```

NEO-ARCH SYSTEMS

The Minimalist OS Meets Cyberpunk Aesthetic.

91. PROFILE

- **NAME** — ktkr3d
- **OS** — Arch Linux (Hyprrland / paru)
- **SHELL** — fish
- **KEYBOARD** — us / jp
- **IDE** — vscode / code-server
- **LANGUAGE** — C++ / JavaScript / Lua
- **WIRED** — `EVERYONE_CAN_CONNECT..._BUT_NOT_ME.ERR`



STATUS: OFFLINE_LOOPBACK

92. LAYOUTS

LAYOUT NAME	PURPOSE	PARTITION
<code>cyber-cover</code>	Cover	- <code>:: command ::</code> - <code>:: default ::</code> - <code>:: subtitle ::</code>
<code>cyber-one-col</code>	One Column	- <code>:: header ::</code> - <code>:: default ::</code>
<code>cyber-two-cols</code>	Two Columns	- <code>:: header ::</code> - <code>:: left ::</code> - <code>:: right ::</code>
<code>lain-end</code>	Closing Slide	(none)

93. FRONT MATTER

Head Matter



```
title: Arch Linux Style Presentation
theme: default
addons: [ slidev-addon-google-charts ]
lineNumbers: false
drawings: { persist: false }
highlighter: shiki
transition: fade

layout: cyber-cover
background: ''
class: text-center
```

Slide Front Matter (One Column)



```
layout: cyber-one-col
```

Slide Front Matter (Two Columns)



```
layout: cyber-two-cols
```

Slide Front Matter (Closing Slide)



```
layout: lain-end
```

94. TABLE

MODULE NAME	CORE ARCHITECTURE	INTEGRITY	OPERATIONAL STATUS
kernel-hardened	Linux x86_64	100% SECURE	ACTIVE (BYPASS_MODE)
wayland-compositor	Hyprland / Cyber	98.4% STABLE	RENDERING
luna-network-daemon	Protocol-X via Wired	100% ONLINE	ENCRYPTED_TUNNEL

95. CODEBLOCK

```
// Retry failed async operation
export async function retry<T>(
  fn: () => Promise<T>,
  retries = 3
): Promise<T> {
  try {
    return await fn();
  } catch (err) {
    if (retries ≤ 0) throw err;
    console.warn(`Fail: \${retries} left`);
    return retry(fn, retries - 1);
  }
}
```

Auto-Retry

Automatically re-runs failed async tasks.

Type-Safe

Maintains the exact return type for any function.

Recursion

Retries clean and minimal with self-calling loops.

Safe Throw

Throws the final error after all attempts fail.

96. LIST

Task list



- [X] Closed
- [] Open

☒ Closed

☐ Open

Description List



```
<dl>
  <dt>Real</dt>
  <dd>The real world</dd>
  <dt>Wired</dt>
  <dd>The world of the Internet</dd>
</dl>
```

Real The real world

Wired The world of the Internet

97. RIBBON / FOOTER

RIBBON - TEMPLATE



```
---
ribbon: TEMPLATE
---
```

RIBBON - WIP



```
---
ribbon: WIP
---
```

FOOTER - Default



LAYER_SLIDETITLE

FOOTER - Custom



```
::footer::
custom string
```

custom string

98. DECORATION



```
<span class="point">Point</span>
```

Point



```
<span class="alert">Alert</span>
```

Alert

PRESENT DAY,
PRESENT TIME...
HAHAHAHAHA...