

5.171 graph_isomorphism

	DESCRIPTION	LINKS
Origin	[277]	
Constraint	graph_isomorphism(NODES_PATTERN, NODES_TARGET, FUNCTION)	
Arguments	NODES_PATTERN : collection(index—int, succ—sint) NODES_TARGET : collection(index—int, succ—sint) FUNCTION : collection(image—dvar)	
Restrictions	<pre> required(NODES_PATTERN, [index, succ]) NODES_PATTERN.index ≥ 1 NODES_PATTERN.index ≤ NODES_PATTERN distinct(NODES_PATTERN, index) NODES_PATTERN.succ ≥ 1 NODES_PATTERN.succ ≤ NODES_PATTERN required(NODES_TARGET, [index, succ]) NODES_TARGET.index ≥ 1 NODES_TARGET.index ≤ NODES_TARGET distinct(NODES_TARGET, index) NODES_TARGET.succ ≥ 1 NODES_TARGET.succ ≤ NODES_TARGET NODES_TARGET = NODES_PATTERN required(FUNCTION, [image]) FUNCTION.image ≥ 1 FUNCTION.image ≤ NODES_TARGET distinct(FUNCTION, image) FUNCTION = NODES_PATTERN </pre>	
Purpose	<p>Given two directed graphs PATTERN and TARGET enforce a one to one correspondence, defined by the function FUNCTION, between the vertices of the graph PATTERN and the vertices of the graph TARGET so that:</p> <ol style="list-style-type: none"> 1. if there is an arc from u to v in the graph PATTERN, then there is also an arc from the image of u to the image of v in the graph TARGET, 2. if there is no arc from u to v in the graph PATTERN, then there is also no arc from the image of u to the image of v in the graph TARGET. <p>Both, the PATTERN and TARGET are fixed, and the vertices of both graphs are respectively defined by the two collections of vertices NODES_PATTERN and NODES_TARGET.</p>	

Example

$$\left(\begin{array}{c} \left(\begin{array}{ll} \text{index} - 1 & \text{succ} - \{2, 4\}, \\ \text{index} - 2 & \text{succ} - \{1, 3, 4\}, \\ \text{index} - 3 & \text{succ} - \emptyset, \\ \text{index} - 4 & \text{succ} - \emptyset \end{array} \right), \\ \left(\begin{array}{ll} \text{index} - 1 & \text{succ} - \emptyset, \\ \text{index} - 2 & \text{succ} - \{1, 3, 4\}, \\ \text{index} - 3 & \text{succ} - \emptyset, \\ \text{index} - 4 & \text{succ} - \{1, 2\} \end{array} \right), \\ \langle 4, 2, 3, 1 \rangle \end{array} \right)$$

Figure 5.385 gives the pattern (see Part (A)) and target graph (see Part (B)) of the **Example** slot as well as the one to one correspondence (see Part (C)) between the pattern graph and the target graph. The `graph_isomorphism` constraint since the pattern and target graphs have the same number of vertices and arcs and since:

- To the arc from vertex 1 to vertex 4 in the pattern graph corresponds the arc from vertex 4 to 1 in the target graph.
- To the arc from vertex 1 to vertex 2 in the pattern graph corresponds the arc from vertex 4 to 2 in the target graph.
- To the arc from vertex 2 to vertex 1 in the pattern graph corresponds the arc from vertex 2 to 4 in the target graph.
- To the arc from vertex 2 to vertex 4 in the pattern graph corresponds the arc from vertex 2 to 1 in the target graph.
- To the arc from vertex 2 to vertex 3 in the pattern graph corresponds the arc from vertex 2 to 3 in the target graph.

Typical
 $|\text{NODES_PATTERN}| > 1$
Symmetries

- Items of `NODES_PATTERN` are [permutable](#).
- Items of `NODES_TARGET` are [permutable](#).

Algorithm

A constraint approach is described in [395].

See also

[related: subgraph_isomorphism](#).

Keywords

[constraint arguments: constraint involving set variables](#).
[constraint type: predefined constraint, graph constraint](#).

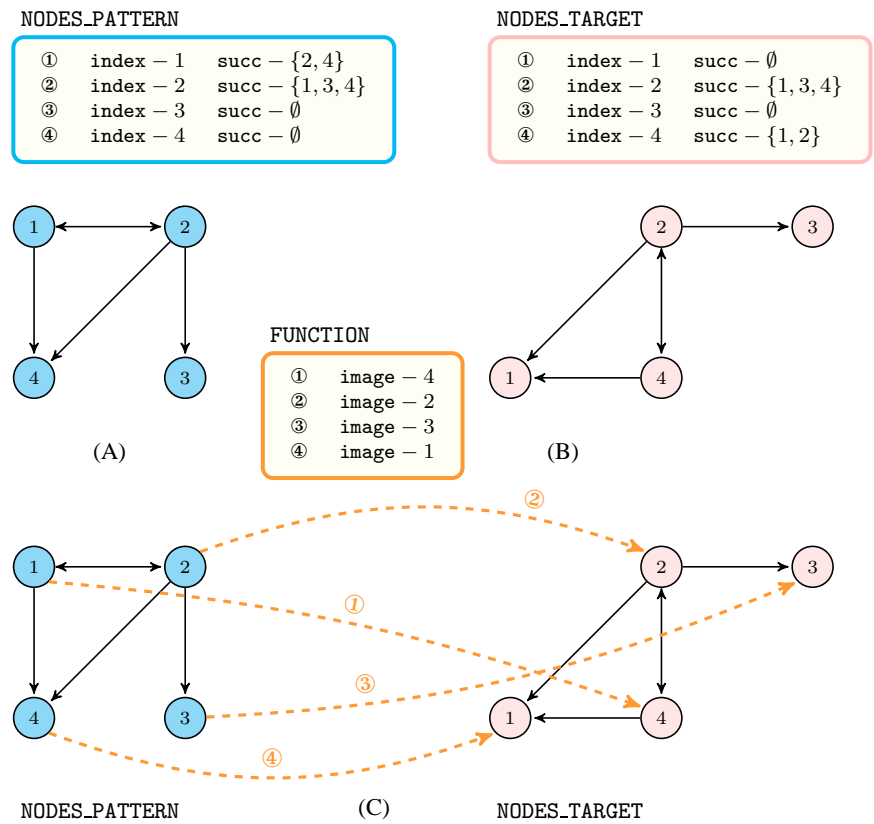


Figure 5.385: Illustration of the **Example** slot: (A) The pattern graph, (B) the target graph and (C) the correspondence, denoted by thick dashed arcs, between the vertices of the pattern graph and the vertices of the target graph

20090822

1299