

```
Duplex


MAC Address

0005.5E30.5501

IP Configuration
IPv4 Address

192.168.0.100
255.255.255.0
```

```
RUBLET (CUMITY-II) #ID BURLESS 134.100.0.100 400.400.200.
Router(config-if) #ip address 192.168.0.100 255.255.255.0
Router(config-if)#
Router(config-if) #exit
Router(config) #interface FastEthernet0/1
Router(config-if) #ip address 100.10.10.1 255.0.0.0
Router(config-if) #ip address 100.10.10.1 255.0.0.0
Router(config-if) #
Router(config-if) #exit
Router(config) #interface FastEthernet0/0
Router(config-if) #
Router(config-if) #exit
Router(config) #access-list 1 permit 192.168.0.0 0.0.0.255
Router(config) #ip nat pool white-address 100.10.11.77 100.10.11.99 netmask 255.255.255.0
Router(config) #ip nat inside source list 1 pool white-address
Router(config) #int fa0/0
Router(config-if) #ip nat inside
Router(config-if) #int fa0/1
Router(config-if) #ip nat outside
Router (config-if) #exit
Router (config) #
                                                                                                  Pas
                                                                                      Сору
```

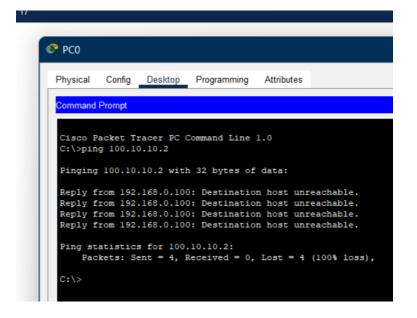

```
Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 100.10.10.2

Pinging 100.10.10.2 with 32 bytes of data:

Reply from 192.168.0.100: Destination host unreachable.
Reply from 192.168.0.100: Destination host unreachable.
Request timed out.
Reply from 192.168.0.100: Destination host unreachable.

Ping statistics for 100.10.10.2:

Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```