

Lecture 4 – Identifiers (1)

COSE212: Programming Languages

Jihyeok Park



2026 Fall

- **ADT** for **Abstract Syntax** of AE

```
enum Expr:  
  case Num(number: BigInt)  
  case Add(left: Expr, right: Expr)  
  case Mul(left: Expr, right: Expr)
```

- **Parser** for **Concrete Syntax** of AE

```
lazy val expr: P[Expr] = ...
```

- **Interpreter** for **Semantics** of AE

```
def interp(expr: Expr): Value = ...
```

- In this lecture, we will learn **identifiers**.

1. Identifiers

- Bound Identifiers

- Free Identifiers

- Shadowing

2. VAE – AE with Variables

- Concrete Syntax

- Abstract Syntax

- Examples

1. Identifiers

- Bound Identifiers

- Free Identifiers

- Shadowing

2. VAE – AE with Variables

- Concrete Syntax

- Abstract Syntax

- Examples

An **identifier** is a **name** for a certain element in a program.

In Scala, there are diverse kinds of identifiers:

```
/* Scala */

// variable names
val x: Int = 42

// function and parameter names
def f(a: Int, b: Int): Int = a + b

// class and field names
case class Person(name: String, age: Int)

...
```

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```

Binding
Occurrences

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```

The diagram illustrates the concept of a **scope** for a bound identifier. A red dashed arrow points from the identifier `x` in the first line (`val x: Int = 3`) to a red rectangular box. This box encloses the code block starting with `val y: Int = x + z` and ending with `add(x, b)`. The word **scope** is written in red text to the right of the box, indicating the region where the identifier `x` is bound and can be used.

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
scope  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
+ scope  
add(x, b)
```

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  scope  
add(x, b)
```

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  scope  
  
add(x, b)
```

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
add(x, b)
```

The diagram highlights the binding occurrence of `x` in the `def add` function body with a red box and an arrow. The scope of this binding is indicated by a red box around the expression `x + add(y, z)` and the label **scope** below it.

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```


Bound
Occurrences

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

Let's draw arrows from each bound occurrence to its binding occurrence.

```
/* Scala */  
val x: Int = 3  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```




A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

Let's draw arrows from each bound occurrence to its binding occurrence.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```

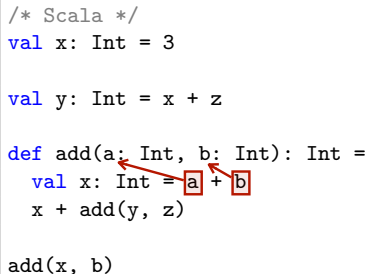

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

Let's draw arrows from each bound occurrence to its binding occurrence.


```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
   + add(y, z)  
  
add(x, b)
```

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

Let's draw arrows from each bound occurrence to its binding occurrence.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```

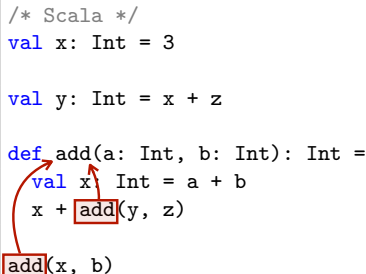


A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

Let's draw arrows from each bound occurrence to its binding occurrence.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```




A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

Let's draw arrows from each bound occurrence to its binding occurrence.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```

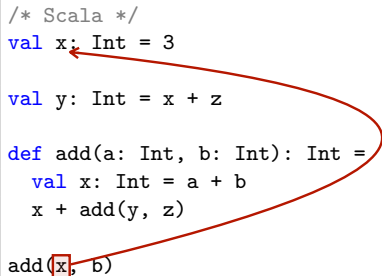


A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

Let's draw arrows from each bound occurrence to its binding occurrence.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```

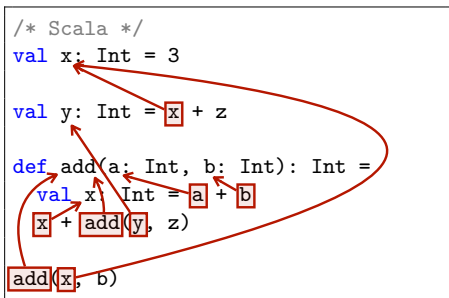

A **bound identifier** is an identifier that is **defined** in a program.

- A **binding occurrence** of an identifier denotes its **definition** site.
- A **scope** of an identifier denotes where the identifier is **usable**.
- A **bound occurrence** of an identifier denotes its **lookup** site.

Let's draw arrows from each bound occurrence to its binding occurrence.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, z)
```

Free Identifiers

A **free identifier** is an identifier that is **not defined** in the current scope of the program.

```
/* Scala */  
val x: Int = 3  
  
val y: Int = x + z  
  
def add(a: Int, b: Int): Int =  
  val x: Int = a + b  
  x + add(y, z)  
  
add(x, b)
```

Diagram illustrating shadowing in Scala code:

- The first `x` (in `val x: Int = 3`) is labeled **Shadowed Identifier**.
- The second `x` (in `val x: Int = a + b`) is labeled **Shadowing Identifier**.
- A red arrow points from the second `x` to the first `x`, indicating that the inner binding shadows the outer one.

Shadowing means that the innermost binding occurrence shadows the outer binding occurrences of the same name.

- A **shadowing identifier** is an identifier that shadows another.
- A **shadowed identifier** is an identifier that is shadowed by another.

Note that shadowing is **NOT** a mutation.

1. Identifiers

Bound Identifiers

Free Identifiers

Shadowing

2. VAE – AE with Variables

Concrete Syntax

Abstract Syntax

Examples

Now, we want to extend AE into VAE with **variables**:

```
/* VAE */  
val x = 1 + 2;    // x = 1 + 2 = 3  
val y = x + 3;    // y = x + 3 = 3 + 3 = 6  
y + 4             // 6 + 4 = 10
```

First, we define the **concrete syntax** of **identifiers** used in VAE:

```
<digit>      ::= "0" | "1" | "2" | "3" | "4" | "5" | "6" | "7" | "8" | "9"  
<number>     ::= "-"? <digit>+  
<alphabet>   ::= "A" | "B" | "C" | ... | "Z" | "a" | "b" | "c" | ... | "z"  
<idstart>    ::= <alphabet> | "_"  
<idcont>     ::= <alphabet> | "_" | <digit>  
<keyword>    ::= "val"  
<id>         ::= <idstart> <idcont>* butnot <keyword>
```

For example, the following are valid identifiers:

x y get_name getName add42

Then, let's define the **concrete syntax** of VAE in BNF:

```
<expr> ::= <number>
         | <expr> "+" <expr>
         | <expr> "*" <expr>
         | "(" <expr> ")"
         | "{" <expr> "}"
         | "val" <id> "=" <expr> ";" <expr>
         | <id>
```

Note that each variable definition creates a **new scope**. For example:

```
/* VAE */
val x = 1 + 2;
val y = x + 3;
y + 4
```

means

```
/* VAE */
val x = 1 + 2;
{ // scope of x
  val y = x + 3;
  { // scope of y
    y + 4
  }
}
```

Let's define the **abstract syntax** of VAE in BNF:

Numbers	$n \in \mathbb{Z}$	(BigInt)	Expressions	$e ::= n$	(Num)
Identifiers	$x \in \mathbb{X}$	(String)		$ e + e$	(Add)
				$ e * e$	(Mul)
				$ \text{val } x = e; e$	(Val)
				$ x$	(Id)

We can define an **ADT** for the abstract syntax of VAE in Scala:

```
enum Expr:  
  case Num(number: BigInt)  
  case Add(left: Expr, right: Expr)  
  case Mul(left: Expr, right: Expr)  
  // variable definition  
  case Val(name: String, init: Expr, body: Expr)  
  // variable lookup  
  case Id(name: String)
```

```
enum Expr:
  case Num(number: BigInt)
  case Add(left: Expr, right: Expr)
  case Mul(left: Expr, right: Expr)
  case Val(name: String, init: Expr, body: Expr)
  case Id(name: String)
```

Parser implementation is given and you don't need to implement it.

You can freely use Expr to parse VAE programs as follows:

```
Expr("val x = 1; x + 2")
// Val("x", Num(1), Add(Id("x"), Num(2)))

Expr("val a = 1; val b = 2; a + b")
// Val("a", Num(1), Val("b", Num(2), Add(Id("a"), Id("b"))))
```

For each VAE program, please draw:

- an **arrow** from each **bound occurrence** to its **binding occurrence**.
- a **dotted arrow** from each **shadowing variable** to its **shadowed one**.
- an **X** mark on each **free variable**.

```
/* VAE */  
val x = 1; x
```

```
/* VAE */  
val x = x + 1;  
val y = x * 2;  
val x = y + x;  
x * z
```

```
/* VAE */  
val x = 1;  
val y = {  
    val x = 2 * x;  
    { val y = x; y } + { val y = 3; y }  
};  
x + y
```

1. Identifiers

- Bound Identifiers

- Free Identifiers

- Shadowing

2. VAE – AE with Variables

- Concrete Syntax

- Abstract Syntax

- Examples

- Identifiers (2)

Jihyeok Park

jihyeok_park@korea.ac.kr

<https://plrg.korea.ac.kr>