

Lecture 0 – Introduction

AAA705: Software Testing and Quality Assurance

Jihyeok Park



2026 Fall

- **Instructor:** Jihyeok Park (박지혁)
 - **Position:** Assistant Professor in CS, Korea University
 - **Expertise:** Programming Languages, Software Analysis
 - **Office hours:** By appointment via e-mail
 - **Office:** 507, Jung Woonoh IT & General Education Center
 - **Email:** jihyeok_park@korea.ac.kr

- **Instructor:** Jihyeok Park (박지혁)
 - **Position:** Assistant Professor in CS, Korea University
 - **Expertise:** Programming Languages, Software Analysis
 - **Office hours:** By appointment via e-mail
 - **Office:** 507, Jung Woonoh IT & General Education Center
 - **Email:** jihyeok_park@korea.ac.kr
- **Class:** AAA705: Software Testing and Quality Assurance

- **Instructor:** Jihyeok Park (박지혁)
 - **Position:** Assistant Professor in CS, Korea University
 - **Expertise:** Programming Languages, Software Analysis
 - **Office hours:** By appointment via e-mail
 - **Office:** 507, Jung Woonoh IT & General Education Center
 - **Email:** jihyeok_park@korea.ac.kr
- **Class:** AAA705: Software Testing and Quality Assurance
- **Lectures:** 09:00–12:00, Mon. and Wed. @ 304 애기능생활관

- **Instructor:** Jihyeok Park (박지혁)
 - **Position:** Assistant Professor in CS, Korea University
 - **Expertise:** Programming Languages, Software Analysis
 - **Office hours:** By appointment via e-mail
 - **Office:** 507, Jung Woonoh IT & General Education Center
 - **Email:** jihyeok_park@korea.ac.kr
- **Class:** AAA705: Software Testing and Quality Assurance
- **Lectures:** 09:00–12:00, Mon. and Wed. @ 304 애기능생활관
- **Homepage:** <https://plrg.korea.ac.kr/courses/aaa705/>

Week	Date	Contents
1	09/02	Introduction
2	09/07	Input Space Modeling
	09/09	Random Testing and Fuzzing
3	09/14	Coverage Criteria
	09/16	Search Based Software Testing (SBST)
4	09/21	Dynamic Symbolic Execution (DSE)
	09/23	Regression Testing
5	09/28	Mutation Testing
	09/30	Testing Oracles
6	10/05–10/07	No Offline Lectures (Homework)
7	10/12	Fault Localization (recorded)
	10/14	Automated Program Repair (recorded)
8	10/19	LLM-based Software Testing
	10/21	Course Review

- **4 Homework Assignments: 80%**
 - Each assignment is worth **20%**:
 - Homework 1 (due on Sep. 21) – Coverage Measurement
 - Homework 2 (due on Sep. 28) – Test Generation
 - Homework 3 (due on Oct. 5) – Mutation Testing and Minimization
 - Homework 4 (due on Oct. 19) – Fault Localization
 - Submit your homework on [LMS](#).

- **4 Homework Assignments: 80%**

- Each assignment is worth **20%**:
 - Homework 1 (due on Sep. 21) – Coverage Measurement
 - Homework 2 (due on Sep. 28) – Test Generation
 - Homework 3 (due on Oct. 5) – Mutation Testing and Minimization
 - Homework 4 (due on Oct. 19) – Fault Localization
- Submit your homework on [LMS](#).

- **Attendance: 20%**

- Please use [LMS](#) to attend the class with the code provided.
- **All or nothing:** $\geq 2/3$ of the checks $\rightarrow$ **20%**, otherwise **0%**.
- **No** attendance check in the first week; it starts on **Sep. 7**.

- **Self-contained lecture notes.**

<https://plrg.korea.ac.kr/courses/aaa705/>

- **Self-contained lecture notes.**

<https://plrg.korea.ac.kr/courses/aaa705/>

- **References:** this course is developed with reference to the following materials.
 - [“Introduction to Software Testing \(2nd Ed.\)”](#) by Paul Ammann and Jeff Offutt.
 - [“Why Programs Fail \(2nd Ed.\)”](#) by Andreas Zeller.
 - [“CS453: Automated Software Testing”](#) by [Shin Yoo](#) @ KAIST.

1. Why Software Testing?

2. Terminologies in Software Testing


Types of Software Quality

Faults vs. Errors vs. Failures



More Terminologies

3. Software Testing Techniques

Unexpected faults in **safety-critical software** cause serious problems:


 June 4, 1996: Ariane-5 explodes after lift off Today in History: June 4, 1996: Ariane-5 explodes after lift off Published: January 20, 2017 World Science, World of Science Follow us + Facebook Twitter YouTube			
Rocket Ariane 5 (1996)	Security Heartbleed (2014)	Global IT CrowdStrike (2024)	Cloud Cloudflare (2025)

Unexpected faults in **safety-critical software** cause serious problems:

 June 4, 1996: Ariane-5 explodes after lift off Today in History: June 4, 1996: Ariane-5 explodes after lift off Published: January 20, 2017 World Science, Head of Science			
Rocket Ariane 5 (1996)	Security Heartbleed (2014)	Global IT CrowdStrike (2024)	Cloud Cloudflare (2025)

Then, how can we **prevent** such software faults?

Unexpected faults in **safety-critical software** cause serious problems:

 June 4, 1996: Ariane-5 explodes after lift off Today in History: June 4, 1996: Ariane 5 explodes after lift off Facebook Twitter LinkedIn			
Rocket Ariane 5 (1996)	Security Heartbleed (2014)	Global IT CrowdStrike (2024)	Cloud Cloudflare (2025)

Then, how can we **prevent** such software faults?

Can we **automatically check** whether a program does not have any software faults?

Detecting Software Faults

How do we know whether a software is correct?

How do we know whether a software is correct?



Empiricists – Francis Bacon

*It is correct because I **TESTED**
several times but no error was found!*

VS.



Rationalists – René Descartes

*It is correct because I formally
PROVED that no error exists!*

We can use various **analysis** techniques to detect software faults.



An **analyzer** is a program that takes a **program** and a **property** as inputs and determines whether the program **satisfies** the property.

We can use various **analysis** techniques to detect software faults.



An **analyzer** is a program that takes a **program** and a **property** as inputs and determines whether the program **satisfies** the property.

We can categorize them into two groups:

- **Dynamic analyzers** analyze programs by **executing** them.
- **Static analyzers** analyze programs **without executing** them.

Dynamic Analysis vs. Static Analysis


★ : Possible States ● : Error States ⋮ : Dynamic Analysis ⬡ : Static Analysis



P₁



P₂




P₃

Dynamic Analysis	Static Analysis
Software Testing	Formal Verification
Empiricists	Rationalists
Under-approximation	Over-approximation
False Negatives (Missed Errors)	False Positives (False Alarms)

Dynamic Analysis vs. Static Analysis


★ : Possible States ● : Error States ⋮ : Dynamic Analysis ◈ : Static Analysis



P₁



P₂




P₃

Dynamic Analysis	Static Analysis
Software Testing	Formal Verification
Empiricists	Rationalists
Under-approximation	Over-approximation
False Negatives (Missed Errors)	False Positives (False Alarms)

Dynamic Analysis vs. Static Analysis


★ : Possible States ● : Error States ⋮ : Dynamic Analysis ◈ : Static Analysis

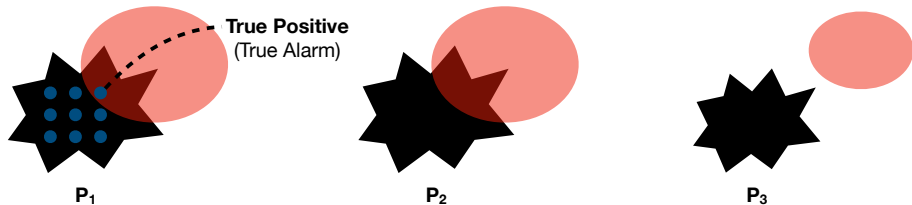

Dynamic Analysis	Static Analysis
Software Testing	Formal Verification
Empiricists	Rationalists
Under-approximation	Over-approximation
False Negatives (Missed Errors)	False Positives (False Alarms)

Dynamic Analysis vs. Static Analysis


★ : Possible States ● : Error States ⋮ : Dynamic Analysis ◈ : Static Analysis

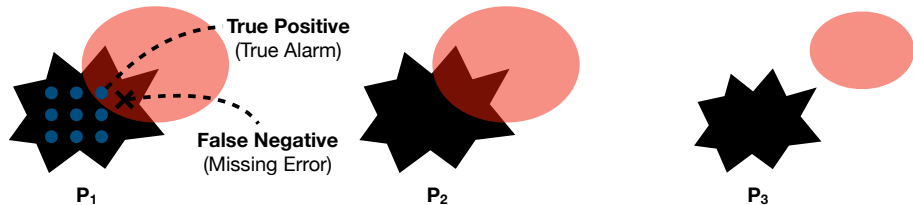

Dynamic Analysis	Static Analysis
Software Testing	Formal Verification
Empiricists	Rationalists
Under-approximation	Over-approximation
False Negatives (Missed Errors)	False Positives (False Alarms)

Dynamic Analysis vs. Static Analysis


★ : Possible States ● : Error States ⋮ : Dynamic Analysis ⬡ : Static Analysis

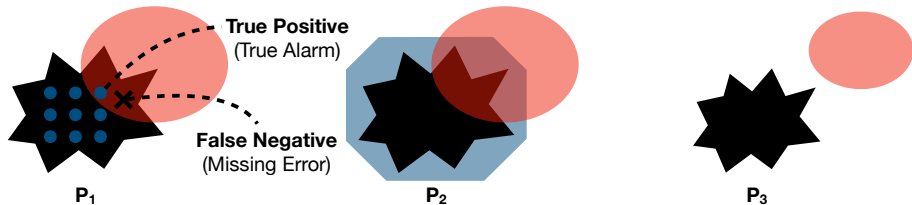

Dynamic Analysis	Static Analysis
Software Testing	Formal Verification
Empiricists	Rationalists
Under-approximation	Over-approximation
False Negatives (Missed Errors)	False Positives (False Alarms)

Dynamic Analysis vs. Static Analysis


★ : Possible States ● : Error States ⋮ : Dynamic Analysis ⬡ : Static Analysis

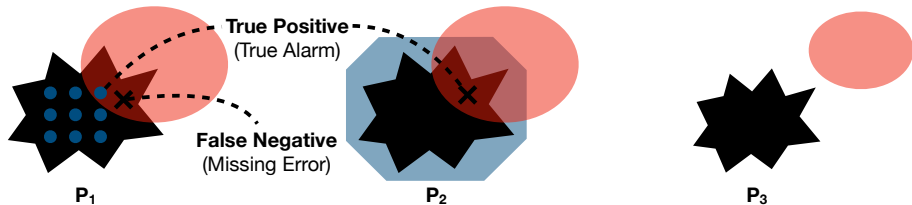

Dynamic Analysis	Static Analysis
Software Testing	Formal Verification
Empiricists	Rationalists
Under-approximation	Over-approximation
False Negatives (Missed Errors)	False Positives (False Alarms)

Dynamic Analysis vs. Static Analysis


★ : Possible States ● : Error States ⋮ : Dynamic Analysis ⬡ : Static Analysis

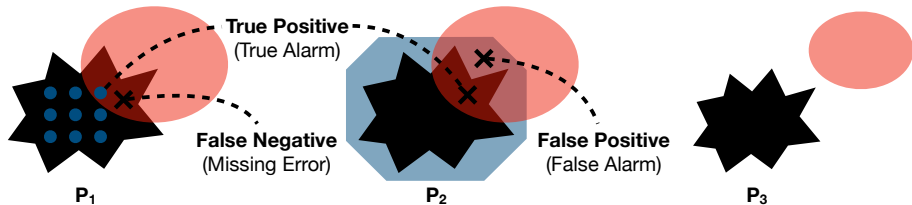

Dynamic Analysis	Static Analysis
Software Testing	Formal Verification
Empiricists	Rationalists
Under-approximation	Over-approximation
False Negatives (Missed Errors)	False Positives (False Alarms)

Dynamic Analysis vs. Static Analysis


★ : Possible States ● : Error States ⋮ : Dynamic Analysis ⬡ : Static Analysis

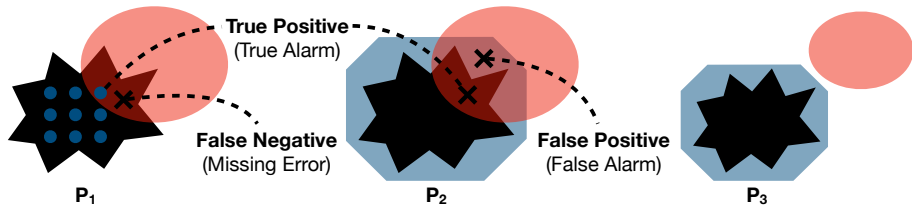

Dynamic Analysis	Static Analysis
Software Testing	Formal Verification
Empiricists	Rationalists
Under-approximation	Over-approximation
False Negatives (Missed Errors)	False Positives (False Alarms)

Dynamic Analysis vs. Static Analysis

★ : Possible States ● : Error States ⋮ : Dynamic Analysis ⬡ : Static Analysis

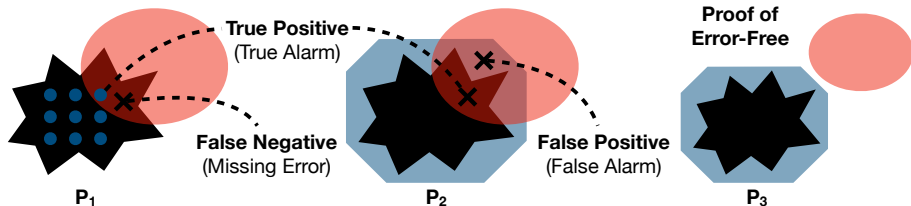

Dynamic Analysis	Static Analysis
Software Testing	Formal Verification
Empiricists	Rationalists
Under-approximation	Over-approximation
False Negatives (Missed Errors)	False Positives (False Alarms)



- Imagine you have two choices when boarding a airplane:
 - While an airplane A has **never been proven** to have any run-time errors, it has been **tested** with a finite number of test flights.
 - While an airplane B has been **formally verified** to have no run-time errors, it has **never been tested** in the real world.



- Imagine you have two choices when boarding a airplane:
 - While an airplane A has **never been proven** to have any run-time errors, it has been **tested** with a finite number of test flights.
 - While an airplane B has been **formally verified** to have no run-time errors, it has **never been tested** in the real world.
- Some people may choose A, while others may choose B.



- Imagine you have two choices when boarding a airplane:
 - While an airplane A has **never been proven** to have any run-time errors, it has been **tested** with a finite number of test flights.
 - While an airplane B has been **formally verified** to have no run-time errors, it has **never been tested** in the real world.
- Some people may choose A, while others may choose B.
- In addition, some properties only can be **tested** but not **verified** (e.g., energy consumption, usability, etc.).

1. Why Software Testing?

2. Terminologies in Software Testing

- Types of Software Quality

- Faults vs. Errors vs. Failures

- More Terminologies

3. Software Testing Techniques

Software testing *is an empirical, technical investigation conducted to provide stakeholders with information about the **quality** of the product or service under test.*

— Cem Kaner (2006)

The software should be **dependable**: **correct**, **reliable**, **safe**, and **robust**.

The software should be **dependable**: **correct**, **reliable**, **safe**, and **robust**.

- **Correctness**: the software should exactly **conform** to its **formal specification**.

The software should be **dependable**: **correct**, **reliable**, **safe**, and **robust**.

- **Correctness**: the software should exactly **conform** to its **formal specification**.
- **Reliability**: the software should have a **high probability** of being **correct** for a period of time.

The software should be **dependable**: **correct**, **reliable**, **safe**, and **robust**.

- **Correctness**: the software should exactly **conform** to its **formal specification**.
- **Reliability**: the software should have a **high probability** of being **correct** for a period of time.
- **Safety**: the software should pose **no risk** of any kind of **hazard** (loss of life, injury, etc.).

The software should be **dependable**: **correct**, **reliable**, **safe**, and **robust**.

- **Correctness**: the software should exactly **conform** to its **formal specification**.
- **Reliability**: the software should have a **high probability** of being **correct** for a period of time.
- **Safety**: the software should pose **no risk** of any kind of **hazard** (loss of life, injury, etc.).
- **Robustness**: the software should reasonably **remain dependable** even if surrounding **environment changes**.

Apart from dependability, the software should meet certain **performance** expectations.

Apart from dependability, the software should meet certain **performance** expectations.

- For example, execution time, network throughput, memory usage, number of simultaneous users, etc.

Apart from dependability, the software should meet certain **performance** expectations.

- For example, execution time, network throughput, memory usage, number of simultaneous users, etc.
- **Hard to thoroughly test** due to the heavy reliance on the **execution environment** and **usage patterns**.

Types of Software Quality: Usability

The software should be **usable**.

The software should be **usable**.

- In general, there is no universally accepted criterion for **usability**.

The software should be **usable**.

- In general, there is no universally accepted criterion for **usability**.
- Usability testing usually involves **user studies**, such as **focus groups**, **beta-testing**, **A/B testing**, etc.


Types of Software Quality: Ethics

The software should be **ethical**.

The software should be **ethical**.

- Typically, this is applied to AI/ML based systems.
- **[FSE'17]** S. Galhotra, Y. Brun, and A. Meliou. "*Fairness testing: testing software for discrimination.*"
- **[TOSEM'24]** Z. Chen, J. M. Zhang, M. Hort, M. Harman, and F. Sarro. "*Fairness testing: a comprehensive survey and analysis of trends.*"
- **[FSE'26]** X. Li, Z. Chen, J. M. Zhang, Y. Xiao, T. Li, W. Sun, Y. Liu, Y. Lou, and X. Liu. "*Fairness testing of large language models in role-playing.*"

The purpose of testing is to **detect** and **remove** faults, errors, and failures.

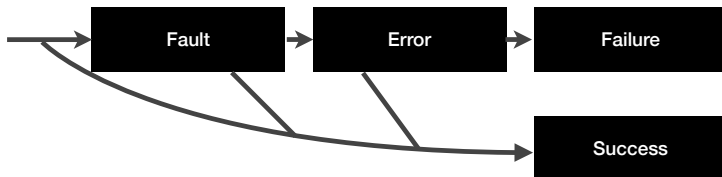

From **IEEE Standard 729-1983**, IEEE Standard Glossary of Software Engineering Terminology¹

- **Fault:** an anomaly in the software that may lead to an error.
- **Error:** a runtime effect of executing a fault, which may cause a failure.
- **Failure:** a manifestation of an error external to the software.

¹<https://ieeexplore.ieee.org/document/7435207>

We want to implement a JavaScript function that computes the sum of elements in a given array.

```
function sum(arr) {  
  let result = 0;  
  for (let i = 0; i < arr.length; i++) {  
    // fault: `i` should be fixed to `arr[i]`  
    result += i;  
  }  
  return result;  
}
```

It is a **fault** but **not an error** until the function is executed.

```
// the faulty statement is not reached at runtime (no error)  
assert(sum([]) === 0);
```

We want to implement a JavaScript function that computes the sum of elements in a given array.

```
function sum(arr) {  
  let result = 0;  
  for (let i = 0; i < arr.length; i++) {  
    // fault: `i` should be fixed to `arr[i]`  
    result += i;  
  }  
  return result;  
}
```

It is an **error** with the following input but **not a failure** because the output is **coincidentally correct**.

```
// the faulty statement is reachable at runtime (error)  
// the output is coincidentally correct (no failure)  
assert(sum([4, -2, 1]) === 3);
```

We want to implement a JavaScript function that computes the sum of elements in a given array.

```
function sum(arr) {  
  let result = 0;  
  for (let i = 0; i < arr.length; i++) {  
    // fault: `i` should be fixed to `arr[i]`  
    result += i;  
  }  
  return result;  
}
```

It is a **failure** with the following input because the output is **incorrect**.

```
// the output is incorrect (failure)  
assert(sum([3, 7, 4]) === 14);
```

- **Test Input:** a set of inputs that are used to test a program.

- **Test Input:** a set of inputs that are used to test a program.
- **Test Oracle:** a mechanism to determine whether the program behaves correctly.

- **Test Input:** a set of inputs that are used to test a program.
- **Test Oracle:** a mechanism to determine whether the program behaves correctly.
- **Test Case:** a pair of a test input and a test oracle.

- **Test Input:** a set of inputs that are used to test a program.
- **Test Oracle:** a mechanism to determine whether the program behaves correctly.
- **Test Case:** a pair of a test input and a test oracle.
- **Test Suite:** a set of test cases.

- **Test Input:** a set of inputs that are used to test a program.
- **Test Oracle:** a mechanism to determine whether the program behaves correctly.
- **Test Case:** a pair of a test input and a test oracle.
- **Test Suite:** a set of test cases.
- **Test Effectiveness:** the ability of a test suite to detect faults or achieve other testing objectives.

- **Test Input:** a set of inputs that are used to test a program.
- **Test Oracle:** a mechanism to determine whether the program behaves correctly.
- **Test Case:** a pair of a test input and a test oracle.
- **Test Suite:** a set of test cases.
- **Test Effectiveness:** the ability of a test suite to detect faults or achieve other testing objectives.
- **Testing vs. Debugging:** testing is the process of detecting faults, while debugging is the process of fixing faults.

1. Why Software Testing?

2. Terminologies in Software Testing

Types of Software Quality

Faults vs. Errors vs. Failures


More Terminologies

3. Software Testing Techniques


- **Exhaustive Testing:** Can we test a program with all possible inputs?

- **Exhaustive Testing:** Can we test a program with all possible inputs?
In theory, **Yes!**

- **Exhaustive Testing:** Can we test a program with all possible inputs?
In theory, **Yes!**
- However, it is infeasible for most programs.
- For example, consider a program that takes three 32-bit integers as inputs and returns whether they can form a **triangle** and, if so, **its type**.




- **Exhaustive Testing:** Can we test a program with all possible inputs?
In theory, **Yes!**
- However, it is infeasible for most programs.
- For example, consider a program that takes three 32-bit integers as inputs and returns whether they can form a **triangle** and, if so, **its type**.



- How many possible inputs are there?

- **Exhaustive Testing:** Can we test a program with all possible inputs?
In theory, **Yes!**
- However, it is infeasible for most programs.
- For example, consider a program that takes three 32-bit integers as inputs and returns whether they can form a **triangle** and, if so, **its type**.




- How many possible inputs are there?

$$2^{32} \times 2^{32} \times 2^{32} = 2^{96} \approx 7.9 \times 10^{28}$$

- Approximated number of stars in the universe: 10^{24}

- **Exhaustive Testing:** Can we test a program with all possible inputs?
In theory, **Yes!**
- However, it is infeasible for most programs.
- For example, consider a program that takes three 32-bit integers as inputs and returns whether they can form a **triangle** and, if so, **its type**.



- How many possible inputs are there?

$$2^{32} \times 2^{32} \times 2^{32} = 2^{96} \approx 7.9 \times 10^{28}$$

- Approximated number of stars in the universe: 10^{24}
- Testing allows only a **sampling** of an enormous **input space**.
The difficulty lies in how to come up with **effective sampling**.

- For every test input, we need to know the **expected behavior** of the program. (i.e., the **oracle**).

- For every test input, we need to know the **expected behavior** of the program. (i.e., the **oracle**).
- How to define the **oracle**?

- For every test input, we need to know the **expected behavior** of the program. (i.e., the **oracle**).
- How to define the **oracle**?
- Without an explicit oracle, we can only detect a small subset of faults. (e.g., **crash**, **unintended infinite loop**, **division by zero**, etc.)

- For every test input, we need to know the **expected behavior** of the program. (i.e., the **oracle**).
- How to define the **oracle**?
- Without an explicit oracle, we can only detect a small subset of faults. (e.g., **crash**, **unintended infinite loop**, **division by zero**, etc.)
- We need to **define** or **infer** the oracle for testing.

- There is no fixed recipe for software testing.

- There is no fixed recipe for software testing.
- We need to understand the pros and cons of each testing technique.

- There is no fixed recipe for software testing.
- We need to understand the pros and cons of each testing technique.
- There are two major categories of testing techniques:
 - **Black-box Testing:** testing **without** knowing the internal structure of the program.
 - **White-box Testing:** testing **with** the knowledge of the internal structure of the program.

- **Combinatorial Testing**

- Tester utilizes **input specifications** to generate test cases.

- **Random Testing**

- Tester **randomly** selects test cases from the input space.
- It can be used for **white-box testing** as well.

Sometimes called **structural testing** because it uses the **internal structure** of the program to derive test cases.

- **Coverage Criteria**

- The adequacy of a test suite is measured in terms of the **coverage** of the program's internal structure.

- **Search Based Software Testing (SBST)**

- A technique that uses **meta-heuristic search** algorithms to maximize/minimize a certain **fitness function**.

- **Dynamic Symbolic Execution (DSE)**

- A technique that systematically explores the input space using **symbolic execution** with **dynamic analysis**.

- **Mutation Testing**

- A technique that evaluates the quality of a test suite by introducing **artificial faults** to the program.

- **Regression Testing**

- A technique that ensures that a change in the program does not introduce new faults.

- **Fault Localization**

- A technique that identifies the **location** of a fault in the program.

- **Metamorphic Testing**

- A technique that tests a program using **metamorphic relations**.

- **Differential Testing**

- A technique that tests a program by comparing the outputs of **multiple implementations**.

- Input Space Modeling

Jihyeok Park

jihyeok_park@korea.ac.kr

<https://plrg.korea.ac.kr>