

Lecture 5 – Dynamic Symbolic Execution

AAA705: Software Testing and Quality Assurance

Jihyeok Park



2026 Fall

- Search Based Software Engineering (SBSE)
 - Representation / fitness / operators; exploitation vs. exploration
- Fitness Landscape – plateau, needle, ruggedness; the landscape is ours to design
- Local Search – hill climbing, local optima, simulated annealing, tabu search
- Genetic Algorithms – selection / crossover / mutation; representation decides the operators
- Bio-inspired Algorithms – PSO / ACO; no free lunch
- Search Based Software Testing (SBST)
 - Fitness = approach level + branch distance; AVM
 - Flag problem; whole test suite (EvoSuite) / many-objective (MOSA)
 - Search beats random only where the fitness has a **slope**

```
int f(int a, int b) {  
    if (a >= 10)  
        if (b == 2 * a)  
            if (a + b > 100) return 1;  
    return 0;  
}
```

```
int f(int a, int b) {  
    if (a >= 10)  
        if (b == 2 * a)  
            if (a + b > 100) return 1;  
    return 0;  
}
```

- **Last time:** a **distance** to the branch where the input left. The search moved the input step by step, and often got stuck.

```
int f(int a, int b) {  
    if (a >= 10)  
        if (b == 2 * a)  
            if (a + b > 100) return 1;  
    return 0;  
}
```

- **Last time:** a **distance** to the branch where the input left. The search moved the input step by step, and often got stuck.
- The path to `return 1` is one formula:
 $a \geq 10 \wedge b = 2a \wedge a + b > 100$. A **solver** returns (34, 68) at once.

```
int f(int a, int b) {  
    if (a >= 10)  
        if (b == 2 * a)  
            if (a + b > 100) return 1;  
    return 0;  
}
```

- **Last time:** a **distance** to the branch where the input left. The search moved the input step by step, and often got stuck.
- The path to `return 1` is one formula:
 $a \geq 10 \wedge b = 2a \wedge a + b > 100$. A **solver** returns (34, 68) at once.
- **Today:** run the program on **symbols** to collect the formula, solve it to reach the other side of a branch, and use **concrete** values where the solver cannot.

1. Symbolic Execution

- Basic Idea

- Satisfiability Modulo Theories (SMT)

- Limitations of Symbolic Execution

2. Dynamic Symbolic Execution (DSE)

- Search Heuristics

- Example – Loops

- Example – Data Structures

- Realistic Implementation

- Hybrid Analysis

1. Symbolic Execution

- Basic Idea

- Satisfiability Modulo Theories (SMT)

- Limitations of Symbolic Execution

2. Dynamic Symbolic Execution (DSE)

- Search Heuristics

- Example – Loops

- Example – Data Structures

- Realistic Implementation

- Hybrid Analysis

- **Random testing** needs about $2^{32} \approx 4 \times 10^9$ runs on average to hit this error:

```
void testme (int x) {  
    if (x == 93589) {  
        ERROR  
    }  
}
```

¹[CACM'76] J. C. King. "Symbolic Execution and Program Testing." [TSE'76] L. A. Clarke. "A System to Generate Test Data and Symbolically Execute Programs."

- **Random testing** needs about $2^{32} \approx 4 \times 10^9$ runs on average to hit this error:

```
void testme (int x) {  
    if (x == 93589) {  
        ERROR  
    }  
}
```

- **Symbolic execution** runs the program **once** on a **symbol** α in place of a number. The branch leaves the constraint $\alpha = 93589$, and a solver returns the input from it.¹

¹[CACM'76] J. C. King. "Symbolic Execution and Program Testing." [TSE'76] L. A. Clarke. "A System to Generate Test Data and Symbolically Execute Programs."

- **Random testing** needs about $2^{32} \approx 4 \times 10^9$ runs on average to hit this error:

```
void testme (int x) {  
    if (x == 93589) {  
        ERROR  
    }  
}
```

- **Symbolic execution** runs the program **once** on a **symbol** α in place of a number. The branch leaves the constraint $\alpha = 93589$, and a solver returns the input from it.¹
- The idea is from 1976. It became practical around 2005 with **SMT solvers**, heuristics against **path explosion**, and models of the **heap** and the **environment** – the rest of today.

¹[CACM'76] J. C. King. "Symbolic Execution and Program Testing." [TSE'76] L. A. Clarke. "A System to Generate Test Data and Symbolically Execute Programs."

- ① Run the program on **symbolic inputs** $\alpha, \beta, \dots$ instead of numbers – one symbol per input.

- ① Run the program on **symbolic inputs** $\alpha, \beta, \dots$ instead of numbers – one symbol per input.
- ② A variable then holds a **symbolic expression** $\omega \in \Omega$, built from those symbols, constants, and the program's own operators:

$$\omega ::= \alpha \mid n \mid \omega \oplus \omega \mid f(\omega, \dots) \quad \text{e.g., } 2\alpha, \beta - \alpha, \text{ hash}(\alpha)$$

- ① Run the program on **symbolic inputs** $\alpha, \beta, \dots$ instead of numbers – one symbol per input.
- ② A variable then holds a **symbolic expression** $\omega \in \Omega$, built from those symbols, constants, and the program's own operators:

$$\omega ::= \alpha \mid n \mid \omega \oplus \omega \mid f(\omega, \dots) \quad \text{e.g., } 2\alpha, \beta - \alpha, \text{ hash}(\alpha)$$

- ③ A **symbolic state** $\sigma \in \mathbb{S} = \mathbb{X} \xrightarrow{\text{fin}} \Omega$ maps each variable to the expression it currently holds.

- 1 Run the program on **symbolic inputs** $\alpha, \beta, \dots$ instead of numbers – one symbol per input.
- 2 A variable then holds a **symbolic expression** $\omega \in \Omega$, built from those symbols, constants, and the program's own operators:

$$\omega ::= \alpha \mid n \mid \omega \oplus \omega \mid f(\omega, \dots) \quad \text{e.g., } 2\alpha, \beta - \alpha, \text{ hash}(\alpha)$$

- 3 A **symbolic state** $\sigma \in \mathbb{S} = \mathbb{X} \xrightarrow{\text{fin}} \Omega$ maps each variable to the expression it currently holds.
- 4 A **path condition** $\Phi = \phi_1 \wedge \dots \wedge \phi_n$ collects one **boolean** symbolic expression ϕ_i per branch taken so far.

- 1 Run the program on **symbolic inputs** $\alpha, \beta, \dots$ instead of numbers – one symbol per input.
- 2 A variable then holds a **symbolic expression** $\omega \in \Omega$, built from those symbols, constants, and the program's own operators:

$$\omega ::= \alpha \mid n \mid \omega \oplus \omega \mid f(\omega, \dots) \quad \text{e.g., } 2\alpha, \beta - \alpha, \text{hash}(\alpha)$$

- 3 A **symbolic state** $\sigma \in \mathbb{S} = \mathbb{X} \xrightarrow{\text{fin}} \Omega$ maps each variable to the expression it currently holds.
- 4 A **path condition** $\Phi = \phi_1 \wedge \dots \wedge \phi_n$ collects one **boolean** symbolic expression ϕ_i per branch taken so far.
- 5 All paths form the **execution tree**. A path is **feasible** when its Φ is satisfiable, and **infeasible** otherwise.

```
void f(int x, int y) {  
    /* 1 */  
    int z = 2 * x;  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```

1:

$x \mapsto \alpha$
$y \mapsto \beta$
$\Phi = true$

```
void f(int x, int y) {  
    /* 1 */  
    int z = 2 * x;  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```


1:

$x \mapsto \alpha$ $y \mapsto \beta$ $\Phi = true$
--


2:

$x \mapsto \alpha$ $y \mapsto \beta$ $z \mapsto 2\alpha$ $\Phi = true$


```
void f(int x, int y) {  
    /* 1 */  
    int z = 2 * x;  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```



```
void f(int x, int y) {  
    /* 1 */  
    int z = 2 * x;  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```

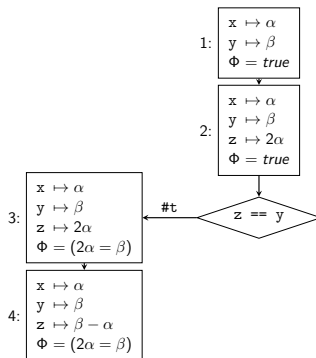


```
void f(int x, int y) {  
    /* 1 */  
    int z = 2 * x;  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```

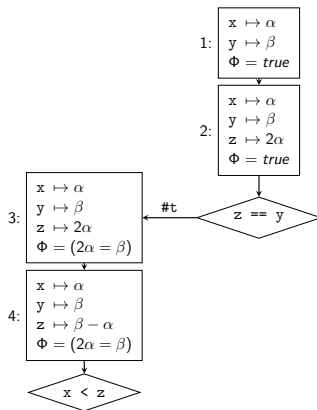

```


void f(int x, int y) {
    /* 1 */
    int z = 2 * x;
    /* 2 */
    if (z == y) {
        /* 3 */
        z = y - x;
        /* 4 */
        if (x < z) {
            /* 5 */
            ERROR;
        } else {
            /* 6 */
        }
    } else {
        /* 7 */
    }
}
    
```

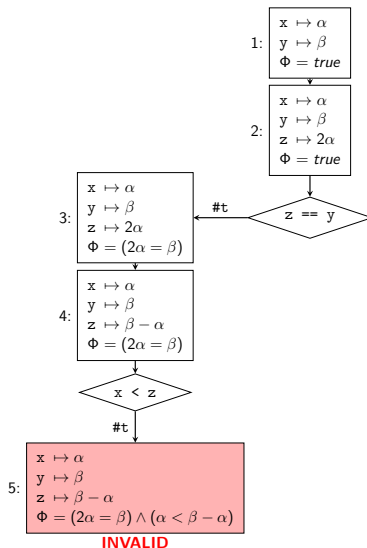

```

void f(int x, int y) {
    /* 1 */
    int z = 2 * x;
    /* 2 */
    if (z == y) {
        /* 3 */
        z = y - x;
        /* 4 */
        if (x < z) {
            /* 5 */
            ERROR;
        } else {
            /* 6 */
        }
    } else {
        /* 7 */
    }
}
    
```

test #1: $(x, y) = (0, 0)$

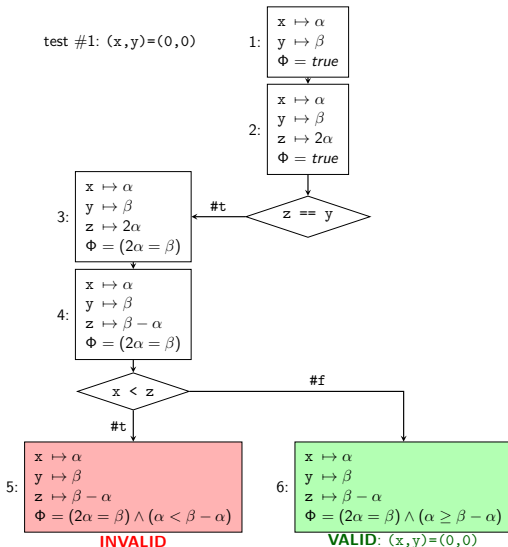


```

void f(int x, int y) {
    /* 1 */
    int z = 2 * x;
    /* 2 */
    if (z == y) {
        /* 3 */
        z = y - x;
        /* 4 */
        if (x < z) {
            /* 5 */
            ERROR;
        } else {
            /* 6 */
        }
    } else {
        /* 7 */
    }
}
    
```

test #1: $(x,y)=(0,0)$

test #2: $(x,y)=(0,1)$

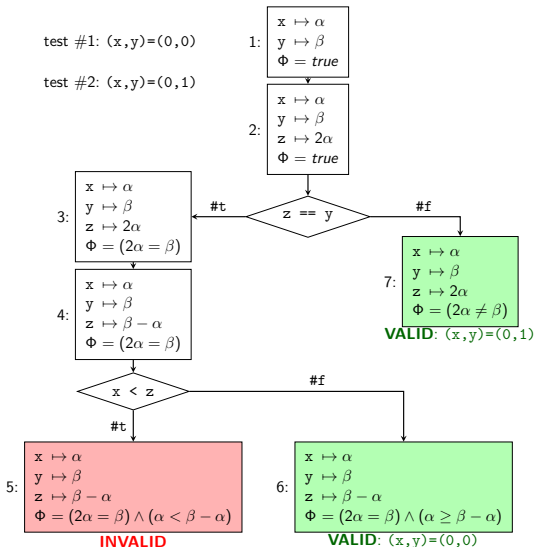

- Then, how to check the **satisfiability** of a path condition Φ ?

- Then, how to check the **satisfiability** of a path condition Φ ?
- Most symbolic execution tools use **Satisfiability Modulo Theories (SMT)** solvers (e.g., Z3, cvc5) to check it.

- Then, how to check the **satisfiability** of a path condition Φ ?
- Most symbolic execution tools use **Satisfiability Modulo Theories (SMT)** solvers (e.g., Z3, cvc5) to check it.
- An SMT solver takes a **first-order logic formula** and returns whether it is **satisfiable** or not using various background theories, such as arithmetic, arrays, bit-vectors, algebraic data types, etc.

- Check the satisfiability of the following formula using an SMT solver.

$$b + 2 = c \wedge f(\text{read}(\text{write}(a, b, 3), c - 2)) \neq f(c - b + 1)$$

- Check the satisfiability of the following formula using an SMT solver.

$$b + 2 = c \wedge f(\text{read}(\text{write}(a, b, 3), c - 2)) \neq f(c - b + 1)$$

- **Substitute** c by $b + 2$ in the second part of the formula.

$$b + 2 = c \wedge f(\text{read}(\text{write}(a, b, b + 2 - 2), b)) \neq f(b + 2 - b + 1)$$

- Check the satisfiability of the following formula using an SMT solver.

$$b + 2 = c \wedge f(\text{read}(\text{write}(a, b, 3), c - 2)) \neq f(c - b + 1)$$

- **Substitute** c by $b + 2$ in the second part of the formula.

$$b + 2 = c \wedge f(\text{read}(\text{write}(a, b, b + 2 - 2), b)) \neq f(b + 2 - b + 1)$$

- **Arithmetic simplification** of the formula.

$$b + 2 = c \wedge f(\text{read}(\text{write}(a, b, 3), b)) \neq f(3)$$

- Check the satisfiability of the following formula using an SMT solver.

$$b + 2 = c \wedge f(\text{read}(\text{write}(a, b, 3), c - 2)) \neq f(c - b + 1)$$

- Substitute** c by $b + 2$ in the second part of the formula.

$$b + 2 = c \wedge f(\text{read}(\text{write}(a, b, b + 2 - 2), b)) \neq f(b + 2 - b + 1)$$

- Arithmetic simplification** of the formula.

$$b + 2 = c \wedge f(\text{read}(\text{write}(a, b, 3), b)) \neq f(3)$$

- Applying array theory axiom** – $\forall a, i, v. \text{read}(\text{write}(a, i, v), i) = v.$

$$b + 2 = c \wedge f(3) \neq f(3) \quad (\text{UNSAT})$$

Z3² is one of the most popular SMT solvers developed by Microsoft Research and used in many symbolic execution tools.

²<https://github.com/Z3Prover/z3>

Z3² is one of the most popular SMT solvers developed by Microsoft Research and used in many symbolic execution tools.

For example, the following Z3 script returns `unsat`.

```
(declare-const a (Array Int Int))
(declare-const b Int)
(declare-const c Int)
(declare-fun f (Int) Int)
(assert (= (+ b 2) c))
(assert (not (= (f (select (store a b 3) (- c 2))) (f (+ (- c b) 1)))))
(check-sat) ; => unsat
```

²<https://github.com/Z3Prover/z3>

Z3² is one of the most popular SMT solvers developed by Microsoft Research and used in many symbolic execution tools.

For example, the following Z3 script returns `unsat`.

```
(declare-const a (Array Int Int))
(declare-const b Int)
(declare-const c Int)
(declare-fun f (Int) Int)
(assert (= (+ b 2) c))
(assert (not (= (f (select (store a b 3) (- c 2))) (f (+ (- c b) 1)))))
(check-sat) ; => unsat
```

Or, the following script returns a satisfying assignment $x = 0$ and $y = 0$.

```
(declare-const x Int)
(declare-const y Int)
(assert (and (= (* 2 x) y) (>= x (- y x))))
(check-sat) ; => sat
(get-model) ; => (x, y) = (0, 0)
```

²<https://github.com/Z3Prover/z3>

A DSE tool builds the path condition **as data** and asks Z3 in a loop. Node 5's condition, through the JavaScript binding:³

```
import { init } from 'z3-solver';
const { Context } = await init();
const { Int, Solver } = new Context('main');

const x = Int.const('x'), y = Int.const('y');
const s = new Solver();
s.add(x.mul(2).eq(y), x.lt(y.sub(x)));    // 2x == y && x < y - x
console.log(await s.check());             // unsat
```

³<https://github.com/Z3Prover/z3> `npm install z3-solver`

A DSE tool builds the path condition **as data** and asks Z3 in a loop. Node 5's condition, through the JavaScript binding:³

```
import { init } from 'z3-solver';
const { Context } = await init();
const { Int, Solver } = new Context('main');

const x = Int.const('x'), y = Int.const('y');
const s = new Solver();
s.add(x.mul(2).eq(y), x.lt(y.sub(x)));    // 2x == y && x < y - x
console.log(await s.check());             // unsat
```

- Flip the last conjunct to $x \geq y - x$ – node 6, the script on the previous slide: `check()` says `sat` and `s.model()` gives $x = 0, y = 0$.

³<https://github.com/Z3Prover/z3> `npm install z3-solver`

No SMT solver can decide a path condition Φ that contains hash.


```
void f(int x, int y) {  
    /* 1 */  
    int z = hash(x);  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```

1:

$x \mapsto \alpha$
$y \mapsto \beta$
$\Phi = \text{true}$


No SMT solver can decide a path condition Φ that contains `hash`.

```
void f(int x, int y) {  
    /* 1 */  
    int z = hash(x);  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```




No SMT solver can decide a path condition Φ that contains hash.

```
void f(int x, int y) {  
    /* 1 */  
    int z = hash(x);  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```




No SMT solver can decide a path condition Φ that contains hash.

```
void f(int x, int y) {  
    /* 1 */  
    int z = hash(x);  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```

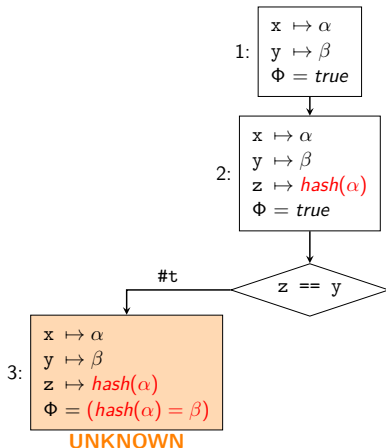

No SMT solver can decide a path condition Φ that contains hash.

```
void f(int x, int y) {  
    /* 1 */  
    int z = hash(x);  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```

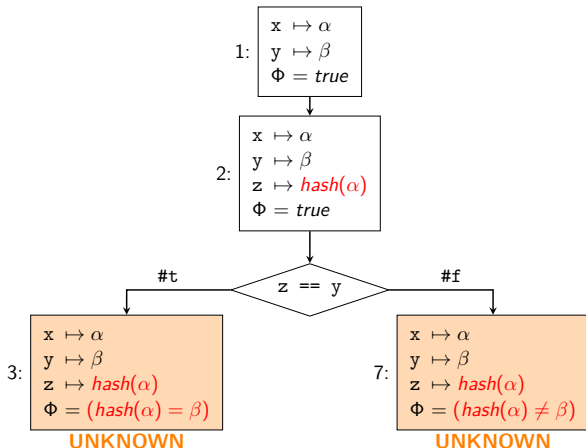

1. Symbolic Execution

- Basic Idea

- Satisfiability Modulo Theories (SMT)

- Limitations of Symbolic Execution

2. Dynamic Symbolic Execution (DSE)

- Search Heuristics

- Example – Loops

- Example – Data Structures

- Realistic Implementation

- Hybrid Analysis

- **Dynamic Symbolic Execution (DSE)** is a technique that combines **concrete execution** with **symbolic execution** to overcome the limitations of symbolic execution.

- **Dynamic Symbolic Execution (DSE)** is a technique that combines **concrete execution** with **symbolic execution** to overcome the limitations of symbolic execution.
- It is sometimes called **concolic testing** because it combines both **concrete** and **symbolic** execution to generate **test cases**.

- **Dynamic Symbolic Execution (DSE)** is a technique that combines **concrete execution** with **symbolic execution** to overcome the limitations of symbolic execution.
- It is sometimes called **concolic testing** because it combines both **concrete** and **symbolic** execution to generate **test cases**.
- It stores both the **concrete** values and the **symbolic** values during the execution of the program, and solves the path condition to **guide execution** at branch points.

- **Dynamic Symbolic Execution (DSE)** is a technique that combines **concrete execution** with **symbolic execution** to overcome the limitations of symbolic execution.
- It is sometimes called **concolic testing** because it combines both **concrete** and **symbolic** execution to generate **test cases**.
- It stores both the **concrete** values and the **symbolic** values during the execution of the program, and solves the path condition to **guide execution** at branch points.
- The concrete values are used to **simplify** the path condition.

```
void f(int x, int y) {  
    /* 1 */  
    int z = hash(x);  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```


test #1: (x,y)=(3,7)

1:

$x \mapsto 3$	$\mid \alpha$
$y \mapsto 7$	$\mid \beta$
$\Phi = \text{true}$	


```
void f(int x, int y) {  
    /* 1 */  
    int z = hash(x);  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```

test #1: (x,y)=(3,7)



```
void f(int x, int y) {  
    /* 1 */  
    int z = hash(x);  
    /* 2 */  
    if (z == y) {  
        /* 3 */  
        z = y - x;  
        /* 4 */  
        if (x < z) {  
            /* 5 */  
            ERROR;  
        } else {  
            /* 6 */  
        }  
    } else {  
        /* 7 */  
    }  
}
```


test #1: (x,y)=(3,7)



```

void f(int x, int y) {
    /* 1 */
    int z = hash(x);
    /* 2 */
    if (z == y) {
        /* 3 */
        z = y - x;
        /* 4 */
        if (x < z) {
            /* 5 */
            ERROR;
        } else {
            /* 6 */
        }
    } else {
        /* 7 */
    }
}
    
```


test #1: (x,y)=(3,7)

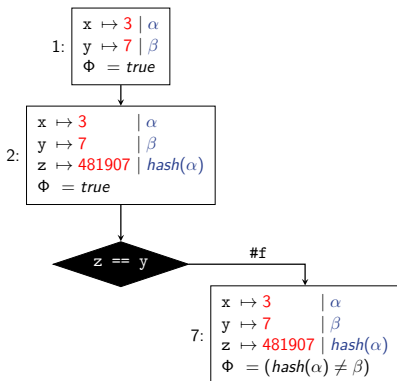

```

void f(int x, int y) {
  /* 1 */
  int z = hash(x);
  /* 2 */
  if (z == y) {
    /* 3 */
    z = y - x;
    /* 4 */
    if (x < z) {
      /* 5 */
      ERROR;
    } else {
      /* 6 */
    }
  } else {
    /* 7 */
  }
}
    
```


test #1: (x,y)=(3,7)

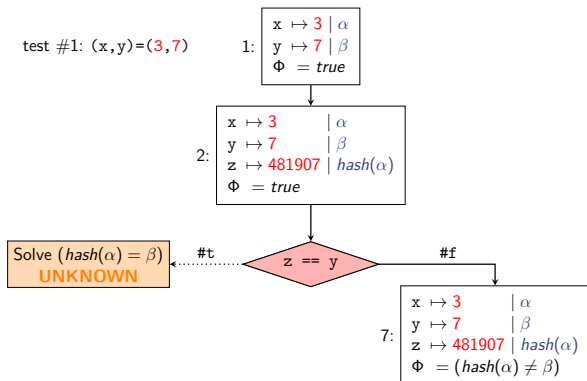

```

void f(int x, int y) {
  /* 1 */
  int z = hash(x);
  /* 2 */
  if (z == y) {
    /* 3 */
    z = y - x;
    /* 4 */
    if (x < z) {
      /* 5 */
      ERROR;
    } else {
      /* 6 */
    }
  } else {
    /* 7 */
  }
}
    
```

test #1: (x,y)=(3,7)

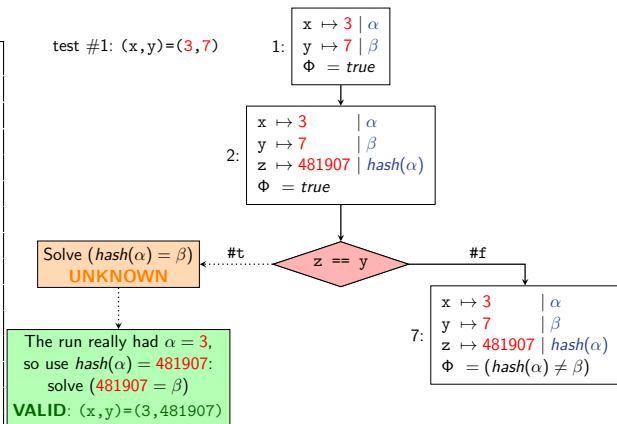


```

void f(int x, int y) {
    /* 1 */
    int z = hash(x);
    /* 2 */
    if (z == y) {
        /* 3 */
        z = y - x;
        /* 4 */
        if (x < z) {
            /* 5 */
            ERROR;
        } else {
            /* 6 */
        }
    } else {
        /* 7 */
    }
}
    
```

test #1: $(x, y) = (3, 7)$

test #2: $(x, y) = (3, 481907)$

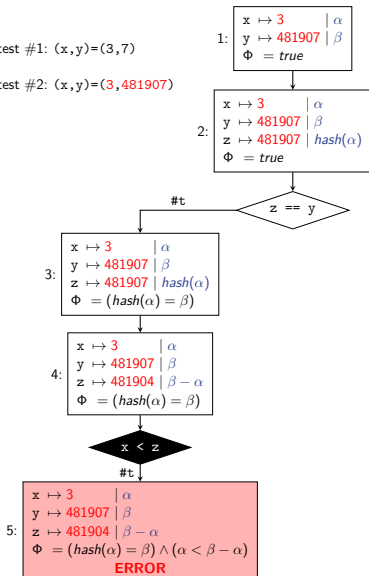


Dynamic Symbolic Execution (DSE) – Example

```

void f(int x, int y) {
    /* 1 */
    int z = hash(x);
    /* 2 */
    if (z == y) {
        /* 3 */
        z = y - x;
        /* 4 */
        if (x < z) {
            /* 5 */
            ERROR;
        } else {
            /* 6 */
        }
    } else {
        /* 7 */
    }
}
    
```

test #1: (x,y)=(3,7)

test #2: (x,y)=(3,481907)

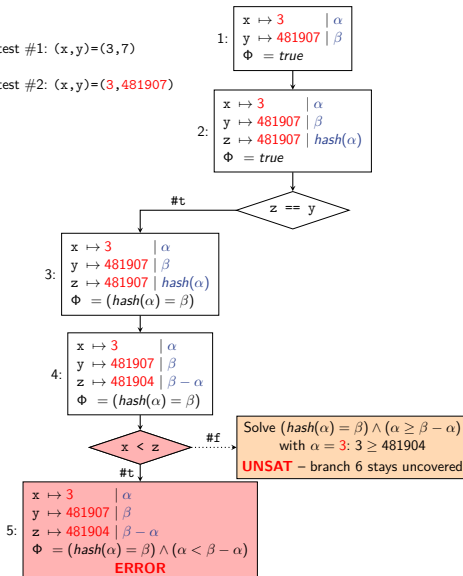

Input: program P , initial input v , budget N .

Output: test suite V .

```

1:  $V \leftarrow \{v\}; \quad T \leftarrow \emptyset$ 
2: for  $m = 1$  to  $N$  do
3:    $\Phi \leftarrow \text{Execute}(P, v)$ 
4:    $T \leftarrow T \cup \{\Phi\}$ 
5:   repeat
6:      $(\Phi, i) \leftarrow \text{Choose}(T)$ 
7:      $\Psi \leftarrow \phi_1 \wedge \dots \wedge \phi_{i-1} \wedge \neg \phi_i$ 
8:   until  $\text{SAT}(\Psi)$ 
9:    $v \leftarrow \text{Model}(\Psi); \quad V \leftarrow V \cup \{v\}$ 
10: return  $V$ 
    
```

▷ paths run so far
 ▷ $\Phi = \phi_1 \wedge \dots \wedge \phi_n$
 ▷ search heuristic
 ▷ same prefix, other side
 ▷ an input that gets there

Input: program P , initial input v , budget N .

Output: test suite V .

```

1:  $V \leftarrow \{v\}; \quad T \leftarrow \emptyset$ 
2: for  $m = 1$  to  $N$  do
3:    $\Phi \leftarrow \text{Execute}(P, v)$ 
4:    $T \leftarrow T \cup \{\Phi\}$ 
5:   repeat
6:      $(\Phi, i) \leftarrow \text{Choose}(T)$ 
7:      $\Psi \leftarrow \phi_1 \wedge \dots \wedge \phi_{i-1} \wedge \neg \phi_i$ 
8:   until  $\text{SAT}(\Psi)$ 
9:    $v \leftarrow \text{Model}(\Psi); \quad V \leftarrow V \cup \{v\}$ 
10: return  $V$ 
    
```

▷ paths run so far
 ▷ $\Phi = \phi_1 \wedge \dots \wedge \phi_n$
 ▷ search heuristic
 ▷ same prefix, other side
 ▷ an input that gets there

Line 3 is what makes it **dynamic**: Φ comes from a real run, so concrete values can replace what the solver cannot handle.

Choose picks the branch to flip. That is the **search heuristic**.

⁴[PLDI'05] P. Godefroid, N. Klarlund, K. Sen. "DART: Directed Automated Random Testing." [FSE'05] K. Sen, D. Marinov, G. Agha. "CUTE: A Concolic Unit Testing Engine for C."

⁵[ASE'08] J. Burnim, K. Sen. "Heuristics for Scalable Dynamic Test Generation."

⁶[FSE'14] H. Seo, S. Kim. "How We Get There: A Context-Guided Search Strategy in Concolic Testing."

Choose picks the branch to flip. That is the **search heuristic**.

- **Random Search** – any branch of the last path.

⁴[PLDI'05] P. Godefroid, N. Klarlund, K. Sen. "DART: Directed Automated Random Testing." [FSE'05] K. Sen, D. Marinov, G. Agha. "CUTE: A Concolic Unit Testing Engine for C."

⁵[ASE'08] J. Burnim, K. Sen. "Heuristics for Scalable Dynamic Test Generation."

⁶[FSE'14] H. Seo, S. Kim. "How We Get There: A Context-Guided Search Strategy in Concolic Testing."

Choose picks the branch to flip. That is the **search heuristic**.

- **Random Search** – any branch of the last path.
- **Depth-First Search (DFS)** – the deepest branch not flipped yet. It chases **paths** (DART, CUTE).⁴

⁴[PLDI'05] P. Godefroid, N. Klarlund, K. Sen. "DART: Directed Automated Random Testing." [FSE'05] K. Sen, D. Marinov, G. Agha. "CUTE: A Concolic Unit Testing Engine for C."

⁵[ASE'08] J. Burnim, K. Sen. "Heuristics for Scalable Dynamic Test Generation."

⁶[FSE'14] H. Seo, S. Kim. "How We Get There: A Context-Guided Search Strategy in Concolic Testing."

Choose picks the branch to flip. That is the **search heuristic**.

- **Random Search** – any branch of the last path.
- **Depth-First Search (DFS)** – the deepest branch not flipped yet. It chases **paths** (DART, CUTE).⁴
- **Control-Flow Directed Search (CFDS)** – the nearest branch whose other side is **uncovered**. It chases **branches**.⁵

⁴[PLDI'05] P. Godefroid, N. Klarlund, K. Sen. "DART: Directed Automated Random Testing." [FSE'05] K. Sen, D. Marinov, G. Agha. "CUTE: A Concolic Unit Testing Engine for C."

⁵[ASE'08] J. Burnim, K. Sen. "Heuristics for Scalable Dynamic Test Generation."

⁶[FSE'14] H. Seo, S. Kim. "How We Get There: A Context-Guided Search Strategy in Concolic Testing."

Choose picks the branch to flip. That is the **search heuristic**.


- **Random Search** – any branch of the last path.
- **Depth-First Search (DFS)** – the deepest branch not flipped yet. It chases **paths** (DART, CUTE).⁴
- **Control-Flow Directed Search (CFDS)** – the nearest branch whose other side is **uncovered**. It chases **branches**.⁵
- **Context-Guided Search (CGS)** – from the root outward, and only a **new** (branch, context) pair.⁶

⁴[PLDI'05] P. Godefroid, N. Klarlund, K. Sen. "DART: Directed Automated Random Testing." [FSE'05] K. Sen, D. Marinov, G. Agha. "CUTE: A Concolic Unit Testing Engine for C."


⁵[ASE'08] J. Burnim, K. Sen. "Heuristics for Scalable Dynamic Test Generation."

⁶[FSE'14] H. Seo, S. Kim. "How We Get There: A Context-Guided Search Strategy in Concolic Testing."


CFDS negates the uncovered branch **closest to the end** of the last path.
Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.




CFDS negates the uncovered branch **closest to the end** of the last path.
Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.




CFDS negates the uncovered branch **closest to the end** of the last path.
Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.

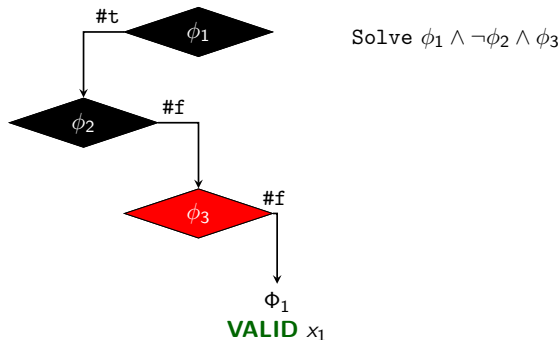


CFDS negates the uncovered branch **closest to the end** of the last path.
Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.

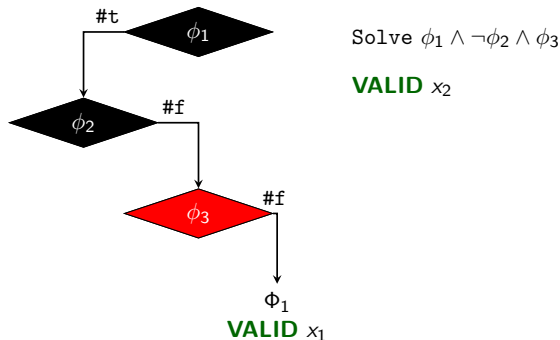


CFDS negates the uncovered branch **closest to the end** of the last path.
Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.




CFDS negates the uncovered branch **closest to the end** of the last path.
Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.




CFDS negates the uncovered branch **closest to the end** of the last path.
Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.

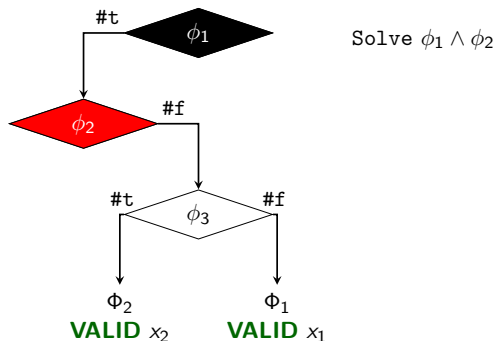


CFDS negates the uncovered branch **closest to the end** of the last path.
Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.

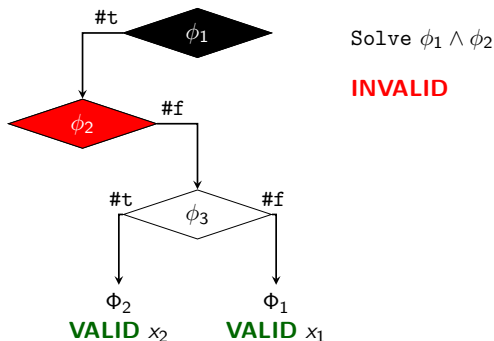


CFDS negates the uncovered branch **closest to the end** of the last path.
 Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.

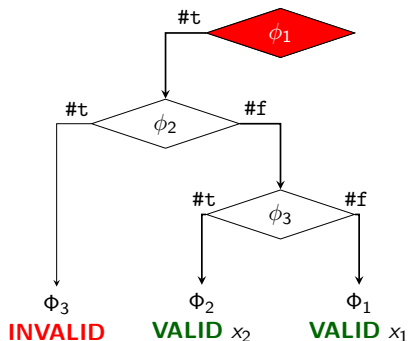


CFDS negates the uncovered branch **closest to the end** of the last path.
 Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.

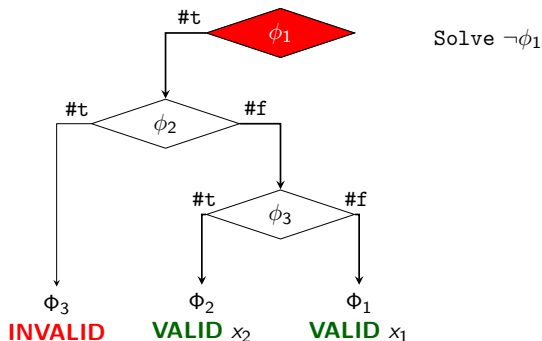

CFDS negates the uncovered branch **closest to the end** of the last path.
 Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.

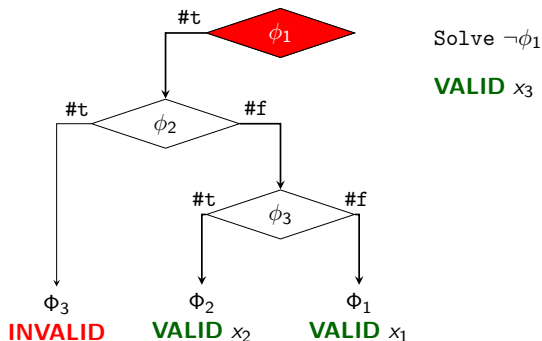

CFDS negates the uncovered branch **closest to the end** of the last path.
 Black = one side still uncovered, white = both sides covered, **red** = the branch being negated.

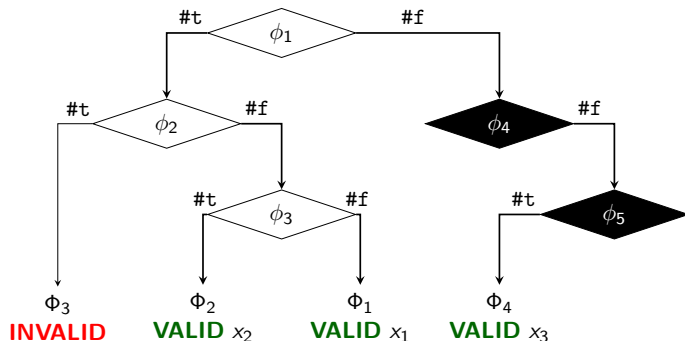

DFS and CFDS Are Not the Same

```
void f(int x, int y) {  
    if (x > 0) a(); // b1  
    if (y > 0) b(); // b2  
}
```

run	input	path	next: DFS	next: CFDS
1	(1, 1)	b1 #t b2 #t	flip b2	flip b2
2	(1, 0)	b1 #t b2 #f	flip b1	flip b1
3	(0, 0)	b1 #f b2 #f	flip b2	both sides covered
4	(0, 1)	b1 #f b2 #t	—	never run

```
void f(int x, int y) {  
    if (x > 0) a(); // b1  
    if (y > 0) b(); // b2  
}
```

run	input	path	next: DFS	next: CFDS
1	(1, 1)	b1 #t b2 #t	flip b2	flip b2
2	(1, 0)	b1 #t b2 #f	flip b1	flip b1
3	(0, 0)	b1 #f b2 #f	flip b2	both sides covered
4	(0, 1)	b1 #f b2 #t	—	never run

- Four leaves, but only four branch sides. Run **3** covers them all. DFS runs a fourth test anyway, because that b2 was never flipped **on this path**.

```
void f(int x, int y) {  
    if (x > 0) a(); // b1  
    if (y > 0) b(); // b2  
}
```

run	input	path	next: DFS	next: CFDS
1	(1, 1)	b1 #t b2 #t	flip b2	flip b2
2	(1, 0)	b1 #t b2 #f	flip b1	flip b1
3	(0, 0)	b1 #f b2 #f	flip b2	both sides covered
4	(0, 1)	b1 #f b2 #t	–	never run

- Four leaves, but only four branch sides. Run **3** covers them all. DFS runs a fourth test anyway, because that b2 was never flipped **on this path**.
- n independent **ifs** in sequence – DFS walks all 2^n paths, CFDS stops at $n + 1$ tests.

CGS scans **from the root outward**, not back from the end, and flips only a **new** (branch, context) pair. Context = the last d branches; here $d = 1$.

```
i = 0;
while (i < 2) {           // b1
    if (arr[i] > 0) s++; // b2
    i++;
}
if (x > 0) t++;           // b3
```

The first run takes the loop twice:

$$\Phi = \phi_1 \wedge \cdots \wedge \phi_6$$

CGS scans **from the root outward**, not back from the end, and flips only a **new** (branch, context) pair. Context = the last d branches; here $d = 1$.

```
i = 0;
while (i < 2) {           // b1
    if (arr[i] > 0) s++; // b2
    i++;
}
if (x > 0) t++;           // b3
```

The first run takes the loop twice:

$$\Phi = \phi_1 \wedge \cdots \wedge \phi_6$$

	ϕ_1	ϕ_2	ϕ_3	ϕ_4	ϕ_5	ϕ_6
branch	b1	b2	b1	b2	b1	b3
context	$\langle \rangle$	$\langle \text{b1} \rangle$	$\langle \text{b2} \rangle$	$\langle \text{b1} \rangle$	$\langle \text{b2} \rangle$	$\langle \text{b1} \rangle$
pair	new	new	new	$= \phi_2$	$= \phi_3$	new
CGS	negate	negate	negate	skip	skip	negate

CGS scans **from the root outward**, not back from the end, and flips only a **new** (branch, context) pair. Context = the last d branches; here $d = 1$.

```
i = 0;
while (i < 2) {           // b1
    if (arr[i] > 0) s++; // b2
    i++;
}
if (x > 0) t++;           // b3
```

The first run takes the loop twice:

$$\Phi = \phi_1 \wedge \cdots \wedge \phi_6$$

	ϕ_1	ϕ_2	ϕ_3	ϕ_4	ϕ_5	ϕ_6
branch	b1	b2	b1	b2	b1	b3
context	$\langle \rangle$	$\langle \text{b1} \rangle$	$\langle \text{b2} \rangle$	$\langle \text{b1} \rangle$	$\langle \text{b2} \rangle$	$\langle \text{b1} \rangle$
pair	new	new	new	$= \phi_2$	$= \phi_3$	new
CGS	negate	negate	negate	skip	skip	negate

ϕ_4, ϕ_5 are the loop's **second turn** – the same pair as ϕ_2, ϕ_3 . d grows by one when a round finds nothing new.

Do not design *Choose* – **learn** it. A branch ϕ becomes a vector of **40 boolean features** $\pi(\phi)$, scored by a weight vector θ learned per program.⁷

$$\text{score}_{\theta}(\phi) = \pi(\phi) \cdot \theta \quad \text{Choose}_{\theta}(\langle \Phi_1 \cdots \Phi_m \rangle) = (\Phi_m, \underset{\phi_j \in \Phi_m}{\operatorname{argmax}} \text{score}_{\theta}(\phi_j))$$

⁷[ICSE'18] S. Cha, S. Hong, J. Lee, H. Oh. "Automatically Generating Search Heuristics for Concolic Testing."

Do not design *Choose* – **learn** it. A branch ϕ becomes a vector of **40 boolean features** $\pi(\phi)$, scored by a weight vector θ learned per program.⁷

$$\text{score}_{\theta}(\phi) = \pi(\phi) \cdot \theta \quad \text{Choose}_{\theta}(\langle \Phi_1 \cdots \Phi_m \rangle) = (\Phi_m, \underset{\phi_j \in \Phi_m}{\operatorname{argmax}} \text{score}_{\theta}(\phi_j))$$

12 static – read off the code


- branch in the `main` function
- true branch of a loop
- nested branch
- branch with external calls
- branch inside a loop body
- $\vdots$

28 dynamic – from the runs so far

- in the first 10% of the path
- newly covered in the last run
- context ($d = 1$) already visited
- negated more than 10 times
- opposite branch still uncovered
- $\vdots$

⁷[ICSE'18] S. Cha, S. Hong, J. Lee, H. Oh. "Automatically Generating Search Heuristics for Concolic Testing."

θ is searched **on the program itself**: try weight vectors, keep the ones that cover more branches. Below, branches covered in vim-5.7.

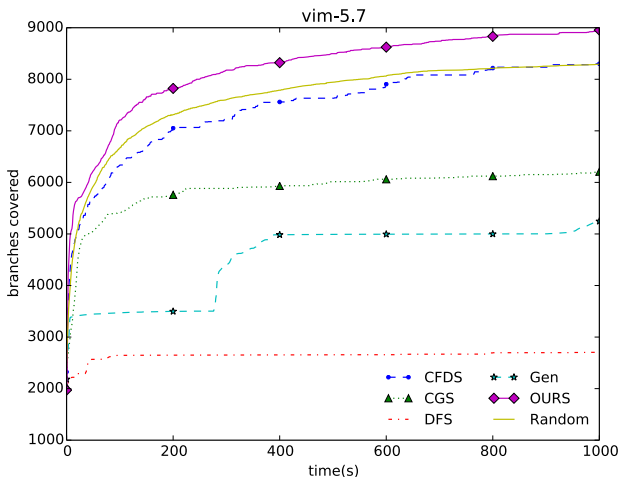

```
void f(int x) {  
    *  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
        if (arr[i] == x) break;  
        i++;  
    }  
  
    return i;  
}
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
arr		
i		
Φ	$true$	

Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
    *  
    while (i < 3) {  
  
        if (arr[i] == x) break;  
        i++;  
  
    }  
  
    return i;  
}
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
arr	{3, 7, 2}	
i	0	
Φ	<i>true</i>	

Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
        *  
        if (arr[i] == x) break;  
        i++;  
    }  
  
    return i;  
}
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
arr	{3, 7, 2}	
i	0	
Φ	<i>true</i>	

```

void f(int x) {


    int arr[] = {3, 7, 2};
    int i = 0;

    while (i < 3) {

        if (arr[i] == x) break;
        i++;
        *
    }

    return i;
}
    
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
arr	{3, 7, 2}	
i	1	
Φ	$(\alpha \neq 3)$	




```
void f(int x) {

    int arr[] = {3, 7, 2};
    int i = 0;

    while (i < 3) {
        *
        if (arr[i] == x) break;
        i++;
    }

    return i;
}
```


$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
arr	{3, 7, 2}	
i	1	
Φ	$(\alpha \neq 3)$	



Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
  
        if (arr[i] == x) break;  
        i++;  
        *  
    }  
  
    return i;  
}
```


$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
arr	{3, 7, 2}	
i	2	
Φ	$(\alpha \neq 3) \wedge (\alpha \neq 7)$	



Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
        *  
        if (arr[i] == x) break;  
        i++;  
    }  
  
    return i;  
}
```


$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
arr	{3, 7, 2}	
i	2	
Φ	$(\alpha \neq 3) \wedge (\alpha \neq 7)$	



Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
  
        if (arr[i] == x) break;  
        i++;  
        *  
    }  
  
    return i;  
}
```


$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
arr	{3, 7, 2}	
i	3	
Φ	$(\alpha \neq 3) \wedge (\alpha \neq 7) \wedge (\alpha \neq 2)$	

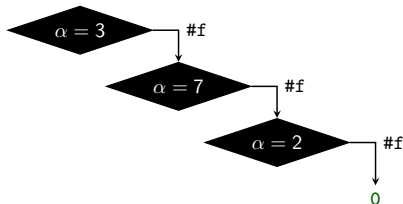

Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
  
        if (arr[i] == x) break;  
        i++;  
  
    }  
    *  
    return i;  
}
```


$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
arr	{3, 7, 2}	
i	3	
Φ	$(\alpha \neq 3) \wedge (\alpha \neq 7) \wedge (\alpha \neq 2)$	

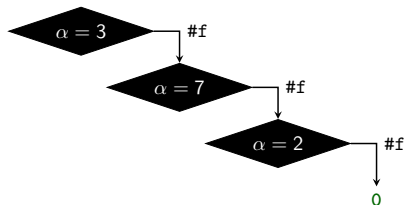

Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
  
        if (arr[i] == x) break;  
        i++;  
  
    }  
    *  
    return i;  
}
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
arr	{3, 7, 2}	
i	3	
Φ	$(\alpha \neq 3) \wedge (\alpha \neq 7) \wedge (\alpha \neq 2)$	

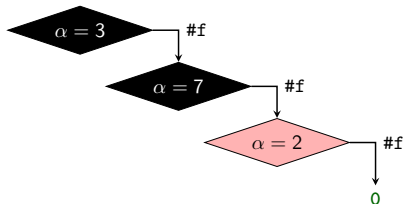


$(\alpha \neq 3) \wedge (\alpha \neq 7) \wedge (\alpha = 2)$ is **SAT**
when $x = 2$

Example – Loops

```
void f(int x) {  
    *  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
        if (arr[i] == x) break;  
        i++;  
    }  
  
    return i;  
}
```


$\mathbb{X}$	$\mathbb{V}$	Ω
x	2	α
arr		
i		
Φ	<i>true</i>	

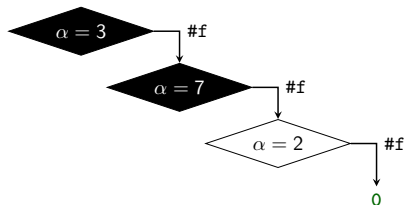

Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
  
        if (arr[i] == x) break;  
        i++;  
  
    }  
    *  
    return i;  
}
```


$\mathbb{X}$	$\mathbb{V}$	Ω
x	2	α
arr	{3, 7, 2}	
i	2	
Φ	$(\alpha \neq 3) \wedge (\alpha \neq 7) \wedge (\alpha = 2)$	

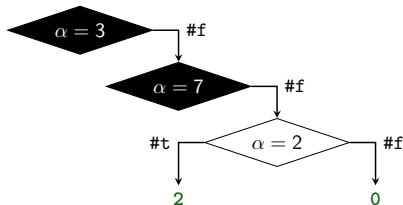

Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
  
        if (arr[i] == x) break;  
        i++;  
  
    }  
    *  
    return i;  
}
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	2	α
arr	{3, 7, 2}	
i	2	
Φ	$(\alpha \neq 3) \wedge (\alpha \neq 7) \wedge (\alpha = 2)$	

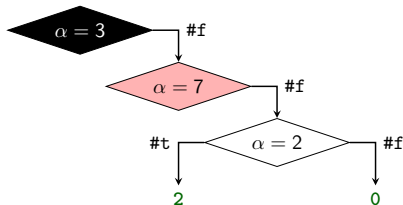


$(\alpha \neq 3) \wedge (\alpha = 7)$ is **SAT**
when $x = 7$

Example – Loops

```
void f(int x) {  
    *  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
        if (arr[i] == x) break;  
        i++;  
    }  
  
    return i;  
}
```


$\mathbb{X}$	$\mathbb{V}$	Ω
x	7	α
arr		
i		
Φ	true	

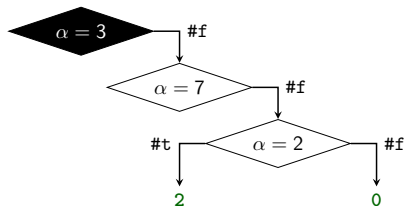

Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
  
        if (arr[i] == x) break;  
        i++;  
  
    }  
    *  
    return i;  
}
```


$\mathbb{X}$	$\mathbb{V}$	Ω
x	7	α
arr	{3, 7, 2}	
i	1	
Φ	$(\alpha \neq 3) \wedge (\alpha = 7)$	

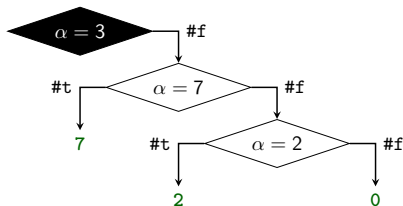

Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
  
        if (arr[i] == x) break;  
        i++;  
  
    }  
    *  
    return i;  
}
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	7	α
arr	{3, 7, 2}	
i	1	
Φ	$(\alpha \neq 3) \wedge (\alpha = 7)$	

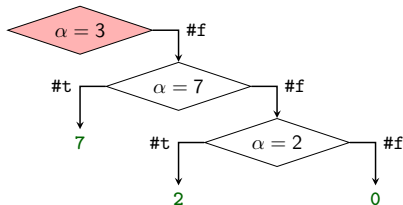


$(\alpha = 3)$ is **SAT**
when $x = 3$

Example – Loops

```
void f(int x) {  
    *  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
        if (arr[i] == x) break;  
        i++;  
    }  
  
    return i;  
}
```


$\mathbb{X}$	$\mathbb{V}$	Ω
x	3	α
arr		
i		
Φ	$true$	

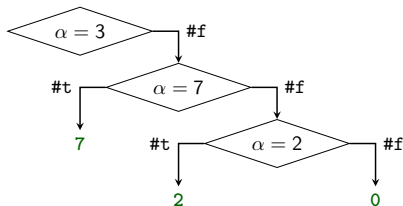

Example – Loops

```
void f(int x) {  
  
    int arr[] = {3, 7, 2};  
    int i = 0;  
  
    while (i < 3) {  
  
        if (arr[i] == x) break;  
        i++;  
  
    }  
    *  
    return i;  
}
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	3	α
arr	{3, 7, 2}	
i	0	
Φ	$(\alpha = 3)$	

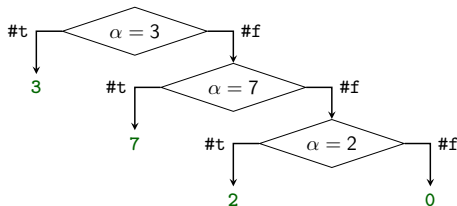

```
class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {
    *
    if (x > 0)

        if (p != NULL)

            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    return 0;
}
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
p	NULL	β
Φ	true	

```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    *
    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
p	NULL	β
Φ	$(\alpha \leq 0)$	



```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    *
    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	0	α
p	NULL	β
Φ	$(\alpha \leq 0)$	



$(\alpha > 0)$ is **SAT**
 when $(x, p) = (42, \text{NULL})$

```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {
    *
    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	42	α
p	NULL	β
Φ	true	



```
class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)
        *
        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    return 0;
}
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	42	α
p	NULL	β
Φ	$(\alpha > 0)$	



```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    *
    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	42	α
p	NULL	β
Φ	$(\alpha > 0) \wedge (\beta = \text{NULL})$	



```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    *
    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	42	α
p	<i>NULL</i>	β
Φ	$(\alpha > 0) \wedge (\beta = \text{NULL})$	



$(\alpha > 0) \wedge (\beta \neq \text{NULL})$ is **SAT**

when $(x, p) = (42, 0xA0BF : \boxed{0 \mid \text{NULL}})$

```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {
    *
    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	42	α
p	0xA0BF : 0 NULL	β
Φ	true	



```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)


        if (p != NULL)
            *
            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$			Ω
x	42			α
p	0xA0BF :	0	NULL	β
Φ	$(\alpha > 0) \wedge (\beta \neq \text{NULL})$			



```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    *
    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$			Ω
x	42			α
p	0xA0BF :	0	NULL	β
Φ	$(\alpha > 0) \wedge (\beta \neq \text{NULL}) \wedge$ $(2\alpha + 1 \neq \beta.\text{data})$			

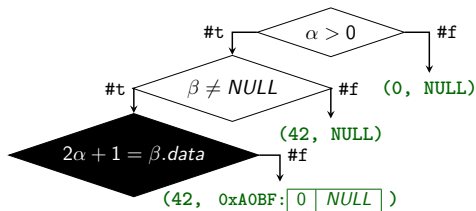

```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    *
    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$		Ω
x	42		α
p	0xA0BF :	0 NULL	β
Φ	$(\alpha > 0) \wedge (\beta \neq \text{NULL}) \wedge$ $(2\alpha + 1 \neq \beta.\text{data})$		

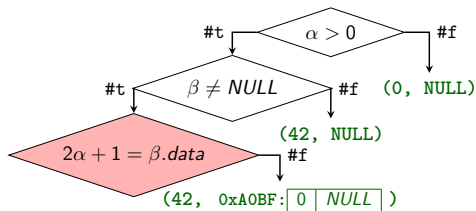

$(\alpha > 0) \wedge (\beta \neq \text{NULL})$
 $\wedge (2\alpha + 1 = \beta.\text{data})$ is **SAT**

when $(x, p) = (1, 0xA0BF : \boxed{3} \mid \text{NULL})$

```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {
    *
    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	1	α
p	0xA0BF : 3 NULL	β
Φ	true	

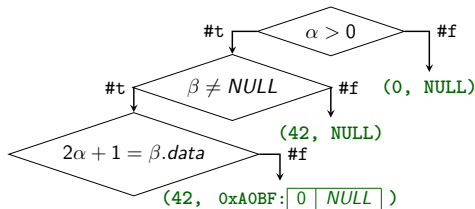

```
class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)


        if (p != NULL)

            if (x*2+1 == p->data)
                *
                if (p->next == p)

                    ERROR;

    return 0;
}
```

$\mathbb{X}$	$\mathbb{V}$	Ω
x	1	α
p	0xA0BF : 3 NULL	β
Φ	$(\alpha > 0) \wedge (\beta \neq \text{NULL}) \wedge$ $(2\alpha + 1 = \beta.\text{data})$	

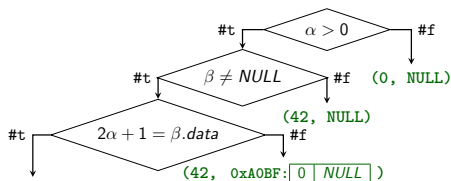

```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    *
    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$		Ω
x	1		α
p	0xA0BF :	3 NULL	β
Φ	$(\alpha > 0) \wedge (\beta \neq \text{NULL}) \wedge$ $(2\alpha + 1 = \beta.\text{data}) \wedge (\beta.\text{next} \neq \beta)$		

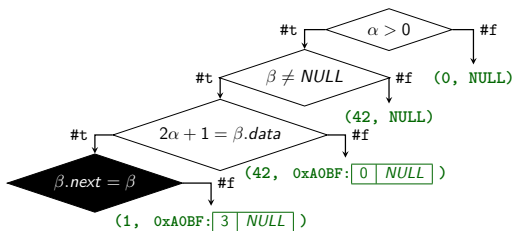

```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    *
    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$		Ω
x	1		α
p	0xA0BF :	3 NULL	β
Φ	$(\alpha > 0) \wedge (\beta \neq \text{NULL}) \wedge$ $(2\alpha + 1 = \beta.\text{data}) \wedge (\beta.\text{next} \neq \beta)$		

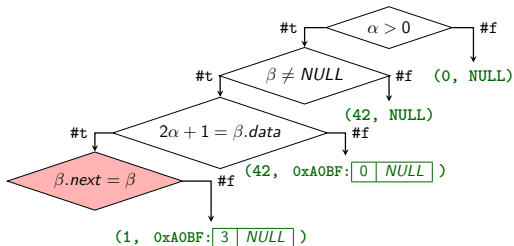

$(\alpha > 0) \wedge (\beta \neq \text{NULL})$
 $\wedge (2\alpha + 1 = \beta.\text{data}) \wedge (\beta.\text{next} = \beta)$ is **SAT**
 when $(x, p) = (1, 0xA0BF : \boxed{3} \mid \boxed{0xA0BF})$

```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {
    *
    if (x > 0)

        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)

                    ERROR;

    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$		Ω
x	1		α
p	0xA0BF :	3 0xA0BF	β
Φ	true		

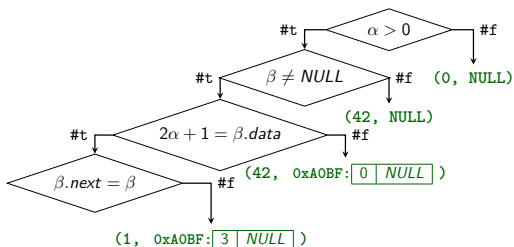

```

class Node {
    int data;
    Node* next;
};

void f(int x, Node *p) {

    if (x > 0)


        if (p != NULL)


            if (x*2+1 == p->data)

                if (p->next == p)
                    *
                    ERROR;

    return 0;
}
    
```

$\mathbb{X}$	$\mathbb{V}$		Ω
x	1		α
p	0xA0BF :	3 0xA0BF	β
Φ	$(\alpha > 0) \wedge (\beta \neq \text{NULL}) \wedge$ $(2\alpha + 1 = \beta.\text{data}) \wedge (\beta.\text{next} = \beta)$		

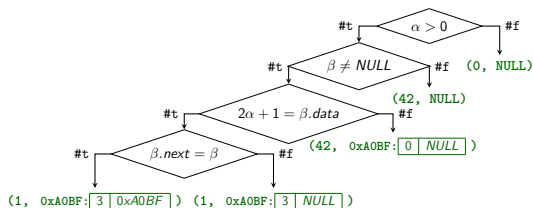

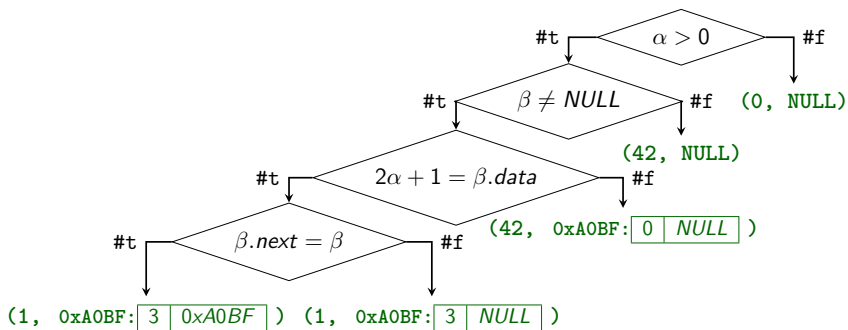

- [KLEE](#) – symbolic execution engine for LLVM bitcode.
- [Jalangi2](#) – JavaScript dynamic analysis framework by Samsung.
- [S2E](#) – Platform for symbolic execution of binary code (x86, ARM).
- [CutEr](#) – Concolic unit testing tool for Erlang.

Symbolic execution is **static**; DSE mixed in **concrete** execution.
Combining the two is **hybrid analysis**.

Symbolic execution is **static**; DSE mixed in **concrete** execution.
Combining the two is **hybrid analysis**.


	what runs concretely	what it buys
DSE	one input, for real	a way past what the solver cannot model
blended analysis	the program, for its call graph	precision; drops paths no run took
heap snapshots	the program, for its heap	facts static analysis misses, e.g., reflection
Concerto, dynamic shortcuts	the part with nothing unknown	precision, and still sound

Symbolic execution is **static**; DSE mixed in **concrete** execution.
Combining the two is **hybrid analysis**.

	what runs concretely	what it buys
DSE	one input, for real	a way past what the solver cannot model
blended analysis	the program, for its call graph	precision; drops paths no run took
heap snapshots	the program, for its heap	facts static analysis misses, e.g., reflection
Concerto, dynamic shortcuts	the part with nothing unknown	precision, and still sound


Recorded runs inherit the runs' **blind spots**. Interleaving keeps **soundness**.

Run the program, keep the call graph it **actually used**, analyze that.⁸

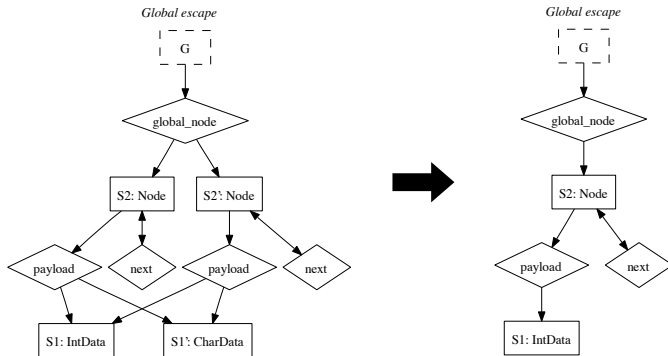

⁸[ISSTA'07] B. Dufour, B. G. Ryder, G. Sevitsky. "Blended Analysis for Performance Understanding of Framework-based Applications."


Run the program, keep the call graph it **actually used**, analyze that.⁸

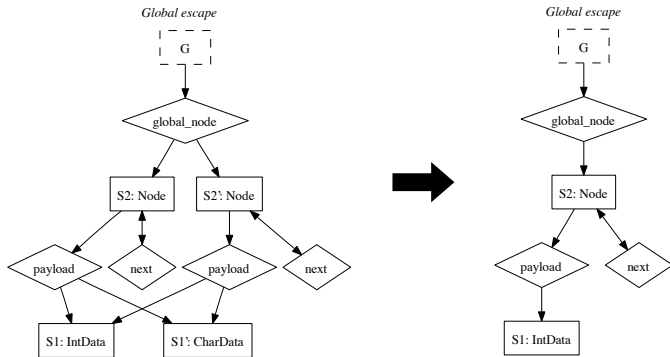

A framework's full call graph is huge and mostly unreachable. **Escape analysis** on the observed part finishes, and is far sharper.

⁸[ISSTA'07] B. Dufour, B. G. Ryder, G. Sevitsky. "Blended Analysis for Performance Understanding of Framework-based Applications."


Run the program, keep the call graph it **actually used**, analyze that.⁸

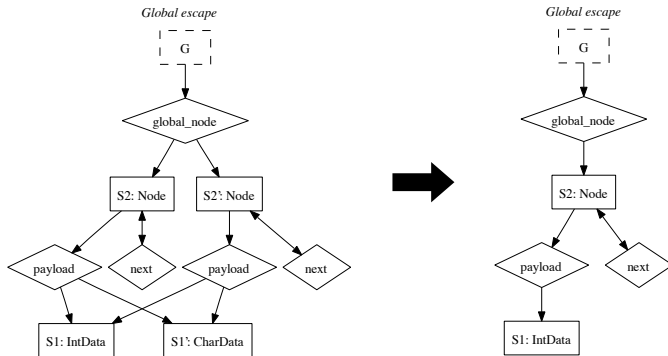

A framework's full call graph is huge and mostly unreachable. **Escape analysis** on the observed part finishes, and is far sharper. **Unsound**: a path no run took is simply not there.


⁸[\[ISSTA'07\]](#) B. Dufour, B. G. Ryder, G. Sevitsky. "Blended Analysis for Performance Understanding of Framework-based Applications."

Record the **whole heap** of a run; the static analysis starts from it.⁹

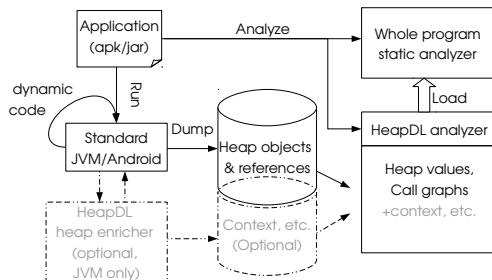

⁹[OOPSLA'17] N. Grech, G. Fourtounis, A. Francalanza, Y. Smaragdakis. "Heaps Don't Lie: Countering Unsoundness with Heap Snapshots."


Record the **whole heap** of a run; the static analysis starts from it.⁹

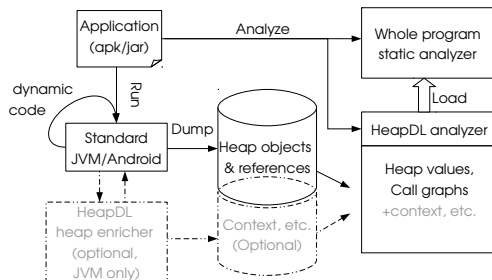


Reflection, native calls and dynamic class loading are what a Java or Android analysis cannot follow. A snapshot has them **already resolved**.

⁹[\[OOPSLA'17\]](#) N. Grech, G. Fourtounis, A. Francalanza, Y. Smaragdakis. "Heaps Don't Lie: Countering Unsoundness with Heap Snapshots."


Concerto runs part of the program **concretely** and the rest **abstractly**, in one interpreter, and stays **sound**.¹⁰



(a) Sound but Imprecise Call-Graph




(b) Unsound Call-Graph




(c) Call-Graph with Concerto

¹⁰[POPL'19] J. Toman, D. Grossman. "Concerto: A Framework for Combined Concrete and Abstract Interpretation."


Concerto runs part of the program **concretely** and the rest **abstractly**, in one interpreter, and stays **sound**.¹⁰



(a) Sound but Imprecise Call-Graph



(b) Unsound Call-Graph



(c) Call-Graph with Concerto

Framework code runs on the **real** configuration; application code stays **abstract**.

¹⁰[POPL'19] J. Toman, D. Grossman. "Concerto: A Framework for Combined Concrete and Abstract Interpretation."

Run **concretely** while nothing unknown is touched; otherwise **seal** and go back to abstract values. g is native: **no model**, but it **runs**.¹¹

```
// JavaScript: analyzed
function f(x) {
  /* 0 */
  if (x >= 0) return x;
  /* 1 */ x = g(-1, x);
  /* 2 */ return -x;
}
```

abstract only

0 T

```
// C: native, can only run
int g(int a, int b) {
  if (a < 0) return b;
  /* complex computation
   on a, b */
}
```


¹¹[ESEC/FSE'21] J. Park, J. Park, D. Youn, S. Ryu. "Accelerating JavaScript Static Analysis via Dynamic Shortcuts."

Run **concretely** while nothing unknown is touched; otherwise **seal** and go back to abstract values. g is native: **no model**, but it **runs**.¹¹

```
// JavaScript: analyzed
function f(x) {
  /* 0 */
  if (x >= 0) return x;
  /* 1 */ x = g(-1, x);
  /* 2 */ return -x;
}
```

```
// C: native, can only run
int g(int a, int b) {
  if (a < 0) return b;
  /* complex computation
    on a, b */
}
```

abstract only




¹¹[ESEC/FSE'21] J. Park, J. Park, D. Youn, S. Ryu. "Accelerating JavaScript Static Analysis via Dynamic Shortcuts."

Run **concretely** while nothing unknown is touched; otherwise **seal** and go back to abstract values. g is native: **no model**, but it **runs**.¹¹


```
// JavaScript: analyzed
function f(x) {
  /* 0 */
  if (x >= 0) return x;
  /* 1 */ x = g(-1, x);
  /* 2 */ return -x;
}
```

```
// C: native, can only run
int g(int a, int b) {
  if (a < 0) return b;
  /* complex computation
    on a, b */
}
```

abstract only



with a dynamic shortcut



−1 picks the branch in g ; x passes through **untouched**. $-x$ needs x : the run **stops**, abstract analysis continues. $+$, not $\top$.

¹¹[ESEC/FSE'21] J. Park, J. Park, D. Youn, S. Ryu. "Accelerating JavaScript Static Analysis via Dynamic Shortcuts."

1. Symbolic Execution

- Basic Idea

- Satisfiability Modulo Theories (SMT)

- Limitations of Symbolic Execution

2. Dynamic Symbolic Execution (DSE)

- Search Heuristics

- Example – Loops

- Example – Data Structures

- Realistic Implementation

- Hybrid Analysis

- Implement a **simple DSE** for a small subset of **JavaScript**, using Z3 to solve path conditions.
- Please see this document on GitHub:

<https://github.com/ku-plrg-classroom/js-dse>

- The due date is **23:59 on September 28 (Mon.)**, and please submit it to [LMS](#).

- Mutation Testing

Jihyeok Park

jihyeok_park@korea.ac.kr

<https://plrg.korea.ac.kr>