

Class Notes

CIS 502 Analysis of Algorithm

4-Greedy Algorithm

Da Kuang
University of Pennsylvania

Version: 1.00

1 Optimization Problem

Definition 1.1 *Optimization Problem:* Minimize or maximize some function subject to some constraints.

Now we start with a special class of optimization problem:

- Given a set of elements, pick a subset.
- Constraints tell you which subsets are allowed.
- Any allowed subset is a feasible solution.
- Goal is to find a feasible solution with greatest/ least value.

hello

1.1 Minimum Spanning Tree Problem

Minimum spanning tree problem is an example of optimization problem.

Input: Connected, undirected graph $G \in (V, E)$ together with a weight function $w : E \rightarrow \mathbb{R}^+$.

Definition 1.2 *The feasible solution is a set of edges forming an acyclic connected graph on all vertices.*

Definition 1.3 *The cost of a solution is the sum of the weights of the edges in the solution.*

There are problems for which the optimal solution can be picked by choosing one element at a time.

Definition 1.4 The **greedy algorithm** builds up solution as by taking the next element to be one of the optimal cost value that can be added feasibly.

Most of the time Greedy algorithm itself is simple but it is difficult to prove correctness.

2 Activity Selection Problem


- **Input:** n activities a_1, \dots, a_n , where a_i starts at time x_i and ends at time y_i .
- **Feasible Solution:** Any subset of these activities such that no two activities in the subset overlap.
- **Objective Function:** Maximize the number of activities we schedule.

2.1 Some Attempts

Criteria to be greedy on:

- Pick the activities with shortest duration.

It dose not work. The counter example is as follows:

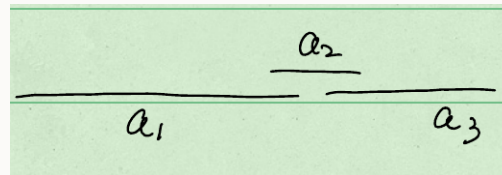

- Pick the activities what finish first.

Sort the activities by finish time and then renumber them so that $f_1 \leq f_2 \leq \dots \leq f_n$

2.2 Proposed Greedy Algorithm

Given a set of activities,

- Pick the earliest finishing activities that remain.
- Remove all activities that conflict with the chosen activity.
- Repeat.

To prove the correctness, we start by arguing that the first choice algorithm is not wrong.


Claim: Greedy Choice Property: First choice made by greedy algorithm is not wrong. To be more specific, in activities selection problem, if greedy algorithm choose an activity at first, then there is an optimal feasible solution that contain a_1 .

Proof: Suppose for contradiction that no optimal feasible solution uses a_1 . Let O be the subset of activities in some optimal solution. We can order the activities in O by finish time.

Let $a_{i1}, a_{i2}, \dots, a_{ik}$ be the activities in O so ordered. We can make an **exchange argument** as the following plot. Throw out a_i from O and include a_1 in instead to get a new set of activities O' .

There are some properties about O' .

- $|O'| = |O|$
- O' is feasible.
- O' is also optimal and contains a_1 . $\Rightarrow \Leftarrow$

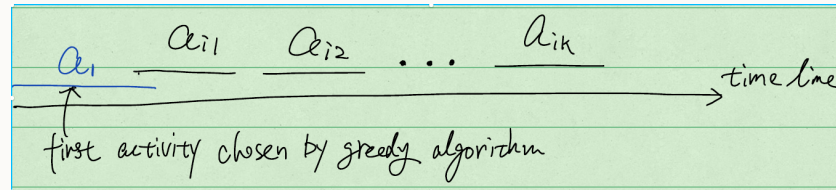

There is a way to construct an optimal solution starting with a_1 . This optimal solution should certainly exclude activities that conflict with a_1 . Recursively need to solve a smaller problem consisting of activities that do not conflict with a_1 . In particular, the smaller problem is finding the optimal subset of activities out of the remaining activities.

Claim: Optimal Substructure Property In the set of activities, we need to pick an optimal feasible subset activities.

Proof:

- A : Original set of activities
- A' : Set of activities that remain after throwing out a_1 and its conflicting activities.

Any solution to A' that gives value k can be extended to a solution to A of value $(k + 1)$ by adding a_1 . So need

optimal solution to A' ■

In general. Optimal Substructure Property inductively assumes that greedy solves problem with fewer than n activities optimally.

Greedy Choice Property and Optimal Substructure Property imply that greedy solve n -activity problem optimally.

2.2.1 Time

We sort the activities by finish time take $O(n \log n)$. Then the rest of steps can be done in linear or constant time.

3 Linear Algebra

Definition 3.1 V is a *vector space over* \mathbb{R} if

- For $v_1, v_2 \in V$, $v_1 + v_2 \in V$.
- For any $\alpha \in \mathbb{R}$, $v \in V$, $\alpha v \in V$.

Definition 3.2 Given a finite set of vectors, v_1, v_2, \dots, v_k , then *span* S is as follows

$$S(v_1, v_2, \dots, v_k) = \{v : v = \alpha_1 v_1 + \alpha_2 v_2 + \dots + \alpha_k v_k, \alpha_i \in \mathbb{R}\}$$

$S(v_1, v_2, \dots, v_k)$ is a vector space.

Definition 3.3 $\alpha_1 v_1 + \alpha_2 v_2 + \dots + \alpha_k v_k$ is a **linear combination** of vectors.

Definition 3.4 The set of vector v_1, \dots, v_k is called **linear dependent** if there exist some coefficient $\alpha_1, \dots, \alpha_k$ not all 0, so that $\sum \alpha_i v_i = 0$

Definition 3.5 A set of vector is said to be **linearly independent** if it is not linearly dependent.

Definition 3.6 If v_1, \dots, v_k are linearly independent and their span in V , then v_1, \dots, v_k form a **basis** of V .

Definition 3.7 If v_1, \dots, v_k is a basis for v and u_1, \dots, u_m is another basis. Then $m = k$.

Proof. Suppose for contradiction that $m > k$. Since v_i 's form a basis,

$$u_1 = \alpha_{11}v_1 + \dots + \alpha_{1k}v_k$$

$$u_2 = \alpha_{21}v_1 + \dots + \alpha_{2k}v_k$$

$$\vdots$$

$$u_m = \alpha_{m1}v_1 + \dots + \alpha_{mk}v_k$$

Will prove (u_1, \dots, u_m) is linearly dependent. Need to show $\sum x_i u_i = 0$ for some (x_1, \dots, x_m) not all zero.

$$x_1 u_1 + x_2 u_2 + \dots + x_m u_m = 0$$

substitute u_i with v_i 's,

$$\begin{aligned} & (x_1\alpha_{11} + x_2\alpha_{21} + \cdots + x_m\alpha_{m1})v_1 \\ & + \cdots \\ & + (x_1\alpha_{1k} + x_2\alpha_{2k} + \cdots + x_m\alpha_{mk})v_k = 0 \end{aligned}$$

All the coefficients above should be 0. There are k coefficients, m equations and we assume $m > k$. Therefore, there are infinite possible combinations of x_i 's. Therefore, there must be a solution which is not all zeros. Because if there is not such solution, then there should be only one solution which is all zeros.

4 Maximum Total Weight Problem

- **Inputs:** vectors (v_1, v_2, \dots, v_n) with weights (w_1, w_2, \dots, w_n) .
- **Goal:** Find a basis for the space spanned by (v_1, v_2, \dots, v_n) of maximum total weights.

Note. A single vector is linear independent to any other vector if it is a zero vector.

4.1 Greedy Algorithm

- Sort vectors by descending order of weights.
- S is an empty set of vectors initially.

- For each vectors v_i in this order, if $S \cup \{v_i\}$ is linearly independent and v_i is a non-zero vector, then $S = S \cup \{v_i\}$.

4.2 Correctness

- Suppose greedy returns vector (v_1, v_2, \dots, v_k) .
- Suppose there is an optimal solution that return $\text{OPT} = (v_{j1}, v_{j2}, \dots, v_{jk})$.

Since the v_j 's form a basis,

$$v_{i1} = \alpha_1 v_{j1} + \alpha_2 v_{j2} + \dots + \alpha_k v_{jk}$$

v_{i1} is chosen by greedy algorithm so it is not a zero vector. Therefore, there must be some α_l is non-zero.

We can add v_{i1} to the set $(v_{j1}, v_{j2}, \dots, v_{jk})$ and kick out v_{jl} .

Claim: This is also a basis whose weight is at least as good as OPT.

5 Find Maximum Spanning Tree

5.1 Kraskel's Algorithm

6 Shortest Path

Directed, weighted graph $G = (V, E)$ with weight function $w : E \rightarrow \mathbb{R}$.

Note that the algorithm can work on undirected graph as well since undirected graph can be seen as a special directed graph. So a undirected graph problem can be reduced to a directed graph problem but not necessarily vice versa. Moreover, the world is full of directed graph (download/upload speed, railway direction). The directed graph is a more general problem.

There are two common sub-problem about the shortest path:

1. Single source shortest path: Find the shortest path from a given vertex s to all other vertex.
2. All-pair shortest path: $\forall u, v$, find length of the shortest path from $u \rightarrow v$.

In most of the time, other problem can be reduced to these two problems. For example, single destination shortest path problem can be seen as a single source shortest path problem on the reversed graph.

Notice that there is actually no particularly better algorithm to solve single-source-single-destination problem. To find the shortest path from s to t , the best we can do is to find the shortest path from s to all the rest of the vertices. (TODO: This was a worst case example?)

Definition 6.1 *The length of a path is the sum of weights of all the edges on the path.*

6.1 Single Source Shortest Path

Note: there is no matroid in the graph to solve the problem by greedy algorithm.

6.1.1 Dijkstra's Algorithm

- Input: Directed Graph $G = (V, E)$ and a source vertex s .
- Assumption: all edge weights are non-negative (for example, driving time of the edges, latency of the internet, cost of putting a pipe).
- Goal: Find the shortest path from s to all the vertices.

Maintain a quantity called $d(v)$ for each vertex v so that,

- $d(v)$ is an upper bound on the length of the shortest path from s to v .
- There is a path from s to v of length $d(v)$.

Based on the assumption, we know that the shortest path from s on the graph is to s itself. We maintain a source set S initially as $\{s\}$ and we know the shortest path from s to each $u \in S$. Grow S until $S = V$. Then we know the shortest path from s to all the vertices.

A path from s that stay eventually within S will be called a source-side path.

Main idea At each state, find a vertex $v \in (V - S)$ for which there is a vertex u in S such that $d(s, u) + w(u, v)$ is minimum over all $x \in (V - S)$. Add v to S . Update as appropriate.

Algorithm

- For each vertex $v \in (V - S)$, maintain a quantity call $d(v)$. It is the length of the shortest path from s to v which consist of a source side path to a some vertex $u \in (V - S)$ followed by edge (u, v) .
- In each iteration, bring the vertex v with minimum $d(v)$ to S . To make sure d is invariant, we have to update d based on the new S (with a new vertex v). For each neighbor vertex x of v , update $d(x) = \min(d(x), d(v) + w(v, x))$. Note that if v is used to update x , then we remember v as the ancestor of x .

6.1.2 Correctness

Statement: For each vertex $v \in S$, $d(v)$ is equal to the length of the shortest path from s to v .

This statement proves the correctness of the algorithm, since when $S = V$, we have the shortest path from s to all the vertices.

Proof. Initialization: $d(s) = 0$, $d(v) = \infty$ for $\forall v \neq s$.

Prove the statement by induction.

- **Base case:** After the first iteration, $S = \{s\}$ and $d(s) = 0$, which is correct.

- **Inductive Hypothesis:** Assume the statement is true for $|S| = k$. Suppose v is the $(k + 1)$ -th vertex brought to S . v has $\min(d(v))$.
- **Inductive Step:** Let it call the path with length $d(v)$ as P . For contradiction, suppose there is a shortest path P' to v . P' must include at least one edge from S to $(V - S)$. Let (x, y) be the first such edge. Then the (s, y) portion of P' is already at least as long as P by the way algorithm works. We get a contradiction by assuming the existence of P' .

This proves that at the point the algorithm brings v into S , $d(v)$ is the length of the shortest path to v . So we complete the induction.

Why negative weight does not work here?

Adding a negative edge into source set can change the length of shortest source-side path for some vertices. But we do not update $d(u)$ for $u \in S$ since we assume introducing more nodes on the path only increase the length of path.

7 Huffman Coding

Given a text, which is a string over a large alphabet (say as English Text), we need to encode the text in binary for storage and communication.

Goal: Minimize the length of the binary code of the text.

Related problem: Code has to be a mapping from symbols in the original alphabet, Σ , to binary string.

7.1 Prefix-ambiguity

If one coded word is a prefix of another, then that could lead to ambiguity. Therefore, code must be “prefix free”, which are called **prefix code**.

Ideally, we could like to assign shorter code to the words with higher frequency.

7.2 Algorithm

Input: $\Sigma = \{\sigma_1, \sigma_2, \dots, \sigma_n\}$. f_i is the frequency of σ_i . Assume that $\sum f_i = 1$, $f_i \geq 0 \forall i$.

Goal: Find a prefix code that makes σ_i to $c(\sigma_i)$ to minimize $\sum f_i(c(\sigma_i))$, which is the average code length.