

# Kube-OVN Document

---

v1.15.0

*Kube-OVN Team*

*2025 Kube-OVN Team*

# Table of contents

---

1.	Kube-OVN	5
1.1	What is Kube-OVN?	5
1.2	Why Kube-OVN?	5
1.3	CNI	6
1.4	OVN/ovn-kubernetes/Kube-OVN	6
1.5		7
2.		8
2.1		8
2.2		10
2.3	Underlay	12
2.4	Talos	17
2.5		18
2.6		20
3.		21
3.1		21
3.2		28
3.3	IP	31
3.4		32
3.5	EIP SNAT	33
3.6	QoS	36
3.7	Egress Firewall	38
3.8		40
3.9	IP	41
3.10	Webhook	44
3.11		46
3.12	NetworkPolicy	52
3.13	LoadBalancer Service	54
3.14		59
3.15	Prometheus	63
4.	KubeVirt	69
4.1	VM IP	69
4.2		72
4.3		74
4.4		76
4.5	DHCP	81

5. VPC	82
5.1 VPC	82
5.2 VPC Egress Gateway	91
5.3 VPC QoS	101
5.4 VPC	104
5.5 VPC DNS	108
5.6 SecurityGroup	111
5.7 OVN EIP FIP SNAT DNAT	114
5.8 OVN SNAT ECMP BFD L3 HA	123
5.9 VPC	127
6.	129
6.1 kubectl	129
6.2	139
6.3 ovn-central	141
6.4 OVN	145
6.5 CIDR	147
6.6 Join CIDR	148
6.7	149
6.8	150
7.	154
7.1	154
7.2	160
7.3 FastPath	165
7.4 eBPF TCP	166
7.5 OVN-IC	170
7.6 Submariner	176
7.7 Overlay	178
7.8 BGP	180
7.9 MetalLB Kube-OVN Underlay	184
7.10 Cilium	188
7.11 Cilium NetworkPolicy	191
7.12 Cilium	195
7.13	200
7.14 VIP IP	201
7.15 Mellanox Offload	205
7.16 Offload	214
7.17 Offload	218
7.18 Offload	221

7.19 DPDK	224
7.20 OpenStack	228
7.21 IPsec	232
7.22 OVN	233
7.23 DNS Kube-OVN	236
7.24 VPC NAT	238
8.	239
8.1	239
8.2 What's Next	242
8.3	243
8.4	247
8.5	249
8.6 Underlay	253
8.7 Iptables	260
8.8	265
8.9 OVS/OVN	267
8.10	269
8.11 Kube-OVN	271
8.12 Kube-OVN	277
8.13 Annotation	298
8.14	302
9.	305
9.1	305


## 1. Kube-OVN

---





### 1.1 What is Kube-OVN?

---



### 1.2 Why Kube-OVN?

---

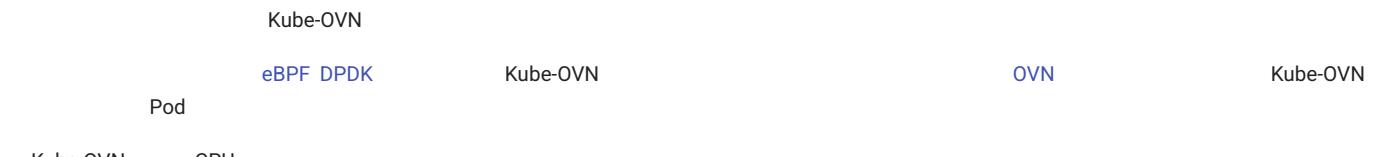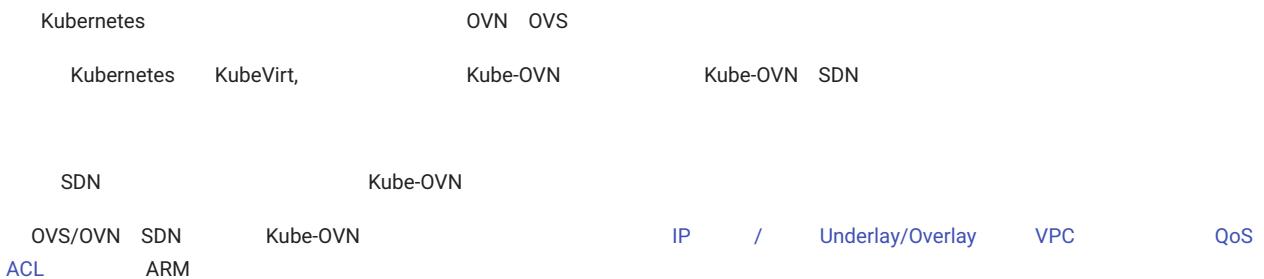

## 1.3 CNI

---



### 1.3.1 eBPF

---

[Cilium](#) [Calico eBPF](#)  
[Kube-OVN](#) [Open vSwitch](#)

### 1.3.2 CNI, Ingress, Service Mesh Observability All in One

---

[Cilium](#)  
[Kube-OVN](#) CNI

### 1.3.3 OpenShift

---

[ovn-kubernetes](#)  
[OpenShift](#) CNI [Cluster Network Operator](#) Kube-OVN RedHat Kubernetes

### 1.3.4 Kubernetes EKS/AKS/GKE

---

Kubernetes CNI

### 1.3.5 AI

---

Hostnetwork [host-device](#)  
AI

## 1.4 OVN/ovn-kubernetes/Kube-OVN

---

### 1.4.1 OVN

---

[OVN](#) Open vSwitch  
Kubernetes OpenStack, Kubernetes CMS ovn-kubernetes Kube-OVN OVN

### 1.4.2 ovn-kubernetes


---

[ovn-kubernetes](#) OVN OVN Kubernetes CNI OpenShift OpenShift [UDN, Multihoming, Hardware Acceleration](#)

### 1.4.3 Kube-OVN

---

Kube-OVN IP Namespace  
Underlay VPC KubeVirt OVN ovn-kubernetes annotation Pod join



⌚2025 9 10

⌚2022 5 20



1.5

---

## 2.

---

### 2.1

Kube-OVN CNI Kubernetes

#### 2.1.1

- Kubernetes >= 1.29
- Docker >= 1.12.6, Containerd >= 1.3.4
- : CentOS 7/8, Ubuntu 16.04/18.04/20.04
- Linux geneve, openvswitch, ip\_tables, iptable\_nat Kube-OVN

1.	3.10.0-862	netfilter	bug	Kube-OVN	CentOS	bug	Floating IPs broken after kernel upgrade to Centos/RHEL 7.5 - DNAT not working
2.	Rocky Linux 8.6	4.18.0-372.9.1.el8.x86_64	TCP	TCP connection failed in Rocky Linux 8.6		4.18.0-372.13.1.el8_6.x86_64	
3.	4.4	openvswitch		openvswitch			
4.	Geneve	IPv6	cat /proc/cmdline		bug	Geneve tunnels don't work when ipv6 is disabled	

#### 2.1.2

- IPv6 ipv6.disable=1 0
- kube-proxy Kube-OVN Service ClusterIP kube-apiserver
- kubelet CNI , kubelet --network-plugin=cni --cni-bin-dir=/opt/cni/bin --cni-conf-dir=/etc/cni/net.d /etc/cni/net.d/

#### 2.1.3

ovn-central	6641/tcp	ovn nb db server
ovn-central	6642/tcp	ovn sb db server
ovn-central	6643/tcp	ovn northd server
ovn-central	6644/tcp	ovn raft server
ovn-ic	6645/tcp	ovn ic nb db server
ovn-ic	6646/tcp	ovn ic sb db server
ovs-ovn	Geneve 6081/udp, STT 7471/tcp, Vxlan 4789/udp	
kube-ovn-controller	10660/tcp	
kube-ovn-daemon	10665/tcp	
kube-ovn-monitor	10661/tcp	

firewalld Packet Forwarding Masquerade

```
# Packet Forwarding
firewall-cmd --add-forward --permanent
```


```
#   IPv4 Masquerade
firewall-cmd --add-masquerade --permanent
#   Kube-OVN IPv6/           Masquerade
firewall-cmd --permanent --add-rich-rule 'rule family="ipv6" source address="fd00:10:16::/112" masquerade'

firewall-cmd --reload
```

[!\[\]\(7e49c700e4adaed94ad5398cf2e7059e\_img.jpg\) PDF](#)[!\[\]\(5ebcf382a6ee952d6c5b8b948415801e\_img.jpg\) Slack](#)[!\[\]\(71ceb62b681518c82e95d615e7265d66\_img.jpg\) Support](#)

⌚2025 9 10


⌚2022 5 20



2.1.4

---

## 2.2



### 2.2.1

release

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/refs/tags/v1.15.0/dist/images/install.sh
```

master

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/images/install.sh
```

```

REGISTRY="kubeovn"
VERSION="v1.15.0"
#           # /Tag
POD_CIDR="10.16.0.0/16"      # CIDR      SVC/NODE/JOIN CIDR
SVC_CIDR="10.96.0.0/12"       # apiserver  service-cluster-ip-range
JOIN_CIDR="100.64.0.0/16"     # Pod        CIDR      SVC/NODE/POD CIDR
LABEL="node-role.kubernetes.io/master" # OVN DB
IFACE=""                      #                 Kubernetes   Node IP
TUNNEL_TYPE="geneve"          #             geneve, vxlan   stt stt   ovs

```

```
IFACE=enp6s0f0,eth.*
```

root

```
bash install.sh
```

Kube-OVN

1. [Step 4/6] Pod
2. Kube-OVN

### 2.2.2 Helm Chart

Kube-OVN      Helm      Kube-OVN

IP

```
# kubectl get node -o wide
NAME           STATUS    ROLES      AGE   VERSION   INTERNAL-IP   EXTERNAL-IP   OS-IMAGE      KERNEL-VERSION   CONTAINER-RUNTIME
kube-ovn-control-plane  NotReady  control-plane  20h  v1.26.0  172.18.0.3  <none>        Ubuntu 22.04.1 LTS  5.10.104-linuxkit  containerd://1.6.9
kube-ovn-worker    NotReady  <none>      20h  v1.26.0  172.18.0.2  <none>        Ubuntu 22.04.1 LTS  5.10.104-linuxkit  containerd://1.6.9
```

**label**

```
# kubectl label node -lbeta.kubernetes.io/os=linux kubernetes.io/os=linux --overwrite
node/kube-ovn-control-plane not labeled
node/kube-ovn-worker not labeled

# kubectl label node -lnode-role.kubernetes.io/control-plane kube-ovn/role=master --overwrite
node/kube-ovn-control-plane labeled

#   label    dpdk      dpdk
# kubectl label node -lvn.kubernetes.io/ovs_dp_type!=userspace ovn.kubernetes.io/ovs_dp_type=kernel --overwrite
node/kube-ovn-control-plane labeled
node/kube-ovn-worker labeled
```

**Helm Repo**

```
# helm repo add kubeovn https://kubeovn.github.io/kube-ovn/
" kubeovn " has been added to your repositories

# helm repo list
NAME          URL
kubeovn      https://kubeovn.github.io/kube-ovn/

# helm repo update kubeovn
Hang tight while we grab the latest from your chart repositories...
...Successfully got an update from the " kubeovn " chart repository
Update Complete. *Happy Helm-ing!*

# helm search repo kubeovn
NAME          CHART VERSION   APP VERSION   DESCRIPTION
kubeovn/kube-ovn   v1.15.0       v1.15.0       Helm chart for Kube-OVN
```

**helm install Kube-OVN**

Chart      values.yaml

```
# helm install kube-ovn kubeovn/kube-ovn --wait -n kube-system --version v1.15.0
NAME: kube-ovn
LAST DEPLOYED: Thu Apr 24 08:30:13 2025
NAMESPACE: kube-system
STATUS: deployed
REVISION: 1
TEST SUITE: None
```

**Helm**      values.yaml

```
helm upgrade -f values.yaml kube-ovn kubeovn/kube-ovn --wait -n kube-system --version v1.15.0
```


 PDF

 Slack

 Support


 2025 9 17

 2022 5 20

**2.2.3**

## 2.3 Underlay

Kube-OVN      Geneve      Overlay  
                   Kube-OVN      Underlay

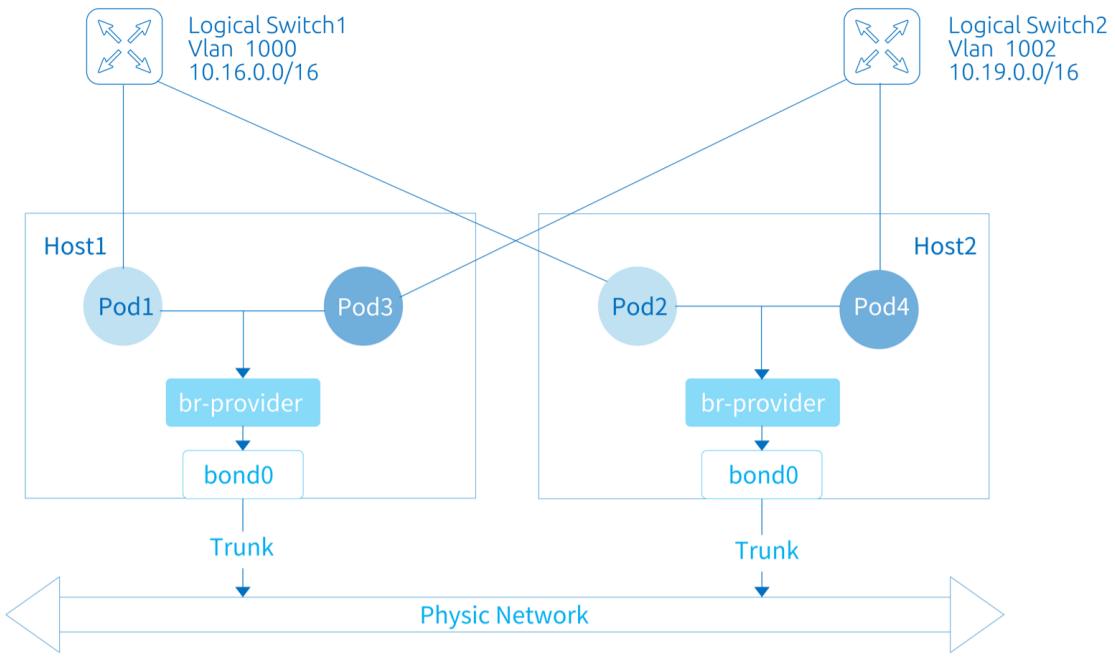

### 2.3.1

Overlay      SNAT/EIP      /      L3      VPC      Underlay

### 2.3.2 Macvlan

Kube-OVN	Underlay	Macvlan				
1. Macvlan	OVS	Macvlan				
2. Kube-OVN	arp-proxy	arp				
3. Macvlan	netfilter Service	NetworkPolicy	Kube-OVN	OVS	Service	NetworkPolicy
4. Kube-OVN	Underlay	Macvlan	IP	QoS		

### 2.3.3

Underlay	OVS	OVS	L2/L3	Vlan
1. OpenStack VM		PortSecurity		
2. VMware vSwitch		MAC Address Changes, Forged Transmits	Promiscuous Mode Operation	allow
3. Hyper-V		MAC Address Spoofing		
4. AWS GCE	Mac	Underlay	Underlay	VPC-CNI
5. Linux Bridge				

	Kube-OVN	Mac	IP	MTU	OVS Bridge	Underlay	OVS Bridge	br-PROVIDER_NAME
PROVIDER_NAME	Provider	provider						

### 2.3.4

Underlay Pod Underlay

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.14/dist/images/install.sh
```

```
ENABLE_ARP_DETECT_IP_CONFLICT #           vlan     arp
NETWORK_TYPE #           vlan
VLAN_INTERFACE_NAME #           eth1
VLAN_ID #           VLAN Tag    0     VLAN
POD_CIDR #           CIDR      192.168.1.0/24
POD_GATEWAY #           192.168.1.1
EXCLUDE_IPS #           IP        192.168.1.1..192.168.1.100
ENABLE_LB #           Underlay   Service   true
EXCHANGE_LINK_NAME #           provider-network OVS     false
LS_DNAT_MOD_DL_DST #           DNAT      MAC       Service   true
```

```
bash install.sh
```

### 2.3.5 CRD Underlay

**Underlay      Pod            ProviderNetwork    Vlan    Subnet**

# ProviderNetwork

ProviderNetwork Underlay

## ProviderNetwork :

```
apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
  name: net1
spec:
  defaultInterface: eth1
  customInterfaces:
    - interface: eth2
      nodes:
        - node1
nodeSelector:
  matchLabels:
    kubernetes.io/arch: amd64
    network-type: underlay
  matchExpressions:
    - key: kubernetes.io/hostname
      operator: In
      values:
        - node1
        - node2
```

## ProviderNetwork

12

- |                     |                     |  |                  |         |              |
|---------------------|---------------------|--|------------------|---------|--------------|
| • defaultInterface: | ProviderNetwork     | excludeNodes   | br-net1          | br-NAME | OVS          |
| • customInterfaces: |                     |  |                  |         |              |
| • nodeSelector:     | OVS                 | matchLabels  | matchExpressions |         |              |
| • excludeNodes:     |                     | net1.provider-network.ovn.kubernetes.io/exclude=true |                  |         | nodeSelector |
| <b>excludeNodes</b> | <b>nodeSelector</b> |  |                  |         |              |

Key	Value
net1.provider-network.ovn.kubernetes.io/ready	true
net1.provider-network.ovn.kubernetes.io/interface	eth1
net1.provider-network.ovn.kubernetes.io/mtu	1500
	MTU

IP IP OVS

**VLAN**

Vlan Vlan Tag ProviderNetwork

**VLAN**

```
apiVersion: kubeovn.io/v1
kind: Vlan
metadata:
  name: vlan1
spec:
  id: 0
  provider: net1
```

- id: VLAN ID/Tag Kube-OVN Vlan Vlan 0 vlan localnet
- provider: ProviderNetwork VLAN ProviderNetwork

**Subnet**

Vlan

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: subnet1
spec:
  protocol: IPv4
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  vlan: vlan1
  disableGatewayCheck: false
```

- vlan VLAN Subnet VLAN
- disableGatewayCheck Underlay true

**2.3.6**

IP

IP Pod IP Mac

**2.3.7**

Kube-OVN Underlay spec.logicalGateway true

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: subnet1
spec:
  protocol: IPv4
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  vlan: vlan1
  logicalGateway: true
```

Pod	Kube-OVN	Logical Router
-----	----------	----------------

### 2.3.8 Underlay Overlay

Underlay	Overlay	Overlay	Pod	NAT	Underlay	Pod IP	Underlay	Pod	Overlay
	Overlay	Underlay	Pod	Pod IP	Underlay	Pod			
Underlay	Overlay		u2oInterconnection	true	Kube-OVN		Underlay IP	Underlay	ovn-cluster
		Kube-OVN	Underlay	Overlay					

#### IP

subnet	IP	Underlay Subnet	u2oInterconnectionIP
--------	----	-----------------	----------------------

Underlay Subnet	VPC
-----------------	-----

Underlay Subnet	VPC	Overlay Subnet	VPC	u2oInterconnection	true	subnet.spec.vpc	VPC
-----------------	-----	----------------	-----	--------------------	------	-----------------	-----

### 2.3.9

IP	Netplan	Ubuntu	Netplan	renderer	NetworkManager	IP	DHCP
----	---------	--------	---------	----------	----------------	----	------

```
network:
  renderer: NetworkManager
  ethernets:
    eth0:
      dhcp4: no
      addresses:
        - 172.16.143.129/24
  version: 2
```

IP	netplan
----	---------

```
netplan generate

nmcli connection reload netplan-eth0
nmcli device set eth0 managed yes
```

Kube-OVN	IP	OVS
----------	----	-----

NetworkManager	CentOS
----------------	--------

```
nmcli connection reload eth0
nmcli device set eth0 managed yes
nmcli -t -f GENERAL.STATE device show eth0 | grep -qw unmanaged || nmcli device reapply eth0
```

IP	MAC
----	-----

### 2.3.10

#### hairpin Pod

hairpin	Pod	Pod	OVS	MAC
		Kube-OVN		

#### Pod Pod

Pod	300	ARP	OVS	resubmit
-----	-----	-----	-----	----------

```
2022-11-13T08:43:46.782Z|00222|ofproto_dpif_upcall(handler5)|WARN|Flow: arp, in_port=331,vlan_tci=0x0000,dl_src=00:00:00:25:eb:39,dl_dst=ff:ff:ff:ff:ff:ff,arp_spa=10.213.131.240,arp_tpa=10.213.159.254,arp_op=1,arp_sha=00:00:00:25:eb:39,arp_tha=ff:ff:ff:ff:ff:ff
bridge("br-int")
-----
0. No match.
```

```
>>> received packet on unknown port 331 <<<
drop

Final flow: unchanged
Megaflow: recirc_id=0,eth,arp,in_port=331,d1_src=00:00:00:25:eb:39
Datapath actions: drop
2022-11-13T08:44:34.077Z|00224|ofproto_dpif_xlate(handler5)|WARN|over 4096 resubmit actions on bridge br-int while processing
arp,in_port=13483,vlan_tci=0x0000,d1_src=00:00:00:59:ef:
13,d1_dst=ff:ff:ff:ff:ff:ff,arp_spa=10.213.152.3,arp_tpa=10.213.159.254,arp_op=1,arp_sha=00:00:00:59:ef:13,arp_tha=ff:ff:ff:ff:ff:ff
```

OVN NB    bcast\_arp\_req\_flood    false

```
kubectl ko nbctl set NB_Global . options:bcast_arp_req_flood=false
```


[!\[\]\(397cc4c04b5e7ea225dbaa029a5dee1f\_img.jpg\) PDF](#)

[!\[\]\(115eff7009a76771e6b7adb966005e4c\_img.jpg\) Slack](#)

[!\[\]\(a6eac08c103efb51b40f958fe35f07bb\_img.jpg\) Support](#)

 2025 9 10

 2022 5 20



 GitHub

+1

2.3.11

---

## 2.4 Talos

Talos Linux    Kubernetes    Linux

### 2.4.1 Helm Chart    Kube-OVN

Talos Linux    Kube-OVN

```
helm install kubeovn kubeovn/kube-ovn --wait \
-n kube-system \
--version v1.15.0 \
--set OVN_DIR=/var/lib/ovn \
--set OPENVSWITCH_DIR=/var/lib/openvswitch \
--set DISABLE_MODULES_MANAGEMENT=true \
--set cni_conf.MOUNT_LOCAL_BIN_DIR=false
```

Underlay

Helm

Chart

```
helm install kubeovn kubeovn/kube-ovn --wait \
-n kube-system \
--version v1.15.0 \
--set OVN_DIR=/var/lib/ovn \
--set OPENVSWITCH_DIR=/var/lib/openvswitch \
--set DISABLE_MODULES_MANAGEMENT=true \
--set cni_conf.MOUNT_LOCAL_BIN_DIR=false \
--set networking.NETWORK_TYPE=vlan \
--set networking.vlan.VLAN_INTERFACE_NAME=enp0s5f1 \
--set networking.vlan.VLAN_ID=0 \
--set networking.NET_STACK=ipv4 \
--set-json networking.EXCLUDE_IPS='["172.99.99.11..172.99.99.99"]' \
--set-json ipv4.POD_CIDR='["172.99.99.8/24"]' \
--set-json ipv4.POD_GATEWAY='["172.99.99.1"]'
```



#### Note

VLAN Bond Bridge    Underlay    Underlay    Talos    ignore=true

```
machine:
  network:
    interfaces:
      - interface: enp0s5f1
        ignore: true
```

[PDF](#)

[Slack](#)

[Support](#)

⌚2025 7 1

⌚2025 4 16



GitHub



### 2.4.2

## 2.5

---

Kube-OVN

pre-v0.0.1

Kube-OVN

### 2.5.1

---

- [Linkerd](#)
- [Elasticsearch](#)
- [EMQX](#)
- [KubeSphere](#)

### 2.5.2 OpenVswitch/OVN

---

Kube-OVN

OpenVswitch OVN

- [OVN](#)
- [OpenVswitch](#)

ovn-architecture

### 2.5.3 Kube-OVN

---

Kube-OVN

Kube-OVN      kubectl      bash

Kube-OVN

### 2.5.4

---

Kube-OVN

Kube-OVN

Kube-OVN E2E

### 2.5.5

---

Kube-OVN


7\*24

Github Issue

Github Issue

AI

AI



⌚2025 9 10

⌚2025 8 29



## 2.5.6

---

## 2.6

Kube-OVN

Kube-OVN

OVS

issue

Kube-OVN

### 2.6.1 Kubernetes

[Script Uninstall](#)    [Helm Uninstall](#)

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.14/dist/images/cleanup.sh
bash cleanup.sh

helm uninstall kube-ovn -n kube-system
```

### 2.6.2

ovsdb openvswitch

```
rm -rf /var/run/openvswitch
rm -rf /var/run/ovn
rm -rf /etc/origin/openvswitch/
rm -rf /etc/origin/ovn/
rm -rf /etc/cni/net.d/00-kube-ovn.conflist
rm -rf /etc/cni/net.d/01-kube-ovn.conflist
rm -rf /var/log/openvswitch
rm -rf /var/log/ovn
rm -fr /var/log/kube-ovn
```

### 2.6.3

iptable/ipset

reboot

[PDF](#)

[Slack](#)

[Support](#)

⌚2025 9 10

⌚2022 5 24




### 2.6.4

## 3.

## 3.1

Kube-OVN NAT	Kube-OVN CNI	IP	Namespace	Namespace	Pod	IP	CIDR
VPC	IP	VPC peering	VPN	IP			

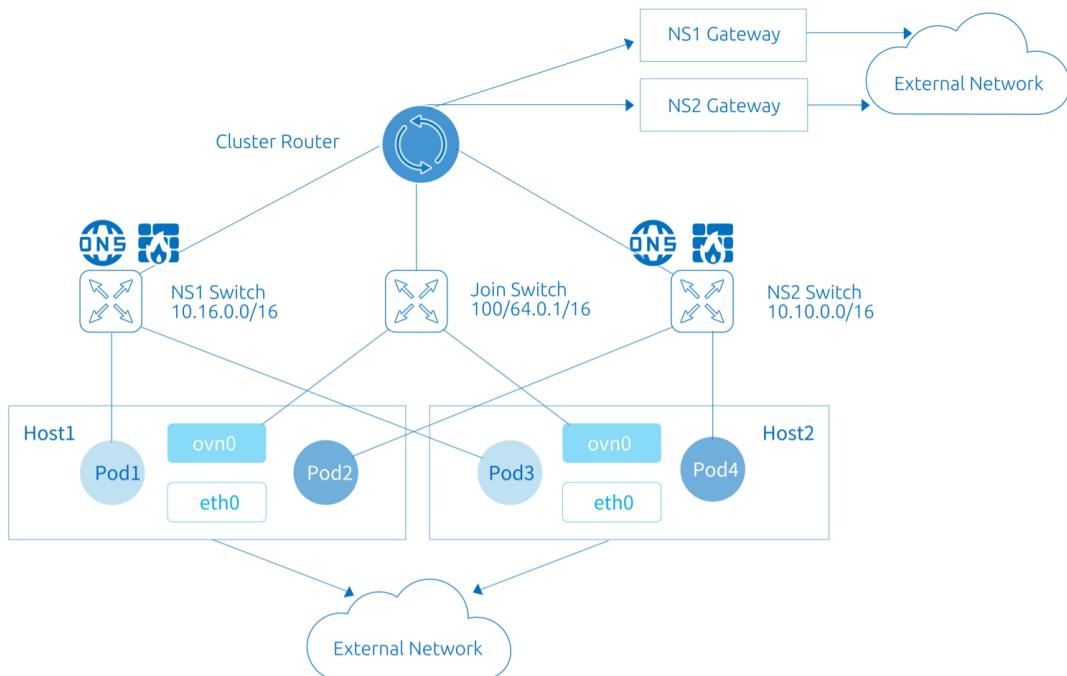

Overlay Underlay

## 3.1.1

Kube-OVN	Namespace	IP	CIDR
Overlay	NAT	Flannel	
Underlay	arping		

spec default true ovn-default

```
# kubectl get subnet ovn-default -o yaml
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  creationTimestamp: "2019-08-06T09:33:43Z"
  generation: 1
  name: ovn-default
  resourceVersion: "1571334"
```

```

selfLink: /apis/kubeovn.io/v1/subnets/ovn-default
uid: 7e2451f8-fb44-4f7f-b3e0-cfd27f6fd5d6
spec:
  cidrBlock: 10.16.0.0/16
  default: true
  excludeIps:
  - 10.16.0.1
  gateway: 10.16.0.1
  gatewayType: distributed
  natOutgoing: true
  private: false
  protocol: IPv4

```

### 3.1.2 Join



#### Join

Pod	hostport	externalTrafficPolicy: Local	NodePort	Service
-----	----------	------------------------------	----------	---------

join	CIDR
------	------

```

# kubectl get subnet join -o yaml
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  creationTimestamp: "2019-08-06T09:33:43Z"
  generation: 1
  name: join
  resourceVersion: "1571333"
  selfLink: /apis/kubeovn.io/v1/subnets/join
  uid: 9c744810-c678-4d50-8a7d-b8ec12ef91b8
spec:
  cidrBlock: 100.64.0.0/16
  default: false
  excludeIps:
  - 100.64.0.1
  gateway: 100.64.0.1
  gatewayNode: ""
  gatewayType: ""
  natOutgoing: false
  private: false
  protocol: IPv4

```

node ovn0

```

# ifconfig ovn0
ovn0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1420
    inet 100.64.0.4 netmask 255.255.0.0 broadcast 100.64.255.255
      inet6 fe80::800:ff:fe40:5 prefixlen 64 scopeid 0x20<link>
        ether 0a:00:00:40:00:05 txqueuelen 1000  (Ethernet)
          RX packets 18 bytes 1428 (1.3 KiB)
          RX errors 0 dropped 0 overruns 0 frame 0
          TX packets 19 bytes 1810 (1.7 KiB)
          TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

```

### 3.1.3 Namespace

#### Namespace

```

cat <<EOF | kubectl create -f -
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: subnet1
spec:
  protocol: IPv4
  cidrBlock: 10.66.0.0/16
  excludeIps:

```

```

- 10.66.0.1..10.66.0.10
- 10.66.0.101..10.66.0.151
gateway: 10.66.0.1
gatewayType: distributed
natOutgoing: true
routeTable: ""
namespaces:
- ns1
- ns2
EOF

```

- cidrBlock : CIDR      VPC      Subnet CIDR
- excludeIps :              IP      Underlay
- gateway :      Overlay      Kube-OVN      Underlay
- namespaces :      Namespace      Namespace      Pod
- routeTable :

```

# kubectl create ns ns1
namespace/ns1 created

# kubectl run nginx --image=docker.io/library/nginx:alpine -n ns1
deployment.apps/nginx created

# kubectl get pod -n ns1 -o wide
NAME           READY   STATUS    RESTARTS   AGE   IP          NODE   NOMINATED NODE   READINESS GATES
nginx-74d5899f46-n8wtg  1/1     Running   0          10s   10.66.0.11   node1  <none>        <none>

```

## Workload

Pod	Namespace	IP	Namespace	Workload	Pod	Annotation ovn.kubernetes.io/logical_switch
-----	-----------	----	-----------	----------	-----	---

```


apiVersion: v1
kind: Pod
metadata:
  name: another-subnet
  annotations:
    ovn.kubernetes.io/logical_switch: subnet1
spec:
  containers:
  - name: another-subnet
    image: docker.io/library/nginx:alpine

```

Workload	Deployment	StatefulSet	ovn.kubernetes.io/logical_switch Annotation
spec.template.metadata.annotations			


## 3.1.4 Overlay



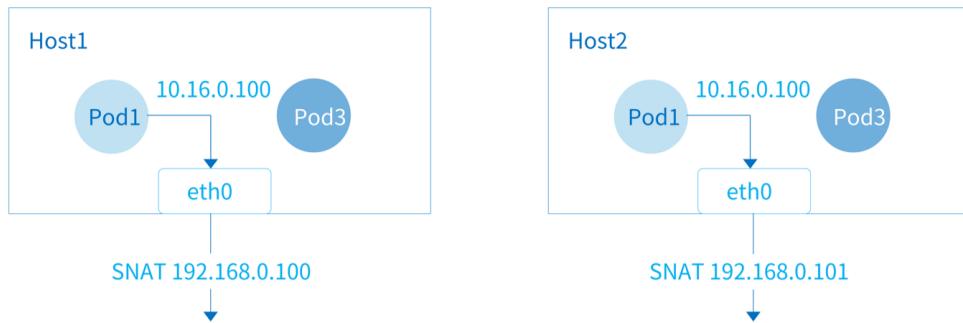

```
gatewayType      distributed
```

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: distributed
spec:
  protocol: IPv4
  cidrBlock: 10.166.0.0/16
  default: false
  excludeIps:
  - 10.166.0.1
  gateway: 10.166.0.1
  gatewayType: distributed
  natOutgoing: true
```

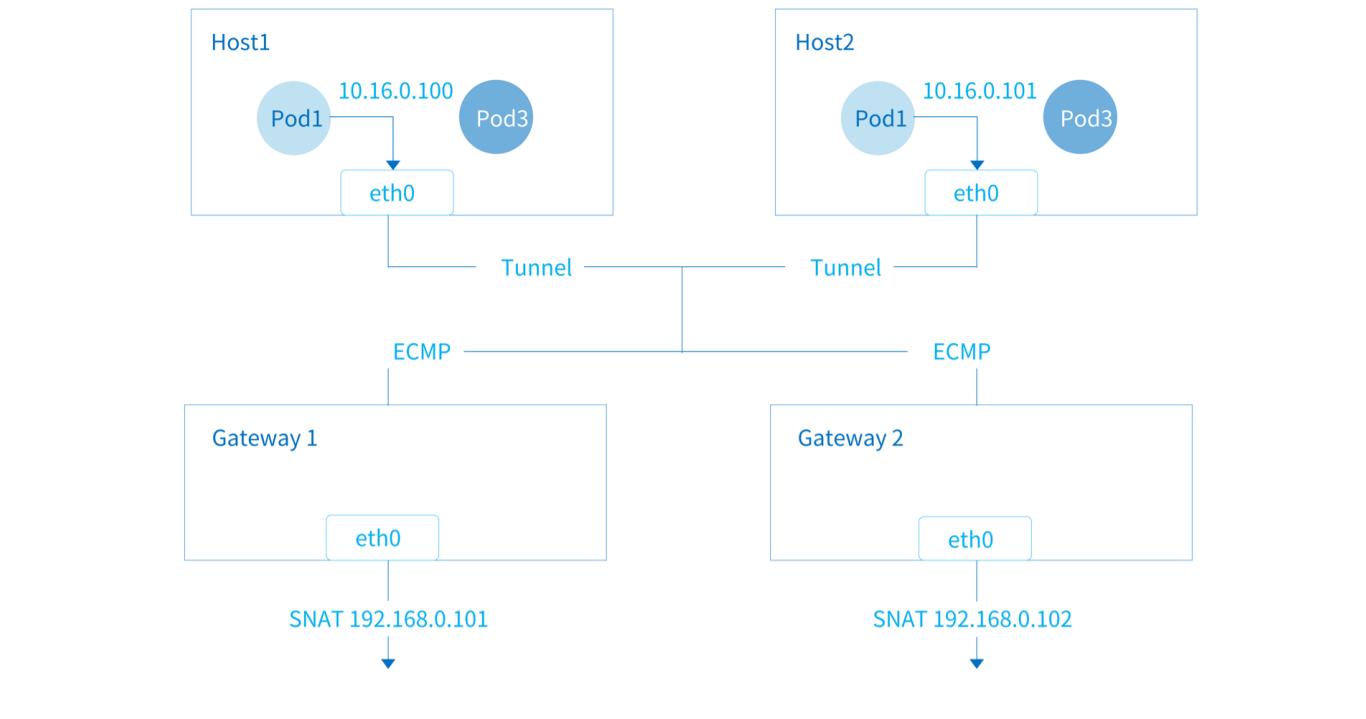

Pod	IP	Pod	ovn0	natOutgoing	true
	IP				
gatewayType	centralized	gatewayNode	Kubernetes	NodeName	gatewayNode

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: centralized
spec:
  protocol: IPv4
  cidrBlock: 10.166.0.0/16
  default: false
  excludeIps:
  - 10.166.0.1
  gateway: 10.166.0.1
  gatewayType: centralized
  gatewayNode: "node1,node2"
  natOutgoing: true
```

- |                               |                       |   |
|-------------------------------|-----------------------|---|
| •                             | gatewayNode           | kube-ovn-worker:172.18.0.2, kube-ovn-control-plane:172.18.0.3 |
| •                             | ECMP                  | ECMP  |
| • Kube-OVN v1.12.0 controller | subnet crd Deployment | spec enableEcmp<br>enable-ecmp v1.12.0                        |
|                               |                       | ECMP ECMP kube-ovn-   |

315 ACI

**Warning**

Kube-OVN      [NetworkPolicy](#) [Network Policy API](#) [Subnet ACL](#) [Security Group](#)      [OVN ACL](#)      [NetworkPolicy](#) [NetworkPolicy API](#)

ACL	Kube-OVN	Subnet	ACL			
Subnet	ACL	OVN	ACL	ovn-nb ACL Table	match	ovn-sb Logical Flow Table

IP 10.10.0.2 Pod

ACL

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: acl
spec:
  allowEWTraffic: false
  acls:
    - action: drop
      direction: to-lport
      match: ip4.dst == 10.10.0.2 && ip
      priority: 1002
    - action: allow-related
      direction: from-lport
      match: ip4.src == 10.10.0.2 && ip
      priority: 1002
  cidrBlock: 10.10.0.0/24

```

ACL

allowEWTraffic: true

### 3.1.6

ACL

ACL

Kube-OVN

Pod

CRD private true

allowSubnets allowSubnets

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: private
spec:
  protocol: IPv4
  default: false
  namespaces:
    - ns1
    - ns2
  cidrBlock: 10.69.0.0/16
  private: true
  allowSubnets:
    - 10.16.0.0/16
    - 10.18.0.0/16

```

### 3.1.7 Underlay

Underlay

- vlan: Underlay Subnet Vlan CR Underlay
- logicalGateway: Underlay OVN Underlay Overlay false

### 3.1.8

kube-ovn-cni Pod ICMP ARP

Underlay ICMP

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: disable-gw-check
spec:
  disableGatewayCheck: true

```

### 3.1.9 Multicast-Snoop

subnet Pod OVN

Pod subnet multicast snoop OVN South Database

Multicast\_Group

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: sample1
spec:
  enableMulticastSnoop: true
```

### 3.1.10 Subnet MTU

Subnet Pod MTU      Subnet Pod

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: sample1
spec:
  mtu: 1300
```

### 3.1.11

- IP
- VPC NAT
- QoS
- 
- DHCP
- 
- 
- IP


[!\[\]\(ab38aa34d7fd9612c4ea4d0692132800\_img.jpg\) PDF](#)

[!\[\]\(4754fc919b2e8116c30595fd4b918f00\_img.jpg\) Slack](#)

[!\[\]\(3d12067139d6a2b0989a839672a8beec\_img.jpg\) Support](#)

 2025 9 17

 2022 5 24



### 3.1.12

## 3.2

Kube-OVN	Pod	Namespace	IP	Mac	Kube-OVN
• Pod	IP/Mac				
• Workload	IP Pool				
• StatefulSet					
• KubeVirt VM					

### 3.2.1 Pod IP Mac

Pod annotation Pod IP/Mac, kube-ovn-controller

```
apiVersion: v1
kind: Pod
metadata:
  name: static-ip
  annotations:
    ovn.kubernetes.io/ip_address: 10.16.0.15      //          10.16.0.15,fd00:10:16::15
    ovn.kubernetes.io/mac_address: 00:00:00:53:6B:B6
spec:
  containers:
  - name: static-ip
    image: docker.io/library/nginx:alpine
```

annotation Pod IP/Mac

1. IP/Mac IP/Mac
2. IP CIDR
3. IP Mac

### 3.2.2 Workload IP Pool

Kube-OVN	annotation ovn.kubernetes.io/ip_pool	Workload Deployment/StatefulSet/DaemonSet/Job/CronJob	IP kube-ovn-
controller	ovn.kubernetes.io/ip_pool	IP	
IP Pool	Annotation template annotation	Kubernetes Workload	Workload
Deployment	IP		

#### Deployment IP

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: ippool
  labels:
    app: ippool
spec:
  replicas: 2
  selector:
    matchLabels:
      app: ippool
  template:
    metadata:
      labels:
        app: ippool
      annotations:
        ovn.kubernetes.io/ip_pool: 10.16.0.15,10.16.0.16,10.16.0.17 //          10.16.0.15,fd00:10:16::000E;10.16.0.16,fd00:10:16::000F;
        10.16.0.17,fd00:10:16::0010
    spec:
      containers:
      - name: ippool
        image: docker.io/library/nginx:alpine
```

Workload	IP								
1. ovn.kubernetes.io/ip_pool	IP		CIDR						
2. ovn.kubernetes.io/ip_pool	IP		IP						
3. ovn.kubernetes.io/ip_pool	IP	replicas		Pod		Workload		ovn.kubernetes.io/ip_pool	IP

### 3.2.3 StatefulSet

StatefulSet	IP	Workload	ovn.kubernetes.io/ip_pool	Pod	IP				
StatefulSet		Kube-OVN							
1. Pod	ovn.kubernetes.io/ip_pool	IP	StatefulSet	web	web-0	ovn.kubernetes.io/ip_pool	IP	web-1	IP
2. StatefulSet Pod	OVN	logical_switch_port		Pod	interface	Pod	IP/Mac		StatefulSet Volume
3. 2	ovn.kubernetes.io/ip_pool	StatefulSet Pod			IP/Mac		StatefulSet		

#### StatefulSet

```

apiVersion: apps/v1
kind: StatefulSet
metadata:
  name: web
spec:
  serviceName: "nginx"
  replicas: 2
  selector:
    matchLabels:
      app: nginx
  template:
    metadata:
      labels:
        app: nginx
  spec:
    containers:
      - name: nginx
        image: docker.io/library/nginx:alpine
      ports:
        - containerPort: 80
          name: web

```

StatefulSet Pod Pod IP

#### StatefulSet Pod IP

StatefulSet	IP	Pod Name	Statefulset	ovn.kubernetes.io/ip_pool	Annotation	Pod	IP
StatefulSet Pod IP		StatefulSet	scale	0	Annotation	StatefulSet	

### 3.2.4 KubeVirt VM

KubeVirt	VM	kube-ovn-controller	StatefulSet Pod	IP	VM
VM	IP				

[PDF](#)
[Slack](#)
[Support](#)

⌚2025 9 10

⌚2022 5 20



⌚GitHub 🐱



+1

3.2.5

---

### 3.3 IP

IP IPPool Subnet IPAM IP Namespace

#### 3.3.1

```
apiVersion: kubeovn.io/v1
kind: IPPool
metadata:
  name: pool-1
spec:
  subnet: ovn-default
  ips:
    - "10.16.0.201"
    - "10.16.0.210/30"
    - "10.16.0.220..10.16.0.230"
  namespaces:
    - ns-1
```




#### 3.3.2

1. Workload IP Pool IP IP
2. IP .spec.ips IP IP .spec.ips CIDR
3. IP IP IP
4. IP .spec.ips
5. IP IP IP IP IP
6. IP IP



⌚2025 9 10

⌚2023 7 10



#### 3.3.3

## 3.4

### Pod Annotations

```
apiVersion: v1
kind: Pod
metadata:
  name: custom-routes
  annotations:
    ovn.kubernetes.io/routes: |
      [{ "dst": "192.168.0.101/24", "gw": "10.16.0.254" },
       { "gw": "10.16.0.254" }]
spec:
  containers:
  - name: nginx
    image: docker.io/library/nginx:alpine
```

dst

Deployment	DaemonSet	StatefulSet	Annotation	.spec.template.metadata.annotations
------------	-----------	-------------	------------	-------------------------------------

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: custom-routes
  labels:
    app: nginx
spec:
  replicas: 2
  selector:
    matchLabels:
      app: nginx
  template:
    metadata:
      labels:
        app: nginx
      annotations:
        ovn.kubernetes.io/routes: |
          [{ "dst": "192.168.0.101/24", "gw": "10.16.0.254" },
           { "gw": "10.16.0.254" }]
    spec:
      containers:
      - name: nginx
        image: docker.io/library/nginx:alpine
```

[PDF](#)
[Slack](#)
[Support](#)

⌚2023 9 26


⌚2023 2 16



GitHub 

### 3.4.1

### 3.5 EIP SNAT

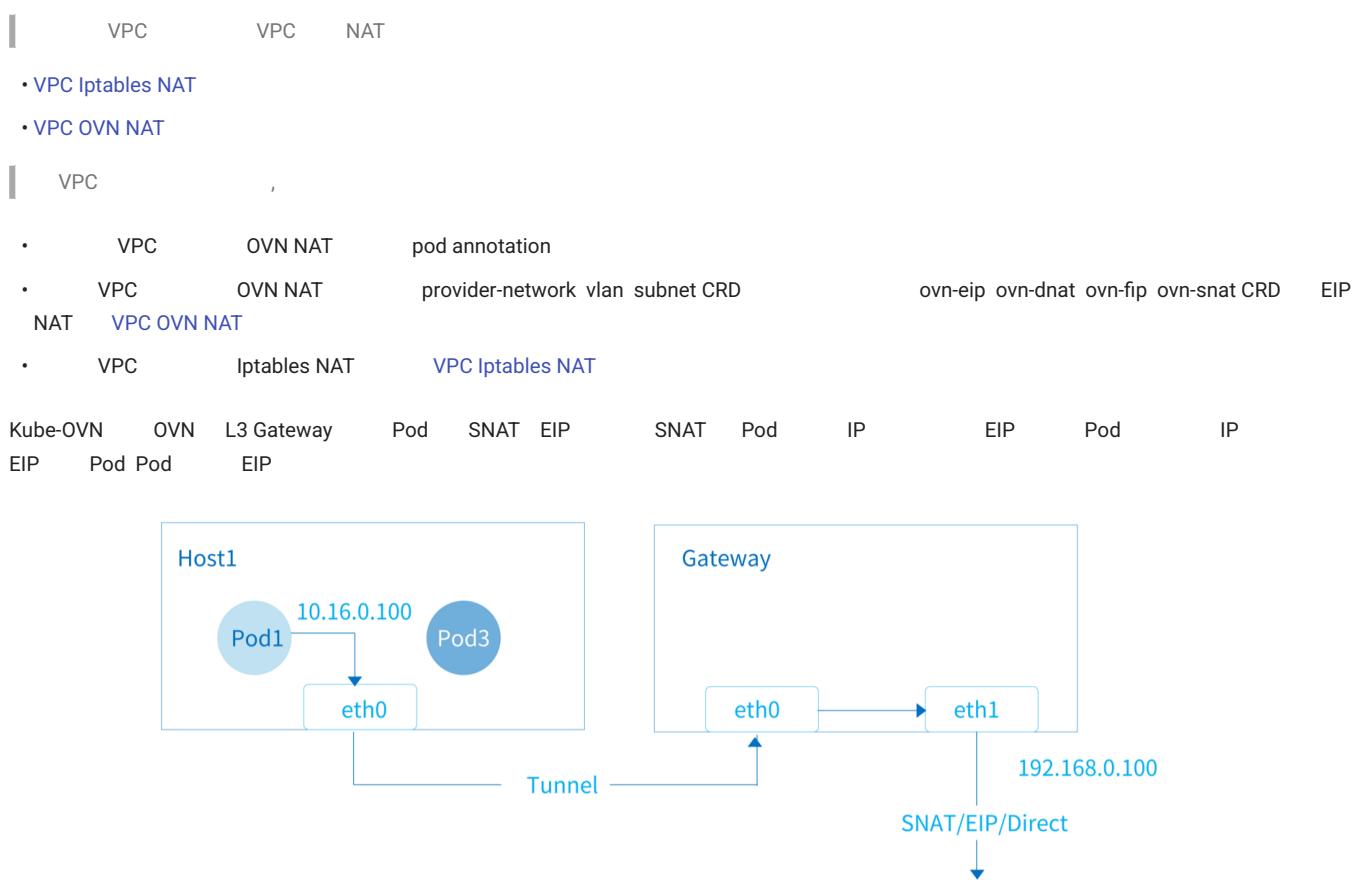

### 3.5.1



### 3.5.2

kube-system ConfigMap ovn-external-gw-config

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-external-gw-config
  namespace: kube-system
data:
  enable-external-gw: "true"
  external-gw-nodes: "kube-ovn-worker"
  external-gw-nic: "eth1"
  external-gw-addr: "172.56.0.1/16"
```

```

nic-ip: "172.56.0.254/16"
nic-mac: "16:52:f3:13:6a:25"

• enable-external-gw: SNAT EIP
• type: centralized distributed centralized distributed
• external-gw-nodes: centralized
• external-gw-nic:
• external-gw-addr: IP
• nic-ip, nic-mac: IP Mac IP Mac

```

### 3.5.3 OVN OVS

OVN-NB	ovn-external	ovn-cluster-ovn-external	chassis
--------	--------------	--------------------------	---------

```

# kubectl get nbctl show
switch 3de4cead7-1a71-43f3-8b62-435a57ef16a6 (external)
  port localnet.external
    type: localnet
    addresses: ["unknown"]
  port external-ovn-cluster
    type: router
    router-port: ovn-cluster-external
router e1eb83ad-34be-4ed5-9a02-fcc8b1d357c4 (ovn-cluster)
  port ovn-cluster-external
    mac: "ac:1f:6b:2d:33:f1"
    networks: ["172.56.0.100/16"]
  gateway chassis: [a5682814-2e2c-46dd-9c1c-6803ef0dab66]

```

OVS	br-external
-----	-------------

```

# kubectl get vsctl ${gateway node name} show
e7d81150-7743-4d6e-9e6f-5c688232e130
  Bridge br-external
    Port br-external
      Interface br-external
        type: internal
    Port eth1
      Interface eth1
      Port patch-localnet.external-to-br-int
        Interface patch-localnet.external-to-br-int
          type: patch
          options: {peer=patch-br-int-to-localnet.external}

```

### 3.5.4 Pod EIP SNAT

Pod	ovn.kubernetes.io/snat	ovn.kubernetes.io/eip annotation	SNAT EIP
-----	------------------------	----------------------------------	----------

```

apiVersion: v1
kind: Pod
metadata:
  name: pod-snat
  annotations:
    ovn.kubernetes.io/snat: 172.56.0.200
spec:
  containers:
    - name: pod-snat
      image: docker.io/library/nginx:alpine
---
apiVersion: v1
kind: Pod
metadata:
  name: pod-eip
  annotations:
    ovn.kubernetes.io/eip: 172.56.0.233
spec:
  containers:
    - name: pod-eip
      image: docker.io/library/nginx:alpine

```

kubectl	Pod	EIP SNAT	ovn.kubernetes.io/routed annotation
---------	-----	----------	-------------------------------------

```

kubectl annotate pod pod-gw ovn.kubernetes.io/eip=172.56.0.221 --overwrite
kubectl annotate pod pod-gw ovn.kubernetes.io/routed-

```

EIP SNAT	ovn.kubernetes.io/routed annotation
----------	-------------------------------------

### 3.5.5

```
kube-ovn-controller      SNAT   EIP  
• --external-gateway-config-ns: Configmap ovn-external-gw-config  Namespace  kube-system  
• --external-gateway-net:           external  
• --external-gateway-vlanid:     Vlan Tag    0    Vlan
```

[!\[\]\(05abdec45d3d9667a7f3c64e46754c68\_img.jpg\) PDF](#)[!\[\]\(b246cff486eb7c4dec085261afe05404\_img.jpg\) Slack](#)[!\[\]\(89b88375a21fd57206ff9ec1ea24d933\_img.jpg\) Support](#)


⌚2025 9 10

⌚2022 5 24



### 3.5.6

## 3.6 QoS

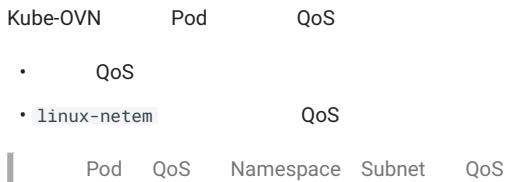

### 3.6.1 QoS

QoS      Pod annotation      Pod      Mbit/s

```

apiVersion: v1
kind: Pod
metadata:
  name: qos
  namespace: ls1
  annotations:
    ovn.kubernetes.io/ingress_rate: "3"
    ovn.kubernetes.io/egress_rate: "1"
spec:
  containers:
  - name: qos
    image: docker.io/library/nginx:alpine
  
```

annotation      QoS

```
kubectl annotate --overwrite pod nginx-74d5899f46-d7qkn ovn.kubernetes.io/ingress_rate=3
```

#### QoS

```

kind: DaemonSet
apiVersion: apps/v1
metadata:
  name: perf
  namespace: ls1
  labels:
    app: perf
spec:
  selector:
    matchLabels:
      app: perf
  template:
    metadata:
      labels:
        app: perf
    spec:
      containers:
      - name: nginx
        image: docker.io/kubeovn/perf
  
```

Pod      iperf3 server

```
# kubectl exec -it perf-4n4gt -n ls1 sh
# iperf3 -s
-----
Server listening on 5201
-----
```

Pod      Pod

```

# kubectl exec -it perf-d4mqc -n ls1 sh
# iperf3 -c 10.66.0.12
Connecting to host 10.66.0.12, port 5201
[  4] local 10.66.0.14 port 51544 connected to 10.66.0.12 port 5201
[ ID] Interval           Transfer     Bandwidth   Retr  Cwnd
[  4]  0.00-1.00  sec   86.4 MBytes   725 Mbits/sec  3   350 KBytes
[  4]  1.00-2.00  sec   89.9 MBytes   754 Mbits/sec 118  473 KBytes
[  4]  2.00-3.00  sec   101 MBytes   848 Mbits/sec 184  586 KBytes
[  4]  3.00-4.00  sec   104 MBytes   875 Mbits/sec 217  671 KBytes
[  4]  4.00-5.00  sec   111 MBytes   935 Mbits/sec 175  772 KBytes
  
```

[ 4 ]	5.00-6.00	sec	100 MBytes	840 Mbits/sec	658	598 KBytes
[ 4 ]	6.00-7.00	sec	106 MBytes	890 Mbits/sec	742	668 KBytes
[ 4 ]	7.00-8.00	sec	102 MBytes	857 Mbytes/sec	764	724 KBytes
[ 4 ]	8.00-9.00	sec	97.4 MBytes	817 Mbits/sec	1175	764 KBytes
[ 4 ]	9.00-10.00	sec	111 MBytes	934 Mbits/sec	1083	838 KBytes
-----						
[ ID]	Interval	Transfer	Bandwidth	Retr		
[ 4 ]	0.00-10.00	sec	1010 MBytes	848 Mbits/sec	5119	sender
[ 4 ]	0.00-10.00	sec	1008 MBytes	846 Mbits/sec		receive

## Pod QoS

```
kubectl annotate --overwrite pod perf-4n4gt -n ls1 ovn.kubernetes.io/ingress_rate=30
```

Pod Pod

```
# iperf3 -c 10.66.0.12
Connecting to host 10.66.0.12, port 5201
[ 4] local 10.66.0.14 port 52372 connected to 10.66.0.12 port 5201
[ ID] Interval           Transfer     Bandwidth    Retr  Cwnd
[ 4]  0.00-1.00  sec   3.66 MBytes  30.7 Mbits/sec  2   76.1 KBytes
[ 4]  1.00-2.00  sec   3.43 MBytes  28.8 Mbits/sec  0   104 KBytes
[ 4]  2.00-3.00  sec   3.50 MBytes  29.4 Mbits/sec  0   126 KBytes
[ 4]  3.00-4.00  sec   3.50 MBytes  29.3 Mbits/sec  0   144 KBytes
[ 4]  4.00-5.00  sec   3.43 MBytes  28.8 Mbits/sec  0   160 KBytes
[ 4]  5.00-6.00  sec   3.43 MBytes  28.8 Mbits/sec  0   175 KBytes
[ 4]  6.00-7.00  sec   3.50 MBytes  29.3 Mbits/sec  0   212 KBytes
[ 4]  7.00-8.00  sec   3.68 MBytes  30.9 Mbits/sec  0   294 KBytes
[ 4]  8.00-9.00  sec   3.74 MBytes  31.4 Mbits/sec  0   398 KBytes
[ 4]  9.00-10.00 sec   3.80 MBytes  31.9 Mbits/sec  0   526 KBytes
-
[ ID] Interval           Transfer     Bandwidth    Retr  Cwnd
[ 4]  0.00-10.00 sec  35.7 MBytes  29.9 Mbits/sec  2   sender
[ 4]  0.00-10.00 sec  34.5 MBytes  29.0 Mbits/sec  receiver

iperf Done.
```

### 3.6.2 linux-netem QoS

```
RHEL      netem      yum install -y kernel-modules-extra && modprobe sch_netem

Pod      annotation    linux-netem   QoS  ovn.kubernetes.io/latency  ovn.kubernetes.io/limit  ovn.kubernetes.io/loss

• ovn.kubernetes.io/latency  Pod          ms
• ovn.kubernetes.io/jitter   Pod          ms
• ovn.kubernetes.io/limit    qdisc        1000
• ovn.kubernetes.io/loss     float        20  20%
```



2025 9 10

Q 2022 5 24



3.6.3

## 3.7 Egress Firewall

AdminNetworkPolicy (ANP) Pod

### 3.7.1

#### ANP BANP CRD

AdminNetworkPolicy CRD

```
kubectl apply -f https://raw.githubusercontent.com/kubernetes-sigs/network-policy-api/refs/heads/main/config/crd/experimental/policy.networking.k8s.io_adminnetworkpolicies.yaml
kubectl apply -f https://raw.githubusercontent.com/kubernetes-sigs/network-policy-api/refs/heads/main/config/crd/experimental/policy.networking.k8s.io_baselineminetworkpolicies.yaml
```

#### DNSNameResolver

DNSNameResolver

```
kubectl apply -f https://raw.githubusercontent.com/kubeovn/dnsnameresolver/refs/heads/main/manifest/crd.yaml
kubectl apply -f https://raw.githubusercontent.com/kubeovn/dnsnameresolver/refs/heads/main/manifest/rbac.yaml
kubectl apply -f https://raw.githubusercontent.com/kubeovn/dnsnameresolver/refs/heads/main/manifest/cm.yaml
```

#### CoreDNS

DNSNameResolver CoreDNS

```
kubectl set image deployment/coredns coredns=kubeovn/dnsnameresolver:dev -n kube-system
```

CoreDNS

```
kubectl get pod -n kube-system -l k8s-app=kube-dns
```

#### ANP

kube-ovn-controller

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: kube-ovn-controller
spec:
  template:
    spec:
      containers:
        - name: kube-ovn-controller
          args:
            - --enable-anp=true
            - --enable-dns-name-resolver=true
          # ...
```

### 3.7.2

```
apiVersion: policy.networking.k8s.io/v1alpha1
kind: AdminNetworkPolicy
metadata:
  name: deny-external-domains
spec:
  priority: 55
  subject:
    namespaces:
      matchLabels:
        kubernetes.io/metadata.name: kube-system
  egress:
    - action: Deny
      name: deny-baidu-google
```

```
to:
- domainNames:
  - '*.baidu.com.'
  - '*.google.com.'
```

priority	
subject	Pod
egress	
action	Allow Deny Pass
domainNames	.

### 3.7.3

#### kube-ovn-pinger

```
# kubectl exec -it -n kube-system kube-ovn-pinger-xxxxx -- ping baidu.com
```

DNS    ACL

#### DNSNameResolver

```
# kubectl get dnsnameresolver
NAME          DNS NAME      RESOLVED IPS
anp-deny-external-domains-88dc32ab  *.google.com.
anp-deny-external-domains-fb3029ce  *.baidu.com.  220.181.7.203
```

[PDF](#)

[Slack](#)

[Support](#)

⌚2025 9 17

⌚2025 9 17



### 3.7.4

## 3.8



### 3.8.1

CIDR    cidr=<IPv4 CIDR>,<IPv6 CIDR>    CIDR    IPv4    IPv6

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: ovn-test
spec:
  cidrBlock: 10.16.0.0/16,fd00:10:16::/64
  excludeIps:
  - 10.16.0.1
  - fd00:10:16::1
  gateway: 10.16.0.1,fd00:10:16::1

```

```

POD_CIDR="10.16.0.0/16,fd00:10:16::/64"
JOIN_CIDR="100.64.0.0/16,fd00:100:64::/64"

```

### 3.8.2 Pod

Pod    IPv4    IPv6    Pod annotation :

```

apiVersion: v1
kind: Pod
metadata:
  annotations:
    ovn.kubernetes.io/allocated: "true"
    ovn.kubernetes.io/cidr: 10.16.0.0/16,fd00:10:16::/64
    ovn.kubernetes.io/gateway: 10.16.0.1,fd00:10:16::1
    ovn.kubernetes.io/ip_address: 10.16.0.9,fd00:10:16::9
    ovn.kubernetes.io/logical_switch: ovn-default
    ovn.kubernetes.io/mac_address: 00:00:00:14:88:09
    ovn.kubernetes.io/network_types: geneve
    ovn.kubernetes.io/routed: "true"
...
podIP: 10.16.0.9
podIPs:
  - ip: 10.16.0.9
  - ip: fd00:10:16::9

```

[PDF](#)

[Slack](#)

[Support](#)

⌚2025 9 10

⌚2022 5 24



### 3.8.3

## 3.9 IP

IP Pod VirtualMachine(VM) IP IP

- a. IP Pod Pod
- a. VM IP ENABLE\_KEEP\_VM\_IP VM IP IP VM Pod VM Pod
- a. Statefulset Pod IP Statefulset Pod Pod IP IP

IP IP

- a. Pod VM IP
- a. Pod VM IP

IP Pod :

- Pod IP : Pod-name.Pod-namespace(.subnet-provider)
- VM Pod IP : vm-name.Pod-namespace(.subnet-provider)

IP IP Pool

Pod VM IP IP IP ip MAC

Pod vip IP

### 3.9.1 IP

- Pod VM IP

- Pod VM IP

IP	Pod	IP	IP	Pod	IP	IP	IP	IP	Pod	VM	namespace	IP
IP	Pod	VM	IP	Pod	VM	IP						
IP CR	IP	Pod	IP	Pod	IP	IP	LSP	IP CR	LSP	IP CR	IP	LSP
IP Pod	IP	IP	IP	IP IP	IP	IP	LSP LSP	Pod	IP CR	IP	IP	keep-
ip label	Pod			IP GC		IP						

#### 1.1 IP

IP IP yaml

```
# cat 01-dynamic.yaml

apiVersion: kubeovn.io/v1
kind: IP
metadata:
  name: vm-dynamic-01.default
spec:
  subnet: ovn-default
  podType: "VirtualMachine"
  namespace: default
  podName: vm-dynamic-01
```

- subnet : Subnet IP
- podType : Pod Owner : "StatefulSet", "VirtualMachine"
- podName : IP podName IP Pod VirtualMachine
- namespace : IP namespace Pod VirtualMachine namespace

IP

## IP

```
# kubectl get subnet ovn-default
NAME      PROVIDER   VPC          PROTOCOL  CIDR        PRIVATE   NAT    DEFAULT   GATEWAYTYPE  V4USED  V4AVAILABLE  V6USED  V6AVAILABLE
ovn-default  ovn        ovn-cluster  IPv4     10.16.0.0/16  false     true   true     distributed   7       65526        0       0

# kubectl get ip vm-dynamic-01.default -o yaml
apiVersion: kubeovn.io/v1
kind: IP
metadata:
  annotations:
    kubectl.kubernetes.io/last-applied-configuration: |
      {"apiVersion":"kubeovn.io/v1","kind":"IP","metadata":{"annotations":{},"name":"vm-dynamic-01.default"},"spec":{"namespace":"default","podName":"vm-dynamic-01","subnet":"ovn-default"}}
  creationTimestamp: "2024-01-29T03:05:40Z"
  finalizers:
  - kube-ovn-controller
  generation: 2
  labels:
    ovn.kubernetes.io/ip_reserved: "true" # IP
    ovn.kubernetes.io/node-name: ""
    ovn.kubernetes.io/subnet: ovn-default
  name: vm-dynamic-01.default
  resourceVersion: "1571"
  uid: 89d05a26-294a-450b-ab63-1eaa957984d7
spec:
  attachIps: []
  attachMacs: []
  attachSubnets: []
  containerID: ""
  ipAddress: 10.16.0.13
  macAddress: 00:00:00:86:C6:36
  namespace: default
  nodeName: ""
  podName: vm-dynamic-01
  podType: VirtualMachine
  subnet: ovn-default
  v4IpAddress: 10.16.0.13
  v6IpAddress: ""

# kubectl get ip vm-dynamic-01.default -o yaml
#   IP      IPAM           LSP
#   IP      IPAM           LSP
```

## 1.2 IP

IP IP yaml

```
# cat 02-static.yaml

apiVersion: kubeovn.io/v1
kind: IP
metadata:
  name: pod-static-01.default
spec:
  subnet: ovn-default
  podType: ""
  namespace: default
  podName: pod-static-01
  v4IpAddress: 10.16.0.3
  v6IpAddress:

# kubectl get ip pod-static-01.default -o yaml
apiVersion: kubeovn.io/v1
kind: IP
metadata:
  annotations:
    kubectl.kubernetes.io/last-applied-configuration: |
      {"apiVersion":"kubeovn.io/v1","kind":"IP","metadata":{"annotations":{},"name":"pod-static-01.default"},"spec":{"namespace":"default","podName":"pod-static-01","subnet":"ovn-default","v4IpAddress":"10.16.0.3","v6IpAddress":null}}
  creationTimestamp: "2024-01-29T03:08:28Z"
  finalizers:
  - kube-ovn-controller
  generation: 2
  labels:
    ovn.kubernetes.io/ip_reserved: "true"
    ovn.kubernetes.io/node-name: ""
    ovn.kubernetes.io/subnet: ovn-default
  name: pod-static-01.default
  resourceVersion: "1864"
  uid: 11fc767d-f57d-4520-89f9-448f9b272bca
spec:
  attachIps: []
  attachMacs: []
  attachSubnets: []
  containerID: ""
  ipAddress: 10.16.0.3
  macAddress: 00:00:00:4D:B4:36
```

```

namespace: default
nodeName: ""
podName: pod-static-01
podType: ""
subnet: ovn-default
v4IpAddress: 10.16.0.3
v6IpAddress: ""

```

- v4IpAddress: IPv4 subnet CIDR
- v6IpAddress: IPv6 subnet CIDR

## Pod IP

: Pod namespace IP Pod IP VM

Pod VM IP CR

```
# kubectl get po -n default -o wide
NAME      READY   STATUS    RESTARTS   AGE     IP          NODE      NOMINATED NODE   READINESS GATES
pod-static-01  1/1     Running   0          30s    10.16.0.3   kube-ovn-worker <none>        <none>
```

## 3.9.2

kube-ovn-controller	GC	IP	IP	LSP	IP CR							
IP	IP	podName	namespace	subnet provider	ipam key	LSP	IPAM	LSP	IP	Finalizer		
<a href="#"> PDF</a>	<a href="#"> Slack</a>	<a href="#"> Support</a>										

 2025 9 10

 2024 1 25



## 3.9.3

## 3.10 Webhook

```
Webhook   Kube-OVN   CRD           Webhook   IP   Subnet CIDR
Webhook   Subnet   Pod           Kube-OVN   Webhook   Pod
```

### 3.10.1 Cert-Manager

```
Webhook   cert-manager   Webhook   cert-manager
```

cert-manager:

```
kubectl apply -f https://github.com/cert-manager/cert-manager/releases/download/v1.8.0/cert-manager.yaml
```

```
cert-manager   cert-manager
```

### 3.10.2 Webhook

```
Webhook   yaml   :
```

```
# kubectl apply -f https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.14/yamls/webhook.yaml
deployment.apps/kube-ovn-webhook created
service/kube-ovn-webhook created
validatingwebhookconfiguration.admissionregistration.k8s.io/kube-ovn-webhook created
certificate.cert-manager.io/kube-ovn-webhook-serving-cert created
issuer.cert-manager.io/kube-ovn-webhook-selfsigned-issuer created
```

### 3.10.3 Webhook

Pod Pod IP 10.16.0.15

```
# kubectl get pod -o wide
NAME          READY   STATUS    RESTARTS   AGE     IP          NODE      NOMINATED NODE   READINESS GATES
static-7584848b74-fw9dm   1/1     Running   0        2d13h   10.16.0.15   kube-ovn-worker   <none>
```

yaml IP Pod

```
apiVersion: v1
kind: Pod
metadata:
  annotations:
    ovn.kubernetes.io/ip_address: 10.16.0.15
    ovn.kubernetes.io/mac_address: 00:00:00:53:6B:B6
  labels:
    app: static
  managedFields:
    name: staticip-pod
    namespace: default
spec:
  containers:
  - image: docker.io/library/nginx:alpine
    imagePullPolicy: IfNotPresent
    name: qatest
```

yaml Pod IP

```
# kubectl apply -f pod-static.yaml
Error from server (annotation ip address 10.16.0.15 is conflict with ip crd static-7584848b74-fw9dm.default 10.16.0.15): error when creating "pod-static.yaml": admission webhook "pod-ip-validation.kube-ovn.io" denied the request: annotation ip address 10.16.0.15 is conflict with ip crd static-7584848b74-fw9dm.default 10.16.0.15
```



PDF



Slack



Support

⌚2023 5 9

⌚2022 5 24

⌚GitHub 🧑‍💻


3.10.4

---

## 3.11

NPM

CPU	5%~10%	CPU
-----	--------	-----

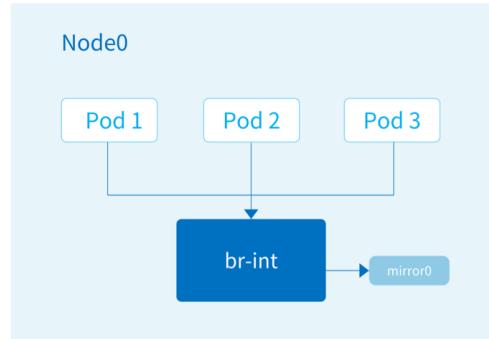

### 3.11.1

kube-ovn-cni DaemonSet

```

• --enable-mirror=true
• --mirror-iface=mirror0:
          br-int
          mirror0
tcpdump      mirror0
tcpdump -ni mirror0

```

### 3.11.2 Pod

Pod	Pod	ovn.kubernetes.io/mirror annotation	Pod
-----	-----	-------------------------------------	-----

```

apiVersion: v1
kind: Pod
metadata:
  name: mirror-pod
  namespace: ls1
  annotations:
    ovn.kubernetes.io/mirror: "true"
spec:
  containers:
  - name: mirror-pod
    image: docker.io/library/nginx:alpine

```

### 3.11.3

---

#### 1. Pod to Pod in the same Nodes

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	12.7 us	289 Mbits/sec	12.6 us	(1.8%)	77.9 Mbits/sec
128	15.5 us	517 Mbits/sec	12.7 us	(0%)	155 Mbits/sec
512	12.2 us	1.64 Gbits/sec	12.4 us	(0%)	624 Mbits/sec
1k	13 us	2.96 Gbits/sec	11.4 us	(0.53%)	1.22 Gbits/sec
4k	18 us	7.67 Gbits/sec	25.7 us	(0.41%)	1.50 Gbits/sec

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	11.9 us	324 Mbits/sec	12.2 us	(0.22%)	102 Mbits/sec
128	10.5 us	582 Mbits/sec	9.5 us	(0.21%)	198 Mbits/sec
512	11.6 us	1.84 Gbits/sec	9.32 us	(0.091%)	827 Mbits/sec
1k	10.5 us	3.44 Gbits/sec	10 us	(1.2%)	1.52 Gbits/sec
4k	16.7 us	8.52 Gbits/sec	18.2 us	(1.3%)	2.42 Gbits/sec

#### 2. Pod to Pod in the different Nodes

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	258 us	143 Mbits/sec	237 us	(61%)	28.5 Mbits/sec
128	240 us	252 Mbits/sec	231 us	(64%)	54.9 Mbits/sec
512	236 us	763 Mbits/sec	256 us	(68%)	194 Mbits/sec
1k	242 us	969 Mbits/sec	225 us	(62%)	449 Mbits/sec
4k	352 us	1.12 Gbits/sec	382 us	(0.71%)	21.4 Mbits/sec

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	278 us	140 Mbits/sec	227 us	(24%)	59.6 Mbits/sec
128	249 us	265 Mbits/sec	265 us	(23%)	114 Mbits/sec
512	233 us	914 Mbits/sec	235 us	(21%)	468 Mbits/sec
1k	238 us	1.14 Gbits/sec	240 us	(15%)	891 Mbits/sec
4k	370 us	1.25 Gbits/sec	361 us	(0.43%)	7.54 Mbits/sec

### 3. Node to Node

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	205 us	162 Mbits/sec	183 us	(11%)	74.2 Mbits/sec
128	222 us	280 Mbits/sec	206 us	(6.3%)	155 Mbits/sec
512	220 us	1.04 Gbits/sec	177 us	(20%)	503 Mbits/sec
1k	213 us	2.06 Gbits/sec	201 us	(8.6%)	1.14 Gbits/sec
4k	280 us	5.01 Gbits/sec	315 us	(37%)	1.20 Gbits/sec

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	204 us	157 Mbits/sec	204 us	(8.8%)	81.9 Mbits/sec
128	213 us	262 Mbits/sec	225 us	(19%)	136 Mbits/sec
512	220 us	1.02 Gbits/sec	227 us	(21%)	486 Mbits/sec
1k	217 us	1.79 Gbits/sec	218 us	(29%)	845 Mbits/sec
4k	275 us	5.27 Gbits/sec	336 us	(34%)	1.21 Gbits/sec

### 4. Pod to the Node where the Pod is located

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	12.2 us	295 Mbits/sec	12.7 us	(0.27%)	74.1 Mbits/sec
128	14.1 us	549 Mbits/sec	10.6 us	(0.41%)	153 Mbits/sec
512	13.5 us	1.83 Gbits/sec	12.7 us	(0.23%)	586 Mbits/sec
1k	12 us	2.69 Gbits/sec	13 us	(1%)	1.16 Gbits/sec
4k	18.9 us	4.51 Gbits/sec	21.8 us	(0.42%)	1.81 Gbits/sec

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	10.4 us	335 Mbits/sec	12.2 us	(0.75%)	95.4 Mbits/sec
128	12.1 us	561 Mbits/sec	11.3 us	(0.25%)	194 Mbits/sec
512	11.6 us	1.87 Gbits/sec	10.7 us	(0.66%)	745 Mbits/sec
1k	12.7 us	3.12 Gbits/sec	10.9 us	(1.2%)	1.46 Gbits/sec
4k	16.5 us	8.23 Gbits/sec	17.9 us	(1.5%)	2.51 Gbits/sec

## 5. Pod to the Node where the Pod is not located

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	234 us	153 Mbits/sec	232 us	(63%)	29.4 Mbits/sec
128	237 us	261 Mbits/sec	238 us	(49%)	76.1 Mbits/sec
512	231 us	701 Mbits/sec	238 us	(57%)	279 Mbits/sec
1k	256 us	1.05 Gbits/sec	228 us	(56%)	524 Mbits/sec
4k	330 us	1.08 Gbits/sec	359 us	(1.5%)	35.7 Mbits/sec

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	283 us	141 Mbits/sec	230 us	(26%)	55.8 Mbits/sec
128	234 us	255 Mbits/sec	234 us	(25%)	113 Mbits/sec
512	246 us	760 Mbits/sec	234 us	(22%)	458 Mbits/sec
1k	268 us	1.23 Gbits/sec	242 us	(20%)	879 Mbits/sec
4k	326 us	1.20 Gbits/sec	369 us	(0.5%)	7.87 Mbits/sec

## 6. Pod to the cluster ip service

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	237 us	133 Mbits/sec	213 us	(65%)	25.5 Mbits/sec
128	232 us	271 Mbits/sec	222 us	(62%)	54.8 Mbits/sec
512	266 us	800 Mbits/sec	234 us	(60%)	232 Mbits/sec
1k	248 us	986 Mbits/sec	239 us	(50%)	511 Mbits/sec
4k	314 us	1.03 Gbits/sec	367 us	(0.6%)	13.2 Mbits/sec

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	14305.17	0.87ms	1.48ms	24.46ms
100	29082.07	3.87ms	4.35ms	102.85ms

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	241 us	145 Mbits/sec	225 us	(19%)	60.2 Mbits/sec
128	245 us	261 Mbits/sec	212 us	(15%)	123 Mbits/sec
512	252 us	821 Mbits/sec	219 us	(14%)	499 Mbits/sec
1k	253 us	1.08 Gbits/sec	242 us	(16%)	852 Mbits/sec
4k	320 us	1.32 Gbits/sec	360 us	(0.47%)	6.70 Mbits/sec

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	13634.07	0.96ms	1.72ms	30.07ms
100	30215.23	3.59ms	3.20ms	77.56ms

#### 7. Host to the Node port service where the Pod is not located on the target Node

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	14802.73	0.88ms	1.66ms	31.49ms
100	29809.58	3.78ms	4.12ms	105.34ms

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	14273.33	0.90ms	1.60ms	37.16ms
100	30757.81	3.62ms	3.41ms	59.78ms

#### 8. Host to the Node port service where the Pod is located on the target Node


TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	15402.39	802.50us	1.42ms	30.91ms
100	29424.66	4.05ms	4.31ms	90.60ms

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	14649.21	0.91ms	1.72ms	43.92ms
100	32143.61	3.66ms	3.76ms	67.02ms



Q2024 5 8

Q2022 5 24



3.11.4

---

## 3.12 NetworkPolicy

NetworkPolicy	Kubernetes	Kube-OVN	OVN	ACL	NetworkPolicy	NetworkPolicy
Kube-OVN				NetworkPolicy Drop		
NetworkPolicy		Drop			CPU	

### 3.12.1 NetworkPolicy

NetworkPolicy annotation ovn.kubernetes.io/enable\_log

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: default-deny-ingress
  namespace: kube-system
  annotations:
    ovn.kubernetes.io/enable_log: "true"
spec:
  podSelector: {}
  policyTypes:
  - Ingress
```

Pod /var/log/ovn/ovn-controller.log

```
# tail -f /var/log/ovn/ovn-controller.log
2022-07-20T05:55:03.229Z|00394|acl_log(ovn_pinctrl0)|INFO|name=<unnamed>, verdict=drop, severity=warning, direction=to-lport: udp,vlan_tci=0x0000,d1_src=00:00:21:b7:d1,d1_dst=00:00:08:0b:86,nw_src=10.16.0.10,nw_dst=10.16.0.7,nw_tos=0,nw_ecn=0,nw_ttl=63,tp_src=54343,tp_dst=53
2022-07-20T05:55:06.229Z|00395|acl_log(ovn_pinctrl0)|INFO|name=<unnamed>, verdict=drop, severity=warning, direction=to-lport: udp,vlan_tci=0x0000,d1_src=00:00:00:21:b7:d1,d1_dst=00:00:00:08:0b:86,nw_src=10.16.0.9,nw_dst=10.16.0.7,nw_tos=0,nw_ecn=0,nw_ttl=63,tp_src=44187,tp_dst=53
2022-07-20T05:55:08.230Z|00396|acl_log(ovn_pinctrl0)|INFO|name=<unnamed>, verdict=drop, severity=warning, direction=to-lport: udp,vlan_tci=0x0000,d1_src=00:00:00:21:b7:d1,d1_dst=00:00:00:08:0b:86,nw_src=10.16.0.10,nw_dst=10.16.0.7,nw_tos=0,nw_ecn=0,nw_ttl=63,tp_src=54274,tp_dst=53
2022-07-20T05:55:11.231Z|00397|acl_log(ovn_pinctrl0)|INFO|name=<unnamed>, verdict=drop, severity=warning, direction=to-lport: udp,vlan_tci=0x0000,d1_src=00:00:00:21:b7:d1,d1_dst=00:00:00:08:0b:86,nw_src=10.16.0.9,nw_dst=10.16.0.7,nw_tos=0,nw_ecn=0,nw_ttl=63,tp_src=32778,tp_dst=53
2022-07-20T05:55:11.231Z|00398|acl_log(ovn_pinctrl0)|INFO|name=<unnamed>, verdict=drop, severity=warning, direction=to-lport: udp,vlan_tci=0x0000,d1_src=00:00:00:21:b7:d1,d1_dst=00:00:00:08:0b:86,nw_src=10.16.0.9,nw_dst=10.16.0.7,nw_tos=0,nw_ecn=0,nw_ttl=63,tp_src=34188,tp_dst=53
2022-07-20T05:55:13.231Z|00399|acl_log(ovn_pinctrl0)|INFO|name=<unnamed>, verdict=drop, severity=warning, direction=to-lport: udp,vlan_tci=0x0000,d1_src=00:00:00:08:0b:86,nw_src=10.16.0.10,nw_dst=10.16.0.7,nw_tos=0,nw_ecn=0,nw_ttl=63,tp_src=43290,tp_dst=53
2022-07-20T05:55:22.096Z|00400|acl_log(ovn_pinctrl0)|INFO|name=<unnamed>, verdict=drop, severity=warning, direction=to-lport:
icmp,vlan_tci=0x0000,d1_src=00:00:00:08:0b:86,nw_src=10.16.0.10,nw_dst=10.16.0.9,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
2022-07-20T05:55:22.097Z|00401|acl_log(ovn_pinctrl0)|INFO|name=<unnamed>, verdict=drop, severity=warning, direction=to-lport:
icmp,vlan_tci=0x0000,d1_src=00:00:00:08:0b:86,nw_src=10.16.0.9,nw_dst=10.16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
2022-07-20T05:55:22.098Z|00402|acl_log(ovn_pinctrl0)|INFO|name=<unnamed>, verdict=drop, severity=warning, direction=to-lport:
icmp,vlan_tci=0x0000,d1_src=00:00:00:08:0b:86,nw_src=10.16.0.9,nw_dst=10.16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
```

### 3.12.2 NetworkPolicy

"ovn.kubernetes.io/enable\_log" annotation Drop ACL ACL

Kube-OVN v1.13.0 annotation "ovn.kubernetes.io/log\_acl\_actions" ACL annotation "allow"

NetworkPolicy annotation ovn.kubernetes.io/log\_acl\_actions

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: default-deny-ingress
  namespace: kube-system
  annotations:
    ovn.kubernetes.io/enable_log: "true"
    ovn.kubernetes.io/log_acl_actions: "allow"
spec:
  podSelector: {}
  policyTypes:
  - Ingress
```

Pod Pod /var/log/ovn/ovn-controller.log Allow ACL

```
2024-08-14T09:27:49.590Z|00004|acl_log(ovn_pinctrl0)|INFO|name="np/test.default/ingress/IPv4/0", verdict=allow, severity=info, direction=to-lport:
icmp,vlan_tci=0x0000,d1_src=96:7b:b0:2f:a0:1a,d1_dst=a6:e5:b:c2:1b:f8,nw_src=10.16.0.7,nw_dst=10.16.0.12,nw_tos=0,nw_ecn=0,nw_ttl=64,nw_frag=no,icmp_type=8,icmp_code=0
```

### 3.12.3 NetworkPolicy

```
NetworkPolicy annotation ovn.kubernetes.io/enable_log false NetworkPolicy
```

```
kubectl annotate networkpolicy -n kube-system default-deny-ingress ovn.kubernetes.io/enable_log=false --overwrite
```

### 3.12.4 AdminNetworkPolicy BaselineAdminNetworkPolicy

v1.13.0	Kube-OVN	AdminNetworkPolicy	BaselineAdminNetworkPolicy	AdminNetworkPolicy	BaselineAdminNetworkPolicy
		"ovn.kubernetes.io/log_acl_actions" annotation	action ACL	annotation	"allow,drop,pass"
		"ovn.kubernetes.io/enable_log" annotation		annotation	"ovn.kubernetes.io/log_acl_actions"
		annotation			

[PDF](#)
[Slack](#)
[Support](#)

⌚2024 8 16

⌚2022 7 20




⌚ GitHub



### 3.12.5

## 3.13 LoadBalancer Service



1. multus-cni macvlan cni
2. LoadBalancer Service VPC vpc-nat-gw macvlan
3. VPC VPC LoadBalancer VPC VPC

### 3.13.1 VPC LoadBalancer Service

```
 kube-system namespace deployment kube-ovn-controller args --enable-lb-svc=true false
```

```
containers:
- args:
  - /kube-ovn/start-controller.sh
  - --default-cidr=10.16.0.0/16
  - --default-gateway=10.16.0.1
  - --default-gateway-check=true
  - --enable-lb-svc=true
  // true
```

#### NetworkAttachmentDefinition CRD

```
 yaml net-attach-def
```

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: lb-svc-attachment
  namespace: kube-system
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "macvlan",
    "master": "eth0",
    "mode": "bridge"
  }'
```

```
 eth0 master
```

#### Subnet

```
 Subnet LoadBalancer Service LoadBalancerIP Underlay Subnet
```

```
 yaml
```

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: attach-subnet
spec:
  protocol: IPv4
  provider: lb-svc-attachment.kube-system # provider
  cidrBlock: 172.18.0.0/16
  gateway: 172.18.0.1
  excludeIps:
  - 172.18.0.0..172.18.0.10
```

Subnet	provider	ovn	.ovn	Kube-OVN	logical switch
provider	ovn	.ovn		Kube-OVN	IPAM
					IP

## LoadBalancer Service

yaml LoadBalancer Service

```
apiVersion: v1
kind: Service
metadata:
  annotations:
    lb-svc-attachment.kube-system.kubernetes.io/logical_switch: attach-subnet  #
    ovn.kubernetes.io/attachmentprovider: lb-svc-attachment.kube-system          #
  labels:
    app: dynamic
    name: test-service
    namespace: default
spec:
  loadBalancerIP: 172.18.0.18
  ports:
    - name: test
      protocol: TCP
      port: 80
      targetPort: 80
  selector:
    app: dynamic
    sessionAffinity: None
  type: LoadBalancer
```

yaml annotation ovn.kubernetes.io/attachmentprovider net-attach-def Name.Namespace annotation Pod  
net-attach-def

annotation	annotation key	net-attach-def	Name.Namespace.kubernetes.io/logical_switch
LoadBalancerIP	LoadBalancerIP		
LoadBalancerIP	spec.loadBalancerIP		

yaml Service Service Namespace Pod

```
# kubectl get pod
NAME                               READY   STATUS    RESTARTS   AGE
lb-svc-test-service-6869d98dd8-cjvll   1/1     Running   0          107m
# kubectl get svc
NAME            TYPE        CLUSTER-IP      EXTERNAL-IP      PORT(S)        AGE
test-service    LoadBalancer  10.109.201.193  172.18.0.18   80:30056/TCP   107m
```

service.spec.loadBalancerIP service external-ip

Pod yaml

```
# kubectl get pod -o yaml lb-svc-test-service-6869d98dd8-cjvll
apiVersion: v1
kind: Pod
metadata:
  annotations:
    k8s.v1.cni.cncf.io/network-status: |-
      [ {
        "name": "kube-ovn",
        "ips": [
          "10.16.0.2"
        ],
        "default": true,
        "dns": {}
      }, {
        "name": "default/test-service",
        "interface": "net1",
        "mac": "ba:85:f7:02:9f:42",
        "dns": {}
      } ]
    k8s.v1.cni.cncf.io/networks: default/test-service
    k8s.v1.cni.cncf.io/networks-status: |-
      [ {
        "name": "kube-ovn",
        "ips": [
          "10.16.0.2"
        ],
        "default": true,
        "dns": {}
      }, {
        "name": "default/test-service",
        "interface": "net1",
        "mac": "ba:85:f7:02:9f:42",
        "dns": {}
      } ]
  ovn.kubernetes.io/allocated: "true"
  ovn.kubernetes.io/cidr: 10.16.0.0/16
  ovn.kubernetes.io/gateway: 10.16.0.1
```

```

ovn.kubernetes.io/ip_address: 10.16.0.2
ovn.kubernetes.io/logical_router: ovn-cluster
ovn.kubernetes.io/logical_switch: ovn-default
ovn.kubernetes.io/mac_address: 00:00:00:45:F4:29
ovn.kubernetes.io/pod_nic_type: veth-pair
ovn.kubernetes.io/routed: "true"
test-service.default.kubernetes.io/allocated: "true"
test-service.default.kubernetes.io/cidr: 172.18.0.0/16
test-service.default.kubernetes.io/gateway: 172.18.0.1
test-service.default.kubernetes.io/ip_address: 172.18.0.18
test-service.default.kubernetes.io/logical_switch: attach-subnet
test-service.default.kubernetes.io/mac_address: 00:00:00:AF:AA:BF
test-service.default.kubernetes.io/pod_nic_type: veth-pair

```

## Service

```

# kubectl get svc -o yaml test-service
apiVersion: v1
kind: Service
metadata:
  annotations:
    kubectl.kubernetes.io/last-applied-configuration: |
      {"apiVersion":"v1","kind":"Service","metadata":{"annotations":{"test-service.default.kubernetes.io/logical_switch":"attach-subnet"},"labels":{"app":"dynamic","name":"test-service","namespace":"default"},"spec":{"ports":[{"name":"test","port":80,"protocol":"TCP","targetPort":80}],"selector":{"app":"dynamic","sessionAffinity":"None","type":"LoadBalancer"}}}
    ovn.kubernetes.io/vpc: ovn-cluster
    test-service.default.kubernetes.io/logical_switch: attach-subnet
  creationTimestamp: "2022-06-15T09:01:58Z"
  labels:
    app: dynamic
    name: test-service
    namespace: default
  resourceVersion: "38485"
  uid: 161edee1-7f6e-40f5-9e09-5a52c44267d0
spec:
  allocateLoadBalancerNodePorts: true
  clusterIP: 10.109.201.193
  clusterIPs:
  - 10.109.201.193
  externalTrafficPolicy: Cluster
  internalTrafficPolicy: Cluster
  ipFamilies:
  - IPv4
  ipFamilyPolicy: SingleStack
  ports:
  - name: test
    nodePort: 30056
    port: 80
    protocol: TCP
    targetPort: 80
  selector:
    app: dynamic
    sessionAffinity: None
    type: LoadBalancer
  status:
    loadBalancer:
      ingress:
      - ip: 172.18.0.18

```

## 3.13.2 LoadBalancerIP

yaml, Pod Service Endpoints

```

apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: dynamic
    name: dynamic
    namespace: default
spec:
  replicas: 2
  selector:
    matchLabels:
      app: dynamic
  strategy:
    rollingUpdate:
      maxSurge: 25%
      maxUnavailable: 25%
    type: RollingUpdate
  template:
    metadata:
      creationTimestamp: null
      labels:
        app: dynamic
    spec:
      containers:
      - image: docker.io/library/nginx:alpine

```

```
imagePullPolicy: IfNotPresent
name: nginx
dnsPolicy: ClusterFirst
restartPolicy: Always
```

#### Service LoadBalancerIP:Port

```
# curl 172.18.0.18:80
<html>
<head>
  <title>Hello World!</title>
  <link href='//fonts.googleapis.com/css?family=Open+Sans:400,700' rel='stylesheet' type='text/css'>
  <style>
    body {
      background-color: white;
      text-align: center;
      padding: 50px;
      font-family: "Open Sans", "Helvetica Neue", Helvetica, Arial, sans-serif;
    }
    #logo {
      margin-bottom: 40px;
    }
  </style>
</head>
<body>
  <h1>Hello World!</h1>
  <h3>Links found</h3>
  <h3>I am on dynamic-7d8d7874f5-hsgc4</h3>
  <h3>Cookie =</h3>
  <b>KUBERNETES</b> listening in 443 available at tcp://10.96.0.1:443<br />
  <h3>my name is hanhouchao!</h3>
  <h3> RequestURI='/'</h3>
</body>
</html>
```

#### Service Pod

```
# ip a
4: net1@if62: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
  link/ether ba:85:f7:02:9f:42 brd ff:ff:ff:ff:ff:ff link-netnsid 0
  inet 172.18.0.18/16 scope global net1
    valid_lft forever preferred_lft forever
  inet6 fe80::ba85:f7ff:fe02:9f42/64 scope link
    valid_lft forever preferred_lft forever
36: eth0@if37: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1400 qdisc noqueue state UP group default
  link/ether 00:00:00:45:f4:29 brd ff:ff:ff:ff:ff:ff link-netnsid 0
  inet 10.16.0.2/16 brd 10.16.255.255 scope global eth0
    valid_lft forever preferred_lft forever
  inet6 fe80::200:ff:fe45:f429/64 scope link
    valid_lft forever preferred_lft forever

# ip rule
0: from all lookup local
32764: from all iif eth0 lookup 100
32765: from all iif net1 lookup 100
32766: from all lookup main
32767: from all lookup default

# ip route show table 100
default via 172.18.0.1 dev net1
10.109.201.193 via 10.16.0.1 dev eth0
172.18.0.0/16 dev net1 scope link

# iptables -t nat -L -n -v
Chain PREROUTING (policy ACCEPT 0 packets, 0 bytes)
  pkts bytes target     prot opt in     out     source        destination
    0     0 DNAT       tcp   --  *      *      0.0.0.0/0    172.18.0.18        tcp  dpt:80  to:10.109.201.193:80

Chain INPUT (policy ACCEPT 0 packets, 0 bytes)
  pkts bytes target     prot opt in     out     source        destination

Chain OUTPUT (policy ACCEPT 0 packets, 0 bytes)
  pkts bytes target     prot opt in     out     source        destination

Chain POSTROUTING (policy ACCEPT 0 packets, 0 bytes)
  pkts bytes target     prot opt in     out     source        destination
    0     0 MASQUERADE  all   --  *      *      0.0.0.0/0    10.109.201.193
```

#### lb service Pod nodeSelector

```
ovn-vpc-nat-config ConfigMap nodeSelector LoadBalancer service Pod
```


```
apiVersion: v1
data:
  image: docker.io/kubeovn/vpc-nat-gateway:v1.14.0
  nodeSelector: |
    kubernetes.io/hostname: kube-ovn-control-plane
```

```
kubernetes.io/os: linux
kind: ConfigMap
metadata:
  name: ovn-vpc-nat-config
  namespace: kube-system
```

[!\[\]\(f751fb5266fcde85b8e494ae0908d01e\_img.jpg\) PDF](#)[!\[\]\(5a2cc4eb4ea5950e5b686a7bc2081e37\_img.jpg\) Slack](#)[!\[\]\(4f522d70b8e25004dfc6cf6b1b2cbec2\_img.jpg\) Support](#)

⌚2025 9 10

⌚2022 7 19



3.13.3

---

## 3.14

---



### 3.14.1 Prometheus Monitor

Kube-OVN    Prometheus Monitor CRD

```

#
kubectl apply -f https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/pinger-monitor.yaml
# kube-ovn-controller
kubectl apply -f https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/controller-monitor.yaml
# kube-ovn-cni
kubectl apply -f https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/cni-monitor.yaml
# ovn
kubectl apply -f https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/ovn-monitor.yaml
  
```

Prometheus    15s    yaml    interval

### 3.14.2 Grafana

Kube-OVN    Grafana Dashboard


Dashboard

```

#
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/pinger-grafana.json
# kube-ovn-controller
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/controller-grafana.json
# kube-ovn-cni
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/cni-grafana.json
# ovn
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/ovn-grafana.json
# ovs
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/ovs-grafana.json
  
```

Grafana    Prometheus    Dashboard

kube-ovn-controller

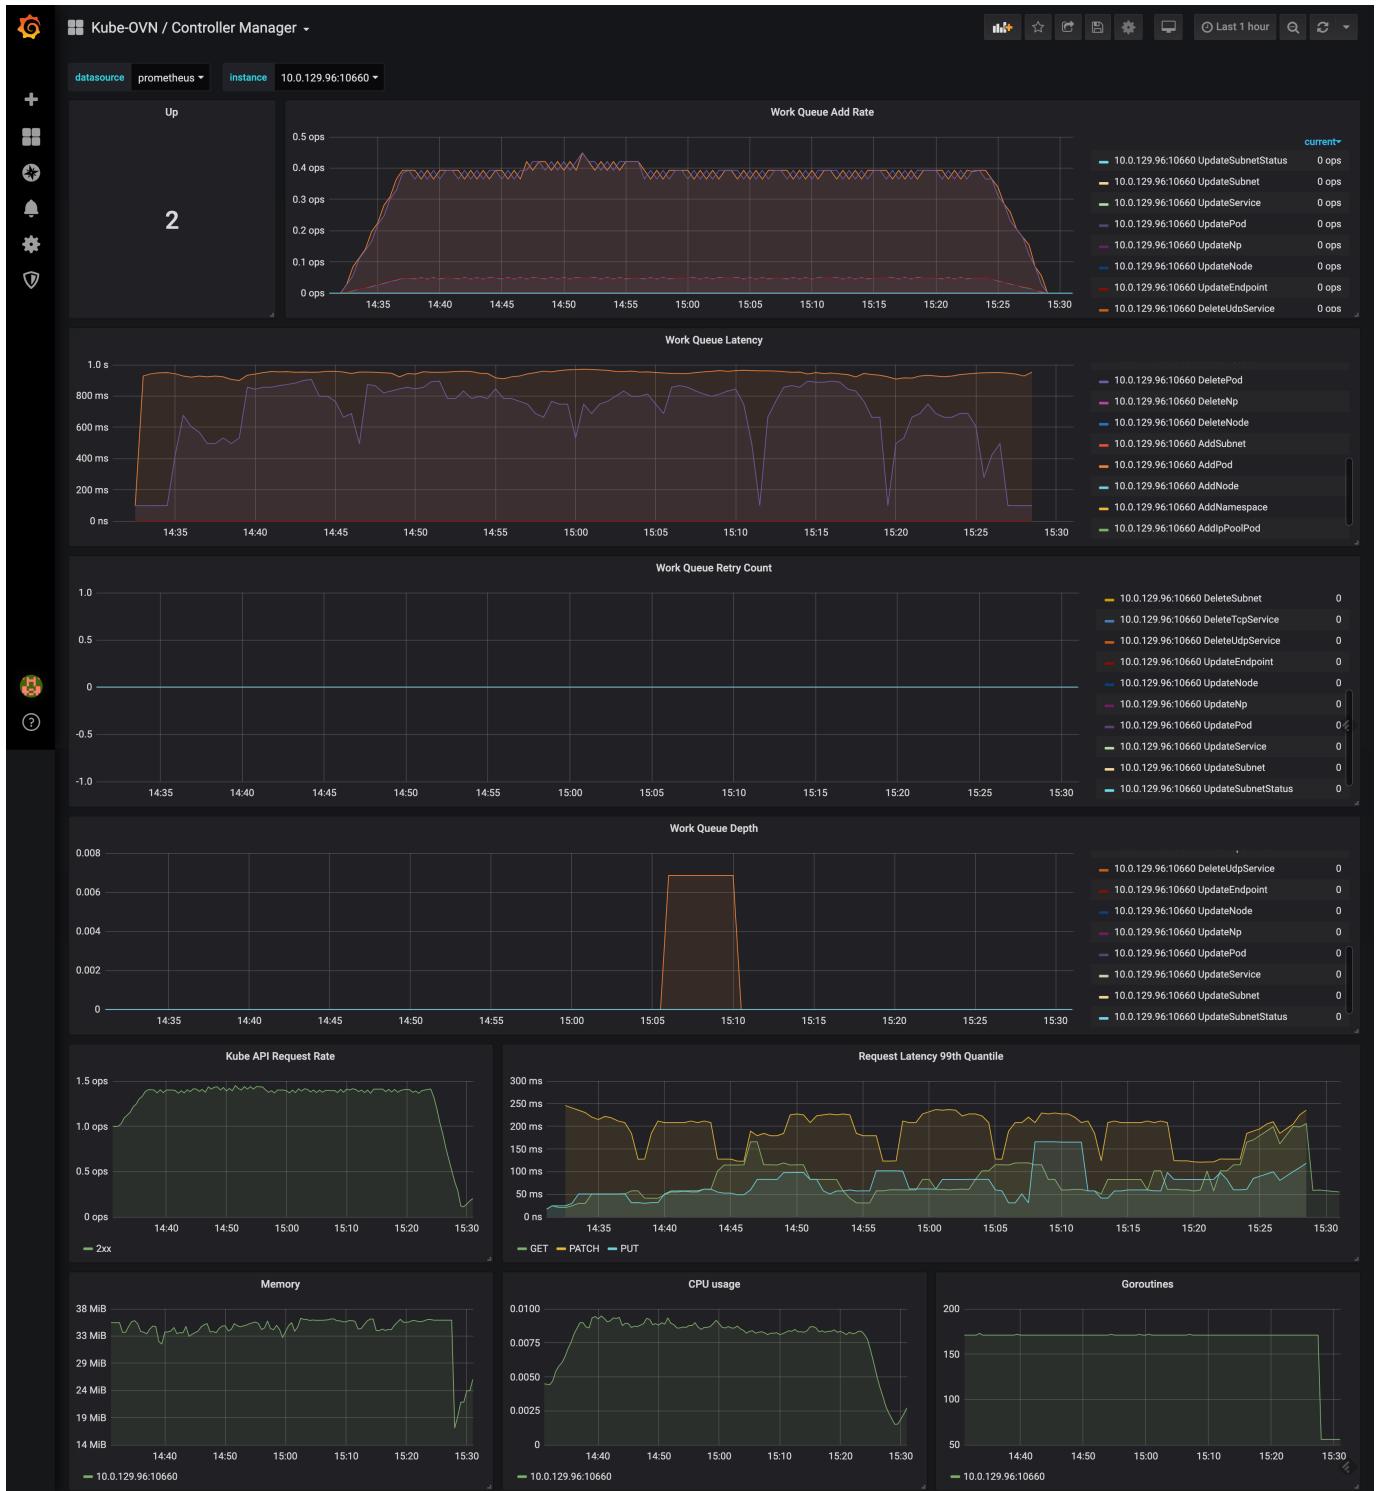


## kube-ovn-pinger

**kube-ovn-cni**[PDF](#)[Slack](#)[Support](#)

2024 9 27


2022 5 23



3.14.3

---

## 3.15 Prometheus



### 3.15.1 Prometheus


[Prometheus](#)



```

apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRole
metadata:
  name: prometheus
rules:
- apiGroups: [""]
  resources:
  - nodes
  - nodes/proxy
  - services
  - endpoints
  - pods
  verbs: ["get", "list", "watch"]
- apiGroups:
  - extensions
  resources:
  - ingresses
  verbs: ["get", "list", "watch"]
- nonResourceURLs: ["/metrics"]
  verbs: ["get"]
---
apiVersion: v1
kind: ServiceAccount
metadata:
  name: prometheus
  namespace: default
---
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRoleBinding
metadata:
  name: prometheus
roleRef:
  apiGroup: rbac.authorization.k8s.io
  kind: ClusterRole
  name: prometheus
subjects:
- kind: ServiceAccount
  name: prometheus
  namespace: default
  
```

### Prometheus



```

apiVersion: v1
kind: ConfigMap
metadata:
  name: prometheus-config
data:
  prometheus.yml: |-
    global:
      scrape_interval: 15s
      evaluation_interval: 15s
    scrape_configs:
    - job_name: 'prometheus'
      static_configs:
      - targets: ['localhost:9090']
    - job_name: 'kubernetes-nodes'
  
```

```

tls_config:
  ca_file: /var/run/secrets/kubernetes.io/serviceaccount/ca.crt
  bearer_token_file: /var/run/secrets/kubernetes.io/serviceaccount/token
  kubernetes_sd_configs:
    - role: node

- job_name: 'kubernetes-service'
  tls_config:
    ca_file: /var/run/secrets/kubernetes.io/serviceaccount/ca.crt
    bearer_token_file: /var/run/secrets/kubernetes.io/serviceaccount/token
    kubernetes_sd_configs:
      - role: service

- job_name: 'kubernetes-endpoints'
  tls_config:
    ca_file: /var/run/secrets/kubernetes.io/serviceaccount/ca.crt
    bearer_token_file: /var/run/secrets/kubernetes.io/serviceaccount/token
    kubernetes_sd_configs:
      - role: endpoints

- job_name: 'kubernetes-ingress'
  tls_config:
    ca_file: /var/run/secrets/kubernetes.io/serviceaccount/ca.crt
    bearer_token_file: /var/run/secrets/kubernetes.io/serviceaccount/token
    kubernetes_sd_configs:
      - role: ingress

- job_name: 'kubernetes-pods'
  tls_config:
    ca_file: /var/run/secrets/kubernetes.io/serviceaccount/ca.crt
    bearer_token_file: /var/run/secrets/kubernetes.io/serviceaccount/token
    kubernetes_sd_configs:
      - role: pod

```

Prometheus	Kubernetes	kubernetes_sd_config
Kubernetes	Prometheus	node service pod endpoints ingress ConfigMap

## Prometheus

yaml      Prometheus Server

```

apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: prometheus
  name: prometheus
  namespace: default
spec:
  replicas: 1
  selector:
    matchLabels:
      app: prometheus
  strategy:
    rollingUpdate:
      maxSurge: 25%
      maxUnavailable: 25%
    type: RollingUpdate
  template:
    metadata:
      labels:
        app: prometheus
    spec:
      serviceAccountName: prometheus
      serviceAccount: prometheus
      containers:
        - image: docker.io/prom/prometheus:latest
          imagePullPolicy: IfNotPresent
          name: prometheus
          command:
            - "/bin/prometheus"
          args:
            - "--config.file=/etc/prometheus/prometheus.yml"
          ports:
            - containerPort: 9090
              protocol: TCP
          volumeMounts:
            - mountPath: "/etc/prometheus"
              name: prometheus-config
      volumes:
        - name: prometheus-config
          configMap:
            name: prometheus-config

```

Prometheus      yaml      Prometheus Service

```

kind: Service
apiVersion: v1
metadata:
  name: prometheus
  namespace: default
  labels:
    name: prometheus
spec:
  ports:
    - name: test
      protocol: TCP
      port: 9090
      targetPort: 9090
  type: NodePort
  selector:
    app: prometheus
  sessionAffinity: None

```

Prometheus    NodePort                  Prometheus

### 3.15.2 Prometheus

#### Prometheus

```

# kubectl get svc
NAME      TYPE      CLUSTER-IP     EXTERNAL-IP      PORT(S)        AGE
kubernetes   ClusterIP  10.4.0.1    <none>          443/TCP       8d
prometheus   NodePort   10.4.102.222  <none>          9090:32611/TCP  8d
# kubectl get pod -o wide
NAME           READY   STATUS    RESTARTS   AGE   IP           NODE   NOMINATED-NODE   READINESS   GATES
prometheus-7544b6b84d-v9m8s  1/1    Running   0          3d5h  10.3.0.7   192.168.137.219  <none>        <none>
# kubectl get endpoints -o wide
NAME           ENDPOINTS
kubernetes   192.168.136.228:6443,192.168.136.232:6443,192.168.137.219:6443
prometheus   10.3.0.7:9090

```

NodePort    Prometheus    Status/Service Discovery

← → ⌂ 不安全 | 192.168.137.219:32611/service-discovery?search=

 Prometheus Alerts Graph Status Help

# Service Discovery

Filter by labels

- kubernetes-endpoints (55 / 55 active targets)
- kubernetes-nodes (3 / 3 active targets)
- kubernetes-pods (45 / 45 active targets)
- kubernetes-service (28 / 28 active targets)
- prometheus (1 / 1 active targets)

---

**kubernetes-endpoints** [show more](#)

**kubernetes-nodes** [show more](#)

**kubernetes-pods** [show more](#)

**kubernetes-service** [show more](#)

**prometheus** [show more](#)

---

Service

ConfigMap

Service	ConfigMap	Service
- job_name: 'kubernetes-service' tls_config: ca_file: /var/run/secrets/kubernetes.io/serviceaccount/ca.crt bearer_token_file: /var/run/secrets/kubernetes.io/serviceaccount/token kubernetes_sd_configs: - role: service relabel_configs: - source_labels: [__meta_kubernetes_service_annotation_prometheus_io_scrape] action: "keep" regex: "true" - action: labelmap regex: __meta_kubernetes_service_label_(.+) - source_labels: [__meta_kubernetes_namespace] target_label: kubernetes_namespace - source_labels: [__meta_kubernetes_service_name] target_label: kubernetes_service_name		

```
- source_labels: [__meta_kubernetes_service_annotation_prometheus_io_path]
  action: replace
  target_label: __metrics_path__
  regex: "(.*)"
```

Service	/metrics	Service	Service	annotation prometheus.io/path
---------	----------	---------	---------	-------------------------------

yaml	ConfigMap	Prometheus Pod
------	-----------	----------------

kube-system Namespace	Service
-----------------------	---------

```
# kubectl get svc -n kube-system
NAME           TYPE      CLUSTER-IP   EXTERNAL-IP     PORT(S)        AGE
kube-dns       ClusterIP 10.4.0.10    <none>        53/UDP,53/TCP,9153/TCP   13d
kube-ovn-cni   ClusterIP 10.4.228.60   <none>        10665/TCP     13d
kube-ovn-controller ClusterIP 10.4.172.213 <none>        10660/TCP     13d
kube-ovn-monitor ClusterIP 10.4.242.9    <none>        10661/TCP     13d
kube-ovn-pinger ClusterIP 10.4.122.52   <none>        8880/TCP      13d
ovn-nb         ClusterIP 10.4.80.213   <none>        6641/TCP      13d
ovn-northd    ClusterIP 10.4.126.234  <none>        6643/TCP      13d
ovn-sb         ClusterIP 10.4.216.249  <none>        6642/TCP      13d
```

Service	annotation prometheus.io/scrape="true"
---------	--

```
# kubectl annotate svc -n kube-system kube-ovn-cni  prometheus.io/scrape=true
service/kube-ovn-cni annotated
# kubectl annotate svc -n kube-system kube-ovn-controller  prometheus.io/scrape=true
service/kube-ovn-controller annotated
# kubectl annotate svc -n kube-system kube-ovn-monitor  prometheus.io/scrape=true
service/kube-ovn-monitor annotated
# kubectl annotate svc -n kube-system kube-ovn-pinger  prometheus.io/scrape=true
service/kube-ovn-pinger annotated
```

Service
---------

```
# kubectl get svc -o yaml -n kube-system kube-ovn-controller
apiVersion: v1
kind: Service
metadata:
  annotations:
    helm.sh/chart-version: v3.10.0-alpha.55
    helm.sh/original-name: kube-ovn-controller
    ovn.kubernetes.io/vpc: ovn-cluster
    prometheus.io/scrape: "true"          // annotation
  labels:
    app: kube-ovn-controller
    name: kube-ovn-controller
    namespace: kube-system
spec:
  clusterIP: 10.4.172.213
  clusterIPs:
  - 10.4.172.213
  internalTrafficPolicy: Cluster
  ipFamilies:
  - IPv4
  ipFamilyPolicy: SingleStack
  ports:
  - name: metrics
    port: 10660
    protocol: TCP
    targetPort: 10660
  selector:
    app: kube-ovn-controller
    sessionAffinity: None
    type: ClusterIP
  status:
    loadBalancer: {}
```

Prometheus Status Targets annotation Service

Endpoint	State	Labels	Last Scrape	Scrape Duration	Error
<a href="http://dynamic.default.svc/metrics">http://dynamic.default.svc/metrics</a>	UP	<code>instance="dynamic.default.svc:80"</code> <code>job="kubernetes-service"</code> <code>kubernetes_namespace="default"</code> <code>kubernetes_service_name="dynamic"</code> <code>prometheus_io_scrape="true"</code>	9.516s ago	4.028ms	
<a href="http://kube-ovn-pinger.kube-system.svc:8080/metrics">http://kube-ovn-pinger.kube-system.svc:8080/metrics</a>	UP	<code>app="kube-ovn-pinger"</code> <code>helm_sh_chart_name="cpaas-kube-ovn"</code> <code>helm_sh_release_name="cpaas-kube-ovn"</code> <code>helm_sh_release_namespace="cpaas-system"</code> <code>instances="kube-ovn-pinger.kube-system.svc:8080"</code> <code>job="kubernetes-service"</code> <code>kubernetes_namespace="kube-system"</code> <code>kubernetes_service_name="kube-ovn-pinger"</code>	4.790s ago	12.019ms	
<a href="http://kube-ovn-controller.kube-system.svc:10660/metrics">http://kube-ovn-controller.kube-system.svc:10660/metrics</a>	UP	<code>app="kube-ovn-controller"</code> <code>helm_sh_chart_name="cpaas-kube-ovn"</code> <code>helm_sh_release_name="cpaas-kube-ovn"</code> <code>helm_sh_release_namespace="cpaas-system"</code> <code>instances="kube-ovn-controller.kube-system.svc:10660"</code> <code>job="kubernetes-service"</code> <code>kubernetes_namespace="kube-system"</code> <code>kubernetes_service_name="kube-ovn-controller"</code>	6.454s ago	16.708ms	
<a href="http://kube-ovn-cni.kube-system.svc:10665/metrics">http://kube-ovn-cni.kube-system.svc:10665/metrics</a>	UP	<code>app="kube-ovn-cni"</code> <code>helm_sh_chart_name="cpaas-kube-ovn"</code> <code>helm_sh_release_name="cpaas-kube-ovn"</code> <code>helm_sh_release_namespace="cpaas-system"</code> <code>instances="kube-ovn-cni.kube-system.svc:10665"</code> <code>job="kubernetes-service"</code> <code>kubernetes_namespace="kube-system"</code> <code>kubernetes_service_name="kube-ovn-cni"</code>	2.646s ago	5.156ms	
<a href="http://kube-ovn-monitor.kube-system.svc:10661/metrics">http://kube-ovn-monitor.kube-system.svc:10661/metrics</a>	UP	<code>app="kube-ovn-monitor"</code> <code>helm_sh_chart_name="cpaas-kube-ovn"</code>	12.341s ago	7.636ms	

relabel

Prometheus-Relabel

[PDF](#)[Slack](#)[Support](#)

⌚2023 5 9

⌚2022 8 23

GitHub 

3.15.3


## 4. KubeVirt

---

### 4.1 VM IP



#### 4.1.1 IP VM



##### 1. VM

```

apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: testvm
spec:
  runStrategy: Always
  template:
    metadata:
      labels:
        kubevirt.io/size: small
        kubevirt.io/domain: testvm
    annotations:
      kubevirt.io/allow-pod-bridge-network-live-migration: "true"
  spec:
    domain:
      devices:
        disks:
          - name: containerdisk
            disk:
              bus: virtio
          - name: cloudinitdisk
            disk:
              bus: virtio
        interfaces:
          - name: default
            bridge: {}
    resources:
      requests:
        memory: 64M
  networks:
    - name: default
      pod: {}
  volumes:
    - name: containerdisk
      containerDisk:
        image: quay.io/kubevirt/cirros-container-disk-demo
    - name: cloudinitdisk
      cloudInitNoCloud:
        userDataBase64: SGkuXG4=
  
```

##### 1. VM

```
kubectl get vmi testvm
```

### 1. VM

```
virtctl restart testvm
```

### 1. VM

```
virtctl migrate testvm
```

bridge    VM    IP

## 4.1.2 IP

VM	IP	VM	annotation	VM	IP	KubeVirt
----	----	----	------------	----	----	----------

```
apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: testvm
spec:
  runStrategy: Always
  template:
    metadata:
      labels:
        kubevirt.io/size: small
        kubevirt.io/domain: testvm
    annotations:
      ovn.kubernetes.io/ip_address: 10.16.0.15 #(1)
      kubevirt.io/allow-pod-bridge-network-live-migration: "true"
  spec:
    domain:
      devices:
        disks:
          - name: containerdisk
            disk:
              bus: virtio
          - name: cloudinitdisk
            disk:
              bus: virtio
        interfaces:
          - name: default
            bridge: {}
    resources:
      requests:
        memory: 64M
    networks:
      - name: default
        pod: {}
    volumes:
      - name: containerdisk
        containerDisk:
          image: quay.io/kubevirt/cirros-container-disk-demo
      - name: cloudinitdisk
        cloudInitNoCloud:
          user DataBase64: SGkuXG4=
```

1. 🖥 IP

## 4.1.3 VM IP

Kube-OVN	VM IP	IP	VM
----------	-------	----	----

VM IP

1. VM Annotation      IP

2. virtctl restart <vm name>    VM    IP

[PDF](#)

[Slack](#)

[Support](#)

Q2025 9 10

Q2025 3 3



4.1.4

---

## 4.2

KubeVirt	Clone	Label	Annotation	Kube-OVN	Annotation	IP	MAC
----------	-------	-------	------------	----------	------------	----	-----

### 4.2.1 Annotation

VirtualMachineClone	Kube-OVN	Annotation
---------------------	----------	------------

```

kind: VirtualMachineClone
apiVersion: "clone.kubevirt.io/v1beta1"
metadata:
  name: testclone
spec:
  source:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-source
  target:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-target
  template:
    annotationFilters:
      - "ovn.kubernetes.io/*"
  
```

### 4.2.2



#### Note

patches KubeVirt 1.6

IP

```

kind: VirtualMachineClone
apiVersion: "clone.kubevirt.io/v1beta1"
metadata:
  name: testclone
spec:
  source:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-source
  target:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-target
  patches:
    - {'op": "replace", "path": "/spec/template/metadata/annotations/ovn.kubernetes.io~1ip_address", "value": "10.16.0.15"}
  
```

```

kind: VirtualMachineClone
apiVersion: "clone.kubevirt.io/v1beta1"
metadata:
  name: testclone
spec:
  source:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-source
  target:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-target
  patches:
    - {"op": "remove", "path": "/spec/template/metadata/annotations/ovn.kubernetes.io~1ip_address"}
  
```

Annotation

KubeVirt Clone API



PDF



Slack



Support

⌚2025 9 10

⌚2025 8 13




⌚GitHub⌚

4.2.3

---

## 4.3

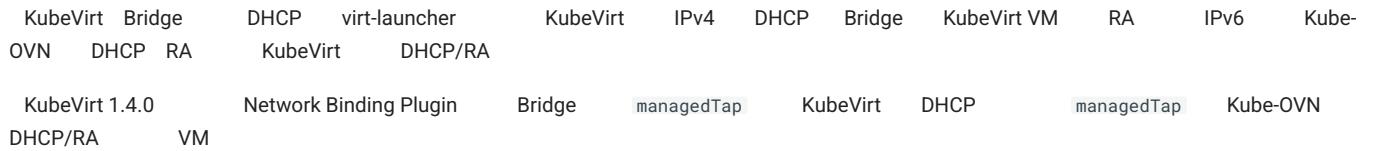

### 4.3.1 DHCP

Kube-OVN Subnet DHCP IPv6 RA YAML

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: dual-stack-subnet
spec:
  cidrBlock: "10.244.0.0/16,fd00:10:244::/64"
  enableDHCP: true
  enableIPv6RA: true
  
```

### 4.3.2 managedTap

KubeVirt managedTap Network Binding Plugin:

```

# kubectl patch kubevirt -n kubevirt kubevirt --type=json -p=
'[{"op": "add", "path": "/spec/configuration/network", "value": {
  "binding": {
    "managedtap": {
      "domainAttachmentType": "managedTap"
    }
  }
}]'
  
```

### 4.3.3 managedTap

```

apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: dual-stack-vm
  namespace: default
spec:
  running: false
  template:
    spec:
      domain:
        devices:
          interfaces:
            - name: default
              binding:
                name: managedtap
      networks:
        - name: default
      pod: {}
  
```

VM DHCP IPv6 RA IPv4/IPv6

[PDF](#)

[Slack](#)

[Support](#)

⌚2025 9 10

⌚2025 3 3



#### 4.3.4

---

## 4.4

---

### KubeVirt

- KubeVirt      Bridge
- KubeVirt
- IP
- 

Kube-OVN                          0.5                          TCP

### 4.4.1

VM Spec    `kubevirt.io/allow-pod-bridge-network-live-migration: "true"` annotation Kube-OVN

#### 1. VM

```
kubectl apply -f - <<EOF
apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: testvm
spec:
  runStrategy: Always
  template:
    metadata:
      labels:
        kubevirt.io/size: small
        kubevirt.io/domain: testvm
    annotations:
      kubevirt.io/allow-pod-bridge-network-live-migration: "true"
  spec:
    domain:
      devices:
        disks:
          - name: containerdisk
            disk:
              bus: virtio
          - name: cloudinitdisk
            disk:
              bus: virtio
        interfaces:
          - name: default
            bridge: {}
    resources:
      requests:
        memory: 64M
    networks:
      - name: default
        pod: {}
    volumes:
      - name: containerdisk
        containerDisk:
          image: quay.io/kubevirt/cirros-container-disk-demo
      - name: cloudinitdisk
        cloudInitNoCloud:
          userDataBase64: SGkuXG4=
EOF
```

#### 1. SSH

```
# password: gocubsgo
virtctl ssh cirros@testvm
ping 8.8.8.8
```

#### 1.


```
virtctl migrate testvm
```

VM	SSH	ping
----	-----	------


## 4.4.2

Kube-OVN

Live migration - Reducing downtime with multichassis port bindings

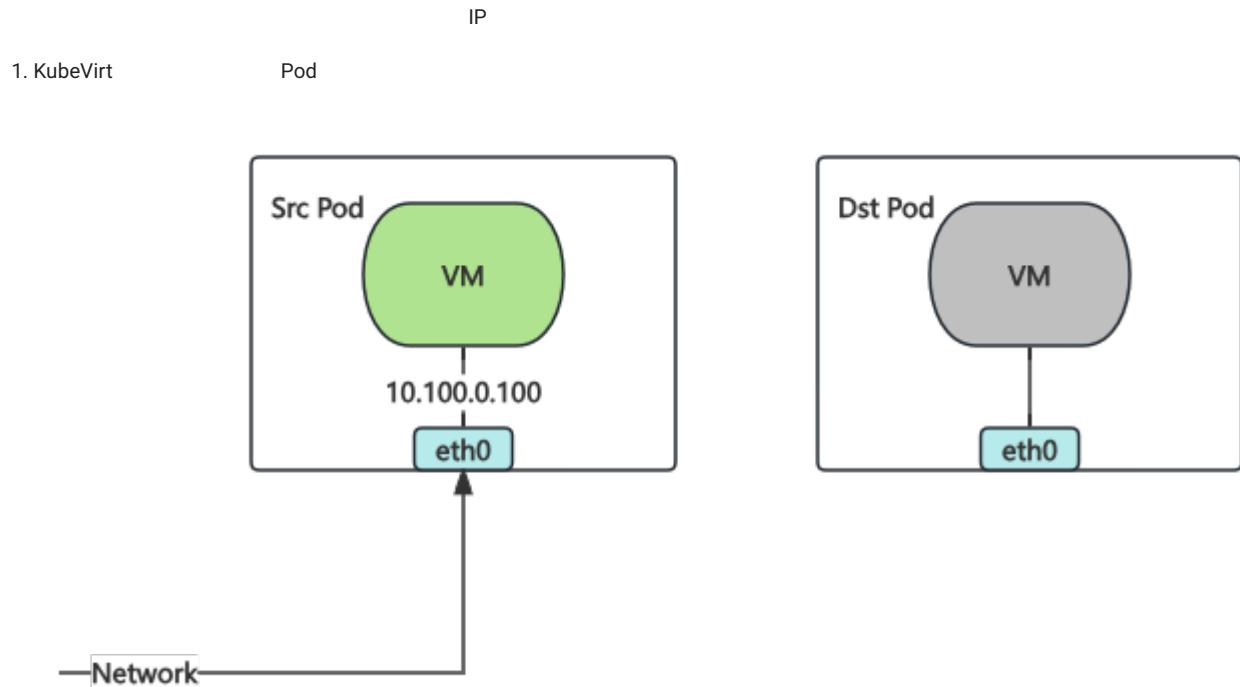

1. Kube-OVN Pod Pod Pod

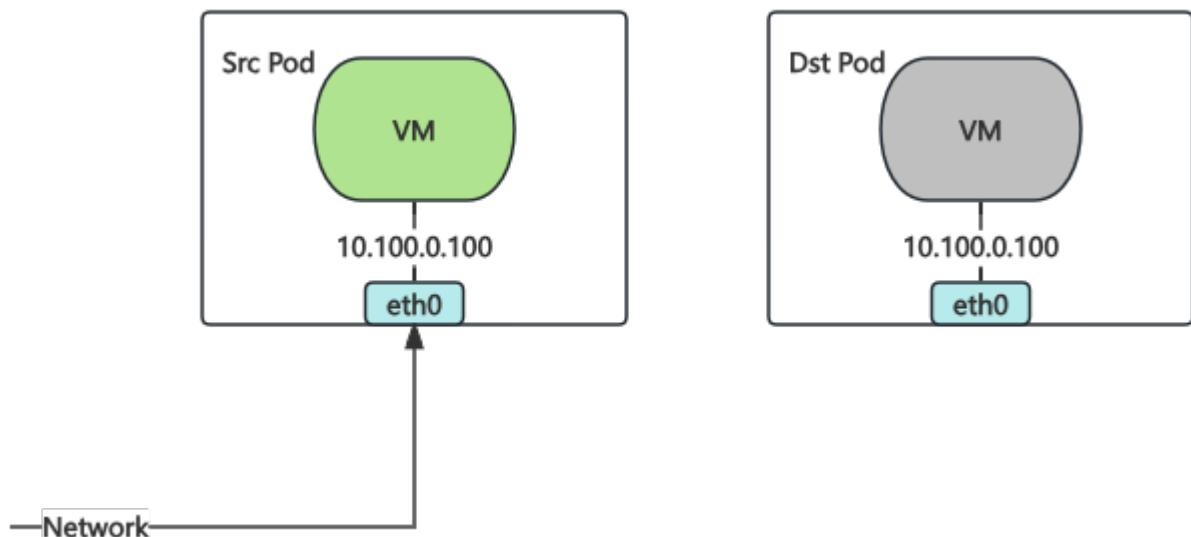


1. Kube-OVN


Pod Pod

Pod

Pod

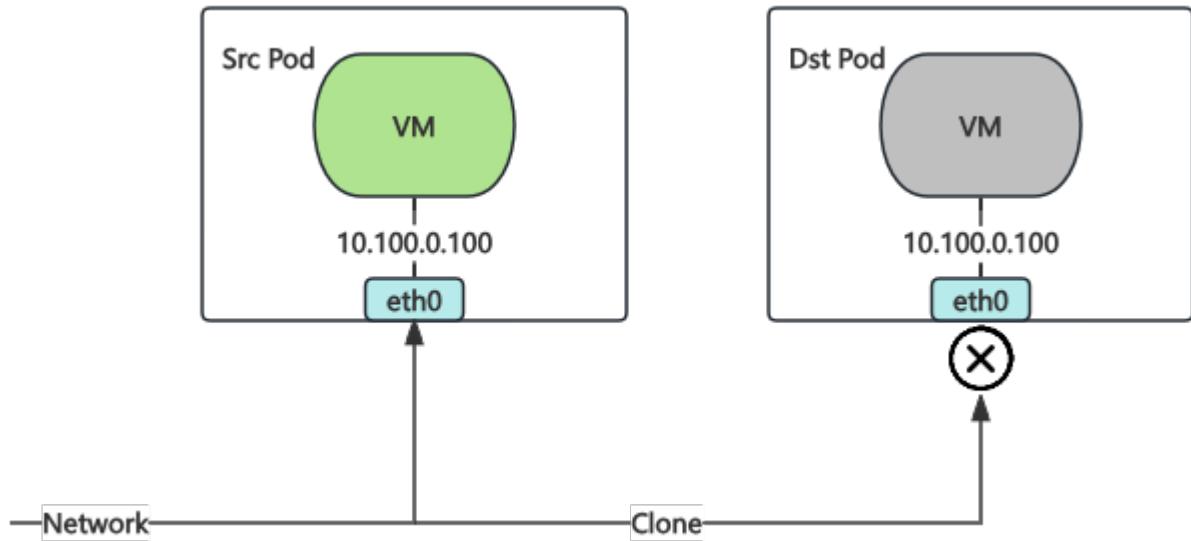


1. KubeVirt VM

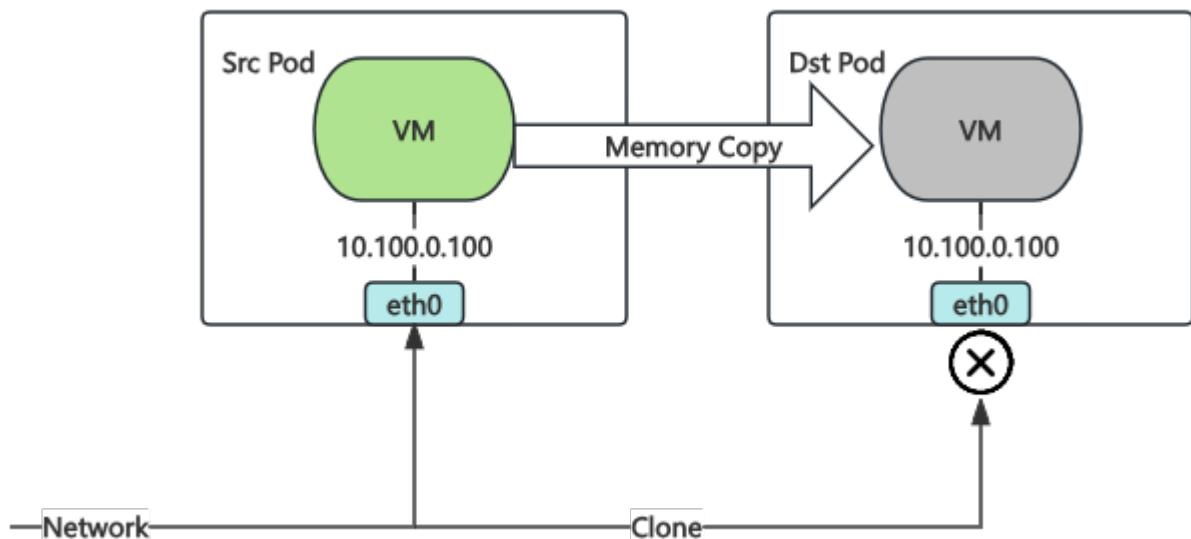


1. KubeVirt


Pod Pod

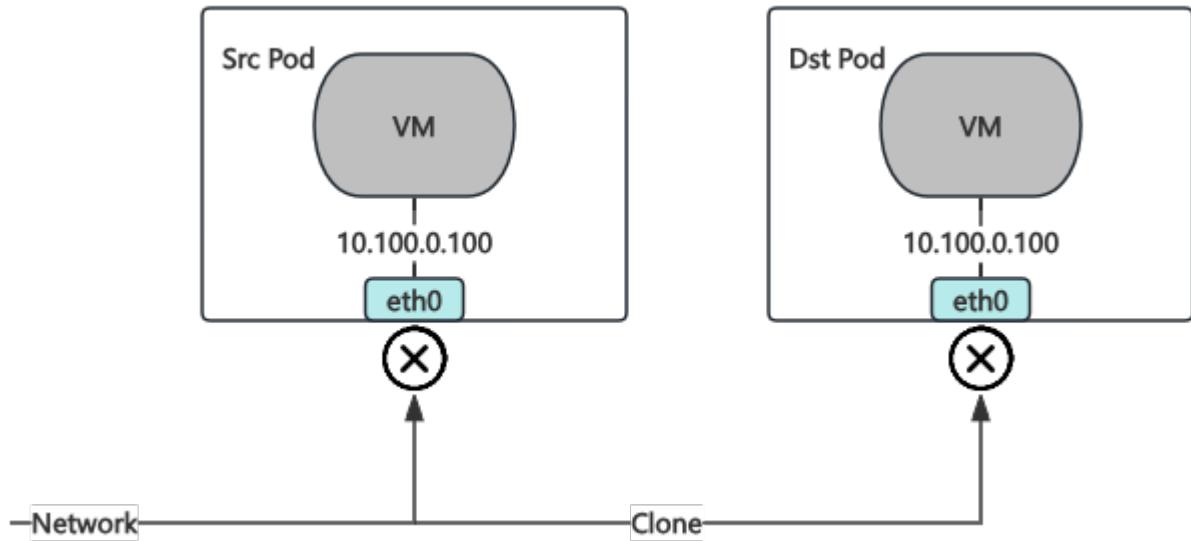

1. KubeVirt    Pod    libvirt    RARP    Pod    Pod

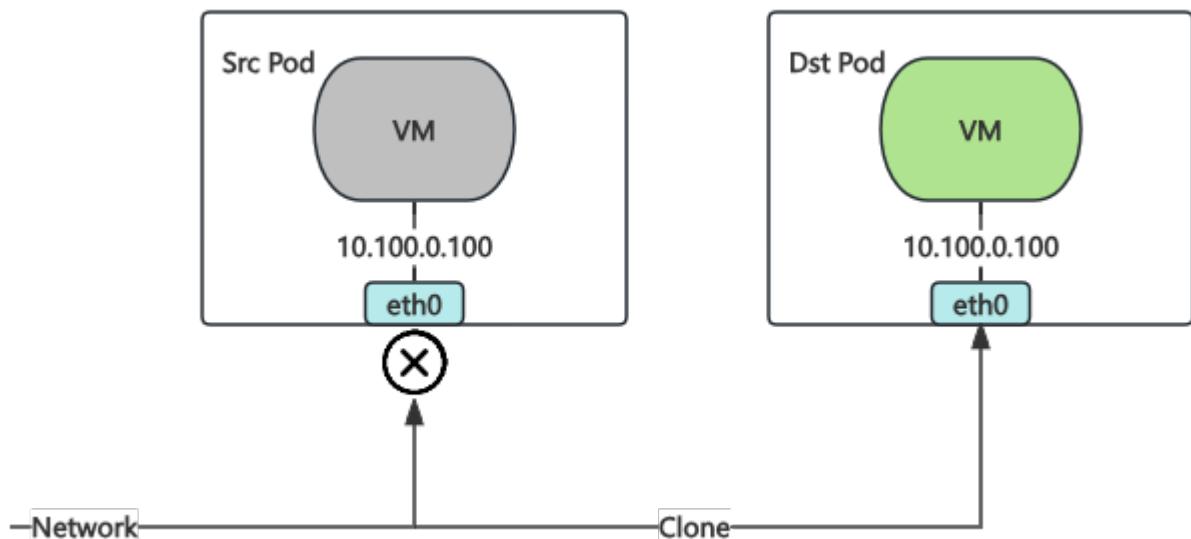

1. KubeVirt    Pod    Kube-OVN    Watch Migration CR

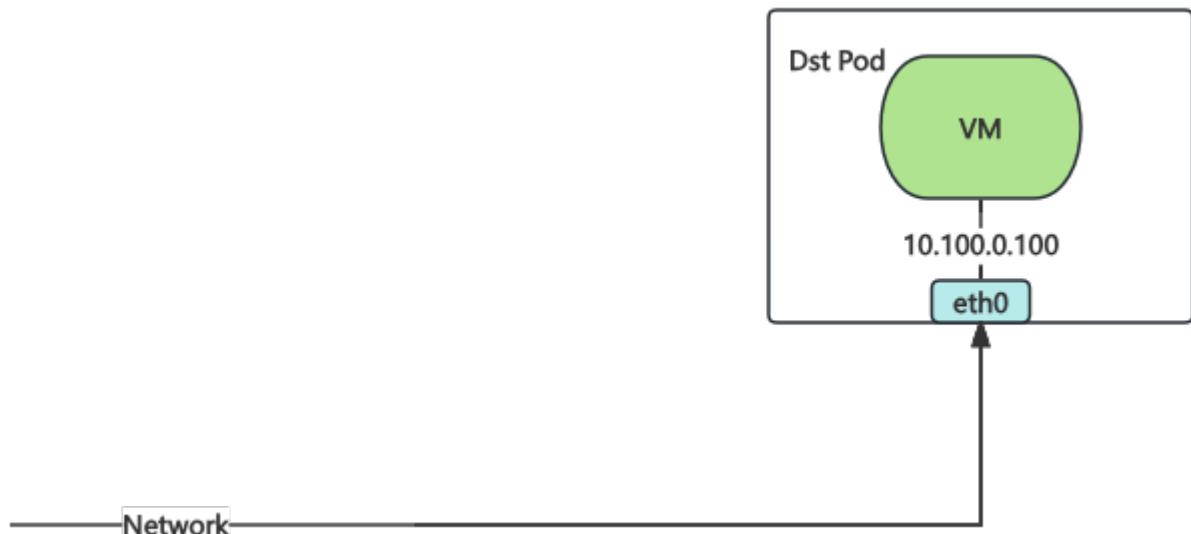

5 6

libvirt RARP

0.5 TCP



⌚2025 9 10

⌚2025 3 3



4.4.3

## 4.5 DHCP

managedTap	SR-IOV	DPDK	KubeVirt	DHCP	Kube-OVN	OVN	DHCP	DHCP	KubeVirt
DHCP	IP		Kube-OVN	DHCP	DHCPv6, IPv6RA, DNS	TFTP	DHCP	DHCP	

### ⚠ Warning

1. bridge      KubeVirt    DHCP    Kube-OVN    DHCP    Kube-OVN    DHCP    Kube-OVN    DHCP    managedTap  
bridge      managedTap      managedTap
2.            DHCP      Pod    DHCP

### DHCP

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: sn-dual
spec:
  cidrBlock: "10.0.0.0/24,240e::a00/120"
  default: false
  disableGatewayCheck: true
  disableInterConnection: false
  excludeIps:
    - 10.0.0.1
    - 240e::a01
  gateway: 10.0.0.1,240e::a01
  gatewayNode: ''
  gatewayType: distributed
  natOutgoing: false
  private: false
  protocol: Dual
  provider: ovn
  vpc: vpc-test
  enableDHCP: true
  dhcpV4Options: "lease_time=3600,router=10.0.0.1,server_id=169.254.0.254,server_mac=00:00:00:2E:2F:B8"
  dhcpV6Options: "server_id=00:00:00:2E:2F:C5"
  enableIPv6RA: true
  ipv6RAConfigs: "address_mode=dhcpv6_stateful,max_interval=30,min_interval=5,send_periodic=true"
```

- enableDHCP :      DHCP
- dhcpV4Options , dhcpV6Options :      ovn-nb    DHCP Options      "lease\_time=3600, router=\$ipv4\_gateway, server\_id=169.254.0.254, server\_mac=\$random\_mac"    server\_id=\$random\_mac
- enableIPv6RA :      DHCPv6
- ipv6RAConfigs :      ovn-nb    Logical\_Router\_Port      Logical Router Port      address\_mode=dhcpv6\_stateful, max\_interval=30, min\_interval=5, send\_periodic=true

[PDF](#)
[Slack](#)
[Support](#)
 2025 9 10


 2022 5 24


4.5.1

## 5. VPC

### 5.1 VPC

Kube-OVN	VPC	VPC	Subnet	EIP				
VPC	Kube-OVN	VPC	Kubernetes	Pod	NodePort	DNS	Kubernetes	Kubernetes
VPC	VPC	VPC	Subnet	VPC	VPC	NAT	VPC	ACL

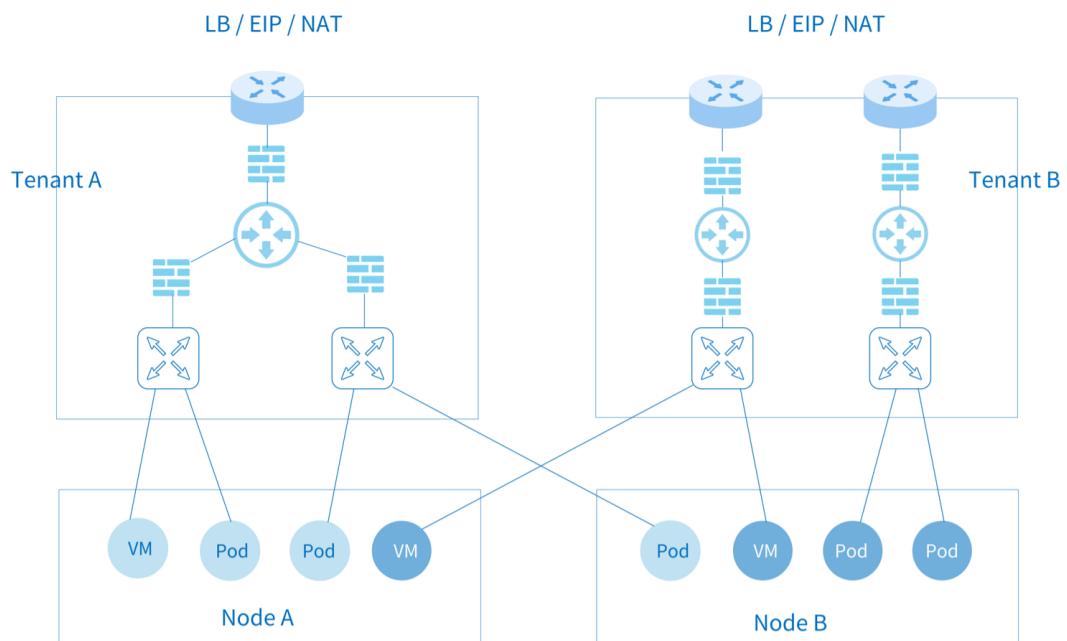

#### 5.1.1

Kube-OVN	VPC	OVN	IP	VPC	IP	IP	VPC	OVN	Datapath ID
Datapath ID									

#### 5.1.2 VPC

VPC

```

kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: test-vpc-1
spec:
  namespaces:
  - ns1
---
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: test-vpc-2
spec:
  namespaces:
  - ns2
  
```

- namespaces

Namespace

VPC

VPC      CIDR:

```
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: net1
spec:
  vpc: test-vpc-1
  cidrBlock: 10.0.1.0/24
  protocol: IPv4
  namespaces:
    - ns1
---
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: net2
spec:
  vpc: test-vpc-2
  cidrBlock: 10.0.1.0/24
  protocol: IPv4
  namespaces:
    - ns2
```

Namespace    Pod:

```
apiVersion: v1
kind: Pod
metadata:
  namespace: ns1
  name: vpc1-pod
spec:
  containers:
    - name: vpc1-pod
      image: docker.io/library/nginx:alpine
---
apiVersion: v1
kind: Pod
metadata:
  namespace: ns2
  name: vpc2-pod
spec:
  containers:
    - name: vpc2-pod
      image: docker.io/library/nginx:alpine
```

Pod      CIDR      VPC      Pod

**VPC Pod    livenessProbe    readinessProbe**

VPC	Pod	kubelet	VPC	Pod	Kube-OVN	TProxy	kubelet	VPC	Pod
				--enable-tproxy=true					

```
spec:
  template:
    spec:
      containers:
        - args:
          - --enable-tproxy=true
```

1.      VPC    Pod      IP
2.      `tcpSocket`    `httpGet`

### 5.1.3 VPC

VPC	VPC	VPC	IP SNAT DNAT
VPC	Multus-CNI	<a href="#">multus-cni</a>	

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: ovn-vpc-external-network
spec:
  protocol: IPv4
  provider: ovn-vpc-external-network.kube-system
  cidrBlock: 192.168.0.0/24
  gateway: 192.168.0.1 # IP address of the physical gateway
  excludeIps:
    - 192.168.0.1..192.168.0.10
---
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: ovn-vpc-external-network
  namespace: kube-system
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "macvlan",
    "master": "eth1",
    "mode": "bridge",
    "ipam": {
      "type": "kube-ovn",
      "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
      "provider": "ovn-vpc-external-network.kube-system"
    }
}'

```

- Subnet Macvlan VPC IP
- VPC Macvlan NetworkAttachmentDefinition master
- name
  
- Macvlan L2/L3 Vlan

  1. OpenStack VM PortSecurity
  2. VMware vSwitch MAC Address Changes, Forged Transmits Promiscuous Mode Operation allow
  3. Hyper-V MAC Address Spoofing
  4. AWS GCE Mac Macvlan
  5. Macvlan Macvlan VpcNatGateway Pod Pod
  6. Trunk Macvlan

## VPC

VPC kube-system ovn-vpc-nat-gw-config nodeSelector

```

---
kind: ConfigMap
apiVersion: v1
metadata:
  name: ovn-vpc-nat-config
  namespace: kube-system
data:
  image: 'docker.io/kubeovn/vpc-nat-gateway:v1.15.0'
  nodeSelector: |
    kubernetes.io/hostname: kube-ovn-control-plane
---
kind: ConfigMap
apiVersion: v1
metadata:
  name: ovn-vpc-nat-gw-config
  namespace: kube-system
data:
  enable-vpc-nat-gw: 'true'

```

- image: Pod
- enable-vpc-nat-gw VPC

## VPC

```

kind: VpcNatGateway
apiVersion: kubeovn.io/v1
metadata:

```

```

  name: gw1
spec:
  vpc: test-vpc-1
  subnet: net1
  lanIp: 10.0.1.254
  selector:
    - "kubernetes.io/hostname: kube-ovn-worker"
    - "kubernetes.io/os: linux"
  externalSubnets:
    - ovn-vpc-external-network

```

- vpc VpcNatGateway VPC
- subnet VPC Subnet VPC Pod lanIp
- lanIp subnet IP VPC Pod IP VPC VpcNatGateway nextHopIP lanIp
- selector VpcNatGateway Pod Kubernetes NodeSelector
- externalSubnets VPC ovn-vpc-external-network

- tolerations: VPC
- affinity: VPC Pod

### VPC-NAT-GW

1. nat gw pod net1 arp ping eip arp ping

### EIP

EIP IP VPC DNAT SNAT IP  
EIP

```

kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eip-random
spec:
  natGwDp: gw1

```

### EIP

```

kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eip-static
spec:
  natGwDp: gw1
  v4ip: 192.168.0.100

```

### EIP

```

kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eip-random
spec:
  natGwDp: gw1
  externalSubnet: ovn-vpc-external-network

```

- externalSubnet EIP ovn-vpc-external-network VPC externalSubnets

### DNAT

DNAT EIP VPC IP

```

kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eipd01
spec:
  natGwDp: gw1

```

```
---
kind: IptablesDnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: dnat01
spec:
  eip: eipd01
  externalPort: '8888'
  internalIp: 10.0.1.10
  internalPort: '80'
  protocol: tcp
```

## SNAT

SNAT    VPC    Pod                  EIP    SNAT

```
---
kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eips01
spec:
  natGwDp: gw1
---
kind: IptablesSnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: snat01
spec:
  eip: eips01
  internalCIDR: 10.0.1.0/24
```

## IP

IP    VPC    IP    EIP                  EIP    VPC    IP VPC    IP                  SNAT    EIP

```
---
kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eipf01
spec:
  natGwDp: gw1
---
kind: IptablesFIPRule
apiVersion: kubeovn.io/v1
metadata:
  name: fip01
spec:
  eip: eipf01
  internalIp: 10.0.1.5
```

## 5.1.4

VPC                                      Kube-OVN

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: test-vpc-1
spec:
  staticRoutes:
    - cidr: 0.0.0.0/0
      nextHopIP: 10.0.1.254
      policy: policyDst
    - cidr: 172.31.0.0/24
      nextHopIP: 10.0.1.253
      policy: policySrc
      routeTable: "rtb1"
```

- policy:                policyDst                policySrc
- CIDR
- routeTable:

## OVN

## Logical Router Policy

```

kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: test-vpc-1
spec:
  policyRoutes:
    - action: drop
      match: ip4.src==10.0.1.0/24 && ip4.dst==10.0.1.250
      priority: 11
    - action: reroute
      match: ip4.src==10.0.1.0/24
      nextHopIP: 10.0.1.252
      priority: 10

```

## 5.1.5

Kubernetes	Service	Kubernetes	Service	IP	VPC	VPC
------------	---------	------------	---------	----	-----	-----

Kubernetes	Service
------------	---------

Kube-OVN      SwitchLBRule

SwitchLBRule

```

apiVersion: kubeovn.io/v1
kind: SwitchLBRule
metadata:
  name: cjh-slr-nginx
spec:
  vip: 1.1.1.1
  sessionAffinity: ClientIP
  namespace: default
  selector:
    - app:nginx
  ports:
    - name: dns
      port: 8888
      targetPort: 80
      protocol: TCP

```

- vip
- namespace      Pod      Namespace
- sessionAffinity    Service    sessionAffinity
- selector    Service    selector
- ports    Service    port

```

# kubectl get slr
NAME          VIP        PORT(S)           SERVICE           AGE
vpc-dns-test-cjh2  10.96.0.3  53/UDP,53/TCP,9153/TCP  kube-system/slr-vpc-dns-test-cjh2  88m

```

## 5.1.6 vpc-dns

VPC	VPC	VPC	Pod	coredns	VPC	CoreDNS	Service	Kube-OVN	vpc-dns
-----	-----	-----	-----	---------	-----	---------	---------	----------	---------

```

apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: ovn-nad
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "kube-ovn",

```

```

    "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
    "provider": "ovn-nad.default.ovn"
}'

```

## ovn-default provider

```
ovn-default provider nad provider ovn-nad.default.ovn
```

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: ovn-default
spec:
  cidrBlock: 10.16.0.0/16
  default: true
  disableGatewayCheck: false
  disableInterConnection: false
  enableDHCP: false
  enableIPv6RA: false
  excludeIps:
  - 10.16.0.1
  gateway: 10.16.0.1
  gatewayType: distributed
  logicalGateway: false
  natOutgoing: true
  private: false
  protocol: IPv4
  provider: ovn-nad.default.ovn
  vpc: ovn-cluster

```

## vpc-dns ConfigMap

```
kube-system configmap vpc-dns vpc-dns
```

```

apiVersion: v1
kind: ConfigMap
metadata:
  name: vpc-dns-config
  namespace: kube-system
data:
  coredns-vip: 10.96.0.3
  enable-vpc-dns: "true"
  nad-name: ovn-nad
  nad-provider: ovn-nad.default.ovn

```

- enable-vpc-dns true false true
- coredns-image dns coredns
- coredns-template dns URL yamls/coredns-template.yaml
- coredns-vip coredns lb vip
- nad-name network-attachment-definitions
- nad-provider provider
- k8s-service-host coredns k8s apiserver ip
- k8s-service-port coredns k8s apiserver port

## vpc-dns

```

apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRole
metadata:
  labels:
    kubernetes.io/bootstrapping: rbac-defaults
  name: system:vpc-dns
rules:
- apiGroups:
  - ""
  resources:
  - endpoints
  - services
  - pods
  - namespaces
  verbs:
  - list
  - watch
- apiGroups:

```

```

- discovery.k8s.io
resources:
- endpointslices
verbs:
- list
- watch
---
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRoleBinding
metadata:
  annotations:
    rbac.authorization.kubernetes.io/autoupdate: "true"
  labels:
    kubernetes.io/bootstrapping: rbac-defaults
  name: vpc-dns
roleRef:
  apiGroup: rbac.authorization.k8s.io
  kind: ClusterRole
  name: system:vpc-dns
subjects:
- kind: ServiceAccount
  name: vpc-dns
  namespace: kube-system
---
apiVersion: v1
kind: ServiceAccount
metadata:
  name: vpc-dns
  namespace: kube-system
---
apiVersion: v1
kind: ConfigMap
metadata:
  name: vpc-dns-corefile
  namespace: kube-system
data:
  Corefile: |
    .:53 {
      errors
      health {
        lameduck 5s
      }
      ready
      kubernetes cluster.local in-addr.arpa ip6.arpa {
        pods insecure
        fallthrough in-addr.arpa ip6.arpa
      }
      prometheus :9153
      forward . /etc/resolv.conf {
        prefer_udp
      }
      cache 30
      loop
      reload
      loadbalance
    }
}

```

## vpc-dns

```

kind: VpcDns
apiVersion: kubeovn.io/v1
metadata:
  name: test-cjh1
spec:
  vpc: cjh-vpc-1
  subnet: cjh-subnet-1

```

- vpc dns vpc
- subnet dns

```
[root@hci-dev-mst-1 kubeovn]# kubectl get vpc-dns
NAME      ACTIVE   VPC      SUBNET
test-cjh1  false    cjh-vpc-1  cjh-subnet-1
test-cjh2  true     cjh-vpc-1  cjh-subnet-2
```

- ACTIVE : true dns false

- VPC DNS

- VPC      vpc-dns      VPC      subnet      vpc-dns      true      false
- true      vpc-dns      false      vpc-dns

### 5.1.7

VPC      VPC

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: test-vpc-1
spec:
  namespaces:
  - ns1
  defaultSubnet: test
```

- defaultSubnet VPC

Namespace      ovn.kubernetes.io/logical\_switch      ovn.kubernetes.io/logical\_switch      Pod


[!\[\]\(ce59ccb5fd51f4752e3fafa2a8faae81\_img.jpg\) PDF](#)

[!\[\]\(7af6ce14a28d939baed0e14f90e5b239\_img.jpg\) Slack](#)

[!\[\]\(289401936af4bfde2c57be66917cac98\_img.jpg\) Support](#)

 2025 9 10

 2022 5 24



### 5.1.8

## 5.2 VPC Egress Gateway

VPC Egress Gateway    VPC    VPC    Pod


- ECMP    Active-Active
- BFD    <1s
- IPv6
- Namespace    Pod
- Node    Egress Gateway

VPC Egress Gateway


- Macvlan                      Underlay
- Gateway                      Egress IP
- SNAT    EIP    DNAT
- 

### 5.2.1

Egress Gateway    Pod    Pod    VPC    Macvlan    Egress Gateway    NAT

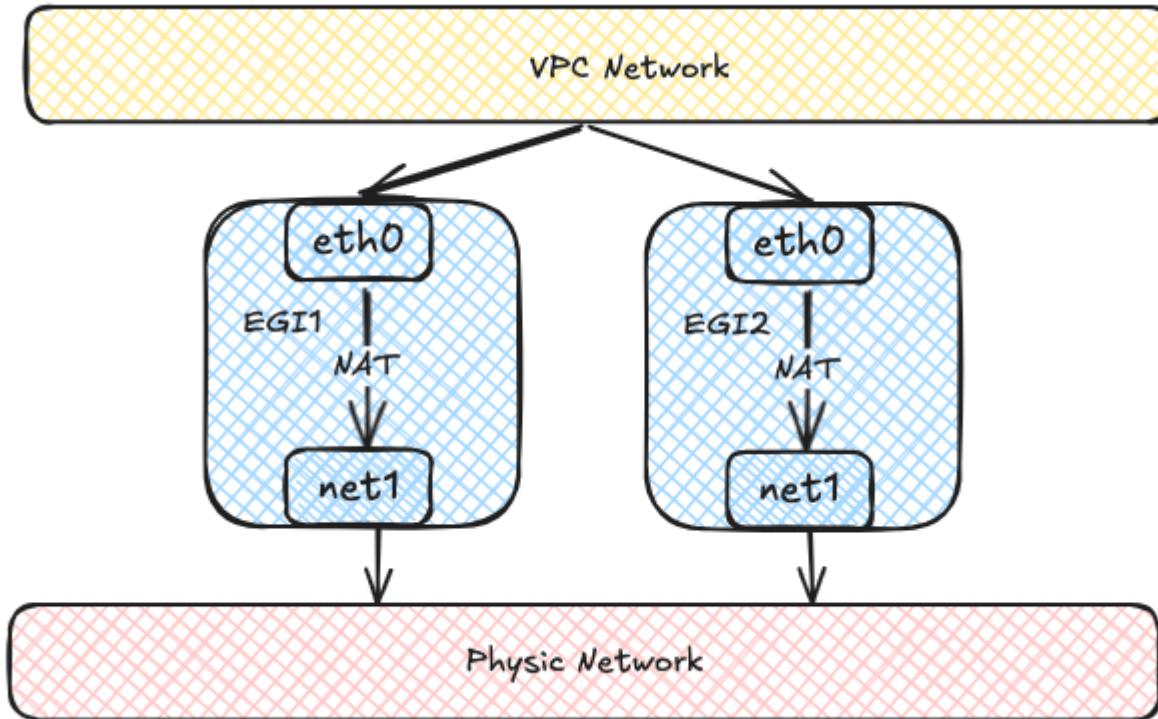


Egress Gateway    OVN    VPC    Pod    OVN    Egress Gateway    Egress Gateway

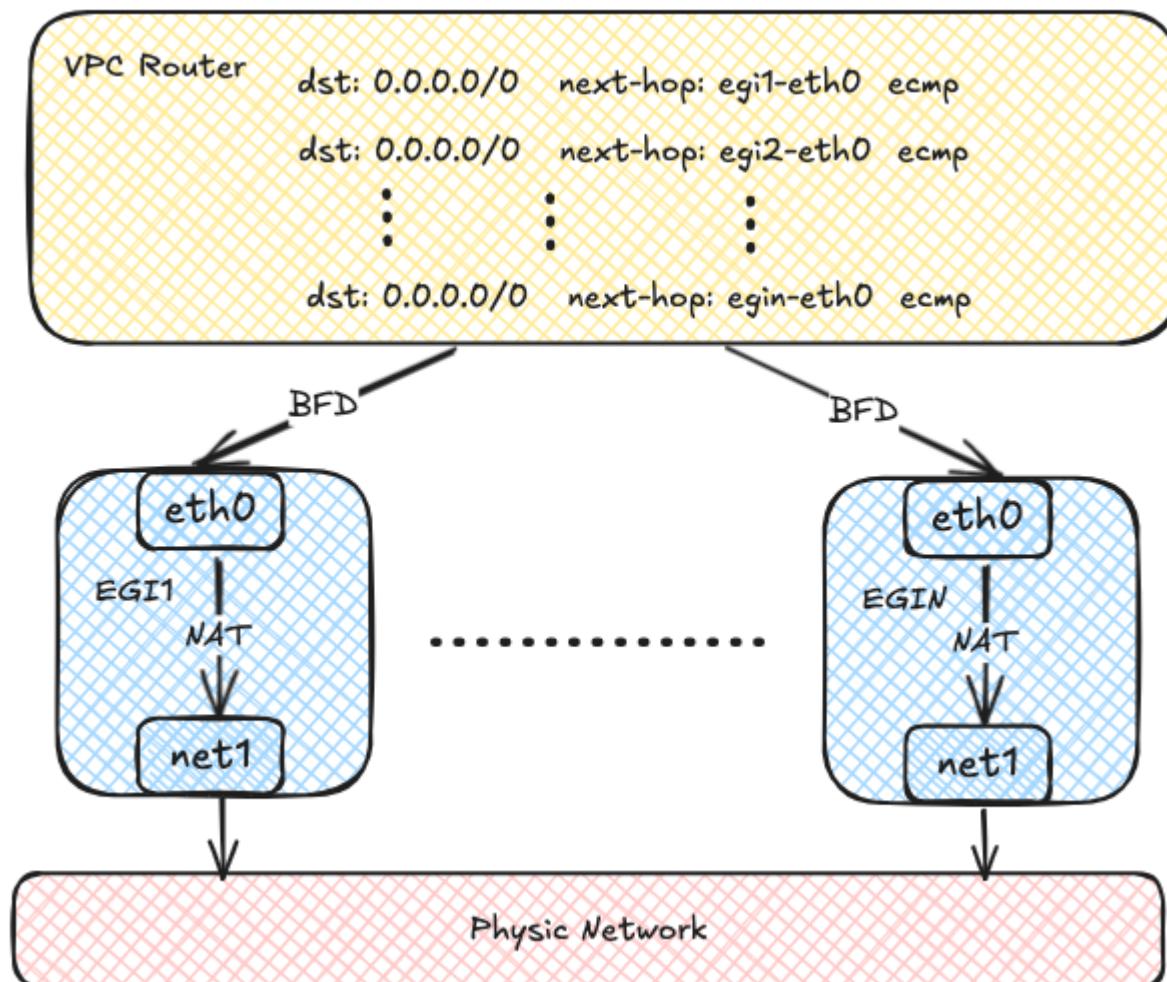

OVN   BFD      Egress Gateway

Egress Gateway      OVN

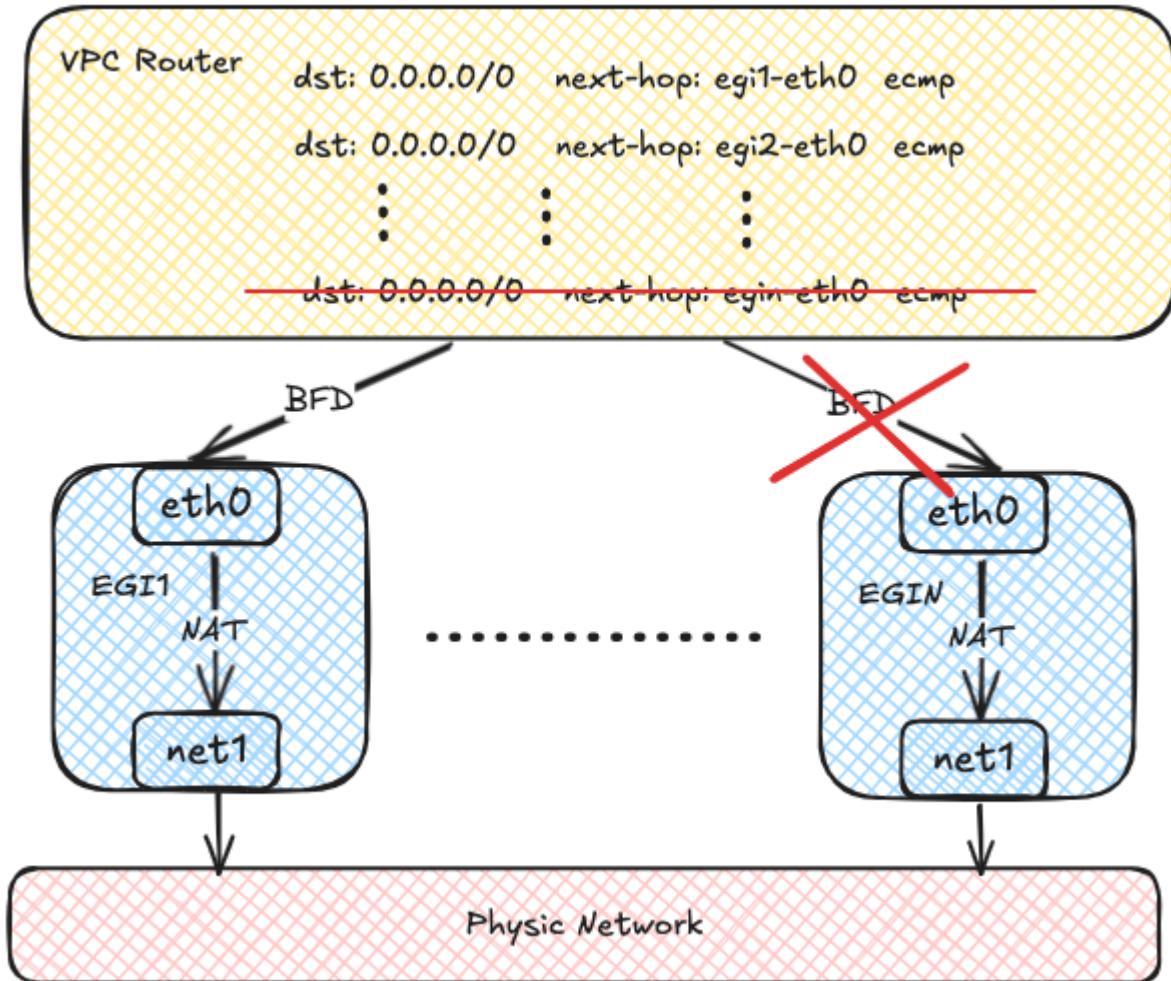

### 5.2.2

VPC Egress Gateway	VPC NAT Gateway	Multus-CNI
VPC Egress Gateway	ConfigMap	

### 5.2.3

#### NetworkAttachmentDefinition

VPC Egress Gateway	VPC	NetworkAttachmentDefinition	macvlan	Kube-OVN	IPAM
--------------------	-----	-----------------------------	---------	----------	------

```

apiVersion: k8s.cni.cncf.io/v1
kind: NetworkAttachmentDefinition
metadata:
  name: eth1
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "macvlan",
    "master": "eth1",
    "mode": "bridge",
    "ipam": {
      "type": "kube-ovn",
      "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
      "provider": "eth1.default"
    }
  }'
---
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: macvlan1

```

```
spec:
  protocol: IPv4
  provider: eth1.default
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  excludeIps:
    - 172.17.0.0..172.17.0.10
```

CNI NetworkAttachmentDefinition VPC Egress Gateway

## VPC Egress Gateway

### VPC Egress Gateway

```
apiVersion: kubeovn.io/v1
kind: VpcEgressGateway
metadata:
  name: gateway1
  namespace: default
spec:
  vpc: ovn-cluster
  replicas: 1
  externalSubnet: macvlan1
  policies:
    - snat: true
      subnets:
        - ovn-default
```

default	VPC	ovn-cluster	gateway1	VPC Egress Gateway	ovn-cluster	ovn-default	10.16.0.0/16	Pod
macvlan1								SNAT

### VPC Egress Gateway

```
$ kubectl get veg gateway1
NAME      VPC      REPLICAS   BFD ENABLED   EXTERNAL SUBNET   PHASE   READY   AGE
gateway1  ovn-cluster  1          false        macvlan1       Completed  true    13s
```

```
kubectl get veg gateway1 -o wide
NAME      VPC      REPLICAS   BFD ENABLED   EXTERNAL SUBNET   PHASE   READY   INTERNAL IPS   EXTERNAL IPS   WORKING NODES   AGE
gateway1  ovn-cluster  1          false        macvlan1       Completed  true    ["10.16.0.12"]  ["172.17.0.11"]  ["kube-ovn-worker"]  82s
```

```
$ kubectl get deployment -l ovn.kubernetes.io/vpc-egress-gateway=gateway1
NAME      READY   UP-TO-DATE   AVAILABLE   AGE
gateway1  1/1     1           1           4m40s
```

```
$ kubectl get pod -l ovn.kubernetes.io/vpc-egress-gateway=gateway1 -o wide
NAME          READY   STATUS   RESTARTS   AGE   IP           NODE   NOMINATED NODE   READINESS GATES
gateway1-b9f8b4448-761hm  1/1     Running   0        4m48s  10.16.0.12  kube-ovn-worker  <none>  <none>
```

### Pod IP iptables

```
$ kubectl exec gateway1-b9f8b4448-761hm -c gateway -- ip address show
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
  link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
  inet 127.0.0.1/8 scope host lo
    valid_lft forever preferred_lft forever
  inet6 ::1/128 scope host
    valid_lft forever preferred_lft forever
2: net1@if13: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default qlen 1000
  link/ether 62:d8:71:90:7b:86 brd ff:ff:ff:ff:ff:ff link-netnsid 0
  inet 172.17.0.11/16 brd 172.17.255.255 scope global net1
    valid_lft forever preferred_lft forever
  inet6 fe80::60d8:71ff:fe90:7b86/64 scope link
    valid_lft forever preferred_lft forever
17: eth0@if18: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1400 qdisc noqueue state UP group default
  link/ether 36:7c:6b:c7:82:6b brd ff:ff:ff:ff:ff:ff link-netnsid 0
  inet 10.16.0.12/16 brd 10.16.255.255 scope global eth0
    valid_lft forever preferred_lft forever
  inet6 fe80::347c:6bff:fec7:826b/64 scope link
    valid_lft forever preferred_lft forever
```

```
$ kubectl exec gateway1-b9f8b4448-761hm -c gateway -- ip route show
default via 172.17.0.1 dev net1
10.16.0.0/16 dev eth0 proto kernel scope link src 10.16.0.12
```

```
172.17.0.0/16 dev net1 proto kernel scope link src 172.17.0.11

$ kubectl exec gateway1-b9f8b4448-76lhm -c gateway -- iptables -t nat -S
-P PREROUTING ACCEPT
-P INPUT ACCEPT
-P OUTPUT ACCEPT
-P POSTROUTING ACCEPT
-A POSTROUTING -s 10.16.0.0/16 -j MASQUERADE --random-fu
```

## Gateway Pod

```
$ kubectl exec -ti gateway1-b9f8b4448-76lhm -c gateway -- bash
nobody@gateway1-b9f8b4448-76lhm:/kube-ovn$ tcpdump -i any -nnve icmp and host 172.17.0.1
tcpdump: data link type LINUX_SLL2
tcpdump: listening on any, link-type LINUX_SLL2 (Linux cooked v2), snapshot length 262144 bytes
06:50:58.936528 eth0 In ifindex 17 92:26:b8:9e:f2:1c ethertype IPv4 (0x0800), length 104: (tos 0x0, ttl 63, id 30481, offset 0, flags [DF], proto ICMP (1), length 84)
    10.16.0.9 > 172.17.0.1: ICMP echo request, id 37989, seq 0, length 64
06:50:58.936574 net1 Out ifindex 2 62:d8:71:90:7b:86 ethertype IPv4 (0x0800), length 104: (tos 0x0, ttl 62, id 30481, offset 0, flags [DF], proto ICMP (1), length 84)
    172.17.0.11 > 172.17.0.1: ICMP echo request, id 39449, seq 0, length 64
06:50:58.936613 net1 In ifindex 2 02:42:39:79:7f:08 ethertype IPv4 (0x0800), length 104: (tos 0x0, ttl 64, id 26701, offset 0, flags [none], proto ICMP (1), length 84)
    172.17.0.1 > 172.17.0.11: ICMP echo reply, id 39449, seq 0, length 64
06:50:58.936621 eth0 Out ifindex 17 36:7c:6b:c7:82:6b ethertype IPv4 (0x0800), length 104: (tos 0x0, ttl 63, id 26701, offset 0, flags [none], proto ICMP (1), length 84)
    172.17.0.1 > 10.16.0.9: ICMP echo reply, id 37989, seq 0, length 64
```

## OVN Logical Router

### VPC

```
$ kubectl ko nbctl lr-policy-list ovn-cluster
Routing Policies
 31000          ip4.dst == 10.16.0.0/16      allow
 31000          ip4.dst == 100.64.0.0/16     allow
 30000          ip4.dst == 172.18.0.2       reroute   100.64.0.3
 30000          ip4.dst == 172.18.0.3       reroute   100.64.0.2
 30000          ip4.dst == 172.18.0.4       reroute   100.64.0.4
 29100          ip4.src == 10.16.0.0/16      reroute   10.16.0.12
 29000 ip4.src == $ovn.default.kube.ovn.control_plane_ip4  reroute   100.64.0.2
 29000          ip4.src == $ovn.default.kube.ovn.worker2_ip4  reroute   100.64.0.4
 29000          ip4.src == $ovn.default.kube.ovn.worker_ip4   reroute   100.64.0.3
```

```
.spec.replicas
```

```
$ kubectl scale veg gateway1 --replicas=2
vpceregressgateway.kubeovn.io/gateway1 scaled

$ kubectl get veg gateway1
NAME      VPC      REPLICAS  BFD ENABLED  EXTERNAL SUBNET  PHASE  READY  AGE
gateway1  ovn-cluster  2        false      macvlan        Completed  true   39m

$ kubectl get pod -l ovn.kubernetes.io/vpc-egress-gateway=gateway1 -o wide
NAME                  READY  STATUS  RESTARTS  AGE  IP           NODE      NOMINATED NODE  READINESS GATES
gateway1-b9f8b4448-76lhm  1/1   Running  0         40m  10.16.0.12  kube-ovn-worker  <none>   <none>
gateway1-b9f8b4448-zd4dl  1/1   Running  0         64s  10.16.0.13  kube-ovn-worker2 <none>   <none>

$ kubectl ko nbctl lr-policy-list ovn-cluster
Routing Policies
 31000          ip4.dst == 10.16.0.0/16      allow
 31000          ip4.dst == 100.64.0.0/16     allow
 30000          ip4.dst == 172.18.0.2       reroute   100.64.0.3
 30000          ip4.dst == 172.18.0.3       reroute   100.64.0.2
 30000          ip4.dst == 172.18.0.4       reroute   100.64.0.4
 29100          ip4.src == 10.16.0.0/16      reroute   10.16.0.12, 10.16.0.13
 29000 ip4.src == $ovn.default.kube.ovn.control_plane_ip4  reroute   100.64.0.2
 29000          ip4.src == $ovn.default.kube.ovn.worker2_ip4  reroute   100.64.0.4
 29000          ip4.src == $ovn.default.kube.ovn.worker_ip4   reroute   100.64.0.3
```

## BFD

BFD	VPC	BFD LRP	VPC	BFD Port

```
apiVersion: kubeovn.io/v1
kind: Vpc
metadata:
  name: vpc
spec:
  bfdPort:
    enabled: true
    ip: 10.255.255.255
---
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: subnet
```

```
spec:
  vpc: vpc1
  protocol: IPv4
  cidrBlock: 192.168.0.0/24
```

BFD Port      OVN LR      BFD    LRP

```
$ kubectl ko nbctl show vpc1
router 0c1d1e8f-4c86-4d96-88b2-c4171c7ff824 (vpc1)
  port bfd@vpc1
    mac: "8e:51:4b:16:3c:90"
    networks: ["10.255.255.255"]
  port vpc1-subnet1
    mac: "de:c9:5c:38:7a:61"
    networks: ["192.168.0.1/24"]
```

VPC Egress Gateway    .spec.bfd.enabled    true

```
apiVersion: kubeovn.io/v1
kind: VpcEgressGateway
metadata:
  name: gateway2
  namespace: default
spec:
  vpc: vpc1
  replicas: 2
  internalSubnet: subnet1
  externalSubnet: macvlan
  bfd:
    enabled: true
  policies:
    - snat: true
    ipBlocks:
      - 192.168.0.0/24
```

VPC Egress Gateway

```
$ kubectl get veg gateway2 -o wide
NAME      VPC      REPLICAS   BFD ENABLED   EXTERNAL SUBNET   PHASE      READY   INTERNAL IPS                               EXTERNAL IPs          WORKING
NODES          AGE
gateway2   vpc1     2           true        macvlan       Completed   true    ["192.168.0.2", "192.168.0.3"]   ["172.17.0.13", "172.17.0.14"]   ["kube-ovn-worker", "kube-ovn-worker2"]
            58s

$ kubectl get pod -l ovn.kubernetes.io/vpc-egress-gateway=gateway2 -o wide
NAME          READY   STATUS    RESTARTS   AGE   IP           NODE      NOMINATED NODE   READINESS GATES
gateway2-fcc6b8b87-8lgvx  1/1    Running   0          2m18s  192.168.0.3  kube-ovn-worker2  <none>    <none>
gateway2-fcc6b8b87-wmmww6  1/1    Running   0          2m18s  192.168.0.2  kube-ovn-worker   <none>    <none>

$ kubectl ko nbctl lr-route-list vpc1
IPv4 Routes
Route Table <main>:
  192.168.0.0/24      192.168.0.2 src-ip ecmp ecmp-symmetric-reply bfd
  192.168.0.0/24      192.168.0.3 src-ip ecmp ecmp-symmetric-reply bfd

$ kubectl ko nbctl list bfd
_uuid          : 223ede10-9169-4c7d-9524-a546e24bfab5
detect_mult    : 3
dst_ip         : "192.168.0.2"
external_ids   : {af="4", vendor=kube-ovn, vpc-egress-gateway="default/gateway2"}
logical_port   : "bfd@vpc1"
min_rx         : 1000
min_tx         : 1000
options        : {}
status         : up

_uuid          : b050c75e-2462-470b-b89c-7bd38889b758
detect_mult    : 3
dst_ip         : "192.168.0.3"
external_ids   : {af="4", vendor=kube-ovn, vpc-egress-gateway="default/gateway2"}
logical_port   : "bfd@vpc1"
min_rx         : 1000
min_tx         : 1000
options        : {}
status         : up
```

Pod    BFD

```
$ kubectl exec gateway2-fcc6b8b87-8lgvx -c bfdd -- bfdd-control status
There are 1 sessions:
Session 1
id=1 local=192.168.0.3 (p) remote=10.255.255.255 state=Up

$ kubectl exec gateway2-fcc6b8b87-wmmww6 -c bfdd -- bfdd-control status
There are 1 sessions:
Session 1
id=1 local=192.168.0.2 (p) remote=10.255.255.255 state=Up
```

## VPC BFD PORT

<code>enabled</code>	<code>boolean</code>	<code>false</code>	<code>BFD Port</code>	<code>true</code>
<code>ip</code>	<code>string</code>	-	<code>BFD Port</code>	<code>IP</code> <code>IPv6</code> <code>169.255.255.2</code> <code>169.255.255.2</code>
<code>nodeSelector</code>	<code>object</code>	-	<code>BFD Port</code>	-
			<code>OVN HA Chassis</code> <code>Group</code> Active/ Backup Active <code>nodeSelector</code> Kube-OVN	
			<code>kubectl ko nbctl</code> <code>list</code> <code>ha_chassis_group</code> OVN HA Chassis Group	
<code>nodeSelector.matchLabels</code>	<code>dict/map</code>	-		-
<code>nodeSelector.matchExpressions</code>	<code>object array</code>	-		-

## VPC EGRESS GATEWAY

## Spec

vpc	string	VPC	ovn-cluster	VPC	vpc1
replicas	integer/int32	1			2
prefix	string	-		Deployment	veg-
image	string	-		Deployment	docker.io/kubeovn/kube-ovn
internalSubnet	string	VPC		VPC	subnet1
externalSubnet	string	-			ext1
internalIPs	string array	-	VPC IPv6	IP IP	10.16.0.101 / fd00::11 / 1
			<replicas> + 1 Pod		
externalIPs	string array	-	IPv6	IP IP	10.16.0.101 / fd00::11 / 1
			<replicas> + 1 Pod		
bfd	object	-		BFD	-
policies	object array	-		Egress selectors	-
selectors	object array	-		Namespace Selector Pod Selector Egress Pod SNAT/ MASQUERADE policies	-
nodeSelector	object array	-		Deployment/Pod	-
trafficPolicy	string	Cluster		Cluster / Local BFD Local Egress VPC	Local
				Egress Gateway VPC Egress Gateway Egress	

**BFD**

<code>enabled</code>	<code>boolean</code>	<code>false</code>	<code>BFD</code>	<code>true</code>
<code>minRX</code>	<code>integer/int32</code>	<code>1000</code>	<code>BFD minRX</code>	<code>500</code>
<code>minTX</code>	<code>integer/int32</code>	<code>1000</code>	<code>BFD minTX</code>	<code>500</code>
<code>multiplier</code>	<code>integer/int32</code>	<code>3</code>	<code>BFD multiplier</code>	<code>1</code>

**Egress**

<code>snat</code>	<code>boolean</code>	<code>false</code>	<code>SNAT/MASQUERADE</code>	<code>true</code>
<code>ipBlocks</code>	<code>string array</code>	<code>-</code>	<code>Gateway IP</code>	<code>192.168.0.1 / 192.168.0.0/24</code>
<code>subnets</code>	<code>string array</code>	<code>-</code>	<code>Gateway VPC</code>	<code>subnet1 IPv6</code>

**Selectors**

<code>namespaceSelector</code>	<code>object</code>	<code>-</code>	<code>Namespace</code>	<code>-</code>
<code>podSelector</code>	<code>object</code>	<code>-</code>	<code>Pod</code>	<code>-</code>
<code>podSelector.matchLabels</code>	<code>dict/map</code>	<code>-</code>	<code>Pod</code>	<code>-</code>
<code>podSelector.matchExpressions</code>	<code>object array</code>	<code>-</code>	<code>Pod</code>	<code>-</code>
<code>namespaceSelector.matchLabels</code>	<code>dict/map</code>	<code>-</code>	<code>Namespace</code>	<code>-</code>
<code>namespaceSelector.matchExpressions</code>	<code>object array</code>	<code>-</code>	<code>Namespace</code>	<code>-</code>

<code>matchLabels</code>	<code>dict/map</code>	<code>-</code>	<code>-</code>
<code>matchExpressions</code>	<code>object array</code>	<code>-</code>	<code>-</code>
<code>matchFields</code>	<code>object array</code>	<code>-</code>	<code>-</code>

## Status

ready	boolean	Gateway	true
phase	string	Gateway	Pending / Processing / Completed
internalIPs	string array	VPC	IP
externalIPs	string array	IP	-
workload	object		-
workload.apiVersion	string	API	apps/v1
workload.kind	string		Deployment
workload.name	string		gateway1
workload.nodes	string array		-
conditions	object array	-	-

[PDF](#)[Slack](#)[Support](#)

⌚2025 7 29

⌚2024 12 12



GitHub



5.2.4

## 5.3 VPC QoS

Kube-OVN    QoS Policy CRD    VPC

### 5.3.1 EIP QoS

EIP	1Mbps	1	shared=false	QoS Policy	EIP	QoS Policy	QoS
-----	-------	---	--------------	------------	-----	------------	-----

QoS Policy

```
apiVersion: kubeovn.io/v1
kind: QoS Policy
metadata:
  name: qos-eip-example
spec:
  shared: false
  bindingType: EIP
  bandwidthLimitRules:
    - name: eip-ingress
      rateMax: "1" # Mbps
      burstMax: "1" # Mbps
      priority: 1
      direction: ingress
    - name: eip-egress
      rateMax: "1" # Mbps
      burstMax: "1" # Mbps
      priority: 1
      direction: egress
```

Iptables EIP

```
kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eip-1
spec:
  natGwDp: gw1
  qosPolicy: qos-eip-example
```

.spec.qosPolicy

### 5.3.2 QoS EIP

label	qos	eip
-------	-----	-----

```
# kubectl get eip -l ovn.kubernetes.io/qos=qos-eip-example
NAME     IP          MAC        NAT      NATGWDP   READY
eip-1   172.18.11.24  00:00:00:34:41:0B  fip    gw1      true
```

### 5.3.3 VPC NATGW net1 QoS

VPC NATGW	net1	10Mbps	3	shared=true	QoS Policy	QoS Policy
-----------	------	--------	---	-------------	------------	------------

QoS Policy

```
apiVersion: kubeovn.io/v1
kind: QoS Policy
metadata:
  name: qos-natgw-example
spec:
  shared: true
  bindingType: NATGW
  bandwidthLimitRules:
    - name: net1-ingress
      interface: net1
      rateMax: "10" # Mbps
      burstMax: "10" # Mbps
      priority: 3
      direction: ingress
    - name: net1-egress
      interface: net1
      rateMax: "10" # Mbps
      burstMax: "10" # Mbps
```

```
priority: 3
direction: egress
```

### VpcNatGateway

```
kind: VpcNatGateway
apiVersion: kubeovn.io/v1
metadata:
  name: gw1
spec:
  vpc: test-vpc-1
  subnet: net1
  lanIp: 10.0.1.254
  qosPolicy: qos-natgw-example
  selector:
    - "kubernetes.io/hostname: kube-ovn-worker"
    - "kubernetes.io/os: linux"
```

```
.spec.qosPolicy
```

## 5.3.4 net1 QoS

net1	5Mbps	2	shared=true	QoS Policy	QoS Policy
------	-------	---	-------------	------------	------------

### QoS Policy

```
apiVersion: kubeovn.io/v1
kind: QoS Policy
metadata:
  name: qos-natgw-example
spec:
  shared: true
  bindingType: NATGW
  bandwidthLimitRules:
    - name: net1-extip-ingress
      interface: net1
      rateMax: "5" # Mbps
      burstMax: "5" # Mbps
      priority: 2
      direction: ingress
      matchType: ip
      matchValue: src 172.18.11.22/32
    - name: net1-extip-egress
      interface: net1
      rateMax: "5" # Mbps
      burstMax: "5" # Mbps
      priority: 2
      direction: egress
      matchType: ip
      matchValue: dst 172.18.11.23/32
```

### VpcNatGateway

```
kind: VpcNatGateway
apiVersion: kubeovn.io/v1
metadata:
  name: gw1
spec:
  vpc: test-vpc-1
  subnet: net1
  lanIp: 10.0.1.254
  qosPolicy: qos-natgw-example
  selector:
    - "kubernetes.io/hostname: kube-ovn-worker"
    - "kubernetes.io/os: linux"
```

## 5.3.5 QoS NATGW

label	qos	eip
-------	-----	-----


```
# kubectl get vpc-nat-gw -l ovn.kubernetes.io/qos=qos-natgw-example
NAME    VPC      SUBNET   LANIP
gw1    test-vpc-1  net1    10.0.1.254
```

## 5.3.6 qos

```
# kubectl get qos -A
NAME          SHARED   BINDINGTYPE
```

qos-eip-example	false	EIP
qos-natgw-example	true	NATGW

### 5.3.7




⌚2025 3 3

⌚2023 5 9



### 5.3.8

## 5.4 VPC

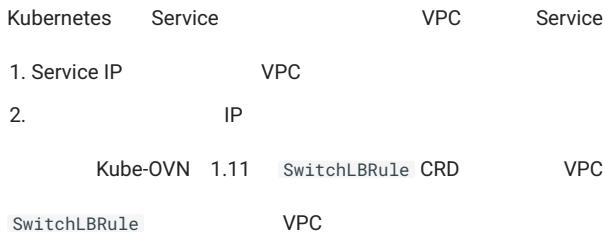

### 5.4.1 Selector

selector      label      pod  
**SwitchLBRule**

```

apiVersion: kubeovn.io/v1
kind: SwitchLBRule
metadata:
  name: cjh-slr-nginx
spec:
  vip: 1.1.1.1
  sessionAffinity: ClientIP
  namespace: default
  selector:
    - app:nginx
  ports:
    - name: dns
      port: 8888
      targetPort: 80
      protocol: TCP
  
```

- selector, sessionAffinity, port      Kubernetes Service
- vip      IP
- namespace, selector      Pod

Kube-OVN      SwitchLBRule      Pod      Pod      VPC      L2 LB

### 5.4.2 Endpoints

endpoints      selector      kubevirt      vm  
**SwitchLBRule**

```

apiVersion: kubeovn.io/v1
kind: SwitchLBRule
metadata:
  name: cjh-slr-nginx
spec:
  vip: 1.1.1.1
  sessionAffinity: ClientIP
  namespace: default
  endpoints:
    - 192.168.0.101
    - 192.168.0.102
    - 192.168.0.103
  ports:
    - name: dns
      port: 8888
      targetPort: 80
      protocol: TCP
  
```

- sessionAffinity, port      Kubernetes Service
- vip      IP
- namespace, selector      Pod
- endpoints      IP

```
    selector  endpoints ,      selector
```

### 5.4.3

OVN IPv4

[Health Checks](<https://www.ovn.org/support/dist-docs/ovn-nb.5.html>)

```
ovn          SwitchLBRule      SwitchLBRule      VPC   subnet      vip           ip_port_mappings
load_balancer_health_check

•     vip       subnet         subnet          SwitchLBRule
•     Selector
```

```
root@server:~# kubectl get po -o wide -n vulpecula
NAME        READY  STATUS    RESTARTS   AGE     IP          NODE   NOMINATED NODE   READINESS GATES
nginx-78d9578975-f4qn4  1/1   Running   3        4d16h  10.16.0.4  worker <none>        <none>
nginx-78d9578975-t8tm5  1/1   Running   3        4d16h  10.16.0.6  worker <none>        <none>

#   slr
root@server:~# cat << END > slr.yaml
apiVersion: kubeovn.io/v1
kind: SwitchLBRule
metadata:
  name: nginx
  namespace: vulpecula
spec:
  vip: 1.1.1.1
  sessionAffinity: ClientIP
  namespace: default
  selector:
    - app:nginx
  ports:
    - name: dns
      port: 8888
      targetPort: 80
      protocol: TCP
END
root@server:~# kubectl apply -f slr.yaml
root@server:~# kubectl get slr
NAME        VIP      PORT(S)      SERVICE          AGE
vulpecula-nginx  1.1.1.1  8888/TCP  default/slr-vulpecula-nginx  3d21h
```

```
subnet      vip
```

```
#   vip
root@server:~# kubectl get vip
NAME      NS      V4IP      MAC      V6IP      PMAC      SUBNET      READY      TYPE
vulpecula-subnet  10.16.0.2  00:00:00:39:95:C1  <nil>      vulpecula-subnet  true
```

```
Load_Balancer_Health_Check  Service_Monitor
```

```
root@server:~# kubectl ko nbctl list Load_Balancer
_uuid      : 3cbb6d43-44aa-4028-962f-30d2dba9f0b8
external_ids  : {}
health_check  : [5bee3f12-6b54-411c-9cc8-c9def8f67356]
ip_port_mappings  : {"10.16.0.4":"nginx-78d9578975-f4qn4.default:10.16.0.2", "10.16.0.6":"nginx-78d9578975-t8tm5.default:10.16.0.2"}
name        : cluster-tcp-session-loadbalancer
options      : {affinity_timeout="10800"}
protocol      : tcp
selection_fields  : [ip_src]
vips        : {"1.1.1.1:8888":"10.16.0.4:80,10.16.0.6:80"}
```

```
root@server:~# kubectl ko nbctl list Load_Balancer_Health_Check
_uuid      : 5bee3f12-6b54-411c-9cc8-c9def8f67356
external_ids  : {switch_lb_subnet=vulpecula-subnet}
options      : {failure_count="3", interval="5", success_count="3", timeout="20"}
vip        : "1.1.1.1:8888"
```

```
root@server:~# kubectl ko sbctl list Service_Monitor
_uuid      : 1bddc541-cc49-44ea-9935-a4208f627a91
external_ids  : {}
ip        : "10.16.0.4"
logical_port  : nginx-78d9578975-f4qn4.default
options      : {failure_count="3", interval="5", success_count="3", timeout="20"}
port        : 80
protocol      : tcp
```

```

src_ip : "10.16.0.2"
src_mac : "c6:d4:b8:08:54:e7"
status : online

_uuid : 84dd24c5-e1b4-4e97-9daa-13687ed59785
external_ids : {}
ip : "10.16.0.6"
logical_port : nginx-78d9578975-t8tm5.default
options : {"failure_count="3", interval="5", success_count="3", timeout="20"}
port : 80
protocol : tcp
src_ip : "10.16.0.2"
src_mac : "c6:d4:b8:08:54:e7"
status : online

```

## vip

```

root@server:~# kubectl exec -it -n vulpecula nginx-78d9578975-t8tm5 -- curl 1.1.1.1:8888
<!DOCTYPE html>
<html>
<head>
<title>Welcome to nginx!</title>
<p><em>Thank you for using nginx.</em></p>
</body>
</html>

```

## pod

```

kubectl delete po nginx-78d9578975-f4qn4
kubectl get po -o wide -n vulpecula
NAME           READY   STATUS    RESTARTS   AGE     IP          NODE   NOMINATED NODE   READINESS GATES
nginx-78d9578975-lxmvh  1/1    Running   0          31s    10.16.0.8   worker <none>        <none>
nginx-78d9578975-t8tm5  1/1    Running   3          4d16h   10.16.0.6   worker <none>        <none>

```

## Load\_Balancer\_Health\_Check Service\_Monitor

```

root@server:~# kubectl ko nbctl list Load_Balancer
_uuid : 3ccb6d43-44aa-4028-962f-30d2dba9f0b8
external_ids : {}
health_check : [5bee3f12-6b54-411c-9cc8-c9def8f67356]
ip_port_mappings : {"10.16.0.4":"nginx-78d9578975-f4qn4.default:10.16.0.2", "10.16.0.6":"nginx-78d9578975-t8tm5.default:10.16.0.2", "10.16.0.8":"nginx-78d9578975-lxmvh.default:10.16.0.2"}
name : cluster-tcp-session-loadbalancer
options : {"affinity_timeout="10800"}
protocol : tcp
selection_fields : [ip_src]
vips : {"1.1.1.1:8888"="10.16.0.6:80,10.16.0.8:80"}

root@server:~# kubectl ko nbctl list Load_Balancer_Health_Check
_uuid : 5bee3f12-6b54-411c-9cc8-c9def8f67356
external_ids : {switch_lb_subnet=vulpecula-subnet}
options : {"failure_count="3", interval="5", success_count="3", timeout="20"}
vip : "1.1.1.1:8888"

root@server:~# kubectl ko sbctl list Service_Monitor
_uuid : 84dd24c5-e1b4-4e97-9daa-13687ed59785
external_ids : {}
ip : "10.16.0.6"
logical_port : nginx-78d9578975-t8tm5.default
options : {"failure_count="3", interval="5", success_count="3", timeout="20"}
port : 80
protocol : tcp
src_ip : "10.16.0.2"
src_mac : "c6:d4:b8:08:54:e7"
status : online

_uuid : 5917b7b7-a999-49f2-a42d-da81f1eeb28f
external_ids : {}
ip : "10.16.0.8"
logical_port : nginx-78d9578975-lxmvh.default
options : {"failure_count="3", interval="5", success_count="3", timeout="20"}
port : 80
protocol : tcp
src_ip : "10.16.0.2"
src_mac : "c6:d4:b8:08:54:e7"
status : online

```

## SwitchLBRule Load\_Balancer\_Health\_Check Service\_Monitor vip

```

root@server:~# kubectl delete -f slr.yaml
switchlrule.kubeovn.io "vulpecula-nginx" deleted
root@server:~# kubectl get vip
No resources found

```

```
root@server:~# kubectl ko sbctl list Service_Monitor
root@server:~#
root@server:~# kubectl ko nbctl list Load_Balancer_Health_Check
root@server:~#
```

[↓ PDF](#)[Slack](#)[Support](#)

⌚2025 9 10

⌚2022 12 15



5.4.4

---

## 5.5 VPC DNS



### 5.5.1 vpc-dns

```

apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRole
metadata:
  labels:
    kubernetes.io/bootstrapping: rbac-defaults
  name: system:vpc-dns
rules:
- apiGroups:
  - ""
  resources:
  - endpoints
  - services
  - pods
  - namespaces
  verbs:
  - list
  - watch
- apiGroups:
  - discovery.k8s.io
  resources:
  - endpointslices
  verbs:
  - list
  - watch
---
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRoleBinding
metadata:
  annotations:
    rbac.authorization.kubernetes.io/autoupdate: "true"
  labels:
    kubernetes.io/bootstrapping: rbac-defaults
  name: vpc-dns
roleRef:
  apiGroup: rbac.authorization.k8s.io
  kind: ClusterRole
  name: system:vpc-dns
subjects:
- kind: ServiceAccount
  name: vpc-dns
  namespace: kube-system
---
apiVersion: v1
kind: ServiceAccount
metadata:
  name: vpc-dns
  namespace: kube-system
---
apiVersion: v1
kind: ConfigMap
metadata:
  name: vpc-dns-corefile
  namespace: kube-system
data:
  Corefile: |
    .:53 {
      errors
      health {
        lameduck 5s
      }
      ready
      kubernetes cluster.local in-addr.arpa ip6.arpa {
        pods insecure
        fallthrough in-addr.arpa ip6.arpa
      }
      prometheus :9153
      forward . /etc/resolv.conf {
        prefer_udp
      }
    }
    cache 30

```

```

    loop
    reload
    loadbalance
}

```

nat-gw-pod

### 5.5.2

```

apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: ovn-nad
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "kube-ovn",
    "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
    "provider": "ovn-nad.default.ovn"
}'

```

### 5.5.3 vpc-dns Configmap

kube-system configmap vpc-dns vpc-dns

```

apiVersion: v1
kind: ConfigMap
metadata:
  name: vpc-dns-config
  namespace: kube-system
data:
  coredns-vip: 10.96.0.3
  enable-vpc-dns: "true"
  nad-name: ovn-nad
  nad-provider: ovn-nad.default.ovn

```

- enable-vpc-dns true
- coredns-image dns coredns
- coredns-vip coredns lb vip
- coredns-template coredns URL ovn coredns-template.yaml <https://raw.githubusercontent.com/kubeovn/kube-ovn/> /yaml/coredns-template.yaml
- nad-name network-attachment-definitions
- nad-provider provider
- k8s-service-host coredns k8s apiserver ip apiserver
- k8s-service-port coredns k8s apiserver port apiserver

### 5.5.4 vpc-dns

vpc-dns yaml

```

kind: VpcDns
apiVersion: kubeovn.io/v1
metadata:
  name: test-cjh1
spec:
  vpc: cjh-vpc-1
  subnet: cjh-subnet-1
  replicas: 2

```

- vpc dns vpc
- subnet dns
- replicas: vpc dns deployment replicas

```
# kubectl get vpc-dns
NAME      ACTIVE   VPC      SUBNET
test-cjh1  false    cjh-vpc-1  cjh-subnet-1
test-cjh2  true     cjh-vpc-1  cjh-subnet-2
```

```
ACTIVE : true      dns  false
          VPC      DNS
•  VPC      vpc-dns      VPC      subnet      vpc-dns      true      false
•  true   vpc-dns      false  vpc-dns
```

### 5.5.5

vpc-dns Pod      label app=vpc-dns      vpc-dns Pod

```
# kubectl -n kube-system get pods -l app=vpc-dns
NAME                  READY   STATUS    RESTARTS   AGE
vpc-dns-test-cjh1-7b878d96b4-g5979  1/1    Running   0          28s
vpc-dns-test-cjh1-7b878d96b4-ltmf9   1/1    Running   0          28s
```

slr

```
# kubectl -n kube-system get slr
NAME      VIP      PORT(S)      SERVICE      AGE
vpc-dns-test-cjh1  10.96.0.3  53/UDP, 53/TCP  kube-system/vpc-dns-test-cjh1  113s
```

VPC   Pod   dns :

```
nslookup kubernetes.default.svc.cluster.local 10.96.0.3
```

VPC   switch lb rule      VPC      Pod

[PDF](#)

[Slack](#)

[Support](#)

⌚2025 9 10

⌚2022 12 26



### 5.5.6

## 5.6 SecurityGroup

Kube-OVN	Pod	Pod	IPAM	L2/L3	MAC	IP	
<b>⚠ Warning</b>							
Kube-OVN	<a href="#">NetworkPolicy</a>	<a href="#">Network Policy API</a>	<a href="#">Subnet ACL</a>	<a href="#">Security Group</a>	<a href="#">OVN ACL</a>	<a href="#">NetworkPolicy</a>	<a href="#">NetworkPolicy API</a>

### 5.6.1

```
apiVersion: kubeovn.io/v1
kind: SecurityGroup
metadata:
  name: sg-example
spec:
  allowSameGroupTraffic: true
  egressRules:
  - ipVersion: ipv4
    policy: allow
    priority: 1
    protocol: all
    remoteAddress: 10.16.0.13 # 10.16.0.0/16
    remoteType: address
  ingressRules:
  - ipVersion: ipv4
    policy: deny
    priority: 1
    protocol: icmp
    remoteAddress: 10.16.0.14
    remoteType: address
```

#### Kube-OVN

Pod	annotation	annotation	Kube-OVN	IPAM	L2/L3	Pod	L2/L3	Pod
• port_security:			Kube-OVN	IPAM	L2/L3	Pod	L2/L3	Pod
• security_groups:		ACL						
annotation								
ovn.kubernetes.io/port_security: "true" ovn.kubernetes.io/security_groups: sg-example								

### 5.6.2

•	ACL	OVN	ACL	ACL				
•	priority	1-200	ACL	ACL	ACL	= 2300 -		ACL
•		Kube-OVN	CNI	Pod	Pod	Pod	ContainerCreating	Running

### 5.6.3

YAML Pod annotation

```
apiVersion: v1
kind: Pod
metadata:
  labels:
    app: static
  annotations:
    ovn.kubernetes.io/port_security: 'true'
    ovn.kubernetes.io/security_groups: 'sg-example'
  name: sg-test-pod
  namespace: default
spec:
  nodeName: kube-ovn-worker
  containers:
```

```
- image: docker.io/library/nginx:alpine
  imagePullPolicy: IfNotPresent
  name: qatest
```

```
# kubectl get pod -o wide
NAME           READY   STATUS      RESTARTS   AGE     IP          NODE
sg-test-pod    0/1     ContainerCreating  0          5h32m  <none>      kube-ovn-worker
test-99fffff86-52h9r  1/1     Running     0          5h41m  10.16.0.14  kube-ovn-control-plane
test-99fffff86-qcgjw  1/1     Running     0          5h43m  10.16.0.13  kube-ovn-worker
```

kubectl describe pod Pod

```
# kubectl describe pod sg-test-pod
Name:         sg-test-pod
Namespace:    default
Priority:    0
Node:        kube-ovn-worker/172.18.0.2
Start Time:  Tue, 28 Feb 2023 10:29:36 +0800
Labels:      app=static
Annotations: ovn.kubernetes.io/allocated: true
             ovn.kubernetes.io/cidr: 10.16.0.0/16
             ovn.kubernetes.io/gateway: 10.16.0.1
             ovn.kubernetes.io/ip_address: 10.16.0.15
             ovn.kubernetes.io/logical_router: ovn-cluster
             ovn.kubernetes.io/logical_switch: ovn-default
             ovn.kubernetes.io/mac_address: 00:00:00:FA:17:97
             ovn.kubernetes.io/pod_nic_type: veth-pair
             ovn.kubernetes.io/port_security: true
             ovn.kubernetes.io/routed: true
             ovn.kubernetes.io/security_groups: sg-allow-reject
Status:      Pending
IP:
IPs:        <none>
.
.
Events:
  Type  Reason     Age     From      Message
  ----  ----     --  ----      -----
  Warning FailedCreatePodSandBox 5m3s (x70 over 4h59m)  kubelet  (combined from similar events): Failed to create pod sandbox: rpc error: code = Unknown desc = failed to setup network for sandbox "40636e0c7f1ade5500fa958486163d74f2e2300051a71522a9af7ba0538afb6": plugin type="kube-ovn" failed (add): RPC failed; request ip return 500 configure nic failed 10.16.0.15 network not ready after 200 ping 10.16.0.1
```

```
apiVersion: kubeovn.io/v1
kind: SecurityGroup
metadata:
  name: sg-gw-both
spec:
  allowSameGroupTraffic: true
  egressRules:
  - ipVersion: ipv4
    policy: allow
    priority: 2
    protocol: all
    remoteAddress: 10.16.0.13
    remoteType: address
  - ipVersion: ipv4
    policy: allow
    priority: 1
    protocol: all
    remoteAddress: 10.16.0.1
    remoteType: address
  ingressRules:
  - ipVersion: ipv4
    policy: deny
    priority: 2
    protocol: icmp
    remoteAddress: 10.16.0.14
    remoteType: address
  - ipVersion: ipv4
    policy: allow
    priority: 1
    protocol: icmp
    remoteAddress: 10.16.0.1
    remoteType: address
```

yaml      Pod      Pod

```
apiVersion: v1
kind: Pod
```

```

metadata:
  labels:
    app: static
  annotations:
    ovn.kubernetes.io/port_security: 'true'
    ovn.kubernetes.io/security_groups: 'sg-gw-both'
  name: sg-gw-both
  namespace: default
spec:
  nodeName: kube-ovn-worker
  containers:
  - image: docker.io/library/nginx:alpine
    imagePullPolicy: IfNotPresent
  name: qatest

```

## Pod

# kubectl get pod -o wide									
NAME	READY	STATUS	RESTARTS	AGE	IP	NODE	NOMINATED NODE	NODE	READINESS GATES
sg-test-pod	0/1	ContainerCreating	0	5h41m	<none>	kube-ovn-worker	<none>	<none>	<none>
sg-gw-both	1/1	Running	0	5h37m	10.16.0.19	kube-ovn-worker	<none>	<none>	<none>

[PDF](#)
[Slack](#)
[Support](#)

⌚2025 9 10

⌚2023 2 28



5.6.4

## 5.7 OVN EIP FIP SNAT DNAT

VPC OVN NAT

provider-network vlan (external) subnet

VPC EIP/SNAT

### 5.7.1

- kube-ovn-controller kube-ovn-cni ovn-external-gw-config VPC spec enableExternal
- CRD provider-network vlan subnet VPC spec extraExternalSubnets ovn-eip ovn-dnat ovn-fip ovn-snats CRD

```
graph LR
pod --> subnet --> vpc --> lrp --bind--> gw-chassis --> snat --> lsp --> external-subnet
lrp -. peer -. -lsp
```

Pod SNAT

Pod Fip

```
graph LR
pod --> subnet --> vpc --> lrp --bind--> local-chassis --> snat --> lsp --> external-subnet
lrp -. peer -. -lsp
```

Pod FIP (dnat\_and\_snat)

CRD iptables nat gw

- ovn eip: ip underlay provider network vlan subnet
- ovn fip dnat snat VPC ip vip
- ovn snat VPC ip snat
- ovn dnat router lb , ip + VPC endpoints

### 5.7.2 1.

OpenStack Neutron ovn

provider network

VPC EIP/SNAT

vlan vlan 0 vlan id

```
#
# 1. kube-ovn-controller
- --external-gateway-vlanid=204
- --external-gateway-switch=external204

# 2. kube-ovn-cni :
- --external-gateway-switch=external204

###      vlan id      underlay
```

- provider network vlan subnet
- VPC enable\_eip\_snat vlan subnet ip ipam
- VPC enable\_eip\_snat , pod annotation fip snat
- VPC enable\_eip\_snat vlan subnet VPC eip snat

## 1.1 underlay

```
# provider-network vlan subnet
# cat 01-provider-network.yaml

apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
  name: external204
spec:
  defaultInterface: vlan

# cat 02-vlan.yaml

apiVersion: kubeovn.io/v1
kind: Vlan
metadata:
  name: vlan204
spec:
  id: 204
  provider: external204

# cat 03-vlan-subnet.yaml

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: external204
spec:
  protocol: IPv4
  cidrBlock: 10.5.204.0/24
  gateway: 10.5.204.254
  vlan: vlan204
  excludeIps:
    - 10.5.204.1..10.5.204.100
```

## 1.2 VPC eip\_snat

```
# VPC underlay provider subnet
# cat 00-centralized-external-gw-no-ip.yaml

apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-external-gw-config
  namespace: kube-system
data:
  enable-external-gw: "true"
  external-gw-nodes: "pc-node-1,pc-node-2,pc-node-3"
  type: "centralized"
  external-gw-nic: "vlan" # ovs
  external-gw-addr: "10.5.204.254/24" # underlay ip
```

logical router port (lrp)	ip	mac	underlay	lrp	ovn eip
ip	lrp	ovn-eip		lrp	ovn eip

## 1.3 VPC eip snat fip

node

```
# external-gw-nodes
kubectl label nodes pc-node-1 pc-node-2 pc-node-3 ovn.kubernetes.io/external-gw=true

# cat 00-ns.yaml

apiVersion: v1
kind: Namespace
metadata:
  name: vpc1

# cat 01-vpc-ecmp-enable-external-bfd.yaml

kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc1
spec:
  namespaces:
    - vpc1
  enableExternal: true
  staticRoutes:
    - cidr: 0.0.0.0/0
      nextHopIP: 10.5.204.254
```

```

policy: policyDst

# VPC      enableExternal      lrp

# cat 02-subnet.yml

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: vpc1-subnet1
spec:
  cidrBlock: 192.168.0.0/24
  default: false
  disableGatewayCheck: false
  disableInterConnection: true
  enableEcmp: true
  gatewayNode: ""
  gatewayType: distributed
  #gatewayType: centralized
  natOutgoing: false
  private: false
  protocol: IPv4
  provider: ovn
  vpc: vpc1
  namespaces:
    - vpc1

#
#          subnet

```

```

# kubectl ko nbctl show vpc1

router 87ad06fd-71d5-4ff8-a1f0-54fa3bba1a7f (vpc1)
  port vpc1-vpc1-subnet1
    mac: "00:00:00:ED:8E:C7"
    networks: ["192.168.0.1/24"]
  port vpc1-external294
    mac: "00:00:00:EF:05:C7"
    networks: ["10.5.204.105/24"]
    gateway chassis: [7cedd14f-265b-42e5-ac17-e03e7a1f2342 276baccb-fe9c-4476-b41d-05872a94976d fd9f140c-c45d-43db-a6c0-0d4f8ea298dd]
  nat 21d853b0-f7b4-40bd-9a53-31d2e2745739
    external ip: "10.5.204.115"
    logical ip: "192.168.0.0/24"
    type: "snat"

# kubectl ko nbctl lr-route-list vpc1

IPv4 Routes
Route Table <main>:
  0.0.0.0/0           10.5.204.254 dst-ip
#   VPC CRD

```

enableExternal

VPC CRD

## 1.4

### 1.4.1 UNDERLAY

eip snat fip 1 eip snat fip

```

#   provider-network  vlan  subnet
# cat 01-extra-provider-network.yaml
apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
  name: extra
spec:
  defaultInterface: vlan
# cat 02-extra-vlan.yaml
apiVersion: kubeovn.io/v1
kind: Vlan
metadata:
  name: vlan0
spec:
  id: 0
  provider: extra
# cat 03-extra-vlan-subnet.yaml
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: extra
spec:
  protocol: IPv4
  cidrBlock: 10.10.204.0/24
  gateway: 10.10.204.254
  vlan: vlan0

```

```
excludeIps:
- 10.10.204.1..10.10.204.100
```

#### 1.4.2 VPC

```
apiVersion: kubeovn.io/v1
kind: Vpc
metadata:
  name: vpc1
spec:
  namespaces:
  - vpc1
  enableExternal: true #   enableExternal    VPC           external   ls
  extraExternalSubnets: #   extraExternalSubnets
  - extra
```

```
# kubectl ko nbctl show vpc1
router 87ad06fd-71d5-4ff8-a1f0-54fa3bba1a7f (vpc1)
  port vpc1-vpc1-subnet
    mac: "00:00:00:ED:8E:C7"
    networks: ["192.168.0.1/24"]
  port vpc1-external204
    mac: "00:00:00:EF:05:C7"
    networks: ["10.5.204.105/24"]
    gateway chassis: [7cedd14f-265b-42e5-ac17-e03e7a1f2342 276baccb-fe9c-4476-b41d-05872a94976d fd9f140c-c45d-43db-a6c0-0d4f8ea298dd]
  port vpc1-extra
    mac: "00:00:00:EF:6A:C7"
    networks: ["10.10.204.105/24"]
    gateway chassis: [7cedd14f-265b-42e5-ac17-e03e7a1f2342 276baccb-fe9c-4476-b41d-05872a94976d fd9f140c-c45d-43db-a6c0-0d4f8ea298dd]
```

### 5.7.3 2. ovn-eip

iptables-eip	ovn-eip	type
• nat: ovn dnat fip, snat	nat	
• lrp:	underlay	lrp ip dnat snat
• lsp: ovn bfd ecmp		ovs internal port ecmp

```
---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-static
spec:
  externalSubnet: external204
  type: nat
#       eip          fip
```

externalSubnet	external204
externalSubnet	extra

#### 2.1 ovn-fip pod fip

```
# kubectl get po -o wide -n vpc1 vpc-1-busybox01
NAME        READY   STATUS    RESTARTS   AGE      IP          NODE
vpc-1-busybox01  1/1     Running   0          3d15h   192.168.0.2   pc-node-2

# kubectl get ip vpc-1-busybox01.vpc1
NAME          V4IP          V6IP   MAC          NODE      SUBNET
vpc-1-busybox01.vpc1  192.168.0.2          00:00:00:0A:DD:27  pc-node-2  vpc1-subnet1

---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-static
spec:
  externalSubnet: external204
  type: nat

---
kind: OvnFip
apiVersion: kubeovn.io/v1
metadata:
```

```

    name: eip-static
spec:
  ovnEip: eip-static
  ipName: vpc-1-busybox01.vpc1 #      ip crd
  type: "centralized"          # centralized   distributed

--
#       VPC      ip

kind: OvnFip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-static
spec:
  ovnEip: eip-static
  vpc: vpc1
  v4Ip: 192.168.0.2
  type: "centralized"          # centralized   distributed

# kubectl get ofip
NAME      VPC      V4EIP      V4IP      READY   IPTYPE   IPNAME
eip-for-vip  vpc1  10.5.204.106  192.168.0.3  true    vip      test-fip-vip
eip-static   vpc1  10.5.204.101  192.168.0.2  true    vpc     vpc-1-busybox01.vpc1
# kubectl get ofip eip-static
NAME      VPC      V4EIP      V4IP      READY   IPTYPE   IPNAME
eip-static   vpc1  10.5.204.101  192.168.0.2  true    vpc     vpc-1-busybox01.vpc1

[root@pc-node-1 03-cust-vpc]# ping 10.5.204.101
PING 10.5.204.101 (10.5.204.101) 56(84) bytes of data.
64 bytes from 10.5.204.101: icmp_seq=2 ttl=62 time=1.21 ms
64 bytes from 10.5.204.101: icmp_seq=3 ttl=62 time=0.624 ms
64 bytes from 10.5.204.101: icmp_seq=4 ttl=62 time=0.368 ms
^C
--- 10.5.204.101 ping statistics ---
4 packets transmitted, 3 received, 25% packet loss, time 3049ms
rtt min/avg/max/mdev = 0.368/0.734/1.210/0.352 ms
[root@pc-node-1 03-cust-vpc]# 

#       node ping      VPC      pod      ip

#       ip
# kubectl get nbctl show vpc1
router 87ad6fd-71d5-4ff8-a1f0-54fa3bba1a7f (vpc1)
  port vpc1-vpc1-subnet1
    mac: "00:00:00:ED:8E:C7"
    networks: ["192.168.0.1/24"]
  port vpc1-external204
    mac: "00:00:00:EF:05:C7"
    networks: ["10.5.204.105/24"]
    gateway chassis: [7cedd14f-265b-42e5-ac17-e03e7a1f2342 276baccb-fe9c-4476-b41d-05872a94976d fd9f140c-c45d-43db-a6c0-0d4f8ea298dd]
  nat 813523e7-c68c-408f-bd8c-cba30cb2e4f4
    external ip: "10.5.204.101"
    logical ip: "192.168.0.2"
    type: "dnat_and_snat"
```

## 2.2 ovn-fip vip fip

vip	kubevirt	vip	keepalived	kube-vip
fip	VPC	vip	vip	

```

#       vip      eip      eip      vip
# cat vip.yaml

apiVersion: kubeovn.io/v1
kind: Vip
metadata:
  name: test-fip-vip
spec:
  subnet: vpc1-subnet1

# cat 04-fip.yaml

---
kind: OvnFip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-for-vip
spec:
  externalSubnet: external204
  type: nat

---
kind: OvnFip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-for-vip
spec:
```

```

ovnEip: eip-for-vip
ipType: vip      #     fip      pod ip          vip
ipName: test-fip-vip

---
#       VPC      ip

kind: OvnFip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-for-vip
spec:
  ovnEip: eip-for-vip
  ipType: vip      #     fip      pod ip          vip
  vpc: vpc1
  v4Ip: 192.168.0.3

# kubectl get ofip
NAME      VPC      V4EIP      V4IP      READY    IPTYPE    IPNAME
eip-for-vip  vpc1  10.5.204.106  192.168.0.3  true    vip      test-fip-vip

[root@pc-node-1 fip-vip]# ping 10.5.204.106
PING 10.5.204.106 (10.5.204.106) 56(84) bytes of data.
64 bytes from 10.5.204.106: icmp_seq=1 ttl=62 time=0.694 ms
64 bytes from 10.5.204.106: icmp_seq=2 ttl=62 time=0.436 ms

# node ping

# pod ip

[root@pc-node-1 fip-vip]# kubectl -n vpc1 exec -it vpc-1-busybox03 -- bash
[root@vpc-1-busybox03 /]#
[root@vpc-1-busybox03 /]#
[root@vpc-1-busybox03 /]# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
  link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
      valid_lft forever preferred_lft forever
  inet6 ::1/128 scope host
    valid_lft forever preferred_lft forever
1568: eth0@if1569: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
  link/ether 00:00:00:56:40:e5 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 192.168.0.5/24 brd 192.168.0.255 scope global eth0
      valid_lft forever preferred_lft forever
    inet 192.168.0.3/24 scope global secondary eth0  #
      valid_lft forever preferred_lft forever
    inet6 fe80::200:ff:fe56:40e5/64 scope link
      valid_lft forever preferred_lft forever

[root@vpc-1-busybox03 /]# tcpdump -i eth0 host 192.168.0.3 -netvv
tcpdump: listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
00:00:00:ed:8e:c7 > 00:00:00:56:40:e5, ether type IPv4 (0x0800), length 98: (tos 0x0, ttl 62, id 44830, offset 0, flags [DF], proto ICMP (1), length 84)
  10.5.32.51 > 192.168.0.3: ICMP echo request, id 177, seq 1, length 64
00:00:00:56:40:e5 > 00:00:00:ed:8e:c7, ether type IPv4 (0x0800), length 98: (tos 0x0, ttl 64, id 43962, offset 0, flags [none], proto ICMP (1), length 84)
  192.168.0.3 > 10.5.32.51: ICMP echo reply, id 177, seq 1, length 64

# pod fip icmp

```

## 5.7.4 3. ovn-snats

### 3.1 ovn-snats subnet cidr

#### iptables-snats

```

# cat 03-subnet-snat.yaml

---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: snat-for-subnet-in-vpc
spec:
  externalSubnet: external204
  type: nat

---
kind: OvnNatRule
apiVersion: kubeovn.io/v1
metadata:
  name: snat-for-subnet-in-vpc
spec:
  ovnEip: snat-for-subnet-in-vpc
  vpcSubnet: vpc1-subnet1 # eip

---
#       VPC      subnet cidr

```

```
kind: OvnSnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: snat-for-subnet-in-vpc
spec:
  ovnEip: snat-for-subnet-in-vpc
  vpc: vpc1
  v4IpCidr: 192.168.0.0/24 #           cidr
                                ip
```

externalSubnet extra

### 3.2 ovn-snat      pod ip

## iptables-snat

```
# cat 03-pod-snats.yaml

---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: snat-for-pod-vpc-ip
spec:
  externalSubnet: external204
  type: nat

---
kind: OvnSnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: snat01
spec:
  ovnEip: snat-for-pod-vpc-ip
  ipName: vpc-1-busybox02.vpc1 # eip
  pod ip

---
#          VPC          ip

kind: OvnSnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: snat-for-subnet-in-vpc
spec:
  ovnEip: snat-for-subnet-in-vpc
  vpc: vpc1
  v4IpCidr: 192.168.0.4
```

externalSubnet extra

snat

```
# kubectl get nbctl show vpc1
router 87ad06fd-71d5-4ff8-a1f0-54fa3bba1a7f (vpc1)
  port vpc1-vpc1-subnet1
    mac: "00:00:00:ED:8E:C7"
    networks: ["192.168.0.1/24"]
  port vpc1-external204
    mac: "00:00:00:EF:05:C7"
    networks: ["10.5.204.105/24"]
    gateway chassis: [7cedd14f-265b-42e5-ac17-e03e7a1f2342 276baccc-fc9c-4476-b41d-05872a94976d fd9f140c-c45d-43db-a6c0-0d4f8ea298dd]
nat 21d853b0-f7b4-40bd-9a53-31d2e2745739
  external ip: "10.5.204.115"
  logical ip: "192.168.0.0/24"
  type: "snat"
nat da77a11f-c523-439c-b1d1-72c664196a0f
  external ip: "10.5.204.116"
  logical ip: "192.168.0.4"
  type: "snat"
```

```
[root@pc-node-1 03-cust-vpc]# kubectl get po -A -o wide | grep busy
vpc1           vpc-1-busybox01               1/1   Running   0          3d15h   192.168.0.2   pc-node-2   <none>    <none>
vpc1           vpc-1-busybox02               1/1   Running   0          17h     192.168.0.4   pc-node-1   <none>    <none>
vpc1           vpc-1-busybox03               1/1   Running   0          17h     192.168.0.5   pc-node-1   <none>    <none>
vpc1           vpc-1-busybox04               1/1   Running   0          17h     192.168.0.6   pc-node-3   <none>    <none>
vpc1           vpc-1-busybox05               1/1   Running   0          17h     192.168.0.7   pc-node-1   <none>    <none>

# kubectl exec -it -n vpc1           vpc-1-busybox04   bash
kubectl exec [POD] [COMMAND] is DEPRECATED and will be removed in a future version. Use kubectl exec [POD] -- [COMMAND] instead.
[root@vpc-1-busybox04 /]#
[root@vpc-1-busybox04 /]#
[root@vpc-1-busybox04 /]# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::/128 scope host

```

```

valid_lft forever preferred_lft forever
17095: eth0@if17096: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether 00:00:00:76:94:55 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 192.168.0.6/24 brd 192.168.0.255 scope global eth0
        valid_lft forever preferred_lft forever
    inet6 fe80::200:ff:fe76:9455/64 scope link
        valid_lft forever preferred_lft forever
[root@vpc-1-busybox04/]# ping 223.5.5.5
PING 223.5.5.5 (223.5.5.5) 56(84) bytes of data.
64 bytes from 223.5.5.5: icmp_seq=1 ttl=114 time=22.2 ms
64 bytes from 223.5.5.5: icmp_seq=2 ttl=114 time=21.8 ms

[root@pc-node-1 03-cust-vpc]# kubectl exec -it -n vpc1           vpc-1-busybox02 bash
kubectl exec [POD] [COMMAND] is DEPRECATED and will be removed in a future version. Use kubectl exec [POD] -- [COMMAND] instead.
[root@vpc-1-busybox02/]# 
[root@vpc-1-busybox02/]# 
[root@vpc-1-busybox02/]# 
[root@vpc-1-busybox02/]# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
1566: eth0@if1567: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether 00:00:00:0b:e9:d0 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 192.168.0.4/24 brd 192.168.0.255 scope global eth0
        valid_lft forever preferred_lft forever
    inet6 fe80::200:ff:fe0b:e9d0/64 scope link
        valid_lft forever preferred_lft forever
[root@vpc-1-busybox02/]# ping 223.5.5.5
PING 223.5.5.5 (223.5.5.5) 56(84) bytes of data.
64 bytes from 223.5.5.5: icmp_seq=2 ttl=114 time=22.7 ms
64 bytes from 223.5.5.5: icmp_seq=3 ttl=114 time=22.6 ms
64 bytes from 223.5.5.5: icmp_seq=4 ttl=114 time=22.1 ms
^C
--- 223.5.5.5 ping statistics ---
4 packets transmitted, 3 received, 25% packet loss, time 3064ms
rtt min/avg/max/mdev = 22.126/22.518/22.741/0.278 ms

#       pod      snat

```

## 5.7.5 4. ovn-dnat

### 4.1 ovn-dnat pod dnat

```

kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-dnat
spec:
  externalSubnet: underlay

---
kind: OvnDnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: eip-dnat
spec:
  ovnEip: eip-dnat
  ipName: vpc-1-busybox01.vpc1 #      pod ip crd
  protocol: tcp
  internalPort: "22"
  externalPort: "22"

---
#       VPC      ip

kind: OvnDnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: eip-dnat
spec:
  ovnEip: eip-dnat
  protocol: tcp
  internalPort: "22"
  externalPort: "22"
  vpc: vpc1
  v4Ip: 192.168.0.3

```

externalSubnet	extra
----------------	-------

OvnDnatRule      IptablesDnatRule

```

# kubectl get oeip eip-dnat
NAME      V4IP      V6IP   MAC          TYPE   READY
eip-dnat  10.5.49.4  00:00:00:4D:CE:49  dnat   true

```

# kubectl get odnat	NAME	EIP	PROTOCOL	V4EIP	V4IP	INTERNALPORT	EXTERNALPORT	IPNAME	READY
	eip-dnat	eip-dnat	tcp	10.5.49.4	192.168.0.3	22	22	vpc-1-busybox01.vpc1	true

## 4.2 ovn-dnat vip dnat

```
kind: OvnDnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: eip-dnat
spec:
  ipType: vip #      dnat      pod ip          vip
  ovnEip: eip-dnat
  ipName: test-dnat-vip
  protocol: tcp
  internalPort: "22"
  externalPort: "22"

---
#      VPC      ip

kind: OvnDnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: eip-dnat
spec:
  ipType: vip #      dnat      pod ip          vip
  ovnEip: eip-dnat
  ipName: test-dnat-vip
  protocol: tcp
  internalPort: "22"
  externalPort: "22"
  vpc: vpc1
  v4Ip: 192.168.0.4
```

## OvnDnatRule IptablesDnatRule

```
# kubectl get vip test-dnat-vip
NAME      V4IP      PV4IP     MAC           PMAC      V6IP      PV6IP     SUBNET      READY
test-dnat-vip  192.168.0.4   00:00:00:D0:C0:B5   vpc1-subnet1  true

# kubectl get oeip eip-dnat
NAME      V4IP      V6IP     MAC           TYPE      READY
eip-dnat  10.5.49.4  00:00:00:4D:CE:49  dnat    true

# kubectl get odnat eip-dnat
NAME      EIP      PROTOCOL  V4EIP      V4IP      INTERNALPORT  EXTERNALPORT  IPNAME      READY
eip-dnat  eip-dnat  tcp       10.5.49.4  192.168.0.4  22          22          test-dnat-vip  true
```

[PDF](#)
[Slack](#)
[Support](#)

⌚2025 9 10

⌚2023 3 3



5.7.6

## 5.8 OVN SNAT ECMP BFD L3 HA

---

VPC OVN SNAT ECMP Gateway Node ovnnext0

- bfd
- hash

```
graph LR
pod --> vpc-subnet --> vpc --> snat --> ecmp --> external-subnet --> gw-node1-ovnnext0 --> node1-external-switch
external-subnet --> gw-node2-ovnnext0 --> node2-external-switch
external-subnet --> gw-node3-ovnnext0 --> node3-external-switch
```

[ovn-eip-fip-snat.md](#) install.sh provider-network vlan subnet

lsp ovn-eip vpc enable\_bfd bfd ecmp

### 5.8.1 1.

#### 1.1 underlay

#### 1.2 vpc eip\_snat

#### 1.3 VPC eip snat fip

[ovn-eip-fip-snat.md](#) VPC ecmp bfd

VPC 2 ovn-eip

```
# cat gw-node-eip.yaml
---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: pc-node-1
spec:
  externalSubnet: external204
  type: lsp

---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: pc-node-2
spec:
  externalSubnet: external204
  type: lsp

---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: pc-node-3
spec:
  externalSubnet: external204
  type: lsp
```

vpc ecmp vpc bfd enable\_bfd lrp ovn\_eip bfd

### 5.8.2 2. vpc ecmp bfd L3 HA

```
# cat 01-vpc-ecmp-enable-external-bfd.yml
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc1
spec:
  namespaces:
  - vpc1
  enableExternal: true
  enableBfd: true # bfd
  #enableBfd: false
```

```
# cat 02-subnet.yml
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: vpc1-subnet1
spec:
  cidrBlock: 192.168.0.0/24
  default: false
  disableGatewayCheck: false
  disableInterConnection: true
  enableEcmp: true # ecmp
  gatewayNode: ""
  gatewayType: distributed
  #gatewayType: centralized
  natOutgoing: false
  private: false
  protocol: IPv4
  provider: ovn
  vpc: vpc1
  namespaces:
    - vpc1
```

:

1. vpc ecmp ecmp bfd vpc enableBfd subnet enableEcmp ecmp bfd
- 2.
3. VPC VPC VPC snat
4. vpc subnet enableEcmp gatewayType
5. EnableExternal vpc
6. EnableExternal EnableBfd

```
#       ovn
#   vpc
# k get vpc
NAME      ENABLEEXTERNAL  ENABLEBFD  STANDBY  SUBNETS          NAMESPACES
ovn-cluster  true        true      true     ["external204","join","ovn-default"]
vpc1       true        true      true     ["vpc1-subnet1"]      ["vpc1"]

#   vpc  ENABLEBFD
#   vpc

# 1.   bfd
# k ko nbctl list bfd
_uuid           : be7df545-2c4c-4751-878f-b3507987f050
detect_mult    : 3
dst_ip         : "10.5.204.121"
external_ids   : {}
logical_port   : vpc1-external204
min_rx         : 100
min_tx         : 100
options         : {}
status          : up

_uuid           : 684c4489-5b59-4693-8d8c-3beab93f8093
detect_mult    : 3
dst_ip         : "10.5.204.109"
external_ids   : {}
logical_port   : vpc1-external204
min_rx         : 100
min_tx         : 100
options         : {}
status          : up

_uuid           : f0f62077-2ae9-4e79-b4f8-a446ec6e784c
detect_mult    : 3
dst_ip         : "10.5.204.108"
external_ids   : {}
logical_port   : vpc1-external204
min_rx         : 100
min_tx         : 100
options         : {}
status          : up

###   status      up

# 2.   bfd
# k ko nbctl lr-route-list vpc1
IPv4 Routes
Route Table <main>:
  192.168.0.0/24      10.5.204.108 src-ip ecmp ecmp-symmetric-reply bfd
  192.168.0.0/24      10.5.204.109 src-ip ecmp ecmp-symmetric-reply bfd
  192.168.0.0/24      10.5.204.121 src-ip ecmp ecmp-symmetric-reply bfd
```

```

# 3.

# kubectl find Logical_Router_Static_Route policy=src-ip options=ecmp_symmetric_reply="true"
_uuid          : 3aacb384-d5ee-4b14-aebf-59e8c11717ba
bfd            : 684c4489-5b59-4693-8d8c-3beab93f8093
external_ids   : {}
ip_prefix      : "192.168.0.0/24"
nexthop        : "10.5.204.109"
options        : {ecmp_symmetric_reply="true"}
output_port    : []
policy         : src-ip
route_table    : ""

_uuid          : 18bcc585-bc05-430b-925b-ef673c8e1aef
bfd            : f0f62077-2ae9-4e79-b4f8-a446ec6e784c
external_ids   : {}
ip_prefix      : "192.168.0.0/24"
nexthop        : "10.5.204.108"
options        : {ecmp_symmetric_reply="true"}
output_port    : []
policy         : src-ip
route_table    : ""

_uuid          : 7d0a4e6b-cde0-4110-8176-fbaf19738498
bfd            : be7df545-2c4c-4751-878f-b3507987f050
external_ids   : {}
ip_prefix      : "192.168.0.0/24"
nexthop        : "10.5.204.121"
options        : {ecmp_symmetric_reply="true"}
output_port    : []
policy         : src-ip
route_table    : ""

# [root@pc-node-1 ~]# ip netns exec ovnnext bash ip a
/usr/sbin/ip: /usr/sbin/ip: cannot execute binary file
[root@pc-node-1 ~]#
[root@pc-node-1 ~]# ip netns exec ovnnext ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
1541: ovnnext0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1400 qdisc noqueue state UNKNOWN group default qlen 1000
    link/ether 00:00:00:ab:bd:87 brd ff:ff:ff:ff:ff:ff
    inet 10.5.204.108/24 brd 10.5.204.255 scope global ovnnext0
        valid_lft forever preferred_lft forever
    inet6 fe80::200:ff:feab:bd87/64 scope link
        valid_lft forever preferred_lft forever
[root@pc-node-1 ~]#
[root@pc-node-1 ~]# ip netns exec ovnnext route -n
Kernel IP routing table
Destination     Gateway         Genmask        Flags Metric Ref  Use Iface
0.0.0.0         10.5.204.254   0.0.0.0       UG    0      0      0 ovnnext0
10.5.204.0      0.0.0.0        255.255.255.0  U     0      0      0 ovnnext0

##           internal port unerlay     pod      ns

[root@pc-node-1 ~]# ip netns exec ovnnext bfdd-control status
There are 1 sessions:
Session 1
  id=1 local=10.5.204.108 (p) remote=10.5.204.122 state=Up

##     lrp bfd           lrp ecmp

[root@pc-node-1 ~]# ip netns exec ovnnext ping -c1 223.5.5.5
PING 223.5.5.5 (223.5.5.5) 56(84) bytes of data.
64 bytes from 223.5.5.5: icmp_seq=1 ttl=115 time=21.6 ms

#

```

### ovnnext ns

```

# tcpdump -i ovnnext0 host 223.5.5.5 -netvv
dropped privs to tcpdump
tcpdump: listening on ovnnext0, link-type EN10MB (Ethernet), capture size 262144 bytes
^C
0 packets captured
0 packets received by filter
0 packets dropped by kernel
[root@pc-node-1 ~]# exit
[root@pc-node-1 ~]# ssh pc-node-2
Last login: Thu Feb 23 09:21:08 2023 from 10.5.32.51
[root@pc-node-2 ~]# ip netns exec ovnnext bash
[root@pc-node-2 ~]# tcpdump -i ovnnext0 host 223.5.5.5 -netvv
dropped privs to tcpdump
tcpdump: listening on ovnnext0, link-type EN10MB (Ethernet), capture size 262144 bytes
^C
0 packets captured
0 packets received by filter

```

```

0 packets dropped by kernel
[root@pc-node-2 ~]# exit
[root@pc-node-2 ~]# logout
Connection to pc-node-2 closed.
[root@pc-node-1 ~]# ssh pc-node-3
Last login: Thu Feb 23 08:32:41 2023 from 10.5.32.51
[root@pc-node-3 ~]# ip netns exec ovnnext bash
[root@pc-node-3 ~]# tcpdump -i ovnnext0 host 223.5.5.5 -netvv
dropped privs to tcpdump
tcpdump: listening on ovnnext0, link-type EN10MB (Ethernet), capture size 262144 bytes
00:00:00:2d:f8:ce > 00:00:00:fd:b2:a4, ethertype IPv4 (0x0800), length 98: (tos 0x0, ttl 63, id 57978, offset 0, flags [DF], proto ICMP (1), length 84)
    10.5.204.102 > 223.5.5.5: ICMP echo request, id 22, seq 71, length 64
00:00:00:fd:b2:a4 > dc:ef:80:5a:44:1a, ethertype IPv4 (0x0800), length 98: (tos 0x0, ttl 62, id 57978, offset 0, flags [DF], proto ICMP (1), length 84)
    10.5.204.102 > 223.5.5.5: ICMP echo request, id 22, seq 71, length 64
^C
2 packets captured
2 packets received by filter
0 packets dropped by kernel
[root@pc-node-3 ~]#
#       down          pod
#       3

```

### 5.8.3 3. bfd

#### vpc enable\_eip\_snat

```

# cat 01-vpc-ecmp-enable-external-bfd.yml
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc2
spec:
  namespaces:
  - vpc2
  enableExternal: true
  #enableBfd: true
  enableBfd: false

##   bfd

# k ko nbctl lr-route-list vpc2
IPv4 Routes
Route Table <main>:
      0.0.0.0/0           10.5.204.254 dst-ip

#
#   nbctl list bfd      lrp      bfd
#   ovnnext ns      bfd
#       vpc subnet     ping      ( )
#       ( )

```



⌚2025 9 10

⌚2023 3 3



### 5.8.4

## 5.9 VPC

VPC      VPC      VPC      NAT

### 5.9.1

1.      VPC
2.      VPC      CIDR
3.      VPC      VPC

### 5.9.2

VPC    VPC      Subnet    Subnet    CIDR

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc-1
spec: {}
---
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: net1
spec:
  vpc: vpc-1
  cidrBlock: 10.0.0.0/16
---
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc-2
spec: {}
---
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: net2
spec:
  vpc: vpc-2
  cidrBlock: 172.31.0.0/16
```

VPC      vpcPeerings

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc-1
spec:
  vpcPeerings:
    - remoteVpc: vpc-2
      localConnectIP: 169.254.0.1/30
  staticRoutes:
    - cidr: 172.31.0.0/16
      nextHopIP: 169.254.0.2
      policy: policyDst
---
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc-2
spec:
  vpcPeerings:
    - remoteVpc: vpc-1
      localConnectIP: 169.254.0.2/30
  staticRoutes:
    - cidr: 10.0.0.0/16
      nextHopIP: 169.254.0.1
      policy: policyDst
```

- remoteVpc :      VPC
- localConnectIP :      IP      CIDR      IP      CIDR
- cidr      Subnet    CIDR
- nextHopIP      VPC      localConnectIP

## Subnet Pod

```
apiVersion: v1
kind: Pod
metadata:
  annotations:
    ovn.kubernetes.io/logical_switch: net1
  name: vpc-1-pod
spec:
  containers:
    - name: vpc-1-pod
      image: docker.io/library/nginx:alpine
---
apiVersion: v1
kind: Pod
metadata:
  annotations:
    ovn.kubernetes.io/logical_switch: net2
  name: vpc-2-pod
spec:
  containers:
    - name: vpc-2-pod
      image: docker.io/library/nginx:alpine
```

```
# kubectl exec -it vpc-1-pod -- ping $(kubectl get pod vpc-2-pod -o jsonpath='{.status.podIP}')
PING 172.31.0.2 (172.31.0.2): 56 data bytes
64 bytes from 172.31.0.2: seq=0 ttl=62 time=0.655 ms
64 bytes from 172.31.0.2: seq=1 ttl=62 time=0.886 ms
64 bytes from 172.31.0.2: seq=2 ttl=62 time=0.098 ms
^C
--- 172.31.0.2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.086/0.279/0.655 ms
# kubectl exec -it vpc-2-pod -- ping $(kubectl get pod vpc-1-pod -o jsonpath='{.status.podIP}')
PING 10.0.0.2 (10.0.0.2): 56 data bytes
64 bytes from 10.0.0.2: seq=0 ttl=62 time=0.594 ms
64 bytes from 10.0.0.2: seq=1 ttl=62 time=0.093 ms
64 bytes from 10.0.0.2: seq=2 ttl=62 time=0.088 ms
^C
--- 10.0.0.2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.088/0.258/0.594 ms
```

[PDF](#)

[Slack](#)

[Support](#)

⌚2025 7 2

⌚2022 5 24



5.9.3

## 6.

---

### 6.1 kubectl

Kube-OVN	kubectl	OVN	OVN
----------	---------	-----	-----

#### 6.1.1

Kube-OVN	kubectl
----------	---------

kubectl-ko

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.14/dist/images/kubectl-ko
```

\$PATH

```
mv kubectl-ko /usr/local/bin/kubectl-ko
```

```
chmod +x /usr/local/bin/kubectl-ko
```

```
# kubectl plugin list
The following compatible plugins are available:
/usr/local/bin/kubectl-ko
```

#### 6.1.2

kubectl ko

```
# kubectl ko
kubectl ko {subcommand} [option...]
Available Subcommands:
[nb|sb] [status|kick|backup|dbstatus|restore]      ovn-db operations show cluster status, kick stale server, backup database, get db consistency status or
restore ovn nb db when met 'inconsistent data' error
nbctl [ovn-nbctl options ...]   invoke ovn-nbctl
sbctl [ovn-sbctl options ...]   invoke ovn-sbctl
vsctl {node_name} [ovs-vsctl options ...]   invoke ovs-vsctl on the specified node
ofctl {node_name} [ovs-ofctl options ...]   invoke ovs-ofctl on the specified node
dpctl {node_name} [ovs-dpctl options ...]   invoke ovs-dpctl on the specified node
appctl {node_name} [ovs-appctl options ...]   invoke ovs-appctl on the specified node
tcpdump {namespace/podname} [tcpdump options ...]   capture pod traffic
{trace|ovn-trace} ...   trace ovn microflow of specific packet
  {trace|ovn-trace} {namespace/podname} {target_ip_address} [target_mac_address] {icmp|tcp|udp} [target_tcp/udp_port]   trace ICMP/TCP/UDP
  {trace|ovn-trace} {namespace/podname} {target_ip_address} [target_mac_address] arp {request|reply}   trace ARP request/reply
  {trace|ovn-trace} {node//node_name} {target_ip_address} [target_mac_address] {icmp|tcp|udp} [target_tcp/udp_port]   trace ICMP/TCP/UDP
  {trace|ovn-trace} {node//node_name} {target_ip_address} [target_mac_address] arp {request|reply}   trace ARP request/reply
diagnose {all|node|subnet|IPPorts} [{node_name|subnet_name|proto1}-{IP1}-{Port1},{proto2}-{IP2}-{Port2}]   diagnose connectivity of all nodes or a specific
node or specify subnet's ds pods or IPPorts like 'tcp-172.18.0.2-53,udp-172.18.0.3-53'
env-check   check the environment configuration
reload   restart all kube-ovn components
log {kube-ovn|ovn|ovs|linux|all}   save log to ./kubectl-ko-log/
perf [image] performance test default image is docker.io/kubeovn/test:v1.13.0
icnbctl [ovn-nbctl options ...]   invoke ovn-ic-nbctl
icsbctl [ovn-sbctl options ...]   invoke ovn-ic-sbctl
```

**[nb | sb] [status | kick | backup | dbstatus | restore]**

OVN

OVN leader ovs-appctl cluster/status :

```
# kubectl ko nb status
306b
Name: OVN_Northbound
Cluster ID: 9a87 (9a872522-3e7d-47ca-83a3-d74333e1a7ca)
Server ID: 306b (306b256b-b5e1-4eb0-be91-4ca96adf6bad)
Address: tcp:[172.18.0.2]:6643
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 280309 ms ago, reason: timeout
Last Election won: 280309 ms ago
Election timer: 5000
Log: [139, 139]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-8723 ->8723 <-85d6 ->85d6
Disconnections: 0
Servers:
  85d6 (85d6 at tcp:[172.18.0.4]:6643) next_index=139 match_index=138 last msg 763 ms ago
  8723 (8723 at tcp:[172.18.0.3]:6643) next_index=139 match_index=138 last msg 763 ms ago
  306b (306b at tcp:[172.18.0.2]:6643) (self) next_index=2 match_index=138
status: ok
```

Server match\_index last msg Server

OVN 172.18.0.3 :

```
# kubectl ko nb kick 8723
started removal
```

```
# kubectl ko nb status
306b
Name: OVN_Northbound
Cluster ID: 9a87 (9a872522-3e7d-47ca-83a3-d74333e1a7ca)
Server ID: 306b (306b256b-b5e1-4eb0-be91-4ca96adf6bad)
Address: tcp:[172.18.0.2]:6643
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 324356 ms ago, reason: timeout
Last Election won: 324356 ms ago
Election timer: 5000
Log: [140, 140]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-85d6 ->85d6
Disconnections: 2
Servers:
  85d6 (85d6 at tcp:[172.18.0.4]:6643) next_index=140 match_index=139 last msg 848 ms ago
  306b (306b at tcp:[172.18.0.2]:6643) (self) next_index=2 match_index=139
status: ok
```

OVN

```
# kubectl ko nb backup
tar: Removing leading '/' from member names
backup ovn-nb db to /root/ovnnb_db.060223191654183154.backup
```

```
# kubectl ko nb dbstatus
status: ok
```

inconsistent data

### inconsistent data

```
# kubectl ko nb restore
deployment.apps/ovn-central scaled
ovn-central original replicas is 3
first nodeIP is 172.18.0.5
ovs-ovn pod on node 172.18.0.5 is ovs-ovn-8jxv9
ovs-ovn pod on node 172.18.0.3 is ovs-ovn-sjzb6
ovs-ovn pod on node 172.18.0.4 is ovs-ovn-t87zk
backup nb db file
restore nb db file, operate in pod ovs-ovn-8jxv9
deployment.apps/ovn-central scaled
finish restore nb db file and ovn-central replicas
recreate ovs-ovn pods
pod "ovs-ovn-8jxv9" deleted
pod "ovs-ovn-sjzb6" deleted
pod "ovs-ovn-t87zk" deleted
```

### [nbctl | sbctl] [options ...]

OVN

leader

ovn-nbctl ovn-sbctl

OVN

ovn-nbctl(8) ovn-sbctl(8)

```
# kubectl ko nbctl show
switch c7cd17e8-ceee-4a91-9bb3-e5a313fe1ece (snat)
  port snat-ovn-cluster
    type: router
    router-port: ovn-cluster-snat
switch 20e0c6d0-023a-4756-aec5-200e0c60f95d (join)
  port node-liumengxin-ovn3-192.168.137.178
    addresses: ["00:00:00:64:FF:A8 100.64.0.4"]
  port node-liumengxin-ovn1-192.168.137.176
    addresses: ["00:00:00:AF:98:62 100.64.0.2"]
  port node-liumengxin-ovn2-192.168.137.177
    addresses: ["00:00:00:D9:58:B8 100.64.0.3"]
  port join-ovn-cluster
    type: router
    router-port: ovn-cluster-join
switch 0191705c-f827-427b-9de3-3c3b7d971ba5 (central)
  port central-ovn-cluster
    type: router
    router-port: ovn-cluster-central
switch 2a45ff05-388d-4f85-9daf-e6fccd5833dc (ovn-default)
  port alertmanager-main-0.monitoring
    addresses: ["00:00:00:6C:DF:A3 10.16.0.19"]
  port kube-state-metrics-5d6885d89-4nf8h.monitoring
    addresses: ["00:00:00:6F:02:1C 10.16.0.15"]
  port fake-kubelet-67c55dfdf89-pv86k.kube-system
    addresses: ["00:00:00:5C:12:E8 10.16.19.177"]
  port ovn-default-ovn-cluster
    type: router
    router-port: ovn-cluster-ovn-default
router 212f73dd-d63d-4d72-864b-a537e9afbee1 (ovn-cluster)
  port ovn-cluster-snat
    mac: "00:00:00:7A:82:8F"
    networks: ["172.22.0.1/16"]
  port ovn-cluster-join
    mac: "00:00:00:F8:18:5A"
    networks: ["100.64.0.1/16"]
  port ovn-cluster-central
    mac: "00:00:00:4D:8C:F5"
    networks: ["192.168.0.1/16"]
  port ovn-cluster-ovn-default
    mac: "00:00:00:A3:F8:18"
    networks: ["10.16.0.1/16"]
```

### vsctl {nodeName} [options ...]

nodeName ovs-ovn

ovs-vsctl

vswitchd

OVS

ovs-vsctl(8)

```
# kubectl ko vsctl kube-ovn-01 show
0d4c4675-c9cc-440a-8c1a-878e17f81b88
  Bridge br-int
    fail_mode: secure
    datapath_type: system
    Port a2c1a8a8b83a_h
      Interface a2c1a8a8b83a_h
      Port "4fa5c4cbb1a5_h"
        Interface "4fa5c4cbb1a5_h"
    Port ovn-eef07d-0
      Interface ovn-eef07d-0
        type: stt
        options: {csum="true", key=flow, remote_ip="192.168.137.178"}
    Port ovn0
```

```

Interface ovn0
    type: internal
Port mirror0
    Interface mirror0
        type: internal
Port ovn-efa253-0
    Interface ovn-efa253-0
        type: stt
        options: {csum="true", key=flow, remote_ip="192.168.137.177"}
Port br-int
    Interface br-int
        type: internal
ovs_version: "2.17.2"

```

**ofctl {nodeName} [options ...]**

nodeName	ovs-ovn	ovs-ofctl	OpenFlow	OVS	ovs-ofctl(8)
----------	---------	-----------	----------	-----	--------------

```

# kubectl ko ofctl kube-ovn-01 dump-flows br-int
NXST_FLOW reply (xid=0x4): flags=[more]
cookie=0xcf3429e6, duration=671791.432s, table=0, n_packets=0, n_bytes=0, idle_age=65534, hard_age=65534, priority=100, in_port=2 actions=load:0x4->NXM_NX_REG13[], load:0x9->NXM_NX_REG11[], load:0xb->NXM_NX_REG12[], load:0x4->0XM_OF_METADATA[], load:0x1->NXM_NX_REG14[], resubmit(.8)
cookie=0xc91413c6, duration=671791.431s, table=0, n_packets=997825, n_bytes=9997825, idle_age=0, hard_age=65534, priority=100, in_port=7 actions=load:0x1->NXM_NX_REG13[], load:0x9->NXM_NX_REG11[], load:0xb->NXM_NX_REG12[], load:0x4->0XM_OF_METADATA[], load:0x4->NXM_NX_REG14[], resubmit(.8)
cookie=0xf180459, duration=671791.431s, table=0, n_packets=17348582, n_bytes=2667811214, idle_age=0, hard_age=65534, priority=100, in_port=6317 actions=load:0xa->NXM_NX_REG13[], load:0x9->NXM_NX_REG11[], load:0xb->NXM_NX_REG12[], load:0x4->0XM_OF_METADATA[], load:0x9->NXM_NX_REG14[], resubmit(.8)
cookie=0x7806dd90, duration=671791.431s, table=0, n_packets=3235428, n_bytes=833821312, idle_age=0, hard_age=65534, priority=100, in_port=1 actions=load:0xd->NXM_NX_REG13[], load:0x9->NXM_NX_REG11[], load:0xb->NXM_NX_REG12[], load:0x4->0XM_OF_METADATA[], load:0x3->NXM_NX_REG14[], resubmit(.8)
...

```

**dpctl {nodeName} [options ...]**

nodeName	ovs-ovn	ovs-dpctl	OVS datapath	OVS	ovs-dpctl(8)
----------	---------	-----------	--------------	-----	--------------

```

# kubectl ko dpctl kube-ovn-01 show
system@ovs-system:
lookups: hit:35080505 missed:21983648 lost:7:
flows: 105
masks: hit:1970748791 total:22 hit/pkt:5.29
port 0: ovs-system (internal)
port 1: ovn0 (internal)
port 2: mirror0 (internal)
port 3: br-int (internal)
port 4: stt_sys_7471 (stt: packet_type=ptap)
port 5: eeb4d9e51b5d_h
port 6: a2c1a8a8b83a_h
port 7: 4fa5c4cbb1a5_h

```

**appctl {nodeName} [options ...]**

nodeName	ovs-ovn	ovs-appctl	daemon	OVS	ovs-appctl(8)
----------	---------	------------	--------	-----	---------------

```

# kubectl ko appctl kube-ovn-01 vlog/list
      console   syslog   file
      -----  -----
backtrace     OFF      ERR      INFO
bfd           OFF      ERR      INFO
bond          OFF      ERR      INFO
bridge         OFF      ERR      INFO
bundle         OFF      ERR      INFO
bundles        OFF      ERR      INFO
...

```

**tcpdump {namespace/podname} [tcpdump options ...]**

namespace/podname	kube-ovn-cni	tcpdump	veth
-------------------	--------------	---------	------

```

# kubectl ko tcpdump default/ds1-l6n7p icmp
+ kubectl exec -it kube-ovn-cni-wlg4s -n kube-ovn -- tcpdump -nn -i d7176fe7b4e0_h icmp
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on d7176fe7b4e0_h, link-type EN10MB (Ethernet), capture size 262144 bytes
06:52:36.619688 IP 10.64.0.3 > 10.16.0.4: ICMP echo request, id 2, seq 1, length 64
06:52:36.619746 IP 10.16.0.4 > 100.64.0.3: ICMP echo reply, id 2, seq 1, length 64
06:52:37.619588 IP 100.64.0.3 > 10.16.0.4: ICMP echo request, id 2, seq 2, length 64
06:52:37.619630 IP 10.16.0.4 > 100.64.0.3: ICMP echo reply, id 2, seq 2, length 64
06:52:38.619933 IP 100.64.0.3 > 10.16.0.4: ICMP echo request, id 2, seq 3, length 64
06:52:38.619973 IP 10.16.0.4 > 100.64.0.3: ICMP echo reply, id 2, seq 3, length 64

```

## trace [arguments ...]

Pod	OVN	Openflow
-----	-----	----------

```
kubectl ko trace {namespace/podname} {target ip address} [target mac address] {icmp|tcp|udp} [target tcp/udp port]
kubectl ko trace {namespace/podname} {target ip address} [target mac address] arp {request|reply}
kubectl ko trace {node/nodename} {target ip address} [target mac address] {icmp|tcp|udp} [target tcp/udp port]
kubectl ko trace {node/nodename} {target ip address} [target mac address] arp {request|reply}
```

```
# kubectl ko trace default/ds1-16n7p 8.8.8.8 icmp
+ kubectl exec ovn-central-5bc494cb5-n kube-ovn -- ovn-trace --ct=new ovn-default 'inport == "ds1-16n7p.default" && ip.ttl == 64 && icmp && eth.src == 0a:00:00:10:00:05 && ip4.src == 10.16.0.4 && eth.dst == 00:00:00:B8:CA:43 && ip4.dst == 8.8.8.8'
# icmp,reg14=0xf,vlan_tci=0x0000,d1_src=0a:00:00:10:00:05,d1_dst=00:00:00:B8:CA:43,nw_src=10.16.0.4,nw_dst=8.8.8.8,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=0,icmp_code=0

ingress(dp="ovn-default", inport="ds1-16n7p.default")
-----
0. ls_in_port_sec_l2 (ovn-northd.c:4143): inport == "ds1-16n7p.default" && eth.src == {0a:00:00:10:00:05}, priority 50, uuid 39453393
next;
1. ls_in_port_sec_ip (ovn-northd.c:2898): inport == "ds1-16n7p.default" && eth.src == 0a:00:00:10:00:05 && ip4.src == {10.16.0.4}, priority 90, uuid 81bcd485
next;
3. ls_in_pre_acl (ovn-northd.c:3269): ip, priority 100, uuid 7b4f4971
    reg0[0] = 1;
next;
5. ls_in_pre_stateful (ovn-northd.c:3396): reg0[0] == 1, priority 100, uuid 36cd577
    ct_next;

ct_next(ct_state=new|trk)
-----
6. ls_in_acl (ovn-northd.c:3759): ip && (!ct.est || (ct.est && ct_label.blocked == 1)), priority 1, uuid 7608af5b
    reg0[1] = 1;
next;
10. ls_in_stateful (ovn-northd.c:3995): reg0[1] == 1, priority 100, uuid 2aba1b90
    ct_commit(ct_label=0x01);
next;
16. ls_in_l2_1kup (ovn-northd.c:4470): eth.dst == 00:00:00:B8:CA:43, priority 50, uuid 5c9c3c9f
    output = "ovn-default-ovn-cluster";
output;
...
...
```

trace	Underlay	Mac
-------	----------	-----

```
kubectl ko trace default/virt-handler-7lvm1 8.8.8.8 82:7c:9f:83:8c:01 icmp
```

## diagnose {all|node|subnet|IPPorts} [nodename|subnetName|{proto1}-{IP1}-{Port1},{proto2}-{IP2}-{Port2}]

kube-ovn-pinger

```
# kubectl ko diagnose all
switch c7cd17e8-ceee-4a91-9bb3-e5a313fe1ece (snat)
  port snat-ovn-cluster
    type: router
    router-port: ovn-cluster-snat
switch 20e0c6d0-023a-4756-aec5-200e0c60f95d (join)
  port node-liumengxin-ovn3-192.168.137.178
    addresses: ["00:00:00:64:FF:A8 100.64.0.4"]
  port node-liumengxin-ovn1-192.168.137.176
    addresses: ["00:00:00:AF:98:62 100.64.0.2"]
  port join-ovn-cluster
    type: router
    router-port: ovn-cluster-join
switch 0191705c-f827-427b-9de3-3c3b7d971ba5 (central)
  port central-ovn-cluster
    type: router
    router-port: ovn-cluster-central
switch 2a45ff05-388d-4f85-9daf-e6fccd5833dc (ovn-default)
  port ovn-default-ovn-cluster
    type: router
    router-port: ovn-cluster-ovn-default
  port prometheus-k8s-1.monitoring
    addresses: ["00:00:00:AA:37:DF 10.16.0.23"]
router 212f73dd-d63d-4d72-864b-a537e9afbee1 (ovn-cluster)
  port ovn-cluster-snats
    mac: "00:00:00:7A:82:8F"
    networks: ["172.22.0.1/16"]
  port ovn-cluster-join
    mac: "00:00:00:F8:18:5A"
    networks: ["100.64.0.1/16"]
  port ovn-cluster-central
```

```

mac: "00:00:00:4D:8C:F5"
networks: ["192.101.0.1/16"]
port ovn-cluster-ovn-default
  mac: "00:00:00:A3:F8:18"
  networks: ["10.16.0.1/16"]

Routing Policies
  31000 ip4.dst == 10.16.0.0/16 allow
  31000 ip4.dst == 100.64.0.0/16 allow
  30000 ip4.dst == 192.168.137.177 reroute 100.64.0.3
  30000 ip4.dst == 192.168.137.178 reroute 100.64.0.4
  29000 ip4.src == $ovn.default.fake.6_ip4 reroute 100.64.0.22
  29000 ip4.src == $ovn.default.fake.7_ip4 reroute 100.64.0.21
  29000 ip4.src == $ovn.default.fake.8_ip4 reroute 100.64.0.23
  29000 ip4.src == $ovn.default.liumengxin.ovn3.192.168.137.178_ip4 reroute 100.64.0.4
  20000 ip4.src == $ovn.default.liumengxin.ovn1.192.168.137.176_ip4 & ip4.dst != $ovn.cluster.overlay.subnets.IPv4 reroute 100.
64.0.2
  20000 ip4.src == $ovn.default.liumengxin.ovn2.192.168.137.177_ip4 & ip4.dst != $ovn.cluster.overlay.subnets.IPv4 reroute 100.
64.0.3
  20000 ip4.src == $ovn.default.liumengxin.ovn3.192.168.137.178_ip4 & ip4.dst != $ovn.cluster.overlay.subnets.IPv4 reroute 100.
64.0.4
IPv4 Routes
Route Table <main>:
  0.0.0.0/0      100.64.0.1 dst-ip
UUID          LB           PROTO      VIP          IPs
e9bcfd9d-793e-4431-9073-6dec96b75d71  cluster-tcp-load  tcp        10.100.209.132:10660  192.168.137.176:10660
                                         tcp        10.101.239.192:6641   192.168.137.177:6641
                                         tcp        10.101.240.101:3000   10.16.0.7:3000
                                         tcp        10.103.184.186:6642   192.168.137.177:6642
35d2b7a5-e3a7-485a-a4b7-b4970eb0e63b  cluster-tcp-sess  tcp        10.100.158.128:8080  10.16.0.10:8080,10.16.0.5:8080,10.16.63.30:8080
                                         tcp        10.107.26.215:8080  10.16.0.19:8080,10.16.0.20:8080,10.16.0.21:8080
                                         tcp        10.107.26.215:9093  10.16.0.19:9093,10.16.0.20:9093,10.16.0.21:9093
                                         tcp        10.98.187.99:8080  10.16.0.22:8080,10.16.0.23:8080
                                         tcp        10.98.187.99:9090  10.16.0.22:9090,10.16.0.23:9090
f43303e4-89aa-4d3e-a3dc-278a552fe27b  cluster-udp-load  udp        10.96.0.10:53    10.16.0.4:53,10.16.0.9:53
_uuid          : 06776304-5a96-43ed-90c4-c4854c251699
addresses       : []
external_ids     : {vendor=kube-ovn}
name            : node_liumengxin_ovn2_192.168.137.177_underlay_v6

_uuid          : 62690625-87d5-491c-8675-9fd83b1f433c
addresses       : []
external_ids     : {vendor=kube-ovn}
name            : node_liumengxin_ovn1_192.168.137.176_underlay_v6

_uuid          : b03a9bae-94d5-4562-b34c-b5f6198e180b
addresses       : ["10.16.0.0/16", "100.64.0.0/16", "172.22.0.0/16", "192.101.0.0/16"]
external_ids     : {vendor=kube-ovn}
name            : ovn.cluster.overlay.subnets.IPv4

_uuid          : e1056f3a-24cc-4666-8a91-75ee6c3c2426
addresses       : []
external_ids     : {vendor=kube-ovn}
name            : ovn.cluster.overlay.subnets.IPv6

_uuid          : 3e5dffff-e670-47b2-a2f5-a39f4698a8c5
addresses       : []
external_ids     : {vendor=kube-ovn}
name            : node_liumengxin_ovn3_192.168.137.178_underlay_v6
_uuid          : 2d85dbdc-d0db-4abe-b19e-cc886d32b492
action          : drop
direction        : from-lport
external_ids     : {}
label            : 0
log              : false
match            : "inport==@ovn.sg.kubeovn_deny_all && ip"
meter            : []
name             : []
options          : {}
priority         : 2003
severity         : []

_uuid          : de790cc8-f155-405f-bb32-5a51f30c545f
action          : drop
direction        : to-lport
external_ids     : {}
label            : 0
log              : false
match            : "outport==@ovn.sg.kubeovn_deny_all && ip"
meter            : []
name             : []
options          : {}
priority         : 2003
severity         : []

Chassis "e15ed4d4-1780-4d50-b09e-ea8372ed48b8"
  hostname: liumengxin-ovn1-192.168.137.176
  Encap stt
    ip: "192.168.137.176"
    options: {csum="true"}
  Port_Binding node-liumengxin-ovn1-192.168.137.176
  Port_Binding perf-6vxkn.default
  Port_Binding kube-state-metrics-5d6885d89-4nf8h.monitoring
  Port_Binding alertmanager-main-0.monitoring
  Port_Binding kube-ovn-pinger-6ftdf.kube-system
  Port_Binding fake-kubelet-67c55dfd89-pv86k.kube-system

```

```

Port_Binding prometheus-k8s-0.monitoring
Chassis "eef07da1-f8ad-4775-b14d-bd6a3b4eb0d5"
  hostname: liumengxin-ovn3-192.168.137.178
  Encap stt
    ip: "192.168.137.178"
    options: {csum="true"}
Port_Binding kube-ovn-pinger-7twb4.kube-system
Port_Binding prometheus-adapter-86df476d87-r188g.monitoring
Port_Binding prometheus-k8s-1.monitoring
Port_Binding node-liumengxin-ovn3-192.168.137.178
Port_Binding perf-ff475.default
Port_Binding alertmanager-main-1.monitoring
Port_Binding blackbox-exporter-676d976865-tvsjd.monitoring
Chassis "efa253c9-494d-4719-83ae-b48ab0f11c03"
  hostname: liumengxin-ovn2-192.168.137.177
  Encap stt
    ip: "192.168.137.177"
    options: {csum="true"}
Port_Binding grafana-6c4c6b8fb7-pzd2c.monitoring
Port_Binding node-liumengxin-ovn2-192.168.137.177
Port_Binding alertmanager-main-2.monitoring
Port_Binding coredns-6789c94dd8-9jqsz.kube-system
Port_Binding coredns-6789c94dd8-25d4r.kube-system
Port_Binding prometheus-operator-7bbc99fc8b-wgjm4.monitoring
Port_Binding prometheus-adapter-86df476d87-gdxmc.monitoring
Port_Binding perf-fjnws.default
Port_Binding kube-ovn-pinger-vh2xg.kube-system
ds kube-proxy ready
kube-proxy ready
deployment ovn-central ready
deployment kube-ovn-controller ready
ds kube-ovn-cni ready
ds ovs-ovn ready
deployment coredns ready
ovn-nb leader check ok
ovn-sb leader check ok
ovn-northd leader check ok
### kube-ovn-controller recent log

### start to diagnose node liumengxin-ovn1-192.168.137.176
##### ovn-controller log:
2022-06-03T00:56:44.897Z|16722|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:06:44.912Z|16723|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:16:44.925Z|16724|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:26:44.936Z|16725|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:36:44.959Z|16726|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:46:44.974Z|16727|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:56:44.988Z|16728|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T02:06:45.001Z|16729|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T02:16:45.025Z|16730|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T02:26:45.040Z|16731|inc_proc_eng|INFO|User triggered force recompute.

##### ovs-vswitchd log:
2022-06-02T23:03:00.137Z|00079|dpif(handler1)|WARN|system@ovs-system: execute ct(commit,zone=14,label=0/0x1,nat(src)),8 failed (Invalid argument) on packet
  icmp,vlan_tci=0x0000,dl_src=00:00:00:f8:07:c8,dl_dst=00:00:00:fa:1e:50,nw_src=10.16.0.5,nw_dst=10.16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
  icmp_csum:f0d1
  with metadata skb_priority(0),tunnel(tun_id=0x160017000004,src=192.168.137.177,dst=192.168.137.176,ttl=64,tp_src=38881,tp_dst=7471,flags(csum|key)),skb_mark(0),ct_state(0x21),ct_zone(0xe),ct_tuple4(src=10.16.0.5,dst=10.16.0.10,proto=1,tp_src=8,tp_dst=0),in_port(4) mtu 0
  2022-06-02T23:23:31.840Z|00080|dpif(handler1)|WARN|system@ovs-system: execute ct(commit,zone=14,label=0/0x1,nat(src)),8 failed (Invalid argument) on packet
  icmp,vlan_tci=0x0000,dl_src=00:00:00:f8:07:c8,dl_dst=00:00:00:fa:1e:50,nw_src=10.16.0.5,nw_dst=10.16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
  icmp_csum:15b2
  with metadata skb_priority(0),tunnel(tun_id=0x160017000004,src=192.168.137.177,dst=192.168.137.176,ttl=64,tp_src=38881,tp_dst=7471,flags(csum|key)),skb_mark(0),ct_state(0x21),ct_zone(0xe),ct_tuple4(src=10.16.0.5,dst=10.16.0.10,proto=1,tp_src=8,tp_dst=0),in_port(4) mtu 0
  2022-06-03T00:09:15.659Z|00081|dpif(handler1)|WARN|system@ovs-system: execute ct(commit,zone=14,label=0/0x1,nat(src)),8 failed (Invalid argument) on packet
  icmp,vlan_tci=0x0000,dl_src=00:00:00:dc:a3:63,dl_dst=00:00:00:fa:1e:50,nw_src=10.16.63.30,nw_dst=10.16.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
  16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0 icmp_csum:e5a5
  with metadata skb_priority(0),tunnel(tun_id=0x150017000004,src=192.168.137.178,dst=192.168.137.176,ttl=64,tp_src=9239,tp_dst=7471,flags(csum|key)),skb_mark(0),ct_state(0x21),ct_zone(0xe),ct_tuple4(src=10.16.0.5,dst=10.16.0.10,proto=1,tp_src=8,tp_dst=0),in_port(4) mtu 0
  2022-06-03T00:30:13.409Z|00064|dpif(handler2)|WARN|system@ovs-system: execute ct(commit,zone=14,label=0/0x1,nat(src)),8 failed (Invalid argument) on packet
  icmp,vlan_tci=0x0000,dl_src=00:00:00:f8:07:c8,dl_dst=00:00:00:fa:1e:50,nw_src=10.16.0.5,nw_dst=10.16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
  icmp_csum:6b4a
  with metadata skb_priority(0),tunnel(tun_id=0x160017000004,src=192.168.137.177,dst=192.168.137.176,ttl=64,tp_src=38881,tp_dst=7471,flags(csum|key)),skb_mark(0),ct_state(0x21),ct_zone(0xe),ct_tuple4(src=10.16.0.5,dst=10.16.0.10,proto=1,tp_src=8,tp_dst=0),in_port(4) mtu 0
  2022-06-03T02:03:23.832Z|00082|dpif(handler1)|WARN|system@ovs-system: execute ct(commit,zone=14,label=0/0x1,nat(src)),8 failed (Invalid argument) on packet
  icmp,vlan_tci=0x0000,dl_src=00:00:00:f8:07:c8,dl_dst=00:00:00:fa:1e:50,nw_src=10.16.0.5,nw_dst=10.16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
  icmp_csum:a819
  with metadata skb_priority(0),tunnel(tun_id=0x160017000004,src=192.168.137.177,dst=192.168.137.176,ttl=64,tp_src=38881,tp_dst=7471,flags(csum|key)),skb_mark(0),ct_state(0x21),ct_zone(0xe),ct_tuple4(src=10.16.0.5,dst=10.16.0.10,proto=1,tp_src=8,tp_dst=0),in_port(4) mtu 0

##### ovs-vsctl show results:
0d4c4675-c9cc-448a-8c1a-878e17f81b88
Bridge br-int
  fail_mode: secure
  datapath_type: system
  Port a2c1a8a8b83a_h
    Interface a2c1a8a8b83a_h
      "4fa5c4ccb1a5_h"
    Interface "4fa5c4ccb1a5_h"
  Port ovn-eef07d-0
    Interface ovn-eef07d-0
      type: stt
      options: {csum="true", key=flow, remote_ip="192.168.137.178"}
  Port ovn0
    Interface ovn0

```

```

        type: internal
Port "04d03360e9a0_h"
    Interface "04d03360e9a0_h"
Port eeb4d9e51b5d_h
    Interface eeb4d9e51b5d_h
Port mirror0
    Interface mirror0
        type: internal
Port "8e5d887cc80_h"
    Interface "8e5d887cc80_h"
Port ovn-efa253-0
    Interface ovn-efa253-0
        type: stt
        options: {csum="true", key=flow, remote_ip="192.168.137.177"}
Port "17512d5be1f1_h"
    Interface "17512d5be1f1_h"
Port br-int
    Interface br-int
        type: internal
ovs_version: "2.17.2"

#### pinger diagnose results:
I0603 10:35:04.349404 17619 pinger.go:19]

Kube-OVN:
Version: v1.15.0
Build: 2022-04-24_08:02:50
Commit: git-73f9d15
Go Version: go1.17.8
Arch: amd64

I0603 10:35:04.376797 17619 config.go:166] pinger config is &{KubeConfigFile: KubeClient:0xc000493380 Port:8080 DaemonSetNameSpace:kube-system DaemonSetName:kube-ovn-pinger Interval:5 Mode:job ExitCode:0 InternalDNS:kubernetes.default ExternalDNS: NodeName:liumengxin-ovn1-192.168.137.176 HostIP:192.168.137.176 PodName:kube-ovn-pinger-6ftdf PodIP:10.16.0.10 PodProtocols:[IPv4] ExternalAddress: NetworkMode:kube-ovn PollTimeout:2 PollInterval:15 SystemRunDir:/var/run/openvswitch DatabaseVswitchName:Open_vSwitch DatabaseVswitchSocketRemote:unix:/var/run/openvswitch/db.sock DatabaseVswitchFilePath:/etc/openvswitch/conf.db DatabaseVswitchFileLogPath:/var/log/openvswitch/ovsdb-server.log DatabaseVswitchFilePidPath:/var/run/openvswitch/ovsdb-server.pid DatabaseVswitchFileSystemIDPath:/etc/openvswitch/system-id.conf ServiceVswitchchFileLogPath:/var/log/openvswitch/ovs-vswitchd.log ServiceVswitchchFilePidPath:/var/run/openvswitch/ovs-vswitchd.pid ServiceOvnControllerFileLogPath:/var/log/ovn/ovn-controller.log ServiceOvnControllerFilePidPath:/var/run/ovn-controller.pid}
I0603 10:35:04.449166 17619 exporter.go:75] liumengxin-ovn1-192.168.137.176: exporter connect successfully
I0603 10:35:04.554011 17619 ovn.go:21] ovs-vswitchd and ovsvdb are up
I0603 10:35:04.651293 17619 ovn.go:33] ovn_controller is up
I0603 10:35:04.651342 17619 ovn.go:39] start to check port binding
I0603 10:35:04.749613 17619 ovn.go:135] chassis id is 1d7f3d6c-eec5-4b3c-adca-2969d9cdfd80
I0603 10:35:04.763487 17619 ovn.go:49] port in sb is [node-liumengxin-ovn1-192.168.137.176 perf-6vxkn.default kube-state-metrics-5d6805d89-4nf8h.monitoring alertmanager-main-0.monitoring kube-ovn-pinger-6ftdf.kube-system fake-kubelet-67c55dfd89-pv86k.kube-system prometheus-k8s-0.monitoring]
I0603 10:35:04.763583 17619 ovn.go:61] ovs and ovn-sb binding check passed
I0603 10:35:05.049309 17619 ping.go:259] start to check apiserver connectivity
I0603 10:35:05.053666 17619 ping.go:268] connect to apiserver success in 4.27ms
I0603 10:35:05.053786 17619 ping.go:129] start to check pod connectivity
I0603 10:35:05.249590 17619 ping.go:159] ping pod: kube-ovn-pinger-6ftdf 10.16.0.10, count: 3, loss count 0, average rtt 16.30ms
I0603 10:35:05.354135 17619 ping.go:159] ping pod: kube-ovn-pinger-7wb4 10.16.63.30, count: 3, loss count 0, average rtt 1.81ms
I0603 10:35:05.458460 17619 ping.go:159] ping pod: kube-ovn-pinger-vh2xg 10.16.0.5, count: 3, loss count 0, average rtt 1.92ms
I0603 10:35:05.458523 17619 ping.go:83] start to check node connectivity

```

diagnose	subnet	subnet	daemonset	kube-ovn-pinger	daemonset	pod	daemonset
diagnose	IPPorts			kube-ovn-pinger		IP Port	

**reload**

## Kube-OVN

```

# kubectl ko reload
pod "ovn-central-8684dd94bd-vzgr" deleted
Waiting for deployment "ovn-central" rollout to finish: 0 of 1 updated replicas are available...
deployment "ovn-central" successfully rolled out
pod "ovs-ovn-bsnvz" deleted
pod "ovs-ovn-m9b98" deleted
pod "kube-ovn-controller-8459db5ff4-64c62" deleted
Waiting for deployment "kube-ovn-controller" rollout to finish: 0 of 1 updated replicas are available...
deployment "kube-ovn-controller" successfully rolled out
pod "kube-ovn-cni-2klhn" deleted
pod "kube-ovn-cni-t2jz4" deleted
Waiting for daemon set "kube-ovn-cni" rollout to finish: 0 of 2 updated pods are available...
Waiting for daemon set "kube-ovn-cni" rollout to finish: 1 of 2 updated pods are available...
daemon set "kube-ovn-cni" successfully rolled out
pod "kube-ovn-pinger-ln72z" deleted
pod "kube-ovn-pinger-w8lrk" deleted
Waiting for daemon set "kube-ovn-pinger" rollout to finish: 0 of 2 updated pods are available...
Waiting for daemon set "kube-ovn-pinger" rollout to finish: 1 of 2 updated pods are available...
daemon set "kube-ovn-pinger" successfully rolled out
pod "kube-ovn-monitor-7fb67d5488-7q6zb" deleted
Waiting for deployment "kube-ovn-monitor" rollout to finish: 0 of 1 updated replicas are available...
deployment "kube-ovn-monitor" successfully rolled out

```

**log**

kube-ovn      Kube-OVN OVN Open vSwitch log linux debug

```
# kubectl ko log all
Collecting kube-ovn logging files
Collecting ovn logging files
Collecting openvswitch logging files
Collecting linux dmesg files
Collecting linux iptables-legacy files
Collecting linux iptables-nft files
Collecting linux route files
Collecting linux link files
Collecting linux neigh files
Collecting linux memory files
Collecting linux top files
Collecting linux sysctl files
Collecting linux netstat files
Collecting linux addr files
Collecting linux ipset files
Collecting linux tcp files
Collected files have been saved in the directory /root/kubectl-ko-log
```

```
# tree kubectl-ko-log/
kubectl-ko-log/
|-- kube-ovn-control-plane
|   |-- kube-ovn
|   |   |-- kube-ovn-cni.log
|   |   |-- kube-ovn-monitor.log
|   |   '-- kube-ovn-pinger.log
|   '-- linux
|       |-- addr.log
|       |-- dmesg.log
|       |-- ipset.log
|       |-- iptables-legacy.log
|       |-- iptables-nft.log
|       |-- link.log
|       |-- memory.log
|       |-- neigh.log
|       |-- netstat.log
|       |-- route.log
|       |-- sysctl.log
|       |-- tcp.log
|       '-- top.log
|   '-- openvswitch
|       |-- ovs-vswitchd.log
|       '-- ovsdb-server.log
|   '-- ovn
|       |-- ovn-controller.log
|       |-- ovn-northd.log
|       '-- ovsdb-server-nb.log
|           '-- ovsdb-server-sb.log
```

**perf [image]**

Kube-OVN

- 1.
2. Hostnetwork
- 3.
4. OVN-NB, OVN-SB, OVN-Northd leader

image      Pod      kubeovn/test:v1.12.0

```
# kubectl ko perf
===== Preparing Performance Test Resources =====
pod/test-client created
pod/test-host-client created
pod/test-server created
pod/test-host-server created
service/test-server created
pod/test-client condition met
pod/test-host-client condition met
pod/test-host-server condition met
pod/test-server condition met
=====
===== Start Pod Network Unicast Performance Test =====
Size      TCP Latency    TCP Bandwidth   UDP Latency     UDP Lost Rate   UDP Bandwidth
64        82.8 us        97.7 Mbits/sec  67.6 us        (0%)          8.42 Mbits/sec
128       85.4 us        167 Mbits/sec   67.2 us        (0%)          17.2 Mbits/sec
```


```

512      85.8 us    440 Mbits/sec  68.7 us      (0%)      68.4 Mbits/sec
1k       85.1 us    567 Mbits/sec  68.7 us      (0%)      134 Mbits/sec
4k       138 us     826 Mbits/sec  78.1 us     (1.4%)     503 Mbits/sec
=====
===== Start Host Network Performance Test =====
Size      TCP Latency   TCP Bandwidth   UDP Latency   UDP Lost Rate   UDP Bandwidth
64        49.7 us      120 Mbits/sec  37.9 us      (0%)      18.6 Mbits/sec
128       49.7 us      200 Mbits/sec  38.1 us      (0%)      35.5 Mbits/sec
512       51.9 us      588 Mbits/sec  38.9 us      (0%)      142 Mbits/sec
1k        51.7 us      944 Mbits/sec  37.2 us      (0%)      279 Mbits/sec
4k        74.9 us      1.66 Gbits/sec 39.9 us      (0%)      1.20 Gbits/sec
=====
===== Start Service Network Performance Test =====
Size      TCP Latency   TCP Bandwidth   UDP Latency   UDP Lost Rate   UDP Bandwidth
64        111 us       96.3 Mbits/sec  88.4 us      (0%)      7.59 Mbits/sec
128       83.7 us      150 Mbits/sec  69.2 us      (0%)      16.9 Mbits/sec
512       87.4 us      374 Mbits/sec  75.8 us      (0%)      60.9 Mbits/sec
1k        88.2 us      521 Mbits/sec  73.1 us      (0%)      123 Mbits/sec
4k        148 us       813 Mbits/sec  77.6 us     (0.0044%)    451 Mbits/sec
=====
===== Start Pod Multicast Network Performance Test =====
Size      UDP Latency   UDP Lost Rate   UDP Bandwidth
64        0.014 ms     (0.17%)      5.80 Mbits/sec
128      0.012 ms     (0%)         11.4 Mbits/sec
512      0.016 ms     (0%)         46.1 Mbits/sec
1k       0.023 ms     (0.073%)    89.8 Mbits/sec
4k       0.035 ms     (1.3%)       126 Mbits/sec
=====
===== Start Host Multicast Network Performance =====
Size      UDP Latency   UDP Lost Rate   UDP Bandwidth
64        0.007 ms     (0%)         9.95 Mbits/sec
128      0.005 ms     (0%)         21.8 Mbits/sec
512      0.008 ms     (0%)         86.8 Mbits/sec
1k       0.013 ms     (0.045%)    168 Mbits/sec
4k       0.010 ms     (0.31%)      242 Mbits/sec
=====
===== Start Leader Recover Time Test =====
Delete ovn central nb pod
pod "ovn-central-5cb9c67d75-tlz9w" deleted
Waiting for ovn central nb pod running
===== OVN nb Recovery takes 3.305236803 s =====
Delete ovn central sb pod
pod "ovn-central-5cb9c67d75-szx4c" deleted
Waiting for ovn central sb pod running
===== OVN sb Recovery takes 3.462698535 s =====
Delete ovn central northd pod
pod "ovn-central-5cb9c67d75-zqmqv" deleted
Waiting for ovn central northd pod running
===== OVN northd Recovery takes 2.691291403 s =====
=====
===== Remove Performance Test Resource =====
rm -f unicast-test-client.log
rm -f unicast-test-host-client.log
rm -f unicast-test-client.log
kubectl ko nbctl lb-del test-server
rm -f multicast-test-server.log
kubectl exec ovs-ovn-gxdrf -n kube-system -- ip maddr del 01:00:5e:00:00:64 dev eth0
kubectl exec ovs-ovn-h57bf -n kube-system -- ip maddr del 01:00:5e:00:00:64 dev eth0
rm -f multicast-test-host-server.log
pod "test-client" deleted
pod "test-host-client" deleted
pod "test-host-server" deleted
pod "test-server" deleted
service "test-server" deleted
=====
```

[PDF](#)[Slack](#)[Support](#)

⌚2025 9 10

⌚2022 5 24



### 6.1.3

## 6.2



### 6.2.1

```
# kubectl drain kube-ovn-worker --ignore-daemonsets --force
node/kube-ovn-worker cordoned
WARNING: ignoring DaemonSet-managed Pods: kube-system/kube-ovn-cni-zt74b, kube-system/kube-ovn-pinger-5rxf, kube-system/kube-proxy-jpmnm, kube-system/ovs-ovn-v2k11
evicting pod kube-system/coredns-64897985d-qsgpt
evicting pod local-path-storage/local-path-provisioner-5ddd94ff66-llss6
evicting pod kube-system/kube-ovn-controller-8459db5ff4-941xb
pod/kube-ovn-controller-8459db5ff4-941xb evicted
pod/coredns-64897985d-qsgpt evicted
pod/local-path-provisioner-5ddd94ff66-llss6 evicted
node/kube-ovn-worker drained
```

### 6.2.2 kubelet docker

ovs-ovn ovn-central

```
systemctl stop kubelet
systemctl stop docker
```

CRI containerd ovs-ovn

```
crlctl rm -f $(crlctl ps | grep openvswitch | awk '{print $1}')
```

### 6.2.3 Node

```
rm -rf /var/run/openvswitch
rm -rf /var/run/ovn
rm -rf /etc/origin/openvswitch/
rm -rf /etc/origin/ovn/
rm -rf /etc/cni/net.d/00-kube-ovn.conflist
rm -rf /etc/cni/net.d/01-kube-ovn.conflist
rm -rf /var/log/openvswitch
rm -rf /var/log/ovn
```

### 6.2.4 kubectl

```
kubectl delete no kube-ovn-01
```

### 6.2.5 ovn-sb

kube-ovn-worker

```
# kubectl ko sbctl show
Chassis "b0564934-5a0d-4804-a4c0-476c93596a17"
  hostname: kube-ovn-worker
  Encap geneve
    ip: "172.18.0.2"
    options: {csum="true"}
  Port_Binding kube-ovn-pinger-5rxf.kube-system
Chassis "6a29de7e-d731-4eaf-bacd-2f239ee52b28"
  hostname: kube-ovn-control-plane
  Encap geneve
    ip: "172.18.0.3"
    options: {csum="true"}
  Port_Binding coredns-64897985d-nbfln.kube-system
  Port_Binding node-kube-ovn-control-plane
  Port_Binding local-path-provisioner-5ddd94ff66-h4tn9.local-path-storage
  Port_Binding kube-ovn-pinger-hf2p6.kube-system
  Port_Binding coredns-64897985d-fhwlw.kube-system
```

## 6.2.6 chassis

uuid      Chassis id

```
# kubectl ko sbctl chassis-del b0564934-5a0d-4804-a4c0-476c93596a17
# kubectl ko sbctl show
Chassis "6a29de7e-d731-4eaf-bacd-2f239ee52b28"
  hostname: kube-ovn-control-plane
  Encap geneve
    ip: "172.18.0.3"
    options: {csum="true"}
  Port_Binding coredns-64897985d-nbf1n.kube-system
  Port_Binding node-kube-ovn-control-plane
  Port_Binding local-path-provisioner-5dd94ff66-h4tn9.local-path-storage
  Port_Binding kube-ovn-pinger-hf2p6.kube-system
  Port_Binding coredns-64897985d-fhw1w.kube-system
```

[PDF](#)[Slack](#)[Support](#)

⌚2023 4 25

⌚2022 6 3

GitHub 

## 6.2.7

## 6.3 ovn-central

```
ovn-central  ovn-nb  ovn-sb      etcd  Raft      ovn-central
```

### 6.3.1 ovn-central

```
kube-ovn-control-plane2          ovn-central
```

```
# kubectl -n kube-system get pod -o wide | grep central
ovn-central-6bf58cbc97-2cdhg      1/1    Running   0           21m  172.18.0.3  kube-ovn-control-plane   <none>       <none>
ovn-central-6bf58cbc97-crmfp      1/1    Running   0           21m  172.18.0.5  kube-ovn-control-plane2  <none>       <none>
ovn-central-6bf58cbc97-lxmpl      1/1    Running   0           21m  172.18.0.4  kube-ovn-control-plane3  <none>       <none>
```

#### ovn-nb

ID

```
# kubectl ko nb status
1b9a
Name: OVN_Northbound
Cluster ID: 32ca (32ca07fb-739b-4257-b510-12fa18e7cce8)
Server ID: 1b9a (1b9a5d76-e69b-410c-8085-39943d0cd38c)
Address: tcp:[172.18.0.3]:6643
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 2135194 ms ago, reason: timeout
Last Election won: 2135188 ms ago
Election timer: 5000
Log: [135, 135]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-d64b ->d64b <-4984 ->4984
Disconnections: 0
Servers:
  4984 (4984 at tcp:[172.18.0.4]:6643) next_index=135 match_index=134 last msg 1084 ms ago
  1b9a (1b9a at tcp:[172.18.0.3]:6643) (self) next_index=2 match_index=134
    d64b (d64b at tcp:[172.18.0.5]:6643) next_index=135 match_index=134 last msg 1084 ms ago
status: ok
```

```
kube-ovn-control-plane2  IP  172.18.0.5  ID  d64b  ovn-nb
```

```
# kubectl ko nb kick d64b
started removal
```

```
# kubectl ko nb status
1b9a
Name: OVN_Northbound
Cluster ID: 32ca (32ca07fb-739b-4257-b510-12fa18e7cce8)
Server ID: 1b9a (1b9a5d76-e69b-410c-8085-39943d0cd38c)
Address: tcp:[172.18.0.3]:6643
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 2297649 ms ago, reason: timeout
Last Election won: 2297643 ms ago
Election timer: 5000
Log: [136, 136]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-4984 ->4984
Disconnections: 2
Servers:
  4984 (4984 at tcp:[172.18.0.4]:6643) next_index=136 match_index=135 last msg 1270 ms ago
  1b9a (1b9a at tcp:[172.18.0.3]:6643) (self) next_index=2 match_index=135
status: ok
```

**ovn-sb**

ovn-sb ID

```
kubectl ko sb status
3722
Name: OVN_Southbound
Cluster ID: d4bd (d4bd37a4-0400-499f-b4df-b4fd389780f0)
Server ID: 3722 (3722d5ae-2ced-4820-a6b2-8b744d11fb3e)
Address: tcp:[172.18.0.3]:6644
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 2395317 ms ago, reason: timeout
Last Election won: 2395316 ms ago
Election timer: 5000
Log: [130, 130]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-e9f7 ->e9f7 <-6e84 ->6e84
Disconnections: 0
Servers:
  e9f7 (e9f7 at tcp:[172.18.0.5]:6644) next_index=130 match_index=129 last msg 1006 ms ago
  6e84 (6e84 at tcp:[172.18.0.4]:6644) next_index=130 match_index=129 last msg 1004 ms ago
  3722 (3722 at tcp:[172.18.0.3]:6644) (self) next_index=2 match_index=129
status: ok
```

kube-ovn-control-plane2 IP 172.18.0.5 ID e9f7 ovn-sb

```
# kubectl ko sb kick e9f7
started removal
```

```
# kubectl ko sb status
3722
Name: OVN_Southbound
Cluster ID: d4bd (d4bd37a4-0400-499f-b4df-b4fd389780f0)
Server ID: 3722 (3722d5ae-2ced-4820-a6b2-8b744d11fb3e)
Address: tcp:[172.18.0.3]:6644
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 2481636 ms ago, reason: timeout
Last Election won: 2481635 ms ago
Election timer: 5000
Log: [131, 131]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-6e84 ->6e84
Disconnections: 2
Servers:
  6e84 (6e84 at tcp:[172.18.0.4]:6644) next_index=131 match_index=130 last msg 642 ms ago
  3722 (3722 at tcp:[172.18.0.3]:6644) (self) next_index=2 match_index=130
status: ok
```

**ovn-central**

ovn-central NODE\_IPS

```
kubectl label node kube-ovn-control-plane2 kube-ovn/role-
kubectl scale deployment -n kube-system ovn-central --replicas=2
kubectl set env deployment/ovn-central -n kube-system NODE_IPS="172.18.0.3,172.18.0.4"
kubectl rollout status deployment/ovn-central -n kube-system
```

**ovn-central**

ovs-ovn

```
# kubectl set env daemonset/ovs-ovn -n kube-system OVN_DB_IPS="172.18.0.3,172.18.0.4"
daemonset.apps/ovs-ovn env updated
# kubectl delete pod -n kube-system -lapp=ovs
pod "ovs-ovn-4f6jc" deleted
```

```

pod "ovs-ovn-csn2w" deleted
pod "ovs-ovn-mpbmb" deleted

kube-ovn-controller

# kubectl set env deployment/kube-ovn-controller -n kube-system OVN_DB_IPS="172.18.0.3,172.18.0.4"
deployment.apps/kube-ovn-controller env updated

# kubectl rollout status deployment/kube-ovn-controller -n kube-system
Waiting for deployment "kube-ovn-controller" rollout to finish: 1 of 3 updated replicas are available...
Waiting for deployment "kube-ovn-controller" rollout to finish: 2 of 3 updated replicas are available...
deployment "kube-ovn-controller" successfully rolled out

```

## kube-ovn-control-plane2

```
rm -rf /etc/origin/ovn
```

Kubernetes

## 6.3.2 ovn-central

Kubernetes ovn-central

```
/etc/origin/ovn ovnnb_db.db ovnsb_db.db
```

```
rm -rf /etc/origin/ovn
```

**ovn-central**

## ovn-central

```

# kubectl ko nb status
1b9a
Name: OVN_Northbound
Cluster ID: 32ca (32ca07fb-739b-4257-b510-12fa18e7cce8)
Server ID: 1b9a (1b9a5d76-e69b-410c-8085-39943d0cd38c)
Address: tcp:[172.18.0.3]:6643
Status: cluster member
Role: leader
Term: 44
Leader: self
Vote: self

Last Election started 1855739 ms ago, reason: timeout
Last Election won: 1855729 ms ago
Election timer: 5000
Log: [147, 147]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: ->4984 <-4984
Disconnections: 0
Servers:
  4984 (4984 at tcp:[172.18.0.4]:6643) next_index=147 match_index=146 last msg 367 ms ago
  1b9a (1b9a at tcp:[172.18.0.3]:6643) (self) next_index=140 match_index=146
status: ok

# kubectl ko sb status
3722
Name: OVN_Southbound
Cluster ID: d4bd (d4bd37a4-0400-499f-b4df-b4fd389780f0)
Server ID: 3722 (3722d5ae-2ced-4820-a6b2-8b744d11fb3e)
Address: tcp:[172.18.0.3]:6644
Status: cluster member
Role: leader
Term: 33
Leader: self
Vote: self

Last Election started 1868589 ms ago, reason: timeout
Last Election won: 1868579 ms ago
Election timer: 5000
Log: [142, 142]
Entries not yet committed: 0

```

```
Entries not yet applied: 0
Connections: ->6e84 <-6e84
Disconnections: 0
Servers:
  6e84 (6e84 at tcp:[172.18.0.4]:6644) next_index=142 match_index=141 last msg 728 ms ago
  3722 (3722 at tcp:[172.18.0.3]:6644) (self) next_index=134 match_index=141
status: ok
```

**ovn-central**    **NODE\_IPS**

```
kubectl label node kube-ovn-control-plane2 kube-ovn/role=master
kubectl scale deployment -n kube-system ovn-central --replicas=3
kubectl set env deployment/ovn-central -n kube-system NODE_IPS="172.18.0.3,172.18.0.4,172.18.0.5"
kubectl rollout status deployment/ovn-central -n kube-system
```

**ovn-central****ovs-ovn**

```
# kubectl set env daemonset/ovs-ovn -n kube-system OVN_DB_IPS="172.18.0.3,172.18.0.4,172.18.0.5"
daemonset.apps/ovs-ovn env updated
# kubectl delete pod -n kube-system -lapp=ovs
pod "ovs-ovn-4f6jc" deleted
pod "ovs-ovn-csn2w" deleted
pod "ovs-ovn-mpbmb" deleted
```

**kube-ovn-controller**

```
# kubectl set env deployment/kube-ovn-controller -n kube-system OVN_DB_IPS="172.18.0.3,172.18.0.4,172.18.0.5"
deployment.apps/kube-ovn-controller env updated

# kubectl rollout status deployment/kube-ovn-controller -n kube-system
Waiting for deployment "kube-ovn-controller" rollout to finish: 1 of 3 updated replicas are available...
Waiting for deployment "kube-ovn-controller" rollout to finish: 2 of 3 updated replicas are available...
deployment "kube-ovn-controller" successfully rolled out
```

[!\[\]\(5fbc29d6021321b9894fc77246298082\_img.jpg\) PDF](#)[!\[\]\(a3bfaa1c672ac3a1d913da9b6e15d6ba\_img.jpg\) Slack](#)[!\[\]\(8186c6ca4b5e8e294c0927f20e542304\_img.jpg\) Support](#)

⌚2025 9 10

⌚2022 5 24



6.3.3

## 6.4 OVN

---

### 6.4.1

```
kubectl backup
```

```
# kubectl ko nb backup
tar: Removing leading `/' from member names
backup ovn-nb db to /root/ovnnb_db.060223191654183154.backup

# kubectl ko sb backup
tar: Removing leading `/' from member names
backup ovn-sb db to /root/ovnsb_db.060223191654183154.backup
```

### 6.4.2

```
/var/log/ovn/ovn-northd.log
```

```
* ovn-northd is not running
ovsdb-server: ovsdb error: error reading record 2739 from OVN_Northbound log: record 2739 advances commit index to 6308 but last log index is 6307
* Starting ovsdb-nb
```

OVN_Northbound	OVN_Southbound	OVN_Northbound	ovn-nb
----------------	----------------	----------------	--------

```
# kubectl ko nb status
9182
Name: OVN_Northbound
Cluster ID: e75f (e75fa340-49ed-45ab-990e-26cb865ebc85)
Server ID: 9182 (9182e8dd-b5b0-4dd8-8518-598cc1e374f3)
Address: tcp:[10.0.128.61]:6643
Status: cluster member
Role: leader
Term: 1454
Leader: self
Vote: self

Last Election started 1732603 ms ago, reason: timeout
Last Election won: 1732587 ms ago
Election timer: 1000
Log: [7332, 12512]
Entries not yet committed: 1
Entries not yet applied: 1
Connections: ->f080 <-f080 <-e631 ->e631
Disconnections: 1
Servers:
  f080 (f080 at tcp:[10.0.129.139]:6643) next_index=12512 match_index=12510 last msg 63 ms ago
  9182 (9182 at tcp:[10.0.128.61]:6643) () next_index=10394 match_index=12510
  e631 (e631 at tcp:[10.0.131.173]:6643) next_index=12512 match_index=0
```

```
kubectl ko nb kick e631
```

```
mv /etc/origin/ovn/ovnnb_db.db /tmp
```

```
ovn-central Pod
```

```
kubectl delete pod -n kube-system ovn-central-xxxx
```

### 6.4.3

leader

#### ovn-central

ovn-central ovn-central

```
kubectl scale deployment -n kube-system ovn-central --replicas=0
```

ovsdb-tool cluster-to-standalone

ovn-central NODE\_IPS

/etc/origin/ovn

```
docker run -it -v /etc/origin/ovn:/etc/ovn kubeovn/kube-ovn:v1.15.0 bash
cd /etc/ovn/
ovsdb-tool cluster-to-standalone ovnnb_db_standalone.db ovnnb_db.db
ovsdb-tool cluster-to-standalone ovnsb_db_standalone.db ovnsb_db.db
```

#### ovn-central

```
mv /etc/origin/ovn/ovnnb_db.db /tmp
mv /etc/origin/ovn/ovnsb_db.db /tmp
```

ovnnb\_db.db ovnsb\_db.db ovn-central NODE\_IPS /etc/origin/ovn/

```
mv /etc/origin/ovn/ovnnb_db_standalone.db /etc/origin/ovn/ovnnb_db.db
mv /etc/origin/ovn/ovnsb_db_standalone.db /etc/origin/ovn/ovnsb_db.db
```

ovn-central

```
kubectl scale deployment -n kube-system ovn-central --replicas=3
kubectl rollout status deployment/ovn-central -n kube-system
```


[PDF](#)

[Slack](#)

[Support](#)

⌚2025 9 10

⌚2022 5 24



### 6.4.4

## 6.5 CIDR

---

CIDR

CIDR Pod

CIDR

Join CIDR

Join CIDR

### 6.5.1

```
kubectl edit cidrBlock gateway excludeIps
```

```
kubectl edit subnet test-subnet
```

### 6.5.2 Namespace Pod

test Namespace

```
for pod in $(kubectl get pod --no-headers -n "$ns" --field-selector spec.restartPolicy=Always -o custom-columns=NAME:.metadata.name,HOST:spec.hostNetwork | awk '{if ($2!="true") print $1}'); do
    kubectl delete pod "$pod" -n test --ignore-not-found
done
```

host Pod

```
for ns in $(kubectl get ns --no-headers -o custom-columns=NAME:.metadata.name); do
    for pod in $(kubectl get pod --no-headers -n "$ns" --field-selector spec.restartPolicy=Always -o custom-columns=NAME:.metadata.name,HOST:spec.hostNetwork | awk '{if ($2!="true") print $1}'); do
        kubectl delete pod "$pod" -n "$ns" --ignore-not-found
    done
done
```

### 6.5.3

CIDR kube-ovn-controller Deployment

```
args:
- --default-cidr=10.17.0.0/16
- --default-gateway=10.17.0.1
- --default-exclude-ipss=10.17.0.1
```

 PDF

 Slack

 Support

 2025 9 10

 2022 5 24



### 6.5.4

## 6.6 Join CIDR

Join CIDR

| Join CIDR Pod

### 6.6.1 Join

```
kubectl patch subnet join --type='json' -p '[{"op": "replace", "path": "/metadata/finalizers", "value": []}]'
kubectl delete subnet join
```

### 6.6.2

```
kubectl annotate node ovn.kubernetes.io/allocated=false --all --overwrite
```

### 6.6.3 Join

kube-ovn-controller Join

```
kubectl edit deployment -n kube-system kube-ovn-controller
```

```
args:
- --node-switch-cidr=100.51.0.0/16
```

kube-ovn-controller join

```
kubectl delete pod -n kube-system -lapp=kube-ovn-controller
```

Join

```
# kubectl get subnet
NAME      PROVIDER   VPC      PROTOCOL  CIDR      PRIVATE  NAT     DEFAULT  GATEWAYTYPE  V4USED  V4AVAILABLE  V6USED  V6AVAILABLE
EXCLUDEIPS
join      ovn        ovn-cluster  IPv4      100.51.0.0/16  false    false   false    distributed   2       65531      0       0
["100.51.0.1"]
ovn-default  ovn        ovn-cluster  IPv4      10.17.0.0/16   true    true   true    distributed   5       65528      0       0
["10.17.0.1"]
```

### 6.6.4 ovn0

ovn0 kube-ovn-cni

```
kubectl delete pod -n kube-system -l app=kube-ovn-cni
```

[PDF](#)

[Slack](#)

[Support](#)

⌚2025 9 10

⌚2022 5 24



### 6.6.5

## 6.7

kube-ovn.yaml

```
vi kube-ovn.yaml
# ...
- name: kube-ovn-controller
  image: "docker.io/kubeovn/kube-ovn:v1.15.0"
  imagePullPolicy: IfNotPresent
  args:
    - /kube-ovn/start-controller.sh
    - --v=3
# ...
#
```

[PDF](#)[Slack](#)[Support](#)

⌚2025 9 10

⌚2023 4 4



⌚ GitHub



### 6.7.1

## 6.8

---

### Kube-OVN

#### 6.8.1

1.

- Pod Pod
- Pod
- Pod Service
- Pod
- Pod
- kube-ovn-pinger

2.

- Pod
- kube-ovn-cni CNI
- ovs-ovn OVS
- kube-ovn-controller
- ovn-central OVN
- dmesg
- netstat -s

3. CPU, IO

```
kubectl ko logs
```

#### 6.8.2 Pod IP

```
Pod     Running    kubectl describe Pod      duplicate IPv4 address <ip> found on logical switch port <port>
```

1. Pod IP Pod IP IP IP IP Pod
2. kube-ovn-controller IP
3. kube-ovn-controller IP
4. kubectl ko nbctl show OVN IP
5. OVN Kubernetes IP kubectl ko nbctl del-port <port>

#### 6.8.3 Pod ping gateway failed

```
Pod     Running    kubectl describe Pod      network <ip> with gateway <gw ip> is not ready for interface eth0 after 30 checks
```

1. kubectl ko sbctl show Pod
2. ovn-central ovs-ovn ovn-central ovs-ovn

3. Pod
4. Underlay [Underlay](#)

#### 6.8.4 Pod

---

VPC Pod

1. kubectl ko trace OVN ACL
2. ACL ACL
3. ACL Subnet stats
4. Subnet Spec
5. kube-ovn-controller

#### 6.8.5 Pod IP CIDR

---

Pod IP CIDR

1. /etc/cni/net.d/ Kube-OVN CNI
- 2.
3. kubelet Pod

#### 6.8.6 Debug Pod

---

kubectl debug Pod ContainerCreating Pod Event network not ready no address allocated

debug Pod yaml yaml Annotation

```
ovn.kubernetes.io/ip_address
ovn.kubernetes.io/mac_address
ovn.kubernetes.io/allocated
ovn.kubernetes.io/routed
```

debug Pod yaml debug Pod

#### 6.8.7 ARM

---

ARM Offload

netstat

```
# netstat -us
IcmpMsg:
  InType0: 22
  InType3: 24
  InType8: 117852
  OutType0: 117852
```

```

OutType3: 29
OutType8: 22
Udp:
  3040636 packets received
  0 packets to unknown port received.
  4 packet receive errors
  602 packets sent
  0 receive buffer errors
  0 send buffer errors
  InCsumErrors: 4
UdpLite:
IpExt:
  InBcastPkts: 10244
  InOctets: 4446320361
  OutOctets: 1496815600
  InBcastOctets: 3095950
  InNoECTPkts: 7683903

```

InCsumErrors

tx offload      TCP

```
ethtool -K eth0 tx off
```

CentOS 7

4.19.90-25.16.v2101

## 6.8.8 Pod Service

Pod      Service      dmesg

```

netlink: Unknown conntrack attr (type=6, max=5)
openvswitch: netlink: Flow actions may not be safe on all matching packets.

```

OVS      NAT

1.      OVS

2.      Overlay      kube-ovn-controller      --enable-lb=false      OVN LB      kube-proxy      Service

## 6.8.9 ovn-central

v1.11.x      1      Pod      OVN NB      SB      Kube-OVN      ovsdb-server/compact

ovn-central      compact

```

- name: ENABLE_COMPACT
  value: "false"

```


[PDF](#)

[Slack](#)

[Support](#)

⌚2025 9 10

⌚2022 5 24



6.8.10

---


## 7.

---

### 7.1


Kube-OVN      CNI      macvlan vlan host-device      IPAM      Kube-OVN      IP  
 Kube-OVN      Kube-OVN

#### 7.1.1

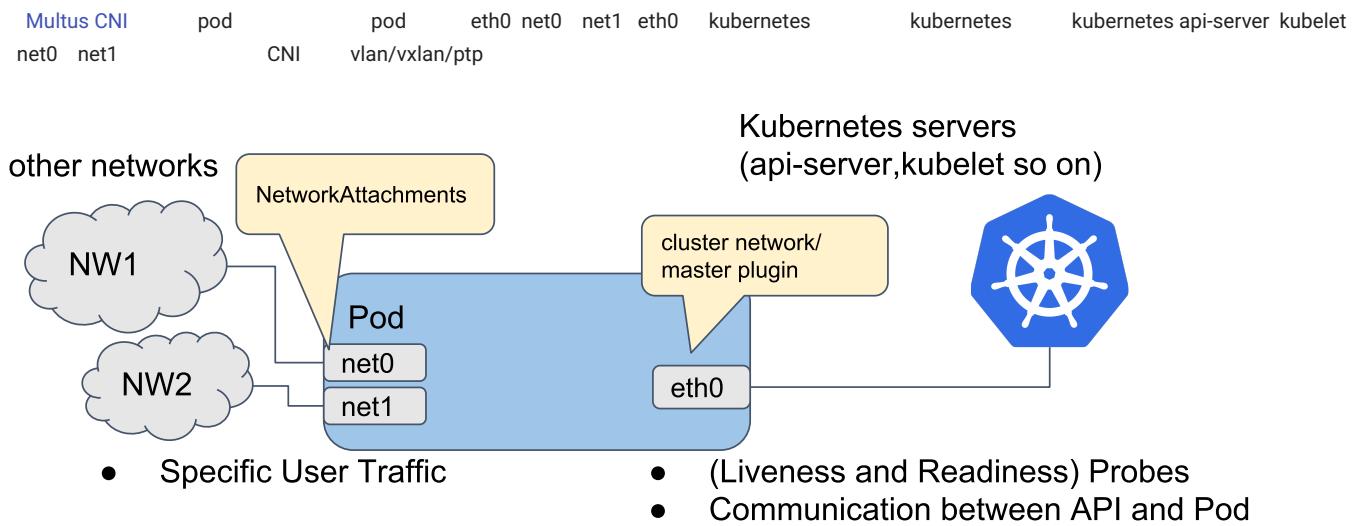

### IPAM

Multus CNI,      Pod      IP  
 Kube-OVN      IPAM      Subnet      IP      CRD      IP      IP

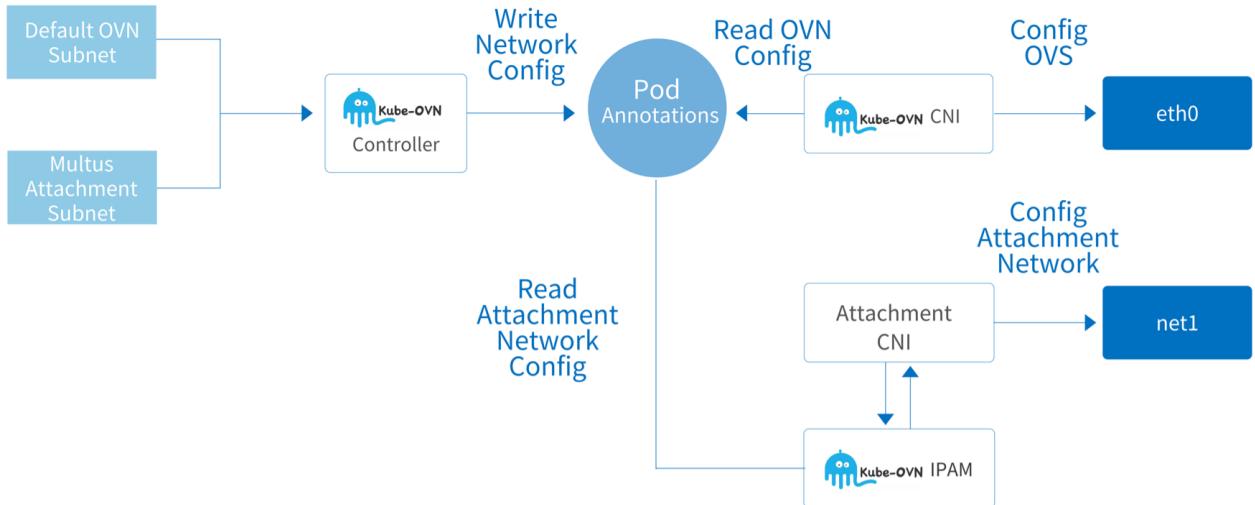

	Kube-OVN	IP	eth0	OVN	net1	CNI	net1	multus-cni	NetworkAttachmentDefinition
Pod	kube-ovn-controller	Pod	Pod	annotation	Subnet	IP	Pod	Pod	Pod annotation
CNI		kube-ovn-cni	ipam	, kube-ovn-cni	Pod annotation	CNI		CNI	CNI

## 7.1.2

NetworkAttachmentDefinition	spec	multus	defaultConfDir	CNI
<pre> apiVersion: "k8s.cni.cncf.io/v1" kind: NetworkAttachmentDefinition metadata:   name: macvlan-conf-2 </pre>				
kube-ovn-controller	NetworkAttachmentDefinition	provider	spec	Kube-OVN IPAM

## 7.1.3

### Kube-OVN Multus

[Kube-OVN](#)    [Multus how to use](#)    [Kube-OVN Multus-CNI](#)

### CNI IPAM

Kube-OVN	CNI
NETWORKATTACHMENTDEFINITION	
macvlan	ipam kube-ovn
<pre> #   macvlan sudo modprobe macvlan </pre>	

```

apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: macvlan
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "macvlan",
    "master": "eth0",
    "mode": "bridge",
    "ipam": {
      "type": "kube-ovn",
      "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
      "provider": "macvlan.default"
    }
}'

```

- spec.config.ipam.type: kube-ovn kube-ovn
- server\_socket: Kube-OVN socket /run/openvswitch/kube-ovn-daemon.sock
- provider: NetworkAttachmentDefinition <name>. <namespace>, Kube-OVN Subnet
- master:

#### KUBE-OVN SUBNET

Kube-OVN Subnet,	cidrBlock	exclude_ips	provider	NetworkAttachmentDefinition	<name>. <namespace>	macvlan
						Subnet

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: macvlan
spec:
  protocol: IPv4
  provider: macvlan.default
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  excludeIps:
    - 172.17.0.0..172.17.0.10

```

gateway, private, nat provider ovn attachment network

#### Pod

Pod	annotation k8s.v1.cni.cncf.io/networks,	NetworkAttachmentDefinition	<namespace>/<name>
-----	---	-----------------------------	--------------------

```

apiVersion: v1
kind: Pod
metadata:
  name: samplepod
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: default/macvlan
spec:
  containers:
  - name: samplepod
    command: ["/bin/ash", "-c", "trap : TERM INT; sleep infinity & wait"]
    image: docker.io/library/alpine:edge

```

#### IP Pod

IP Pod	<networkAttachmentName>. <networkAttachmentNamespace>.kubernetes.io/ip_address annotation
--------	---

```

apiVersion: v1
kind: Pod
metadata:
  name: static-ip
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: default/macvlan
    ovn.kubernetes.io/ip_address: 10.16.0.15
    ovn.kubernetes.io/mac_address: 00:00:00:53:6B:B6
    macvlan.default.kubernetes.io/ip_address: 172.17.0.100
    macvlan.default.kubernetes.io/mac_address: 00:00:00:53:6B:BB
spec:
  containers:
  - name: static-ip
    image: docker.io/library/nginx:alpine

```

IP

```
ippool , <networkAttachmentName>.<networkAttachmentNamespace>.kubernetes.io/ip_pool annotations:
```

```
apiVersion: apps/v1
kind: Deployment
metadata:
  namespace: default
  name: static-workload
  labels:
    app: static-workload
spec:
  replicas: 2
  selector:
    matchLabels:
      app: static-workload
  template:
    metadata:
      labels:
        app: static-workload
      annotations:
        k8s.v1.cni.cncf.io/networks: default/macvlan
        ovn.kubernetes.io/ip_pool: 10.16.0.15,10.16.0.16,10.16.0.17
        macvlan.default.kubernetes.io/ip_pool: 172.17.0.200,172.17.0.201,172.17.0.202
    spec:
      containers:
        - name: static-workload
          image: docker.io/library/nginx:alpine
```

macvlan Pod

macvlan	Pod	Pod	annotation default-route
---------	-----	-----	--------------------------

```
apiVersion: v1
kind: Pod
metadata:
  name: samplepod-route
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: '[{
      "name": "macvlan",
      "namespace": "default",
      "default-route": ["172.17.0.1"]
    }]'
spec:
  containers:
    - name: samplepod-route
      command: ["/bin/bash", "-c", "trap : TERM INT; sleep infinity & wait"]
      image: docker.io/library/alpine:edge
```

macvlan Pod

macvlan	Pod	annotation v1.multus-cni.io/default-network ,	NetworkAttachmentDefinition <namespace>/<name>
---------	-----	---	--

```
apiVersion: v1
kind: Pod
metadata:
  name: samplepod-macvlan
  namespace: default
  annotations:
    v1.multus-cni.io/default-network: default/macvlan
spec:
  containers:
    - name: samplepod-macvlan
      command: ["/bin/bash", "-c", "trap : TERM INT; sleep infinity & wait"]
      image: docker.io/library/alpine:edge
```

**KUBE-OVN SUBNET PROVIDER OVN**

Kube-OVN Subnet	cidrBlock	exclude_ips	provider	ovn	Subnet
-----------------	-----------	-------------	----------	-----	--------

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: macvlan
spec:
  protocol: IPv4
  provider: ovn
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  excludeIps:
    - 172.17.0.0..172.17.0.10
```

**Pod**

```
provider      ovn subnet    IP Pod   annotation k8s.v1.cni.cncf.io/networks
<networkAttachmentName>.<networkAttachmentNamespace>.kubernetes.io/logical_switch
```

```
apiVersion: v1
kind: Pod
metadata:
  name: samplepod
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: default/macvlan
    macvlan.default.kubernetes.io/logical_switch: macvlan
spec:
  containers:
  - name: samplepod
    command: ["/bin/ash", "-c", "trap : TERM INT; sleep infinity & wait"]
    image: docker.io/library/alpine:edge
```

- k8s.v1.cni.cncf.io/networks : NetworkAttachmentDefinition <namespace>/<name>

- macvlan.default.kubernetes.io/logical\_switch :

<networkAttachmentName>.<networkAttachmentNamespace>.kubernetes.io/logical_switch	provider	ovn	subnet				
ipam	IP	Pod	IP	macvlan	Pod	macvlan	Pod

**Kube-OVN****Kube-OVN****NETWORKATTACHMENTDEFINITION**

```
provider      ovn
```

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: attachnet
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "kube-ovn",
    "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
    "provider": "attachnet.default.ovn"
  }'
```

- spec.config.type : kube-ovn CNI Kube-OVN

- server\_socket : Kube-OVN socket /run/openvswitch/kube-ovn-daemon.sock

- provider : NetworkAttachmentDefinition <name>.<namespace>.ovn , Kube-OVN Subnet ovn

**KUBE-OVN SUBNET**

Kube-OVN	provider	NetworkAttachmentDefinition	<name>.<namespace>.ovn	ovn	Kube-OVN	Subnet
----------	----------	-----------------------------	------------------------	-----	----------	--------

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: attachnet
spec:
  protocol: IPv4
  provider: attachnet.default.ovn
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  excludeIps:
  - 172.17.0.0..172.17.0.10
```

**Pod**

Pod	annotation k8s.v1.cni.cncf.io/networks ,	NetworkAttachmentDefinition	<namespace>/<name>
-----	--	-----------------------------	--------------------

```
apiVersion: v1
kind: Pod
metadata:
  name: samplepod
```

```

namespace: default
annotations:
  k8s.v1.cni.cncf.io/networks: default/attachnet
spec:
  containers:
    - name: samplepod
      command: ["/bin/bash", "-c", "trap : TERM INT; sleep infinity & wait"]
      image: docker.io/library/alpine:edge

```

## KUBE-OVN SUBNET PROVIDER OVN

Kube-OVN Subnet      cidrBlock    exclude\_ips , provider    ovn    Subnet

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: attachnet
spec:
  protocol: IPv4
  provider: ovn
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  excludeIps:
    - 172.17.0.0..172.17.0.10

```

## Pod

provider	ovn	subnet	IP	Pod	annotation k8s.v1.cni.cncf.io/networks
<networkAttachmentName>.<networkAttachmentNamespace>.					ovn.kubernetes.io/logical_switch

```


apiVersion: v1
kind: Pod
metadata:
  name: samplepod
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: default/attachnet
    attachnet.default.ovn.kubernetes.io/logical_switch: attachnet
spec:
  containers:
    - name: samplepod
      command: ["/bin/bash", "-c", "trap : TERM INT; sleep infinity & wait"]
      image: docker.io/library/alpine:edge

```

- k8s.v1.cni.cncf.io/networks : NetworkAttachmentDefinition <namespace>/<name>
- attachnet.default.ovn.kubernetes.io/logical\_switch :

: <networkAttachmentName>.<networkAttachmentNamespace>.	kubernetes.io/logical_switch	provider	Kube-OVN
Pod      IP      Pod      IP	macvlan      Pod	Kube-OVN      Pod	

[!\[\]\(4b484108aed56222c4cdf0d5abd044e3\_img.jpg\) PDF](#)
[!\[\]\(d5ff7b283427ad1ce5b81fc0cf16c04a\_img.jpg\) Slack](#)
[!\[\]\(6ea8c0f6ce3e42356aa31bcb3c421c2d\_img.jpg\) Support](#)
 2025 9 10

 2022 5 20



---

 7.1.4

## 7.2

---

Kube-OVN

Kube-OVN

### 7.2.1

---

1.	CNI	CNI
2.	10ns	20ns
3.	CPU	CPU
4.	Macvlan	SR-IOV

### 7.2.2

---

#### Overlay

- Kubernetes: 1.22.0
- OS: CentOS 7
- Kube-OVN: 1.8.0 *Overlay*
- CPU: Intel(R) Xeon(R) E-2278G
- Network: 2\*10Gbps, xmit\_hash\_policy=layer3+4

```
qperf -t 60 <server ip> -ub -oo msg_size:1 -vu tcp_lat tcp_bw udp_lat udp_bw 1      tcp/udp
```

Type	tcp_lat (us)	udp_lat (us)	tcp_bw (Mb/s)	udp_bw(Mb/s)
Kube-OVN Default	25.7	22.9	27.1	1.59
Kube-OVN Optimized	13.9	12.9	27.6	5.57
HOST Network	13.1	12.4	28.2	6.02

#### Overlay Underlay

Kube-OVN      Overlay    Underlay

*Environment:*

- Kubernetes: 1.22.0
- OS: CentOS 7
- Kube-OVN: 1.8.0
- CPU: AMD EPYC 7402P 24-Core Processor
- Network: Intel Corporation Ethernet Controller XXV710 for 25GbE SFP28

```
qperf -t 60 <server ip> -ub -oo msg_size:1 -vu tcp_lat tcp_bw udp_lat udp_bw
```

Type	tcp_lat (us)	udp_lat (us)	tcp_bw (Mb/s)	udp_bw(Mb/s)
Kube-OVN Overlay	15.2	14.6	23.6	2.65
Kube-OVN Underlay	14.3	13.8	24.2	3.46
HOST Network	16.6	15.4	24.8	2.64

```
qperf -t 60 <server ip> -ub -oo msg_size:1K -vu tcp_lat tcp_bw udp_lat udp_bw
```

Type	tcp_lat (us)	udp_lat (us)	tcp_bw (Gb/s)	udp_bw(Gb/s)
Kube-OVN Overlay	16.5	15.8	10.2	2.77
Kube-OVN Underlay	15.9	14.5	9.6	3.22
HOST Network	18.1	16.6	9.32	2.66

```
qperf -t 60 <server ip> -ub -oo msg_size:4K -vu tcp_lat tcp_bw udp_lat udp_bw
```

Type	tcp_lat (us)	udp_lat (us)	tcp_bw (Gb/s)	udp_bw(Gb/s)
Kube-OVN Overlay	34.7	41.6	16.0	9.23
Kube-OVN Underlay	32.6	44	15.1	6.71
HOST Network	35.9	45.9	14.6	5.59

netfilter      kube-proxy      netfilter

## 7.2.3

### CPU

CPU

CPU

```
cpupower frequency-set -g performance
```

```
# ethtool -g eno1
Ring parameters for eno1:
Pre-set maximums:
RX:        4096
RX Mini:   0
RX Jumbo:  0
TX:        4096
Current hardware settings:
RX:        255
RX Mini:   0
RX Jumbo:  0
TX:        255
```

```
ethtool -G eno1 rx 4096
ethtool -G eno1 tx 4096
```

**tuned**

tuned profile

tuned-adm profile network-latency

tuned-adm profile network-throughput

irqbalance CPU CPU

**OVN LB**

OVN L2 LB	conntrack	recirculate	CPU	20%	CPU	Overlay	kube-proxy	Service
Pod-to-Pod	kube-ovn-controller							

```
command:
- ./kube-ovn/start-controller.sh
args:
...
- --enable-lb=false
...
```

Underlay kube-proxy iptables ipvs LB Service

**FastPath**

network ns	netfilter	20% CPU	netfilter	FastPath	netfilter CPU
------------	-----------	---------	-----------	----------	---------------

netfilter iptables ipvs nftables

**FastPath**

insmod kube\_ovn\_fastpath.ko FastPath dmesg

```
# dmesg
...
[619631.323788] init_module,kube_ovn_fastpath_local_out
[619631.323798] init_module,kube_ovn_fastpath_post_routing
[619631.323800] init_module,kube_ovn_fastpath_pre_routing
[619631.323801] init_module,kube_ovn_fastpath_local_in
...
```

**OVS**

OVS flow	10% CPU	x86 CPU	popcnt sse4.2	flow CPU
5%				

**FastPath**

CPU

```
cat /proc/cpuinfo | grep popcnt
cat /proc/cpuinfo | grep sse4_2
```

## CENTOS

```
yum install -y gcc kernel-devel-$(uname -r) python3 autoconf automake libtool rpm-build openssl-devel
```

OVS      RPM :

```
git clone -b branch-3.5 --depth=1 https://github.com/openvswitch/ovs.git
cd ovs
curl -s https://github.com/kubeovn/ovs/commit/2d2c83c26d4217446918f39d5cd5838e9ac27b32.patch | git apply
./boot.sh
./configure --with-linux=/lib/modules/$(uname -r)/build CFLAGS="-g -O2 -mpopcnt -msse4.2"
make rpm-fedora-kmod
cd rpm/rpmbuild/RPMS/x86_64/
```

RPM

```
rpm -i openvswitch-kmod-3.5.1-1.el7.x86_64.rpm
```

Kube-OVN      OVS

## UBUNTU

```
apt install -y autoconf automake libtool gcc build-essential libssl-dev
```

OVS

```
apt install -y autoconf automake libtool gcc build-essential libssl-dev

git clone -b branch-3.5 --depth=1 https://github.com/openvswitch/ovs.git
cd ovs
curl -s https://github.com/kubeovn/ovs/commit/2d2c83c26d4217446918f39d5cd5838e9ac27b32.patch | git apply
./boot.sh
./configure --prefix=/usr/ --localstatedir=/var --enable-ssl --with-linux=/lib/modules/$(uname -r)/build
make -j `nproc`
make install
make modules_install

cat > /etc/modprobe.d/openvswitch.conf << EOF
override openvswitch * extra
override vport-* * extra
EOF

depmod -a
cp debian/openvswitch-switch.init /etc/init.d/openvswitch-switch
/etc/init.d/openvswitch-switch force-reload-kmod
```

Kube-OVN      OVS

## STT



**Warning**

OpenVswitch    3.6      STT    Tunnel

CPU	Geneve	Vxlan	UDP	UDP	TCP	TCP	offload	TCP
STT		TCP		TCP		TCP		TCP

STT                 OVS      OVS


STT

```
kubectl set env daemonset/ovs-ovn -n kube-system TUNNEL_TYPE=stt
kubectl delete pod -n kube-system -lapp=ovs
```



⌚2025 9 10

⌚2022 5 24



7.2.4

---

## 7.3 FastPath

Profile Netfilter

20% CPU FastPath

Netfilter CPU

FastPath

### 7.3.1

```
git clone --depth=1 https://github.com/kubeovn/kube-ovn.git
```

### 7.3.2

CentOS

```
yum install -y kernel-devel-$(uname -r) gcc elfutils-libelf-devel
```

### 7.3.3

3.x

```
cd kube-ovn/fastpath
make all
```

4.x

```
cd kube-ovn/fastpath/4.18
cp ../Makefile .
make all
```

### 7.3.4

```
kube_ovn_fastpath.ko          /tmp      kube-ovn-cni
```

dmesg

```
# dmesg
[619631.323788] init_module,kube_ovn_fastpath_local_out
[619631.323798] init_module,kube_ovn_fastpath_post_routing
[619631.323800] init_module,kube_ovn_fastpath_pre_routing
[619631.323801] init_module,kube_ovn_fastpath_local_in
```

```
/tmp      kube-ovn-cni
```



PDF



Slack



Support

⌚2025 9 10

⌚2022 5 24




### 7.3.5

## 7.4 eBPF TCP

5G Pod TCP Intel **istio-tcpip-bypass** Pod eBPF TCP/IP socket

### 7.4.1


Pod TCP TCP/IP, netfilter, OVS

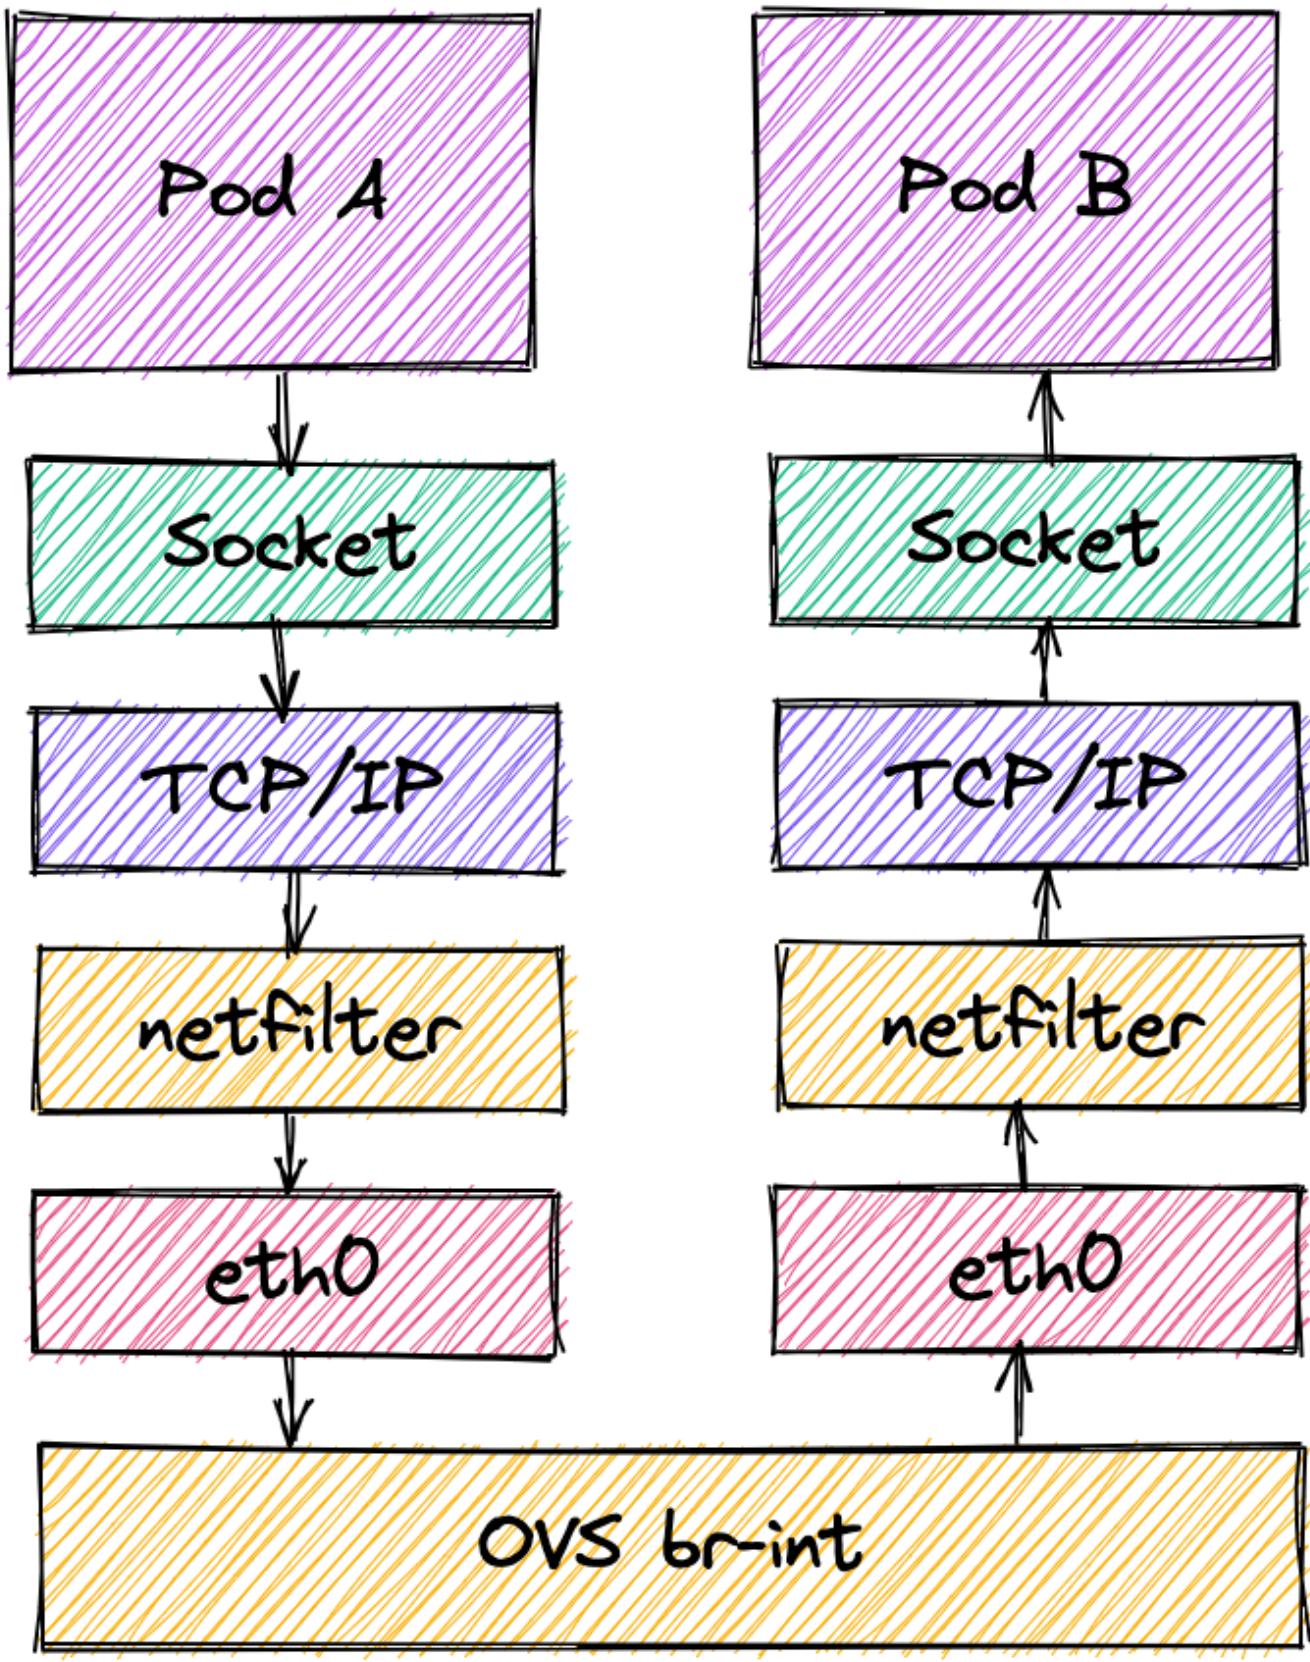

istio-tcpip-bypass

TCP

socket

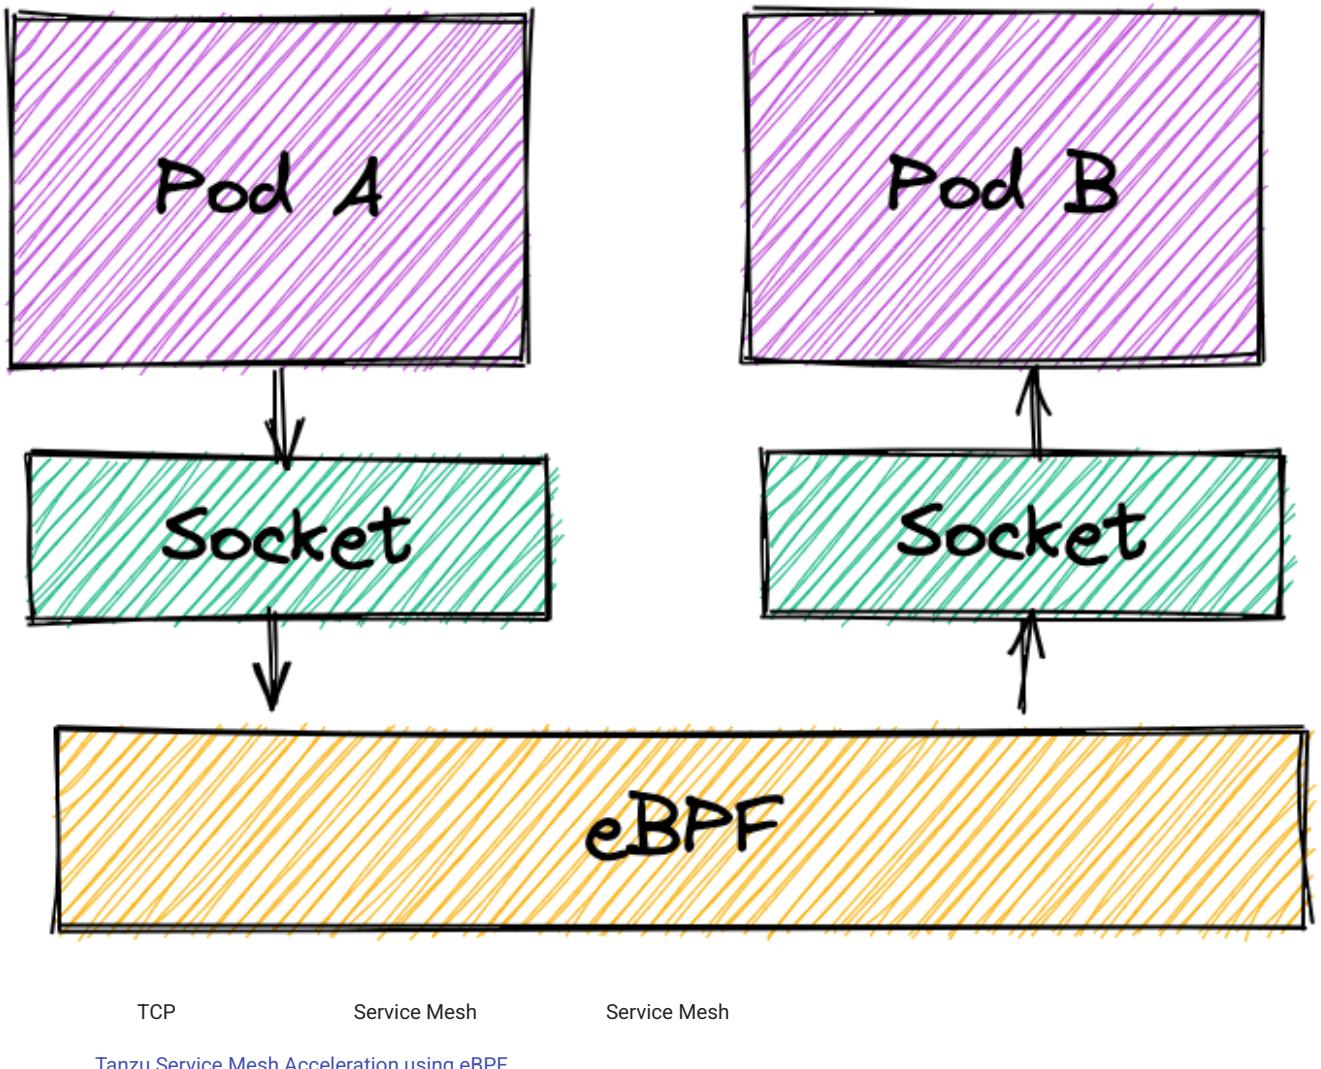

## 7.4.2

eBPF      Ubuntu 20.04    Linux 5.4.0-74-generic

## 7.4.3

Pod                  nodeSelector

```
# kubectl create deployment perf --image=kubeovn/perf:dev --replicas=2
deployment.apps/perf created
# kubectl get pod -o wide
NAME           READY   STATUS    RESTARTS   AGE     IP          NODE   NOMINATED NODE   READINESS GATES
perf-7697bc6ddf-b2cpv  1/1    Running   0          28s    100.64.0.3  sealos <none>        <none>
perf-7697bc6ddf-p2xpt  1/1    Running   0          28s    100.64.0.2  sealos <none>        <none>
```

Pod    qperf server    Pod    qperf client

```
# kubectl exec -it perf-7697bc6ddf-b2cpv sh
/ # qperf

# kubectl exec -it perf-7697bc6ddf-p2xpt sh
/ # qperf -t 60 100.64.0.3 -ub -oo msg_size:1:16K:*4 -vu tcp_lat tcp_bw
```

istio-tcpip-bypass

```
kubectl apply -f https://raw.githubusercontent.com/intel/istio-tcpip-bypass/main/bypass-tcpip-daemonset.yaml
```

### perf client

```
# kubectl exec -it perf-7697bc6ddf-p2xpt sh
/ # qperf -t 60 100.64.0.3 -ub -oo msg_size:1:16K:*4 -vu tcp_lat tcp_bw
```

#### 7.4.4

TCP            40% ~ 60%            1024            40% ~ 80%

Packet Size (byte)	eBPF tcp_lat (us)	Default tcp_lat (us)	eBPF tcp_bw (Mb/s)	Default tcp_bw(Mb/s)
1	20.2	44.5	1.36	4.27
4	20.2	48.7	5.48	16.7
16	19.6	41.6	21.7	63.5
64	18.8	41.3	96.8	201
256	19.2	36	395	539
1024	18.3	42.4	1360	846
4096	16.5	62.6	4460	2430
16384	20.2	58.8	9600	6900

512            eBPF            TCP            eBPF            eBPF TCP

#### 7.4.5

1. [istio-tcpip-bypass](#)
2. [Deep Dive TCP/IP Bypass with eBPF in Service Mesh](#)
3. [Tanzu Service Mesh Acceleration using eBPF](#)


[!\[\]\(7c46c5952754d2164e77b16b34bd0de9\_img.jpg\) PDF](#)

[!\[\]\(405af51eab6456036e1dfd20ce2b2557\_img.jpg\) Slack](#)

[!\[\]\(4c8c82d455b004b88e3658e31f5b2b14\_img.jpg\) Support](#)


 2025 9 10

 2022 9 27



#### 7.4.6

## 7.5 OVN-IC

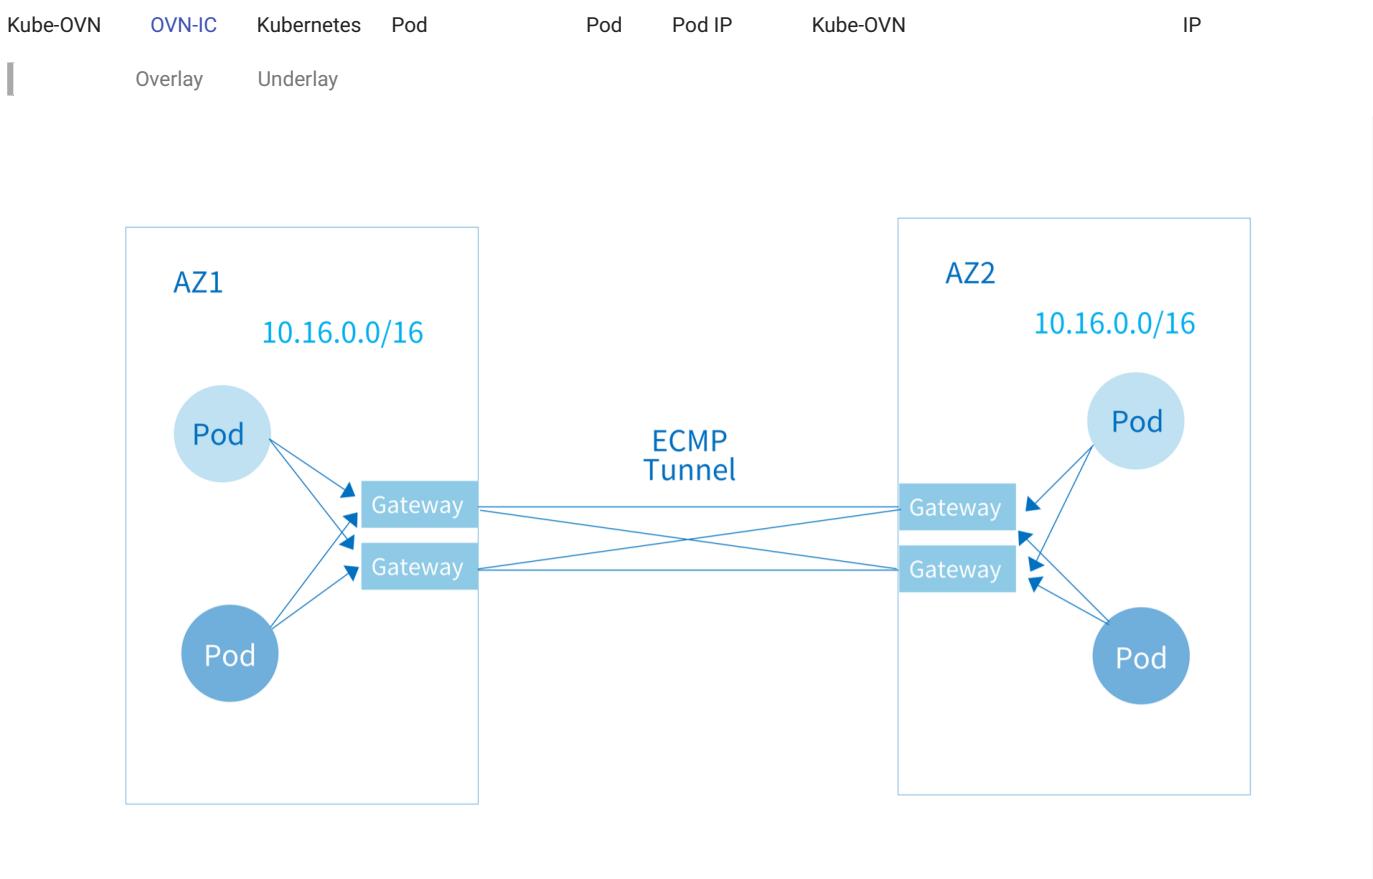

## Limitation

OVN-IC Pod IP Service DNS NetworkPolicy Isti

### 7.5.1

1. 1.11.16 install.sh

ENABLE\_IC=true

## deployment ovn-ic-controller

2. C|DR

3. kube-ovn-controller IP

4 | P

5 VPC VPC

## 7.5.2 OVN-IC

1

1 Kube-OVN v1.11.16

" " " " Deployment master master 1 master

```
install-ovn-ic.sh
```

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.14/dist/images/install-ic-server.sh
```

TS_NUM	ECMP Path
--------	-----------

```
sed 's/VERSION=.*/VERSION=v1.15.0/' dist/images/install-ic-server.sh | TS_NUM=3 bash
```

```
deployment.apps/ovn-ic-server created
Waiting for deployment spec update to be observed...
Waiting for deployment "ovn-ic-server" rollout to finish: 0 out of 3 new replicas have been updated...
Waiting for deployment "ovn-ic-server" rollout to finish: 0 of 3 updated replicas are available...
Waiting for deployment "ovn-ic-server" rollout to finish: 1 of 3 updated replicas are available...
Waiting for deployment "ovn-ic-server" rollout to finish: 2 of 3 updated replicas are available...
Waiting for deployment "ovn-ic-server" rollout to finish: 3 of 3 updated replicas are available...
deployment "ovn-ic-server" successfully rolled out
OVN IC Server installed Successfully
```

```
kubectl ko icsbctl show
```

```
kubectl ko icsbctl show
availability-zone az0
  gateway 059b5c54-c540-4d77-b009-02d65f181a0
    hostname: kube-ovn-worker
    type: geneve
      ip: 172.18.0.3
    port ts-az0
      transit switch: ts
      address: ["00:00:00:B4:8E:BE 169.254.100.97/24"]
  gateway 74ee4b9a-ba48-4a07-861e-1a8e4b9f905f
    hostname: kube-ovn-worker2
    type: geneve
      ip: 172.18.0.2
    port ts1-az0
      transit switch: ts1
      address: ["00:00:00:19:2E:F7 169.254.101.90/24"]
  gateway 7e2428b6-344c-4dd5-a0d5-972c1cc581
    hostname: kube-ovn-control-plane
    type: geneve
      ip: 172.18.0.4
    port ts2-az0
      transit switch: ts2
      address: ["00:00:00:EA:32:BA 169.254.102.103/24"]
availability-zone az1
  gateway 034da7cb-3826-4318-81ce-6a877a9bf285
    hostname: kube-ovn1-worker
    type: geneve
      ip: 172.18.0.6
    port ts-az1
      transit switch: ts
      address: ["00:00:00:25:3A:B9 169.254.100.51/24"]
  gateway 2531a683-283e-4fb8-a619-bdbcb33539b8
    hostname: kube-ovn1-worker2
    type: geneve
      ip: 172.18.0.5
    port ts1-az1
      transit switch: ts1
      address: ["00:00:00:52:87:F4 169.254.101.118/24"]
  gateway b0efb0be-e5a7-4323-ad4b-317637a757c4
    hostname: kube-ovn1-control-plane
    type: geneve
      ip: 172.18.0.8
    port ts2-az1
      transit switch: ts2
      address: ["00:00:00:F6:93:1A 169.254.102.17/24"]
```

## 2

kube-ovn-controller	IP	OVN-IC
---------------------	----	--------

docker		OVN-IC
--------	--	--------

```
docker run --name=ovn-ic-db -d --env "ENABLE_OVN_LEADER_CHECK=false" --network=host --privileged -v /etc/ovn/:/etc/ovn -v /var/run/ovn:/var/run/ovn -v /var/log/ovn:/var/log/ovn kubeovn/kube-ovn:v1.15.0 bash start-ic-db.sh
```

containerd	docker
------------	--------

```
ctr -n k8s.io run -d --env "ENABLE_OVN_LEADER_CHECK=false" --net-host --privileged --mount="type=bind,src=/etc/ovn/,dst=/etc/ovn,options=rbind:rw" --mount="type=bind,src=/var/run/ovn,dst=/var/run/ovn,options=rbind:rw" --mount="type=bind,src=/var/log/ovn,dst=/var/log/ovn,options=rbind:rw" docker.io/kubeovn/kube-ovn:v1.15.0 ovn-ic-db bash start-ic-db.sh
```

## 7.5.3

VPC	Subnet	CIDR	OVN-IC	Subnet CIDR
-----	--------	------	--------	-------------

kube-system Namespace    ovn-ic-config ConfigMap

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-ic-config
  namespace: kube-system
data:
  enable-ic: "true"
  az-name: "az1"
  ic-db-host: "192.168.65.3"
  ic-nb-port: "6645"
  ic-sb-port: "6646"
  gw-nodes: "az1-gw"
  auto-route: "true"
```

- enable-ic:
- az-name:
- ic-db-host: OVN-IC
- ic-nb-port: OVN-IC              6645
- ic-sb-port: OVN-IC              6646
- gw-nodes:
- auto-route:

ovn-ic-config	ConfigMap	ConfigMap	ConfigMap
---------------	-----------	-----------	-----------

ovn-ic              ts

```
# ovn-ic-sbctl show
availability-zone az1
  gateway deee03e0-af16-4f45-91e9-b50c3960f809
    hostname: az1-gw
    type: geneve
      ip: 192.168.42.145
    port ts-az1
      transit switch: ts
      address: ["00:00:00:50:AC:8C 169.254.100.45/24"]
availability-zone az2
  gateway e94cc831-8143-40e3-a478-90352773327b
    hostname: az2-gw
    type: geneve
      ip: 192.168.42.149
    port ts-az2
      transit switch: ts
      address: ["00:00:00:07:4A:59 169.254.100.63/24"]
```

```
# kubectl ko nbctl lr-route-list ovn-cluster
IPv4 Routes
  10.42.1.1      169.254.100.45 dst-ip (learned)
  10.42.1.3      100.64.0.2 dst-ip
  10.16.0.2      100.64.0.2 src-ip
  10.16.0.3      100.64.0.2 src-ip
  10.16.0.4      100.64.0.2 src-ip
  10.16.0.6      100.64.0.2 src-ip
  10.17.0.0/16    169.254.100.45 dst-ip (learned)
  100.65.0.0/16   169.254.100.45 dst-ip (learned)
```

1    Pod    ping    2    Pod IP

Subnet    disableInterConnection

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
```

```

    name: no-advertise
spec:
  cidrBlock: 10.199.0.0/16
  disableInterConnection: true

```

## 7.5.4

### CIDR

```
kube-system Namespace      ovn-ic-config ConfigMap      auto-route      false
```

```

apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-ic-config
  namespace: kube-system
data:
  enable-ic: "true"
  az-name: "az1"
  ic-db-host: "192.168.65.3"
  ic-nb-port: "6645"
  ic-sb-port: "6646"
  gw-nodes: "az1-gw"
  auto-route: "false"

```

```

[root@az1 ~]# kubectl ko nbctl show
switch a391d3a1-14a0-4841-9836-4bd930c447fb (ts)
  port ts-az1
    type: router
    router-port: az1-ts
  port ts-az2
    type: remote
    addresses: ["00:00:00:4B:E2:9F 169.254.100.31/24"]

[root@az2 ~]# kubectl ko nbctl show
switch d46138b8-de81-4908-abf9-b2224ec4edf3 (ts)
  port ts-az2
    type: router
    router-port: az2-ts
  port ts-az1
    type: remote
    addresses: ["00:00:00:FB:2A:F7 169.254.100.79/24"]

```

```

az1      az2      169.254.100.31  az2      az1      169.254.100.79
          CIDR  10.16.0.0/24      az2      CIDR  10.17.0.0/24

```

```
az1      az2
```

```
kubectl ko nbctl lr-route-add ovn-cluster 10.17.0.0/24 169.254.100.31
```

```
az2      az1
```

```
kubectl ko nbctl lr-route-add ovn-cluster 10.16.0.0/24 169.254.100.79
```

## 7.5.5 OVN-IC

**1**

1 Kube-OVN v1.11.16

**1**

**2**

OVN-IC	Raft	3
OVN-IC	leader	
docker		

```
docker run --name=ovn-ic-db -d --env "ENABLE_OVN_LEADER_CHECK=false" --network=host --privileged -v /etc/ovn:/etc/ovn -v /var/run/ovn:/var/run/ovn -v /var/log/ovn:/var/log/ovn -e LOCAL_IP="192.168.65.3" -e NODE_IPS="192.168.65.3,192.168.65.2,192.168.65.1" kubeovn/kube-ovn:v1.15.0 bash start-ic-db.sh
```

containerd

```
ctr -n k8s.io run -d --env "ENABLE_OVN_LEADER_CHECK=false" --net-host --privileged --mount="type=bind,src=/etc/ovn/,dst=/etc/ovn,options=rbind:rw" --mount="type=bind,src=/var/run/ovn,dst=/var/run/ovn,options=rbind:rw" --mount="type=bind,src=/var/log/ovn,dst=/var/log/ovn,options=rbind:rw" --env="NODE_IPS=192.168.65.3,192.168.65.2,192.168.65.1" --env="LOCAL_IP=192.168.65.3" docker.io/kubeovn/kube-ovn:v1.15.0 ovn-ic-db bash start-ic-db.sh
```

- LOCAL\_IP IP
- NODE\_IPS OVN-IC IP
- OVN-IC follower

docker

```
docker run --name=ovn-ic-db -d --network=host --privileged -v /etc/ovn:/etc/ovn -v /var/run/ovn:/var/run/ovn -v /var/log/ovn:/var/log/ovn -e LOCAL_IP="192.168.65.2" -e NODE_IPS="192.168.65.3,192.168.65.2,192.168.65.1" -e LEADER_IP="192.168.65.3" kubeovn/kube-ovn:v1.15.0 bash start-ic-db.sh
```

containerd

```
ctr -n k8s.io run -d --net-host --privileged --mount="type=bind,src=/etc/ovn/,dst=/etc/ovn,options=rbind:rw" --mount="type=bind,src=/var/run/ovn,dst=/var/run/ovn,options=rbind:rw" --mount="type=bind,src=/var/log/ovn,dst=/var/log/ovn,options=rbind:rw" --env="NODE_IPS=192.168.65.3,192.168.65.2,192.168.65.1" --env="LOCAL_IP=192.168.65.2" --env="LEADER_IP=192.168.65.3" docker.io/kubeovn/kube-ovn:v1.15.0 ovn-ic-db bash start-ic-db.sh
```

- LOCAL\_IP IP
- NODE\_IPS OVN-IC IP
- LEADER\_IP: OVN-IC leader IP

ovn-ic-config OVN-IC

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-ic-config
  namespace: kube-system
data:
  enable-ic: "true"
  az-name: "az1"
  ic-db-host: "192.168.65.3,192.168.65.2,192.168.65.1"
  ic-nb-port: "6645"
  ic-sb-port: "6646"
  gw-nodes: "az1-gw"
  auto-route: "true"
```

## 7.5.6 ECMP

1

ECMP ECMP path 3 ECMP path

```
kubectl edit deployment ovn-ic-server -n kube-system
```

'TS\_NUM' TS\_NUM ECMP Path

## 7.5.7

ovn-ic-config Configmap

```
kubectl -n kube-system delete cm ovn-ic-config
```

ts

```
kubectl ko nbctl ls-del ts
```

### 7.5.8 az-name

```
kubectl edit ovn-ic-config configmap az-name ovn-cni pod 10
```

```
ovn-appctl -t ovn-controller inc-engine/recompute
```

### 7.5.9

ovn-ic-config Configmap

```
kubectl -n kube-system delete cm ovn-ic-config
```

ts

```
kubectl ko nbctl ls-del ts
```

OVN-IC

docker

```
docker stop ovn-ic-db
docker rm ovn-ic-db
```

containerd

```
ctr -n k8s.io task kill ovn-ic-db
ctr -n k8s.io containers rm ovn-ic-db
```

deployment ovn-ic-server

```
kubectl delete deployment ovn-ic-server -n kube-system
```

master

DB

```
rm -f /etc/origin/ovn/ovn_ic_nb_db.db
rm -f /etc/origin/ovn/ovn_ic_sb_db.db
```


[PDF](#)

[Slack](#)

[Support](#)

⌚2025 6 19

⌚2022 5 24



### 7.5.10

## 7.6 Submariner



### 7.6.1

- Service CIDR CIDR

### 7.6.2 Submariner

```

subctl

curl -Ls https://get.submariner.io | bash
export PATH=$PATH:~/local/bin
echo export PATH=\$PATH:~/local/bin >> ~/.profile

kubeconfig      submariner-broker

subctl deploy-broker

cluster0      CIDR  10.16.0.0/16 join  CIDR  100.64.0.0/16  cluster1      CIDR  11.16.0.0/16 join  CIDR  100.68.0.0/16

kubeconfig  cluster0  broker  :

subctl join broker-info.subm --clusterid cluster0 --clustercidr 100.64.0.0/16,10.16.0.0/16  --natt=false --cable-driver vxlan --health-check=false
kubectl label nodes cluster0 submariner.io/gateway=true

kubeconfig  cluster1  broker  :

subctl join broker-info.subm --clusterid cluster1 --clustercidr 100.68.0.0/16,11.16.0.0/16  --natt=false --cable-driver vxlan --health-check=false
kubectl label nodes cluster1 submariner.io/gateway=true

join      gateway, routeagent pod  ,  submariner-operator  clusterrole  :

- apiGroups:
  - "apps"
  resources:
  - daemonsets
  verbs:
  - create
  - get
  - list
  - watch
  - update

subnet  ovn-default  centralized  submariner  gateway  subnet

Pod      IP

subctl


subctl show all
subctl diagnose all

Submariner      Submariner
  
```

[PDF](#)  [Slack](#)  [Support](#)

⌚2025 9 10


⌚2022 5 24



7.6.3

---

## 7.7 Overlay



### 7.7.1

- ip\_forward
- iptables forward Drop
- ct INVALID

### 7.7.2

natOutgoing false nat Pod IP

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: routed
spec:
  protocol: IPv4
  cidrBlock: 10.166.0.0/16
  default: false
  excludeIps:
  - 10.166.0.1
  gateway: 10.166.0.1
  gatewayType: distributed
  natOutgoing: false
  
```

Pod

Kubernetes

```
ip route add 10.166.0.0/16 via 192.168.2.10 dev eth0
```

10.166.0.0/16 192.168.2.10 Kubernetes

IP Keepalived VIP VIP

Subnet gatewayType centralized gatewayNode IP

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: routed
spec:
  protocol: IPv4
  cidrBlock: 10.166.0.0/16
  default: false
  excludeIps:
  - 10.166.0.1
  gateway: 10.166.0.1
  gatewayType: centralized
  gatewayNode: "node1"
  natOutgoing: false
  
```

nat VPC NAT

[PDF](#)

[Slack](#)

[Support](#)

⌚2023 12 25

⌚2022 7 6

⌚GitHub 🧑‍💻

7.7.3

---

## 7.8 BGP



### 7.8.1 kube-ovn-speaker

kube-ovn-speaker    GoBGP

`kube-ovn-speaker`

```
kubectl label nodes speaker-node-1 ovn.kubernetes.io/bgp=true
kubectl label nodes speaker-node-2 ovn.kubernetes.io/bgp=true
```

`kube-ovn-speaker`

ECMP

`yaml:`

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.14/yamls/speaker.yaml
```

`yaml`

```
- --neighbor-address=10.32.32.254
- --neighbor-ipv6-address=2409:AB00:AB00:2000::AFB:8AFE
- --neighbor-as=65030
- --cluster-as=65000
```

```
- --neighbor-address=10.32.32.252,10.32.32.253
- --neighbor-ipv6-address=2409:AB00:AB00:2000::AFB:8AFC,2409:AB00:AB00:2000::AFB:8AFD
- --neighbor-as=65030
- --cluster-as=65000
```

- `neighbor-address`: BGP Peer
- `neighbor-as`: BGP Peer AS
- `cluster-as`: AS

`yaml:`

```
kubectl apply -f speaker.yaml
```

### 7.8.2 Pod/Subnet

BGP              Subnet    natOutgoing    false    Pod IP

`annotation`

```
kubectl annotate pod sample ovn.kubernetes.io/bgp=true
kubectl annotate subnet ovn-default ovn.kubernetes.io/bgp=true
```

`annotation`

```
kubectl annotate pod sample ovn.kubernetes.io/bgp-
kubectl annotate subnet ovn-default ovn.kubernetes.io/bgp-
```

`BGP`

### 7.8.3 ClusterIP Service

```
Service ClusterIP      kube-ovn-speaker   --announce-cluster-ip   true          BGP
```

annotation

```
kubectl annotate service sample ovn.kubernetes.io/bgp=true
```

annotation

```
kubectl annotate service sample ovn.kubernetes.io/bgp-
```

### 7.8.4 EIPs

EIPs	VPC NAT Gateway	VpcNatGateway	BGP	BGP Sidecar			
VPC NAT Gateway	BGP	BGP Speaker Sidecar	NetworkAttachmentDefinition	NAD	VPC	Subnet	Sidecar
Kubernetes API	EIPs	VPC	CoreDNS	NAD			

NetworkAttachmentDefinition Subnet provider {nadName}.{nadNamespace}.ovn

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: api-ovn-nad
  namespace: default
spec:
  config: '{'
    "cniVersion": "0.3.0",
    "type": "kube-ovn",
    "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
    "provider": "api-ovn-nad.default.ovn"
  '}'
---
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: vpc-apiserver-subnet
spec:
  protocol: IPv4
  cidrBlock: 100.100.100.0/24
  provider: api-ovn-nad.default.ovn
```

ovn-vpc-nat-config ConfigMap apiNadProvider BGP Speaker :

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-vpc-nat-config
  namespace: kube-system
data:
  apiNadProvider: api-ovn-nad.default.ovn           # What NetworkAttachmentDefinition provider to use so that the sidecar
                                                    # can access the K8S API, as it can't by default due to VPC segmentation
  bgpSpeakerImage: docker.io/kubeovn/kube-ovn:v1.13.0 # Sets the BGP speaker image used
  image: docker.io/vpc-nat-gateway:v1.13.0
```

ovn-default provider

```
provider: api-ovn-nad.default.ovn
```

VPC NAT Gateway BGP

```
kind: VpcNatGateway
apiVersion: kubeovn.io/v1
metadata:
  name: vpc-natgw
spec:
  vpc: vpc1
  subnet: net1
  lanIp: 10.0.1.10
  bgpSpeaker:
    enabled: true
    asn: 65500
    remoteAsn: 65000
    neighbors:
      - 100.127.4.161
      - fd:01::1
    enableGracefulRestart: true # Optional
```

```

routerId: 1.1.1.1      # Optional
holdTime: 1m           # Optional
password: "password123" # Optional
extraArgs:             # Optional, passed directly to the BGP speaker
  - -v5                # Enables verbose debugging of the BGP speaker sidecar
selector:
  - "kubernetes.io/os: linux"
externalSubnets:
  - ovn-vpc-external-network # Network on which we'll speak BGP and receive/send traffic to the outside world
                                # BGP neighbors need to be on that network

```

BGP EIP

```
kubectl annotate eip sample ovn.kubernetes.io/bgp=true
```

## 7.8.5

kube-ovn-speaker									
• Cluster:		speaker	Pod IPs/Subnet CIDRs		IP	CIDR	Pod	speaker	Pod
		Pod	Subnet						
• Local:		Pod IPs	Pod	Cluster	Pod				
: Local kube-ovn-speaker Pod speaker									
Cluster Pod/Subnet annotation ovn.kubernetes.io/bgp									
• ovn.kubernetes.io/bgp=cluster		ovn.kubernetes.io/bgp=yes		Cluster					
• ovn.kubernetes.io/bgp=local		Local							
Service kube-proxy ClusterIP Service Cluster									

## 7.8.6 BGP

kube-ovn-speaker BGP		
• announce-cluster-ip:	Service	false
• auth-password:	BGP peer	
• holdtime:	BGP	90
• graceful-restart:	BGP Graceful Restart	
• graceful-restart-time:	BGP Graceful restart time	RFC4724 3
• graceful-restart-deferral-time:	BGP Graceful restart deferral time	RFC4724 4.1
• passivemode:	Speaker passive	peer
• ebgp-multipath:	ebgp ttl	1

## 7.8.7 BGP routes debug

```

# show peer neighbor
gobgp neighbor

# show announced routes to one peer
gobgp neighbor 10.32.32.254 adj-out

```

[PDF](#)
[Slack](#)
[Support](#)

⌚2025 9 10

⌚2022 6 14



7.8.8

---

## 7.9 MetalLB Kube-OVN Underlay




### 7.9.1

Kube-OVN 1.14.0 MetalLB Underlay

- MetalLB IP
- Pod MetalLB VIP Underlay
- IP SNAT

### 7.9.2

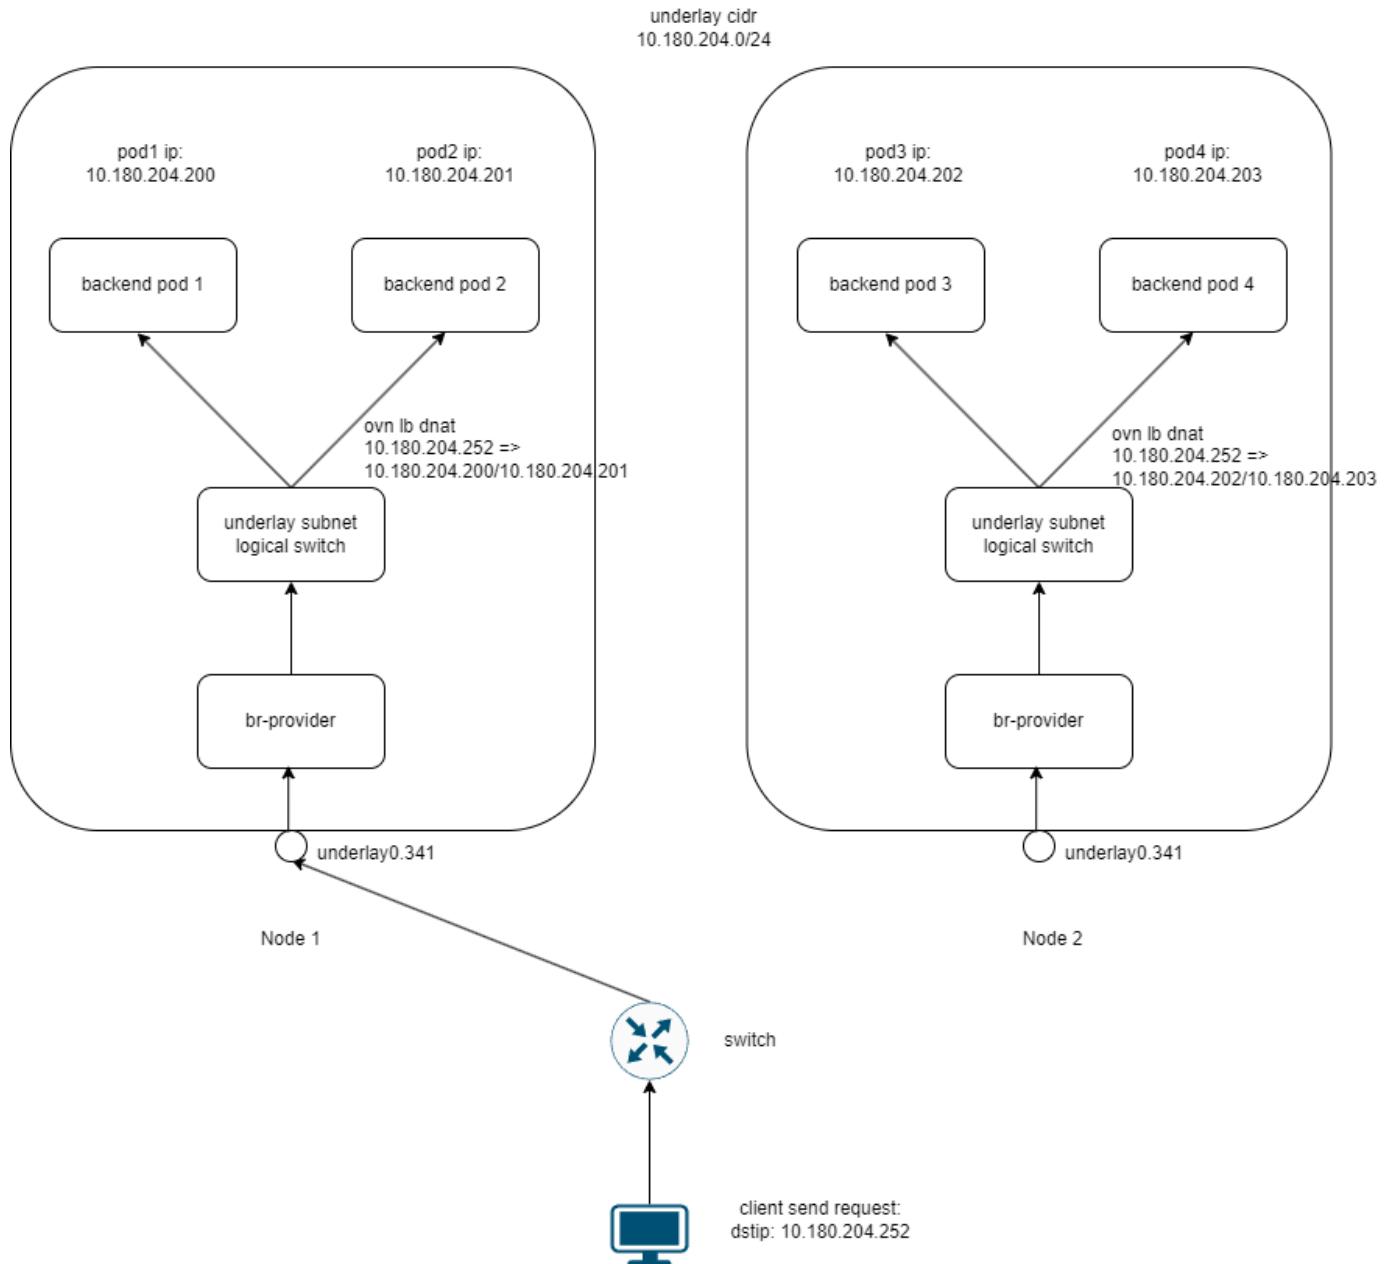

### 1 MetalLB VIP Kube-OVN Underlay

MetalLB Kube-OVN Underlay

```

1.      VIP  10.180.204.252  IP  MetalLB  L2          Node1  metallb  VIP
2.      VIP           underlay0.341
3.  br-provider    Underlay
4. br-provider  OpenFlow        OVN
5.  underlay subnet      OVN      ovn lb dnat
6. OVN            Pod
10.180.204.0/24  VIP  Pod  IP

```

### 7.9.3

- Kube-OVN --enable-ovn-lb-prefer-local=true
- Underlay enableExternalLBAddress=true
- Underlay excludeIps MetalLB IP

### 7.9.4

#### 1. Kube-OVN

```
Kube-OVN  Kube-OVN  --enable-ovn-lb-prefer-local=true  --ls-ct-skip-dst-lport-ips=false
```

```
# kube-ovn-controller Deployment
kubectl edit deployment -n kube-system kube-ovn-controller
```

```
--enable-ovn-lb-prefer-local=true
--ls-ct-skip-dst-lport-ips=false
```

#### 2. Underlay

```
Underlay      LoadBalancer      excludeIps  MetalLB  IP
```

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: underlay-subnet
spec:
  protocol: IPv4
  provider: ovn
  cidrBlock: 10.180.204.0/24 #
  gateway: 10.180.204.1
  excludeIps:
  - 10.180.204.250
  - 10.180.204.251
  - 10.180.204.252 # MetalLB
  natOutgoing: false
  enableExternalLBAddress: true # subnet  cidr   ip     metallb vip
```

#### 3. MetalLB

```
MetalLB      MetalLB
```

```
kubectl apply -f https://raw.githubusercontent.com/metallb/metallb/v0.13.7/config/manifests/metallb-native.yaml
```

```
MetalLB      L2
```

```
apiVersion: metallb.io/v1beta1
kind: IPAddressPool
metadata:
```

```

    name: underlay-pool
    namespace: metallb-system
spec:
  addresses:
  - 10.180.204.250-10.180.204.254 #      VIP 10.180.204.252
---
apiVersion: metallb.io/v1beta1
kind: L2Advertisement
metadata:
  name: l2-advert
  namespace: metallb-system
spec:
  ipAddressPools:
  - underlay-pool

```

#### 4. LoadBalancer Service

LoadBalancer    Service    Underlay    Pod

```

apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: nginx
  name: deploy-16940264
spec:
  replicas: 3
  selector:
    matchLabels:
      app: nginx
  template:
    metadata:
      annotations:
        ovn.kubernetes.io/logical_switch: underlay-subnet
      labels:
        app: nginx
    spec:
      containers:
        - args:
            - netexec
            - --http-port
            - "80"
          image: kubeovn/agnhost:2.47
          imagePullPolicy: IfNotPresent
          name: nginx
---
apiVersion: v1
kind: Service
metadata:
  name: nginx-lb
spec:
  externalTrafficPolicy: Local
  ipFamilies:
  - IPv4
  ipFamilyPolicy: PreferDualStack
  ports:
  - port: 80
    protocol: TCP
    targetPort: 80
  selector:
    app: nginx
  type: LoadBalancer

```

### 7.9.5

1. Service    MetalLB    IP

```
kubectl get svc nginx-lb
```

EXTERNAL-IP    IP    10.180.204.252

1.    Service    IP

```
curl http://10.180.204.252
```

1.              Pod

Service    endpoints    Pod

```
#   Service   endpoints
kubectl get endpoints nginx-lb
```

```
# Pod
kubectl get pods -l app=nginx -o wide
```

## 1. IP

nginx Pod IP IP SNAT IP

```
kubectl exec -it $(kubectl get pods -l app=nginx -o name | head -n1) -- cat /var/log/nginx/access.log
```

## 7.9.6

IP

MetalLB	Underlay	CIDR	Underlay	excludeIps	IP
---------	----------	------	----------	------------	----

MetalLB	Kube-OVN Underlay	underlay0.341	VLAN	VLAN	ARP	MetalLB VIP
---------	-------------------	---------------	------	------	-----	-------------

- Kube-OVN	--enable-ovn-lb-prefer-local=true	- Service	externalTrafficPolicy: Local
------------	-----------------------------------	-----------	------------------------------


PDF

Slack

Support

2025 9 10


2025 4 2



## 7.9.7

## 7.10 Cilium

- Cilium eBPF Kube-OVN CNI Chaining Kube-OVN eBPF
- Cilium Kube-OVN
- Hubble

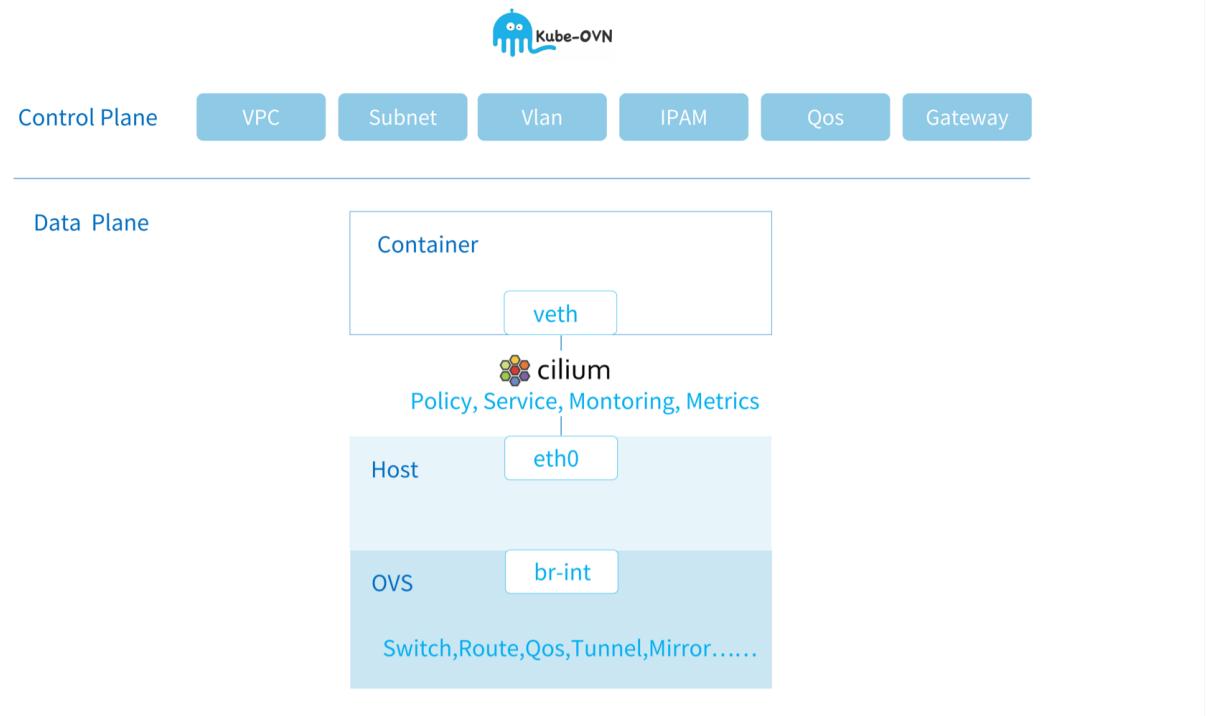

### 7.10.1

1. Linux 4.19 eBPF
2. Helm Cilium Helm [Installing Helm](#)

### 7.10.2 Kube-OVN

Cilium Kube-OVN networkpolicy CNI

```
install.sh
```

```
ENABLE_NP=false
CNI_CONFIG_PRIORITY=10
```

```
kube-ovn-controller networkpolicy
```

```
args:
- --enable-np=false
```

```
kube-ovn-cni CNI
```

```
args:
- --cni-conf-name=10-kube-ovn.conflist
```

Kube-OVN

Cilium

```
mv /etc/cni/net.d/01-kube-ovn.conflist /etc/cni/net.d/10-kube-ovn.conflist
```

### 7.10.3 Cilium

chaining.yaml Cilium generic-veth

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: cni-configuration
  namespace: kube-system
data:
  cni-config: |-
    {
      "name": "generic-veth",
      "cniVersion": "0.3.1",
      "plugins": [
        {
          "type": "kube-ovn",
          "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
          "ipam": {
            "type": "kube-ovn",
            "server_socket": "/run/openvswitch/kube-ovn-daemon.sock"
          }
        },
        {
          "type": "portmap",
          "snat": true,
          "capabilities": {"portMappings": true}
        },
        {
          "type": "cilium-cni"
        }
      ]
    }
```

```
kubectl apply -f chaining.yaml
```

Helm Cilium

```
helm repo add cilium https://helm.cilium.io/
helm install cilium cilium/cilium --version 1.11.6 \
  --namespace kube-system \
  --set cni.chainingMode=generic-veth \
  --set cni.customConf=true \
  --set cni.configMap=cni-configuration \
  --set tunnel=disabled \
  --set enableIPv4Masquerade=false \
  --set devices="eth+ ovn0 genev_sys_6081 vxlan_sys_4789" \
  --set enableIdentityMark=false
```

Cilium

```
# cilium status
  /--\
 /--\ /--\   Cilium:      OK
 \--/ \--/   Operator:    OK
 /--\ /--\   Hubble:     disabled
 \--/ \--\   ClusterMesh: disabled
   \--/

DaemonSet      cilium      Desired: 2, Ready: 2/2, Available: 2/2
Deployment     cilium-operator Desired: 2, Ready: 2/2, Available: 2/2
Containers:    cilium      Running: 2
               cilium-operator Running: 2
Cluster Pods: 8/11 managed by Cilium
Image versions cilium      quay.io/cilium/cilium:v1.10.5@sha256:0612218e28288db360c63677c09fafafa2d17edda4f13867bcabf87056046b33bb: 2
               cilium-operator quay.io/cilium/operator-generic:v1.10.5@sha256:2d2f730f219d489ff0702923bf24c0002cd93eb4b47ba344375566202f56d972: 2
```



PDF



Slack



Support

⌚2024 10 8

⌚2022 5 24



7.10.4

---

## 7.11 Cilium NetworkPolicy

Kube-OVN	Cilium	Cilium
Cilium	Cilium	Cilium L3 L4

### 7.11.1

#### Pod

namespace test yaml test namespace label app=test Pod Pod

```
apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: test
  name: test
  namespace: test
spec:
  replicas: 1
  selector:
    matchLabels:
      app: test
  strategy:
    rollingUpdate:
      maxSurge: 25%
      maxUnavailable: 25%
    type: RollingUpdate
  template:
    metadata:
      labels:
        app: test
    spec:
      containers:
        - image: docker.io/library/nginx:alpine
          imagePullPolicy: IfNotPresent
          name: nginx
```

yaml default namespace label app=dynamic Pod Pod

```
apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: dynamic
  name: dynamic
  namespace: default
spec:
  replicas: 2
  selector:
    matchLabels:
      app: dynamic
  strategy:
    rollingUpdate:
      maxSurge: 25%
      maxUnavailable: 25%
    type: RollingUpdate
  template:
    metadata:
      creationTimestamp: null
    labels:
      app: dynamic
    spec:
      containers:
        - image: docker.io/library/nginx:alpine
          imagePullPolicy: IfNotPresent
          name: nginx
```

Pod Label :

```
# kubectl get pod -o wide --show-labels
NAME           READY   STATUS    RESTARTS   AGE     IP          NODE      NOMINATED NODE   READINESS GATES   LABELS
dynamic-7d8d7874f5-9v5c4   1/1    Running   0          28h    10.16.0.35   kube-ovn-worker   <none>    <none>
template-hash=7d8d7874f5
dynamic-7d8d7874f5-s822n   1/1    Running   0          28h    10.16.0.36   kube-ovn-control-plane   <none>    <none>
template-hash=7d8d7874f5
# kubectl get pod -o wide -n test --show-labels
NAME           READY   STATUS    RESTARTS   AGE     IP          NODE      NOMINATED NODE   READINESS GATES   LABELS
dynamic-7d8d7874f5-6ds96   1/1    Running   0          7h20m  10.16.0.2    kube-ovn-control-plane   <none>    <none>
template-hash=7d8d7874f5
```

```

dynamic-7d8d7874f5-tjgtp  1/1  Running  0   7h46m  10.16.0.42  kube-ovn-worker  <none>    <none>    app=dynamic,pod-
template-hash=7d8d7874f5
label-test1-77b6764857-sq4k  1/1  Running  0   3h43m  10.16.0.12  kube-ovn-worker  <none>    <none>    app=test1,pod-
template-hash=77b6764857

// Pod
test-54c98bc466-mft5s  1/1  Running  0   8h     10.16.0.41  kube-ovn-worker  <none>    <none>    app=test,pod-
template-hash=54c98bc466

```

**L3**

`yaml CiliumNetworkPolicy :`

```

apiVersion: "cilium.io/v2"
kind: CiliumNetworkPolicy
metadata:
  name: "l3-rule"
  namespace: test
spec:
  endpointSelector:
    matchLabels:
      app: test
  ingress:
  - fromEndpoints:
    - matchLabels:
      app: dynamic

```

default namespace	Pod	Pod	test namespace	Pod
-------------------	-----	-----	----------------	-----

`default namespace :`

```

# kubectl exec -it dynamic-7d8d7874f5-9v5c4 -- bash
bash-5.0# ping -c 3 10.16.0.41
PING 10.16.0.41 (10.16.0.41): 56 data bytes
--- 10.16.0.41 ping statistics ---
3 packets transmitted, 0 packets received, 100% packet loss

```

`test namespace Pod :`

```

# kubectl exec -it -n test dynamic-7d8d7874f5-6dsg6 -- bash
bash-5.0# ping -c 3 10.16.0.41
PING 10.16.0.41 (10.16.0.41): 56 data bytes
64 bytes from 10.16.0.41: seq=0 ttl=64 time=2.558 ms
64 bytes from 10.16.0.41: seq=1 ttl=64 time=0.223 ms
64 bytes from 10.16.0.41: seq=2 ttl=64 time=0.304 ms

--- 10.16.0.41 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.223/1.028/2.558 ms

```

Cilium	CiliumNetworkPolicy	Namespace	Cilium
--------	---------------------	-----------	--------

Namespace	Pod	Namespace	Pod
-----------	-----	-----------	-----

Namespace	Namespace
-----------	-----------

`CiliumNetworkPolicy namespace :`

```

ingress:
- fromEndpoints:
  - matchLabels:
    app: dynamic
    k8s.io.kubernetes.pod.namespace: default // Namespace Pod

```

`CiliumNetworkPolicy :`

```

# kubectl get cnp -n test -o yaml l3-rule
apiVersion: cilium.io/v2
kind: CiliumNetworkPolicy
metadata:
  name: l3-rule
  namespace: test
spec:
  endpointSelector:
    matchLabels:
      app: test
  ingress:
  - fromEndpoints:
    - matchLabels:

```

```
app: dynamic
- matchLabels:
  app: dynamic
k8s:io.kubernetes.pod.namespace: default
```

default namespace Pod Pod :

```
# kubectl exec -it dynamic-7d8d7874f5-9v5c4 -n test -- bash
bash-5.0# ping -c 3 10.16.0.41
PING 10.16.0.41 (10.16.0.41): 56 data bytes
64 bytes from 10.16.0.41: seq=0 ttl=64 time=2.383 ms
64 bytes from 10.16.0.41: seq=1 ttl=64 time=0.115 ms
64 bytes from 10.16.0.41: seq=2 ttl=64 time=0.142 ms

--- 10.16.0.41 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.115/0.880/2.383 ms
```

Kubernetes	<a href="#">networkpolicy</a>	Cilium	Namespace	Namespace	Pod	Namespace	Namespace	Pod
Kube-OVN	Kube-OVN	k8s	Namespace	Pod	Pod	Namespace	Namespace	Pod
Pod								

## L4

yaml L4 :

```
apiVersion: "cilium.io/v2"
kind: CiliumNetworkPolicy
metadata:
  name: "14-rule"
  namespace: test
spec:
  endpointSelector:
    matchLabels:
      app: test
  ingress:
  - fromEndpoints:
    - matchLabels:
      app: dynamic
  toPorts:
  - ports:
    - port: "80"
      protocol: TCP
```


Namespace Pod

```
# kubectl exec -it -n test dynamic-7d8d7874f5-6dsg6 -- bash
bash-5.0# ping -c 3 10.16.0.41
PING 10.16.0.41 (10.16.0.41): 56 data bytes

--- 10.16.0.41 ping statistics ---
3 packets transmitted, 0 packets received, 100% packet loss
bash-5.0#
bash-5.0# curl 10.16.0.41:80
<html>
<head>
  <title>Hello World!</title>
  <link href='//fonts.googleapis.com/css?family=Open+Sans:400,700' rel='stylesheet' type='text/css'>
  <style>
  body {
    background-color: white;
    text-align: center;
    padding: 50px;
    font-family: "Open Sans", "Helvetica Neue", Helvetica, Arial, sans-serif;
  }
  #logo {
    margin-bottom: 40px;
  }
  </style>
</head>
<body>
  <h1>Hello World!</h1>
  <h3>Links found</h3>
  <h3>I am on test-54c98bc466-mft5s</h3>
  <h3>Cookie
    <b>KUBERNETES</b> listening in 443 available at tcp://10.96.0.1:443<br />
    <h3>my name is hanhouchao!</h3>
    <h3> RequestURI='/'</h3>
  </body>
</html>
```


```
# kubectl exec -it -n test label-test1-77b6764857-swq4k -- bash
bash-5.0# ping -c 3 10.16.0.41
PING 10.16.0.41 (10.16.0.41): 56 data bytes

--- 10.16.0.41 ping statistics ---
3 packets transmitted, 0 packets received, 100% packet loss
bash-5.0#
bash-5.0# curl -v 10.16.0.41:80 --connect-timeout 10
*   Trying 10.16.0.41:80...
* After 10000ms connect time, move on!
* connect to 10.16.0.41 port 80 failed: Operation timed out
* Connection timeout after 10001 ms
* Closing connection 0
curl: (28) Connection timeout after 10001 ms
```

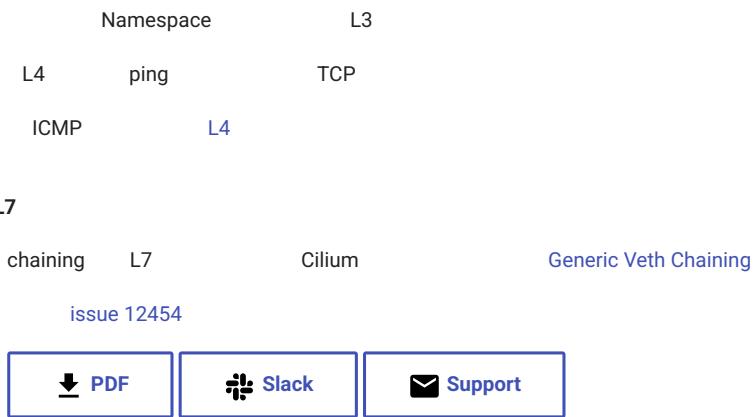

2025 9 10

Q+2022 8 2



7.11.2

## 7.12 Cilium

```
Kube-OVN      Cilium      Cilium
Cilium          Hubble     Hubble
```

### 7.12.1 Hubble

```
Cilium      Hubble      Hubble
```

```
helm  Hubble
```

```
helm upgrade cilium cilium/cilium --version 1.11.6 \
--namespace kube-system \
--reuse-values \
--set hubble.relay.enabled=true \
--set hubble.ui.enabled=true
```

```
Hubble      cilium status      Hubble
```

```
# cilium status
  /--\
 /--\_\_/\_--\ Cilium:      OK
 \_\_/\_--\_\_/\ Operator:    OK
 /--\_\_/\_--\ Hubble:      OK
 \_\_/\_--\_\_/\ ClusterMesh: disabled
 \_\_/\

Deployment      hubble-relay      Desired: 1, Ready: 1/1, Available: 1/1
Deployment      cilium-operator   Desired: 2, Ready: 2/2, Available: 2/2
DaemonSet       cilium           Desired: 2, Ready: 2/2, Available: 2/2
Deployment      hubble-ui        Desired: 1, Ready: 1/1, Available: 1/1
Containers:    cilium           Running: 2
                hubble-ui         Running: 1
                hubble-relay       Running: 1
                cilium-operator    Running: 2
Cluster Pods: 16/17 managed by Cilium
Image versions  hubble-relay      quay.io/cilium/hubble-relay:v1.11.6@sha256:fd9034a2d04d5b973f1e8ed44f230ea195b89c37955ff32e34e5aa68f3ed675a: 1
                cilium-operator   quay.io/cilium/operator-generic:v1.11.6@sha256:9f6063c7bcaede801a39315ec7c166389f6a6783e98665f669393cf1701bc17: 2
                cilium           quay.io/cilium/cilium:v1.11.6@sha256:f7f93c26739b6641a3a3d76b1e1605b15989f25d06625260099e01c8243f54c: 2
                hubble-ui         quay.io/cilium/hubble-ui:v0.9.0@sha256:0ef04e9a29212925da6dfdb0a5b581765e41a01fcc30563cef9b30b457fea0: 1
                hubble-ui         quay.io/cilium/hubble-ui-backend:v0.9.0@sha256:000df6b76719f607a9edefb9af94fdf1811a6f1b6a8a9c537cba90bf12df474b: 1
apple@bogon cilium %
```

```
Hubble      Hubble CLI :
```

```
curl -L --fail --remote-name-all https://github.com/cilium/hubble/releases/download/v0.10.0/hubble-linux-amd64.tar.gz
sudo tar xzvfC hubble-linux-amd64.tar.gz /usr/local/bin
```

### 7.12.2

```
Cilium
```

```
cilium connectivity test Cilium      cilium-test Namespace      cilium-test
```

```
cilium-test namespace
```

```
# kubectl get all -n cilium-test
NAME                  READY   STATUS    RESTARTS   AGE
pod/client-7df6cfbf7b-z5t2j   1/1    Running   0          21s
pod/client2-547996d7db-nvgxg   1/1    Running   0          21s
pod/echo-other-node-d79544ccf-h14gg  2/2    Running   0          21s
pod/echo-same-node-5d466d5444-m17tc  2/2    Running   0          21s

NAME              TYPE        CLUSTER-IP      EXTERNAL-IP      PORT(S)      AGE
service/echo-other-node  NodePort  10.109.58.126  <none>           8080:32269/TCP  21s
service/echo-same-node   NodePort  10.188.70.32   <none>           8080:32490/TCP  21s

NAME                  READY   UP-TO-DATE   AVAILABLE   AGE
deployment.apps/client 1/1     1           1           21s
deployment.apps/client2 1/1     1           1           21s
deployment.apps/echo-other-node 1/1     1           1           21s
deployment.apps/echo-same-node   1/1     1           1           21s

NAME                  DESIRED   CURRENT   READY   AGE

```

```
replicaset.apps/client-7df6cfbf7b      1     1     1     21s
replicaset.apps/client2-547996d7d8    1     1     1     21s
replicaset.apps/echo-other-node-d79544ccf 1     1     1     21s
replicaset.apps/echo-same-node-5d466d5444 1     1     1     21s
```

### 7.12.3

Cilium	kube-system namespace	Cilium	pod	hubble observe				
# kubectl get pod -n kube-system -o wide								
NAME	READY	STATUS	RESTARTS	AGE	IP	NODE	NOMINATED NODE	READINESS GATES
cilium-d6h56	1/1	Running	0	2d20h	172.18.0.2	kube-ovn-worker	<none>	<none>
cilium-operator-5887f78bbb-c7sb2	1/1	Running	0	2d20h	172.18.0.2	kube-ovn-worker	<none>	<none>
cilium-operator-5887f78bbb-wj8gt	1/1	Running	0	2d20h	172.18.0.3	kube-ovn-control-plane	<none>	<none>
cilium-tq5xb	1/1	Running	0	2d20h	172.18.0.3	kube-ovn-control-plane	<none>	<none>
kube-ovn-pinger-7lgk8	1/1	Running	0	21h	10.16.0.19	kube-ovn-control-plane	<none>	<none>
kube-ovn-pinger-msvcn	1/1	Running	0	21h	10.16.0.18	kube-ovn-worker	<none>	<none>

```
# kubectl exec -it -n kube-system cilium-d6h56 -- bash
root@kube-ovn-worker:/home/cilium# hubble observe --from-namespace kube-system
Jul 29 03:24:25.551: kube-system/kube-ovn-pinger-msvcn:35576 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: ACK, PSH)
Jul 29 03:24:25.561: kube-system/kube-ovn-pinger-msvcn:35576 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: RST)
Jul 29 03:24:25.561: kube-system/kube-ovn-pinger-msvcn:35576 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: ACK, RST)
Jul 29 03:24:25.572: kube-system/kube-ovn-pinger-msvcn:35578 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: SYN)
Jul 29 03:24:25.572: kube-system/kube-ovn-pinger-msvcn:35578 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: ACK)
Jul 29 03:24:25.651: kube-system/kube-ovn-pinger-msvcn:35578 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: ACK, PSH)
Jul 29 03:24:25.661: kube-system/kube-ovn-pinger-msvcn:35578 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: RST)
Jul 29 03:24:25.661: kube-system/kube-ovn-pinger-msvcn:35578 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: ACK, RST)
Jul 29 03:24:25.761: kube-system/kube-ovn-pinger-msvcn:52004 -> 172.18.0.3:6443 to-stack FORWARDED (TCP Flags: ACK, PSH)
Jul 29 03:24:25.779: kube-system/kube-ovn-pinger-msvcn -> kube-system/kube-ovn-pinger-7lgk8 to-stack FORWARDED (ICMPv4 EchoRequest)
Jul 29 03:24:25.779: kube-system/kube-ovn-pinger-msvcn <- kube-system/kube-ovn-pinger-7lgk8 to-endpoint FORWARDED (ICMPv4 EchoReply)
Jul 29 03:24:25.866: kube-system/hubble-ui-7596f7ffff-7j6f2:55836 <- kube-system/hubble-relay-959988db5-zc5vv:4245 to-stack FORWARDED (TCP Flags: ACK)
Jul 29 03:24:25.866: kube-system/hubble-ui-7596f7ffff-7j6f2:55836 <- kube-system/hubble-relay-959988db5-zc5vv:80 to-endpoint FORWARDED (TCP Flags: ACK)
Jul 29 03:24:25.866: kube-system/hubble-ui-7596f7ffff-7j6f2:55836 -> kube-system/hubble-relay-959988db5-zc5vv:4245 to-stack FORWARDED (TCP Flags: ACK)
Jul 29 03:24:25.866: kube-system/hubble-ui-7596f7ffff-7j6f2:55836 -> kube-system/hubble-relay-959988db5-zc5vv:4245 to-endpoint FORWARDED (TCP Flags: ACK)
Jul 29 03:24:25.975: kube-system/kube-ovn-pinger-7lgk8 -> kube-system/kube-ovn-pinger-msvcn to-endpoint FORWARDED (ICMPv4 EchoRequest)
Jul 29 03:24:25.975: kube-system/kube-ovn-pinger-7lgk8 <- kube-system/kube-ovn-pinger-msvcn to-stack FORWARDED (ICMPv4 EchoReply)
Jul 29 03:24:25.979: kube-system/kube-ovn-pinger-msvcn -> 172.18.0.3 to-stack FORWARDED (ICMPv4 EchoRequest)
Jul 29 03:24:26.037: kube-system/coredns-6d4b75cb6d-lbgjg:36430 -> 172.18.0.3:6443 to-stack FORWARDED (TCP Flags: ACK)
Jul 29 03:24:26.282: kube-system/kube-ovn-pinger-msvcn -> 172.18.0.2 to-stack FORWARDED (ICMPv4 EchoRequest)
```

### Hubble Relay Hubble

```
Hubble API          Hubble Service      kubectl port-forward deployment/hubble-relay -n kube-system 4245:4245
```

```
kubectl port-forward
```


```
hubble status
```

```
# hubble status
Healthcheck (via localhost:4245): Ok
Current/Max Flows: 8,190/8,190 (100.00%)
Flows/s: 22.86
Connected Nodes: 2/2
```

**hubble observe** **hubble help observe** **Hubble CLI**

#### 7.12.4 UI

```
cilium status      Hubble UI          Hubble           UI  
cilium hubble ui  hubble-ui service  Hubble UI  
http://localhost:12000  UI
```

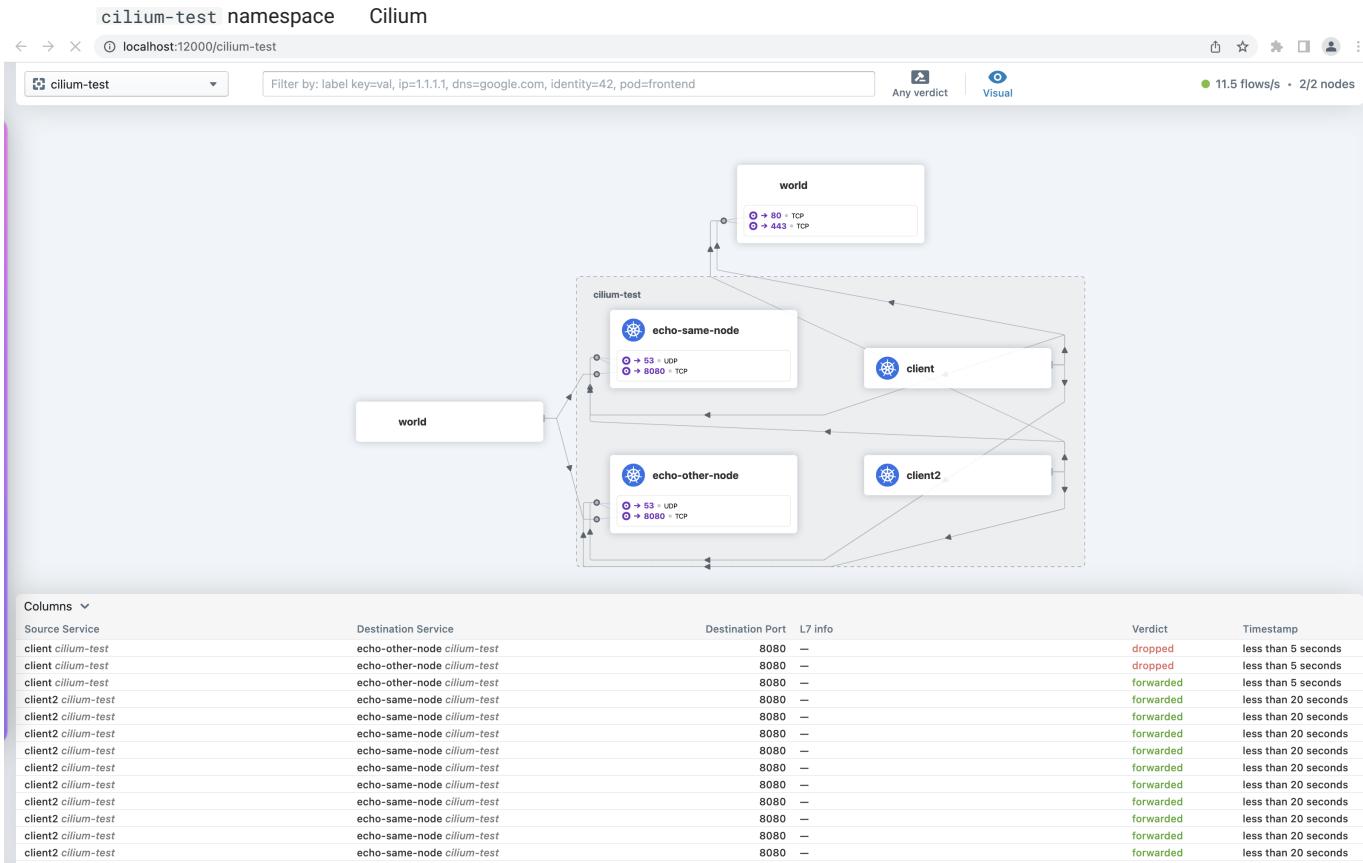

## 7.12.5 Hubble

Hubble Pod Hubble

```
helm upgrade cilium cilium/cilium --version 1.11.6 \
--namespace kube-system \
--reuse-values \
--set hubble.relay.enabled=true \
--set hubble.ui.enabled=true \
--set hubble.metrics.enabled="{dns,drop,tcp,flow,icmp,http}"
```

**kube-system** namespace      **hubble-metrics**      **Endpoints**      **Hubble**

```
# curl 172.18.0.2:9091/metrics
# HELP hubble_drop_total Number of drops
# TYPE hubble_drop_total counter
hubble_drop_total{protocol="ICMPv6",reason="Unsupported L3 protocol"} 2
# HELP hubble_flows_processed_total Total number of flows processed
# TYPE hubble_flows_processed_total counter
hubble_flows_processed_total{protocol="ICMPv4",subtype="to-endpoint",type="Trace",verdict="FORWARDED"} 335
hubble_flows_processed_total{protocol="ICMPv4",subtype="to-stack",type="Trace",verdict="FORWARDED"} 335
hubble_flows_processed_total{protocol="ICMPv6",subtype="",type="Drop",verdict="DROPPED"} 2
hubble_flows_processed_total{protocol="TCP",subtype="to-endpoint",type="Trace",verdict="FORWARDED"} 8282
hubble_flows_processed_total{protocol="TCP",subtype="to-stack",type="Trace",verdict="FORWARDED"} 6767
hubble_flows_processed_total{protocol="UDP",subtype="to-endpoint",type="Trace",verdict="FORWARDED"} 1642
hubble_flows_processed_total{protocol="UDP",subtype="to-stack",type="Trace",verdict="FORWARDED"} 1642
# HELP hubble_icmp_total Number of ICMP messages
# TYPE hubble_icmp_total counter
hubble_icmp_total{family="IPv4",type="EchoReply"} 335
hubble_icmp_total{family="IPv4",type="EchoRequest"} 335
hubble_icmp_total{family="IPv4",type="RouterSolicitation"} 2
# HELP hubble_tcp_flags_total TCP flag occurrences
# TYPE hubble_tcp_flags_total counter
hubble_tcp_flags_total{family="IPv4",flag="FIN"} 2043
hubble_tcp_flags_total{family="IPv4",flag="RST"} 301
hubble_tcp_flags_total{family="IPv4",flag="SYN"} 1169
hubble_tcp_flags_total{family="IPv4",flag="SYN-ACK"} 1169
```



⌚2023 3 26

⌚2022 8 2



7.12.6

---

## 7.13

### Kube-OVN

#### 7.13.1

```
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: external
spec:
  cidrBlock: 172.31.0.0/16
  gatewayType: centralized
  natOutgoing: false
  externalEgressGateway: 192.168.0.1
  policyRoutingTableID: 1000
  policyRoutingPriority: 1500
```

- natOutgoing: false
- externalEgressGateway
- policyRoutingTableID TableID
- policyRoutingPriority

[!\[\]\(214bf89a55463595b962c3de3f4e7260\_img.jpg\) PDF](#)[!\[\]\(36af7f176ee854dd0505c6d8f87a651f\_img.jpg\) Slack](#)[!\[\]\(0d753287df5ad6a2dcdf0d219250f301\_img.jpg\) Support](#)

 2022 6 8

 2022 5 24

 GitHub 

#### 7.13.2

## 7.14 VIP IP

```

VIP   IP      IP      VIP   kube-ovn IP  POD          IP      IP      VIP      Openstack neutron Allowed-Address-Pairs
AAP      Openstack octavia           POD IP      aliyun terway      neutron   IP      VIP      VIP
POD   IP      VIP   IP          OVN   Switch LB      IP   LB   VIP      VIP   OVN
Switch LB Rule      VIP

```

- Allowed-Address-Pairs VIP
- Switch LB rule VIP
- Pod VIP IP

### 7.14.1 1. Allowed-Address-Pairs VIP

```

IP      Pod
• Kubernetes  Kubernetes  Kubernetes  Underlay  Subnet
• LB          Subnet   IP      Pod
VIP      Allowed-Address-Pairs  IP      IP
• Keepalived  IP

```

#### 1.1 VIP

IP IP yaml

```

apiVersion: kubeovn.io/v1
kind: Vip
metadata:
  name: vip-dynamic-01
spec:
  subnet: ovn-default
  type: ""

```

- subnet: Subnet IP
- type: ipam ip switch\_lb\_vip vip switch lb vip ip

VIP

```

# kubectl get vip
NAME      V4IP      PV4IP    MAC      PMAC      V6IP      PV6IP    SUBNET    READY
vip-dynamic-01  10.16.0.12  00:00:00:F0:DB:25

```

VIP 10.16.0.12 IP

#### 1.2 VIP

VIP IP yaml

```

apiVersion: kubeovn.io/v1
kind: Vip
metadata:
  name: static-vip01
spec:
  subnet: ovn-default
  v4ip: "10.16.0.121"

```

- subnet: Subnet IP
- v4ip: IP subnet CIDR

VIP

```
# kubectl get vip
NAME      V4IP      PV4IP      MAC          PMAC      V6IP      PV6IP      SUBNET      READY
static-vip01  10.16.0.121           00:00:00:F0:DB:26      ovn-default  true
```

VIP IP

### 1.3 Pod VIP AAP

Pod	annotation	VIP	AAP	labels	VIP
Pod annotation		VIP			ovn.kubernetes.io/aaps: vip-aap,vip-aap2,vip-aap3
AAP		Pod	AAP	Pod	VIP subnet Port

#### 1.3.1 VIP AAP

```
apiVersion: kubeovn.io/v1
kind: Vip
metadata:
  name: vip-aap
spec:
  subnet: ovn-default
  namespace: default
  selector:
    - "app: aap1"
```

VIP

- namespace : AAP      VIP      VIP      AAP
- selector : AAP      VIP      Pod      Kubernetes      NodeSelector

VIP      Port

```
# kubectl ko nbctl show ovn-default
switch e32e1d3b-c539-45f4-ab19-be4e33a061f6 (ovn-default)
  port aap-vip
    type: virtual
```

```
apiVersion: v1
kind: Pod
metadata:
  name: busybox
  annotations:
    ovn.kubernetes.io/aaps: vip-aap
  labels:
    app: aap1
spec:
  containers:
    - name: busybox
      image: busybox
      command: ["sleep", "3600"]
      securityContext:
        capabilities:
          add:
            - NET_ADMIN
```

AAP

```
# kubectl ko nbctl list logical_switch_port aap-vip
_uuid      : cd930750-0533-4f06-a6c0-217ddac73272
addresses  : []
dhcpv4_options : []
dhcpv6_options : []
dynamic_addresses : []
enabled   : []
external_ids : {ls=ovn-default, vendor=kube-ovn}
ha_chassis_group : []
mirror_rules : []
name       : aap-vip
options    : {virtual-ip="10.16.0.100", virtual-parents="busybox.default"}
parent_name : []
port_security : []
tag        : []
tag_request : []
type       : virtual
up         : false
```

virtual-ip      VIP      IP virtual-parents      AAP      Pod      Port

## Pod

```
# kubectl exec -it busybox -- ip addr add 10.16.0.100/16 dev eth0
# kubectl exec -it busybox01 -- ip addr show eth0
35: eth0@if36: <BROADCAST,MULTICAST,UP,LOWER_UP,M-DOWN> mtu 1400 qdisc noqueue
    link/ether 00:00:00:e2:ab:0c brd ff:ff:ff:ff:ff:ff
    inet 10.16.0.7/16 brd 10.16.255.255 scope global eth0
        valid_lft forever preferred_lft forever
    inet 10.16.0.100/16 scope global secondary eth0
        valid_lft forever preferred_lft forever
    inet6 fe80::200:ff:fee2:ab0c/64 scope link
        valid_lft forever preferred_lft forever
```

Pod	IP	VIP	IP	subnet	Pod	IP
-----	----	-----	----	--------	-----	----

## 7.14.2 2. Switch LB rule vip

```
apiVersion: kubeovn.io/v1
kind: Vip
metadata:
  name: slr-01
spec:
  subnet: ovn-default
  type: switch_lb_vip

  • subnet: Subnet IP
  • type: ipam ip switch_lb_vip vip switch lb vip ip
```

## 7.14.3 3. Pod VIP IP

v1.12

IP

```
apiVersion: kubeovn.io/v1
kind: Vip
metadata:
  name: pod-use-vip
spec:
  subnet: ovn-default
  type: ""
```

annotation VIP Pod

```
apiVersion: v1
kind: Pod
metadata:
  name: static-ip
  annotations:
    ovn.kubernetes.io/vip: pod-use-vip #   vip
    namespace: default
spec:
  containers:
    - name: static-ip
      image: docker.io/library/nginx:alpine
```

## 3.1 StatefulSet Kubevirt VM VIP

StatefulSet	VM	Pod	VIP
VM	VIP	kube-ovn-controller	keep-vm-ip true Kubevirt VM

[PDF](#)[Slack](#)[Support](#)

2025 9 17

2022 5 24




7.14.4

---

## 7.15 Mellanox Offload

Kube-OVN	OVS	CPU	CPU	Mellanox	Accelerated Switching And Packet
Processing (ASAP <sup>2</sup> )	OVS	eSwitch	OVS	CPU	

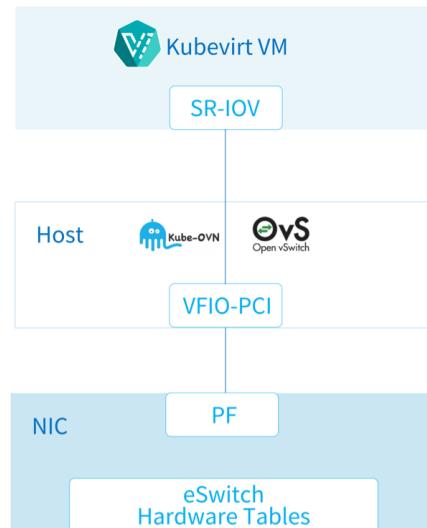

Note

2022

### 7.15.1

- Mellanox CX5/CX6/CX7/BlueField      ASAP<sup>2</sup>
- CentOS 8 Stream      Linux 5.7
- dp\_hash      hash      OVN LB
- bond

### 7.15.2 SR-IOV Device Plugin

Mellanox	offload	SR-IOV Device Plugin	<a href="#">srivio-network-operator</a>
----------	---------	----------------------	---

#### SR-IOV Device Plugin

SR-IOV

ID      84:00.0      84.00.1

```
# lspci -nn | grep ConnectX-5
84:00.0 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5] [15b3:1017]
84:00.1 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5] [15b3:1017]
```

## ID

```
# ls -l /sys/class/net/ | grep 84:00.0
lrwxrwxrwx 1 root root 0 Feb 4 16:16 enp132s0f0np0 -> ../../devices/pci0000:80/0000:80:08.0/0000:84:00.0/net/enp132s0f0np0
# ls -l /sys/class/net/ | grep 84:00.1
lrwxrwxrwx 1 root root 0 Feb 4 16:16 enp132s0f1np1 -> ../../devices/pci0000:80/0000:80:08.0/0000:84:00.1/net/enp132s0f1np1
```

## bond

```
| enp132s0f0np0  enp132s0f1np1  bond1
```

```
# ip link show enp132s0f0np0 | grep bond
160: enp132s0f0np0: <BROADCAST,MULTICAST,SLAVE,UP,LOWER_UP> mtu 1500 qdisc mq master bond1 state UP mode DEFAULT group default qlen 1000
# ip link show enp132s0f1np1 | grep bond
169: enp132s0f1np1: <BROADCAST,MULTICAST,SLAVE,UP,LOWER_UP> mtu 1500 qdisc mq master bond1 state UP mode DEFAULT group default qlen 1000
```

## bond VF

```
ifenslave -d bond1 enp132s0f0np0
ifenslave -d bond1 enp132s0f1np1
echo 0 > /sys/class/net/enp132s0f0np0/device/sriov_numvfs
echo 0 > /sys/class/net/enp132s0f1np1/device/sriov_numvfs
ip link set enp132s0f0np0 down
ip link set enp132s0f1np1 down
```

## OVS

## SMFS DMFS

- SMFS (software-managed flow steering)
- DMFS (device-managed flow steering)

## sysfs devlink API

```
# sysfs
echo <smfs|dmfs> > /sys/class/net/enp132s0f0np0/compat/devlink/steering_mode
echo <smfs|dmfs> > /sys/class/net/enp132s0f1np1/compat/devlink/steering_mode
# devlink
devlink dev param set pci/84:00.0 name flow_steering_mode value smfs cmode runtime
devlink dev param set pci/84:00.1 name flow_steering_mode value smfs cmode runtime
```

## VF

```
# cat /sys/class/net/enp132s0f0np0/device/sriov_totalvfs
127
# cat /sys/class/net/enp132s0f1np1/device/sriov_totalvfs
127
```

## VF

```
# echo '4' > /sys/class/net/enp132s0f0np0/device/sriov_numvfs
# echo '4' > /sys/class/net/enp132s0f1np1/device/sriov_numvfs
# ip link show enp132s0f0np0
160: enp132s0f0np0: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc mq state DOWN mode DEFAULT group default qlen 1000
    link/ether 00:c0:eb:74:c3:4b brd ff:ff:ff:ff:ff:ff
    vf 0 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
    vf 1 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
    vf 2 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
    vf 3 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
# ip link show enp132s0f1np1
169: enp132s0f1np1: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc mq state DOWN mode DEFAULT group default qlen 1000
    link/ether 00:c0:eb:74:c3:4b brd ff:ff:ff:ff:ff:ff
    vf 0 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
    vf 1 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
    vf 2 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
    vf 3 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
# ip link set enp132s0f0np0 up
# ip link set enp132s0f1np1 up
```

## VF ID

```
# lspci -nn | grep ConnectX-5 | grep Virtual
84:00.2 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
84:00.3 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
84:00.4 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
```

```
84:00.5 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
84:00.6 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
84:00.7 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
84:01.0 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
84:01.1 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
```

VF

```
echo 0000:84:00.2 > /sys/bus/pci/drivers/mlx5_core/unbind  
echo 0000:84:00.3 > /sys/bus/pci/drivers/mlx5_core/unbind  
echo 0000:84:00.4 > /sys/bus/pci/drivers/mlx5_core/unbind  
echo 0000:84:00.5 > /sys/bus/pci/drivers/mlx5_core/unbind  
echo 0000:84:00.6 > /sys/bus/pci/drivers/mlx5_core/unbind  
echo 0000:84:00.7 > /sys/bus/pci/drivers/mlx5_core/unbind  
echo 0000:84:01.0 > /sys/bus/pci/drivers/mlx5_core/unbind  
echo 0000:84:01.1 > /sys/bus/pci/drivers/mlx5_core/unbind
```

eSwitch

```
devlink dev eswitch set pci@0000:84:00.0 mode switchdev  
devlink dev eswitch set pci@0000:84:00.1 mode switchdev  
ethtool -K enp13s0f0np0 hw-tc-offload on  
ethtool -K enp13s0f1np1 hw-tc-offload on
```

SR-IOV VF

- Active-backup
  - XOR
  - LACP



LACP

```
modprobe bonding mode=802.3ad
ip link set enp132s0f0np0 master bond1
ip link set enp132s0f1np1 master bond1
ip link set enp132s0f0np0 up
ip link set enp132s0f1np1 up
ip link set bond1 up
```



VF

```
echo 0000:84:00.2 > /sys/bus/pci/drivers/mlx5_core/bind  
echo 0000:84:00.3 > /sys/bus/pci/drivers/mlx5_core/bind  
echo 0000:84:00.4 > /sys/bus/pci/drivers/mlx5_core/bind  
echo 0000:84:00.5 > /sys/bus/pci/drivers/mlx5_core/bind  
echo 0000:84:00.6 > /sys/bus/pci/drivers/mlx5_core/bind  
echo 0000:84:00.7 > /sys/bus/pci/drivers/mlx5_core/bind  
echo 0000:84:01.0 > /sys/bus/pci/drivers/mlx5_core/bind  
echo 0000:84:01.1 > /sys/bus/pci/drivers/mlx5_core/bind
```

## NetworkManager

## NetworkManager

```
systemctl stop NetworkManager  
systemctl disable NetworkManager
```

## DEVICE PLUGIN

VF Pod VF SR-IOV Device Plugin

## SR-IOV Configmap

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: sriovdp-config
  namespace: kube-system
data:
  config.json: |
```

```
{
  "resourceList": [
    {
      "resourcePrefix": "mellanox.com",
      "resourceName": "cx5_sriov_switchdev",
      "selectors": {
        "vendors": ["15b3"],
        "devices": ["1018"],
        "drivers": ["mlx5_core"]
      }
    }
  ]
}
```

SR-IOV Device Plugin      ConfigMap      ConfigMap name sriovdp-config

- **selectors:VF**
- **vendors:**
- **devices:**
- **drivers:**

selectors    pciAddresses acpiIndexes    VF      SR-IOV ConfigMap

### SR-IOV

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/sriov-network-device-plugin/v3.6.2/deployments/sriovdp-daemonset.yaml
```

SR-IOV      Kubernetes Node

```
kubectl describe node kube-ovn-01 | grep mellanox

mellanox.com/cx5_sriov_switchdev: 8
mellanox.com/cx5_sriov_switchdev: 8
mellanox.com/cx5_sriov_switchdev 0 0
```

### sriov-network-operator    SR-IOV Device Plugin

#### node-feature-discovery

```
kubectl apply -k https://github.com/kubernetes-sigs/node-feature-discovery/deployment/overlays/default?ref=v0.11.3
```

offload      annotation:

```
kubectl label nodes [offloadNicNode] feature.node.kubernetes.io/network-sriov.capable=true
```

#### Operator

```
git clone --depth=1 https://github.com/kubeovn/sriov-network-operator.git
kubectl apply -k sriov-network-operator/deploy
```

#### Operator

```
# kubectl get -n kube-system all | grep sriov
NAME READY STATUS RESTARTS AGE
pod/sriov-network-config-daemon-bf9nt 1/1 Running 0 8s
pod/sriov-network-operator-54d7545f65-296gb 1/1 Running 0 10s

NAME DESIRED CURRENT READY UP-TO-DATE AVAILABLE NODE
SELECTOR AGE
daemonset.apps/sriov-network-config-daemon 1 1 1 1 1 beta.kubernetes.io/os=linux,feature.node.kubernetes.io/network-sriov.capable=true 8s

NAME READY UP-TO-DATE AVAILABLE AGE
deployment.apps/sriov-network-operator 1/1 1 1 10s

NAME DESIRED CURRENT READY AGE
replicaset.apps/sriov-network-operator-54d7545f65 1 1 1 10s
```

SriovNetworkNodeState    node1      Mellanox

```
# kubectl get sriovnetworknodestates.sriovnetwork.openshift.io -n kube-system node1 -o yaml
apiVersion: sriovnetwork.openshift.io/v1
kind: SriovNetworkNodeState
spec: ...
```

```

status:
  interfaces:
    - deviceID: "1017"
      driver: mlx5_core
      mtu: 1500
      pciAddress: "0000:5f:00.0"
      totalvfs: 8
      vendor: "15b3"
      linkSeed: 25000Mb/s
      linkType: ETH
      mac: 08:c0:eb:f4:85:bb
      name: ens41f0np0
    - deviceID: "1017"
      driver: mlx5_core
      mtu: 1500
      pciAddress: "0000:5f:00.1"
      totalvfs: 8
      vendor: "15b3"
      linkSeed: 25000Mb/s
      linkType: ETH
      mac: 08:c0:eb:f4:85:bb
      name: ens41f1np1

```

#### SriovNetworkNodePolicy      nicSelector

```

apiVersion: sriovnetwork.openshift.io/v1
kind: SriovNetworkNodePolicy
metadata:
  name: policy
  namespace: kube-system
spec:
  nodeSelector:
    feature.node.kubernetes.io/network-sriov.capable: "true"
  eSwitchMode: switchdev
  numVfs: 3
  nicSelector:
    pfNames:
      - ens41f0np0
      - ens41f1np1
  resourceName: cx_sriov_switchdev

```

#### SriovNetworkNodeState      status

```

# kubectl get sriovnetworknodestates.sriovnetwork.openshift.io -n kube-system node1 -o yaml

...
spec:
  interfaces:
    - eSwitchMode: switchdev
      name: ens41f0np0
      numVfs: 3
      pciAddress: 0000:5f:00.0
      vfGroups:
        - policyName: policy
          vfRange: 0-2
          resourceName: cx_sriov_switchdev
    - eSwitchMode: switchdev
      name: ens41f1np1
      numVfs: 3
      pciAddress: 0000:5f:00.1
      vfGroups:
        - policyName: policy
          vfRange: 0-2
          resourceName: cx_sriov_switchdev
  status:
    interfaces
      - Vfs:
          - deviceID: 1018
            driver: mlx5_core
            pciAddress: 0000:5f:00.2
            vendor: "15b3"
          - deviceID: 1018
            driver: mlx5_core
            pciAddress: 0000:5f:00.3
            vendor: "15b3"
          - deviceID: 1018
            driver: mlx5_core
            pciAddress: 0000:5f:00.4
            vendor: "15b3"
            deviceID: "1017"
            driver: mlx5_core
            linkSeed: 25000Mb/s
            linkType: ETH
            mac: 08:c0:eb:f4:85:ab
            mtu: 1500
            name: ens41f0np0
            numVfs: 3
            pciAddress: 0000:5f:00.0
            totalvfs: 3
            vendor: "15b3"
      - Vfs:

```

```

- deviceID: 1018
  driver: mlx5_core
  pciAddress: 0000:5f:00.5
  vendor: "15b3"
- deviceID: 1018
  driver: mlx5_core
  pciAddress: 0000:5f:00.6
  vendor: "15b3"
- deviceID: 1018
  driver: mlx5_core
  pciAddress: 0000:5f:00.7
  vendor: "15b3"
deviceID: "1017"
driver: mlx5_core
linkSeed: 25000Mb/s
linkType: ETH
mac: 08:c0:eb:f4:85:bb
mtu: 1500
name: ens41f1np1
numVfs: 3
pciAddress: 0000:5f:00.1
totalvfs: 3
vendor: "15b3"

```

## VF

```

# lspci -nn | grep ConnectX
5f:00.0 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5] [15b3:1017]
5f:00.1 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5] [15b3:1017]
5f:00.2 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
5f:00.3 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
5f:00.4 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
5f:00.5 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
5f:00.6 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
5f:00.7 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]

```

## PF

```

# cat /sys/class/net/ens41f0np0/compat/devlink/mode
switchdev

```

## 7.15.3 Multus-CNI

SR-IOV Device Plugin	ID	Multus-CNI	Kube-OVN	Multus-CNI
----------------------	----	------------	----------	------------

### Multus-CNI

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/multus-cni/v4.0.2/deployments/multus-daemonset-thick.yml
```

multus	Thin	Thick	SR-IOV	Thick
--------	------	-------	--------	-------

### NetworkAttachmentDefinition

```

apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: sriov
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/resourceName: mellanox.com/cx5_sriov_switchdev
spec:
  config: '{
    "cniVersion": "0.3.1",
    "name": "kube-ovn",
    "plugins": [
      {
        "type": "kube-ovn",
        "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
        "provider": "sriov.default.ovn"
      },
      {
        "type": "portmap",
        "capabilities": {
          "portMappings": true
        }
      }
    ]
}'

```

- provider: NetworkAttachmentDefinition {name}.{namespace}.ovn

## 7.15.4 Overlay

### Kube-OVN

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.14/dist/images/install.sh
```

IFACE	IP
ENABLE_MIRROR=\${ENABLE_MIRROR:-false}	
HW_OFFLOAD=\${HW_OFFLOAD:-true}	
ENABLE_LB=\${ENABLE_LB:-false}	
IFACE="bond1"	
# SR-IOV Device Plugin	bond
	IFACE
	bond1
	bond
	IFACE
	enp132s0f0np0
	enp132s0f1np1

### Kube-OVN

```
bash install.sh
```

### VF Pod

yaml VF Pod:

```
apiVersion: v1
kind: Pod
metadata:
  name: nginx-overlay
  annotations:
    v1.multus-cni.io/default-network: default/sriov
    sriov.default.ovn.kubernetes.io/logical_switch: ovn-default
spec:
  containers:
  - name: nginx-overlay
    image: docker.io/library/nginx:alpine
    resources:
      requests:
        mellanox.com/cx5_sriov_switchdev: '1'
      limits:
        mellanox.com/cx5_sriov_switchdev: '1'
```

- v1.multus-cni.io/default-network: NetworkAttachmentDefinition {namespace}/{name}
- sriov.default.ovn.kubernetes.io/logical\_switch: Pod Pod

## 7.15.5 Underlay

### Kube-OVN

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.14/dist/images/install.sh
```

IFACE	IP
ENABLE_MIRROR=\${ENABLE_MIRROR:-false}	
HW_OFFLOAD=\${HW_OFFLOAD:-true}	
ENABLE_LB=\${ENABLE_LB:-false}	
IFACE=""	
# Underlay IFACE PF IFACE K8s PF	

### Kube-OVN

```
bash install.sh
```

### VF Pod

yaml VF Pod:

```

apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
  name: underlay-offload
spec:
  defaultInterface: bond1

---
apiVersion: kubeovn.io/v1
kind: Vlan
metadata:
  name: vlan0
spec:
  id: 0
  provider: underlay-offload

---
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: vlan0
spec:
  protocol: IPv4
  provider: ovn
  cidrBlock: 10.10.204.0/24
  gateway: 10.10.204.254
  vlan: vlan0
  excludeIps:
    - 10.10.204.1..10.10.204.100

---
apiVersion: v1
kind: Pod
metadata:
  name: nginx-underlay
  annotations:
    k8s.v1.cni.cncf.io/networks: '[{
      "name": "sriov",
      "namespace": "default",
      "default-route": ["10.10.204.254"]
    }]'
    ovn.default.ovn.kubernetes.io/logical_switch: vlan0
spec:
  containers:
  - name: nginx-underlay
    image: docker.io/library/nginx:alpine
    resources:
      requests:
        mellanox.com/cx5_sriov_switchdev: '1'
      limits:
        mellanox.com/cx5_sriov_switchdev: '1'

```

• v1.multus-cni.io/default-network: NetworkAttachmentDefinition {namespace}/{name}

	multus	VF	Pod	VF	Pod	multus
--	--------	----	-----	----	-----	--------

yaml VF Pod:

```

apiVersion: v1
kind: Pod
metadata:
  name: nginx-underlay-noVF
  annotations:
    ovn.kubernetes.io/logical_switch: vlan0
spec:
  containers:
  - name: nginx-underlay-noVF
    image: docker.io/library/nginx:alpine

```

	VF	Pod	ovs-kernel	e-switch
--	----	-----	------------	----------

## 7.15.6


Pod ovs-ovn

```

# ovs-appctl dptcl/dump-flows -m type=offloaded
ufid:91cc45de-e7e9-4935-8f82-1890430b0f66, skb_priority(0/0),skb_mark(0/0),ct_state(0/0x23),ct_zone(0/0),ct_mark(0/0),ct_label(0/0x1),recirc_id(0),dp_hash(0/0),in_port(5b45c61b307e_h),packet_type(ns=0/0,id=0/0),eth(src=00:00:00:c5:6d:4e,dst=00:00:00:e7:16:ce),eth_type(0x0800),ipv4(src=0.0.0.0/0.0.0.0,dst=0.0.0.0/0.0.0.0,proto=0/0,tos=0/0,ttl=0/0,frag=no), packets:941539, bytes:62142230, used:0.260s, offloaded:yes, dp:tc, actions:54235e5753b8_h
ufid:e00768d7-e652-4d79-8182-3291d852b791, skb_priority(0/0),skb_mark(0/0),ct_state(0/0x23),ct_zone(0/0),ct_mark(0/0),ct_label(0/0x1),recirc_id(0),dp_hash(0/0),in_port(54235e5753b8_h),packet_type(ns=0/0,id=0/0),eth(src=00:00:00:e7:16:ce,dst=00:00:00:c5:6d:4e),eth_type(0x0800),ipv4(src=0.0.0.0/0.0.0.0,dst=0.0.0/0.0.0.0,proto=0/0,tos=0/0,ttl=0/0,frag=no), packets:82386659, bytes:115944854173, used:0.260s, offloaded:yes, dp:tc, actions:5b45c61b307e_h


```

offloaded:yes, dp:tc



⌚2025 9 10

⌚2022 5 24




7.15.7

---

## 7.16 Offload

Kube-OVN	OVS	CPU	CPU	Agilio CX	OVS
OVS		CPU			

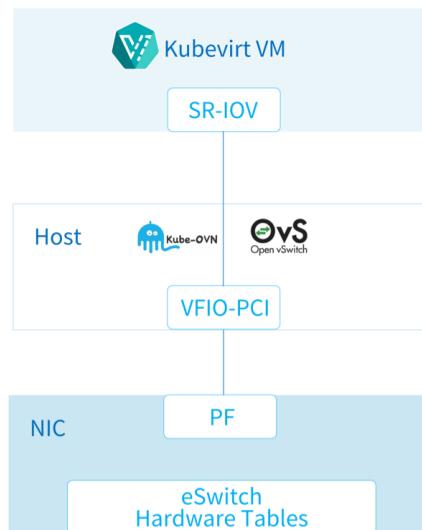

### Note

2022

### 7.16.1

- Agilio CX
- CentOS 8 Stream    Linux 5.7
- dp\_hash    hash              OVN LB

### 7.16.2 SR-IOV

[Agilio Open vSwitch TC User Guide](#)

```

#!/bin/bash
DEVICE=${1}
DEFAULT_ASSY=scan
ASSY=${2:-$DEFAULT_ASSY}
APP=${3:-flower}

if [ "x${DEVICE}" = "x" -o ! -e /sys/class/net/${DEVICE} ]; then
  echo Syntax: ${0} device [ASSY] [APP]
  echo
  echo This script associates the TC Offload firmware
  echo with a Netronome SmartNIC.
  echo
  echo device: is the network device associated with the SmartNIC

```

```

echo ASSY: defaults to ${DEFAULT_ASSY}
echo APP: defaults to flower. flower-next is supported if updated
echo     firmware has been installed.
exit 1
fi

# It is recommended that the assembly be determined by inspection
# The following code determines the value via the debug interface
if [ "${ASSY}"x = "scanz" ]; then
    ethtool -W ${DEVICE} 0
    DEBUG=$(ethtool -w ${DEVICE} data /dev/stdout | strings)
    SERIAL=$(echo "$DEBUG" | grep '^SN:')
    ASSY=$(echo ${SERIAL} | grep -oE AMDA[0-9]{4})
fi

PCIADDR=$(basename $(readlink -e /sys/class/net/${DEVICE}/device))
FWDIR="/lib/firmware/netronome"

# AMDA0081 and AMDA0097 uses the same firmware
if [ "${ASSY}" = "AMDA0081" ]; then
    if [ ! -e ${FWDIR}/${APP}/nic_AMDA0081.nffw ]; then
        ln -sf nic_AMDA0097.nffw ${FWDIR}/${APP}/nic_AMDA0081.nffw
    fi
fi

FW="${FWDIR}/pci-${PCIADDR}.nffw"
ln -sf "${APP}/nic_${ASSY}.nffw" "${FW}"

# insert distro-specific initramfs section here...

```

```

./agilio-tc-fw-select.sh ens47np0 scan
rmmod nfp
modprobe nfp

```

VF        VF

```

# cat /sys/class/net/ens3/device/sriov_totalvfs
65

# echo 4 > /sys/class/net/ens47/device/sriov_numvfs

```

### 7.16.3 SR-IOV Device Plugin

VF	Pod	VF	SR-IOV Device Plugin
----	-----	----	----------------------

SR-IOV Configmap

```

apiVersion: v1
kind: ConfigMap
metadata:
  name: sriovdp-config
  namespace: kube-system
data:
  config.json: |
    {
      "resourceList": [
        {
          "resourcePrefix": "coragine.com",
          "resourceName": "agilio_sriov",
          "selectors": {
            "vendors": ["19ee"],
            "devices": ["6003"],
            "drivers": ["nfp_netvf"]
          }
        }
      ]
    }

```

SR-IOV :

```
kubectl apply -f https://raw.githubusercontent.com/intel/sriov-network-device-plugin/master/deployments/k8s-v1.16/sriovdp-daemonset.yaml
```

SR-IOV        Kubernetes Node

```

kubectl describe no containerserver | grep coragine

coragine.com/agilio_sriov: 4
coragine.com/agilio_sriov: 4
coragine.com/agilio_sriov 0 0

```

## 7.16.4 Multus-CNI

SR-IOV Device Plugin      ID      Multus-CNI      Kube-OVN      Multus-CNI

### Multus-CNI

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/multus-cni/master/deployments/multus-daemonset.yaml
```

#### NetworkAttachmentDefinition

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: default
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/resourceName: corigine.com/agilio_sriov
spec:
  config: '{
    "cniVersion": "0.3.1",
    "name": "kube-ovn",
    "plugins": [
      {
        "type": "kube-ovn",
        "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
        "provider": "default.default.ovn"
      },
      {
        "type": "portmap",
        "capabilities": {
          "portMappings": true
        }
      }
    ]
}'

```

- provider: NetworkAttachmentDefinition {name}.{namespace}.ovn

## 7.16.5 Kube-OVN

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.14/dist/images/install.sh
```

IFACE      IP

```
ENABLE_MIRROR=${ENABLE_MIRROR:-false}
HW_OFFLOAD=${HW_OFFLOAD:-true}
ENABLE_LB=${ENABLE_LB:-false}
IFACE="ensp01"
```

### Kube-OVN

```
bash install.sh
```

## 7.16.6 VF      Pod

yaml      VF      Pod:

```
apiVersion: v1
kind: Pod
metadata:
  name: nginx
  namespace: default
  annotations:
    v1.multus-cni.io/default-network: default/default
spec:
  containers:
    - name: nginx
      image: docker.io/library/nginx:alpine
      resources:
        requests:
          corigine.com/agilio_sriov: '1'
```

```

limits:
  coragine.com/agilio_sriov: '1'

• v1.multus-cni.io/default-network:      NetworkAttachmentDefinition {namespace}/{name}

Pod      ovs-ovn

# ovs-appctl dpctl/dump-flows -m type=offloaded
ufid:91cc45de-e7e9-4935-8f82-1890430b0f66, skb_priority(0/0),skb_mark(0/0),ct_state(0/0x23),ct_zone(0/0),ct_mark(0/0),ct_label(0/0x1),recirc_id(0),dp_hash(0/0),in_port(5b45c61b307e_h),packet_type(ns=0/0,id=0/0),eth(src=00:00:00:c5:6d:4e,dst=00:00:00:e7:16:ce),eth_type(0x0800),ipv4(src=0.0.0.0/0.0.0.0,dst=0.0.0/0.0.0.0,proto=0/0,tos=0/0,ttl=0/0,frag=no), packets:941539, bytes:62142230, used:0.260s, offloaded:yes, dp:tc, actions:54235e5753b8_h
ufid:e00768d7-e652-4d79-8182-3291d852b791, skb_priority(0/0),skb_mark(0/0),ct_state(0/0x23),ct_zone(0/0),ct_mark(0/0),ct_label(0/0x1),recirc_id(0),dp_hash(0/0),in_port(54235e5753b8_h),packet_type(ns=0/0,id=0/0),eth(src=00:00:00:e7:16:ce,dst=00:00:00:c5:6d:4e),eth_type(0x0800),ipv4(src=0.0.0.0/0.0.0.0,dst=0.0.0/0.0.0.0,proto=0/0,tos=0/0,ttl=0/0,frag=no), packets:82386659, bytes:115944854173, used:0.260s, offloaded:yes, dp:tc, actions:5b45c61b307e_h

offloaded:yes, dp:tc

```

[PDF](#)[Slack](#)[Support](#)

⌚2025 7 21

⌚2022 5 24

[GitHub](#)

7.16.7

## 7.17 Offload

Kube-OVN	OVS	CPU	CPU	metaScale	OVS
OVS	CPU				



### Note

1. 2024
2. 1.11 Kube-OVN

### 7.17.1

- metaScale
- MCR
- BIOS SR-IOV VT-d

### 7.17.2

#### **hw-offload    Kube-OVN**

1.

```
wget https://github.com/yunsilicon/kube-ovn/blob/release-1.11/dist/images/install.sh
```

1.

```
/opt/ovs-config/ovs-dpdk-config
```

```
# specify log level for ovs dpdk, the value is info or dbg, default is info
VLOG=info
# specify nic offload, the value is true or false, default is true
HW_OFFLOAD=true
# specify cpu mask for ovs dpdk, not specified by default
CPU_MASK=0x02
# specify socket memory, not specified by default
SOCKET_MEM="2048,2048"
# specify encap IP
ENCAP_IP=6.6.208/24
# specify pci device
DPDK_DEV=0000:b3:00.0
# specify mtu, default is 1500
PF_MTU=1500
# specify bond name if bond enabled, not specified by default
BR_PHY_BOND_NAME=bond0
```

1. Kube-OVN

```
bash install.sh
```

#### **SR-IOV**

1. metaScale ID b3:00.0:

```
[root@k8s-master ~]# lspci -d 1f67:
b3:00.0 Ethernet controller: Device 1f67:1111 (rev 02)
b3:00.1 Ethernet controller: Device 1f67:1111 (rev 02)
```

1. ID p3p1

```
ls -l /sys/class/net/ | grep b3:00.0
lrwxrwxrwx 1 root root 0 May 7 16:30 p3p1 -> ../../devices/pci0000:b2/0000:b2:00.0/0000:b3:00.0/net/p3p1
```

## 1. VF

```
cat /sys/class/net/p3p1/device/sriov_totalvfs
512
```

## 1. VF

```
echo '10' > /sys/class/net/p3p1/device/sriov_numvfs
```

## 1. VF

```
lspci -d 1f67:
b3:00.0 Ethernet controller: Device 1f67:1111 (rev 02)
b3:00.1 Ethernet controller: Device 1f67:1111 (rev 02)
b3:00.2 Ethernet controller: Device 1f67:1112
b3:00.3 Ethernet controller: Device 1f67:1112
b3:00.4 Ethernet controller: Device 1f67:1112
b3:00.5 Ethernet controller: Device 1f67:1112
b3:00.6 Ethernet controller: Device 1f67:1112
b3:00.7 Ethernet controller: Device 1f67:1112
b3:01.0 Ethernet controller: Device 1f67:1112
b3:01.1 Ethernet controller: Device 1f67:1112
b3:01.2 Ethernet controller: Device 1f67:1112
b3:01.3 Ethernet controller: Device 1f67:1112
```

## 1. switchdev

```
devlink dev eswitch set pci/0000:b3:00.0 mode switchdev
```

## SR-IOV Device Plugin

### 1. SR-IOV ConfigMap

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: sriovdp-config
  namespace: kube-system
data:
  config.json: |
    {
      "resourceList": [
        {
          "resourceName": "xsc_sriov",
          "resourcePrefix": "yunsilicon.com",
          "selectors": {
            "vendors": ["1f67"],
            "devices": ["1012", "1112"]
          }
        }
      ]
    }
```

### 1. SR-IOV Device Plugin DevicePlugin

### 2. SR-IOV

```
# kubectl describe node <node name> | grep yunsilicon.com/xsc_sriov
yunsilicon.com/xsc_sriov: 10
yunsilicon.com/xsc_sriov: 10
yunsilicon.com/xsc_sriov 0 0
```

## Multus-CNI

### 1. Multus-CNI Multus-CNI

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/multus-cni/master/deployments/multus-daemonset.yaml
```

### 1. NetworkAttachmentDefinition

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
```

```

metadata:
  name: sriov-net1
  namespace: default
  annotations:
    k8s.v1.cncf.io/resourceName: yunsilicon.com/xsc_sriov
spec:
  config: '{
    "cniVersion": "0.3.1",
    "name": "kube-ovn",
    "plugins": [
      {
        "type": "kube-ovn",
        "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
        "provider": "sriov-net1.default.ovn"
      },
      {
        "type": "portmap",
        "capabilities": {
          "portMappings": true
        }
      }
    ]
}'

```

## SR-IOV Pod

```

apiVersion: v1
kind: Pod
metadata:
  name: nginx
  annotations:
    v1.multus-cni.io/default-network: default/sriov-net1
spec:
  containers:
    - name: nginx
      image: docker.io/library/nginx:alpine
      resources:
        requests:
          yunsilicon.com/xsc_sriov: '1'
        limits:
          yunsilicon.com/xsc_sriov: '1'

```

## Offload

Pod ovs-ovn

```

ovs-appctl dptcl/dump-flows type=offloaded
flow-dump from pmd on cpu core: 9
ct_state(-new+est-rel+rpl+trk),ct_mark(0/0x3),recirc_id(0x2d277),in_port(15),packet_type(ns=0,id=0),eth(src=00:00:00:9d:fb:1a,dst=00:00:00:ce:cf:b9),eth_type(0x0800),ipv4(dst=10.16.0.14,frag=no),packets:6,bytes:588,used:7.276s,actions:ct(zone=4,nat),recirc(0x2d278)
ct_state(-new+est-rel+rpl+trk),ct_mark(0/0x3),recirc_id(0x2d275),in_port(8),packet_type(ns=0,id=0),eth(src=00:00:00:ce:cf:b9,dst=00:00:00:9d:fb:1a),eth_type(0x0800),ipv4(dst=10.16.0.18,frag=no),packets:5,bytes:490,used:7.434s,actions:ct(zone=6,nat),recirc(0x2d276)
ct_state(-new+est-rel-rpl+trk),ct_mark(0/0x1),recirc_id(0x2d276),in_port(8),packet_type(ns=0,id=0),eth(src=00:00:00:ce:cf:b9,dst=00:00:00:9d:fb:1a),eth_type(0x0800),eth_type(0x0800),ipv4(dst=10.16.0.18/255.192.0.0,frag=no),packets:6,bytes:588,used:7.277s,actions:ct(zone=6,nat),recirc(0x2d277)
recirc_id(0),in_port(15),packet_type(ns=0,id=0),eth(src=00:00:00:9d:fb:1a/01:00:00:00:00:00,dst=00:00:00:ce:cf:b9),eth_type(0x0800),ipv4(dst=10.16.0.18/255.192.0.0,frag=no),packets:6,bytes:588,used:7.277s,actions:ct(zone=6,nat),recirc(0x2d278)
recirc_id(0),in_port(8),packet_type(ns=0,id=0),eth(src=00:00:00:ce:cf:b9/01:00:00:00:00:00,dst=00:00:00:9d:fb:1a),eth_type(0x0800),ipv4(dst=10.16.0.18/255.192.0.0,frag=no),packets:6,bytes:588,used:7.434s,actions:ct(zone=4,nat),recirc(0x2d275)
ct_state(-new+est-rel+rpl+trk),ct_mark(0/0x1),recirc_id(0x2d278),in_port(15),packet_type(ns=0,id=0),eth(dst=00:00:00:ce:cf:b9/01:00:00:00:00:00),eth_type(0x0800),ipv4(frag=no),packets:6,bytes:588,used:7.277s,actions:8

```

[PDF](#)

[Slack](#)

[Support](#)

⌚ 2025 7 21

⌚ 2024 5 29



7.17.3

## 7.18 Offload



### Note

2024

#### 7.18.1

- 2200E
- HADOS
- BIOS SR-IOV

#### 7.18.2

##### SR-IOV

1. 2200E vendor ID 1f47 ID 00:0a.0 00:0b.0 2200E

```
lspci | grep 1f47
00:0a.0 Ethernet controller: Device 1f47:1001 (rev 10)
00:0b.0 Ethernet controller: Device 1f47:1001 (rev 10)
```

1. VF

```
cat /sys/bus/pci/devices/0000\:00\:0a.0/sriov_totalvfs
256
```

1. VF VF

```
echo 7 > /sys/bus/pci/devices/0000\:00\:0a.0/sriov_numvfs
```

1. VF

```
lspci | grep 1f47
00:0a.0 Ethernet controller: Device 1f47:1001 (rev 10)
00:0a.1 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.2 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.3 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.4 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.5 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.6 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.7 Ethernet controller: Device 1f47:110f (rev 10)
00:0b.0 Ethernet controller: Device 1f47:1001 (rev 10)
```

##### SR-IOV Device Plugin

1. SR-IOV Configmap SR-IOV Device Plugin VF Pod

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: sriovdp-config
  namespace: kube-system
data:
  config.json: |
    {
      "resourceList": [
        {
          "resourceName": "sriov_dpu",
          "resourcePrefix": "yusur.tech",
          "selectors": {
            "vendors": ["1f47"],
            "devices": ["110f"]
          }
        }
      ]
    }
```

```
    ]  
}
```

## 1. SR-IOV Device Plugin

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/sriov-network-device-plugin/v3.6.2/deployments/sriovdp-daemonset.yaml
```

### 1. SR-IOV      kubernetes Node

```
kubectl describe node node1 | grep yusur  
yusur.tech/sriov_dpu: 7  
yusur.tech/sriov_dpu: 7  
yusur.tech/sriov_dpu 0 0
```

## 7.18.3 Multus-CNI

Multus-CNI    Kube-OCN    SRIOV    Device ID

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/multus-cni/v4.0.2/deployments/multus-daemonset-thick.yaml
```

### NetworkAttachmentDefinition

```
apiVersion: "k8s.cni.cncf.io/v1"  
kind: NetworkAttachmentDefinition  
metadata:  
  name: test  
  namespace: kube-system  
  annotations:  
    k8s.v1.cni.cncf.io/resourceName: yusur.tech/sriov_dpu  
spec:  
  config: '{  
    "cniVersion": "0.3.1",  
    "name": "kube-ovn",  
    "plugins": [  
      {  
        "type": "kube-ovn",  
        "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",  
        "provider": "test.kube-system.ovn"  
      },  
      {  
        "type": "portmap",  
        "capabilities": {  
          "portMappings": true  
        }  
      }  
    ]  
  }
```

- provider : NetworkAttachmentDefinition {name}. {namespace}. ovn

## 7.18.4 Kube-OVN

### 1.

```
wget https://github.com/kubeovn/kube-ovn/blob/release-1.12/dist/images/install.sh
```

### 1. IFACE      IP

```
ENABLE_MIRROR=${ENABLE_MIRROR:-false}  
HW_OFFLOAD=${HW_OFFLOAD:-true}  
ENABLE_LB=${ENABLE_LB:-false}  
IFACE="p0"
```

### 1. kube-ovn

```
bash install.sh
```

### VF    pod

yaml    VF    Pod

```

apiVersion: v1
kind: Pod
metadata:
  name: nginx
  namespace: default
  annotations:
    v1.multus-cni.io/default-network: kube-system/test
spec:
  containers:
    - name: nginx
      image: docker.io/library/nginx:alpine
      resources:
        requests:
          yusur.tech/sriov_dpu: '1'
        limits:
          yusur.tech/sriov_dpu: '1'

```

- v1.multus-cni.io/default-network : NetworkAttachmentDefinition {namespace}/{name}

## Offload

Pod ovs-ovn

```

# ovs-appctl dpctl/dump-flows -m type=offloaded
ufid:67c2e10f-92d4-4574-be70-d072815ff166, skb_priority(0/0),skb_mark(0/0),ct_state(0/0x23),ct_zone(0/0),ct_mark(0/0),ct_label(0/0),recirc_id(0),dp_hash(0/0),in_port(d85b161b6840_h),packet_type(ns=0/0,id=0/0),eth(src=0a:c9:1c:70:01:09,dst=8a:18:a4:22:b7:7d),eth_type(0x0800),ipv4(src=10.0.1.10,dst=10.0.1.6,proto=6,tos=0/0x3,ttl=0/0,frag=no),tcp(src=60774,dst=9001),packets:75021,bytes:109521630,offload_packets:75019,offload_bytes:109521498,used:3.990s,offloaded:yes,dp:tc,actions:set(tunnel(tun_id=0x5,dst=192.168.201.12,ttl=64,tp_dst=6081,geneve({class=0x102,type=0x80,len=4,0xa0006}),flags(csum(key))),genev_sys_6081
ufid:7940666e-a0bd-42a5-8116-1e84e81bb338, skb_priority(0/0),tunnel(tun_id=0x5,src=192.168.201.12,dst=192.168.201.11,ttl=0/0,tp_dst=6081,geneve({class=0x102,type=0x80,len=4,0x6000a}),flags(+key)),skb_mark(0/0),ct_state(0/0),ct_zone(0/0),ct_mark(0/0),ct_label(0/0),recirc_id(0),dp_hash(0/0),in_port(genev_sys_6081),packet_type(ns=0/0,id=0/0),eth(src=8a:18:a4:22:b7:7d,dst=0a:c9:1c:70:01:09),eth_type(0x0800),ipv4(src=10.0.1.6,dst=10.0.1.10,proto=6,tos=0/0,ttl=0/0,frag=no),tcp(src=9001,dst=60774),packets:6946,bytes:459664,offload_packets:6944,offload_bytes:459532,used:4.170s,dp:tc,offloaded:yes,actions:d85b161b6840_h

```



PDF



Slack



Support

⌚2025 7 21

⌚2024 8 13

GitHub

7.18.5

7.19 DPDK

## Kube-OVN      OVS-DPDK      KubeVirt      DPDK

KubeVirt OVS-DPDK patchVhostuser implementation KubeVirt KVM Device Plugin OVS-DPDK

## 7.19.1

- DPDK
  - Hugepages

## 7.19.2 DPDK

`driverctl` DPDK

```
driverctl set-override 0000:00:0b.0 uio_pci_generic
```

7.19.3

```
kubectl label nodes <node> ovn.kubernetes.io/ovs_dp_type="userspace"
```

ovs-dpdk /opt/ovs-config ovs-dpdk-config

ENCAP\_IP=192.168.122.193/24  
DPDK\_DEV=0000:00:0b.0

- ENCAP\_IP :
  - DPDK\_DEV : PCI ID

## 7.19.4 Kube-OVN

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.14/dist/images/install.sh
```

DPDK

```
bash install.sh --with-hybrid-dpdk
```

7.19.5

vhostuser OVS-DPDK

KVM Device Plugin KVM Device Plugin

```
kubectl apply -f https://raw.githubusercontent.com/kubevirt/kubernetes-device-plugins/master/manifests/kvm-ds.yaml
```

## NetworkAttachmentDefinition

```
apiVersion: k8s.cni.cncf.io/v1
kind: NetworkAttachmentDefinition
metadata:
  name: ovn-dpdk
  namespace: default
spec:
  config: >-
    {
      "cniVersion": "0.3.0",
      "tvsne": "kube-ovn"
```

```

        "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
        "provider": "ovn-dpdk.default.ovn",
        "vhost_user_socket_volume_name": "vhostuser-sockets",
        "vhost_user_socket_name": "sock"
    }
}
```

## Dockerfile VM

```

FROM quay.io/kubevirt/virt-launcher:v0.46.1

# wget http://cloud.centos.org/centos/7/images/CentOS-7-x86_64-GenericCloud.qcow2
COPY CentOS-7-x86_64-GenericCloud.qcow2 /var/lib/libvirt/images/CentOS-7-x86_64-GenericCloud.qcow2

```

```

apiVersion: v1
kind: ConfigMap
metadata:
  name: vm-config
data:
  start.sh: |
    chmod u+w /etc/libvirt/qemu.conf
    echo "hugepages_mount = \"/dev/hugepages\" >> /etc/libvirt/qemu.conf
    virtlogd &
    libvirtd &

    mkdir /var/lock

    sleep 5

    virsh define /root/vm/vm.xml
    virsh start vm

    tail -f /dev/null
  vm.xml: |
    <domain type='kvm'>
      <name>vm</name>
      <uuid>4a9b3f53-fa2a-47f3-a757-dd87720d9d1d</uuid>
      <memory unit='KiB'>2097152</memory>
      <currentMemory unit='KiB'>2097152</currentMemory>
      <memoryBacking>
        <hugepages>
          <page size='2' unit='M' nodeset='0' />
        </hugepages>
      </memoryBacking>
      <vcpu placement='static'>2</vcpu>
      <cpurtune>
        <shares>4096</shares>
        <vcpu pin vcpu='0' cpuset='4' />
        <vcpu pin vcpu='1' cpuset='5' />
        <emulatorpin cpuset='1,3' />
      </cpurtune>
      <os>
        <type arch='x86_64' machine='pc'>hvm</type>
        <boot dev='hd' />
      </os>
      <features>
        <acpi/>
        <apic/>
      </features>
      <cpu mode='host-model'>
        <model fallback='allow' />
        <topology sockets='1' cores='2' threads='1' />
        <numa>
          <cell id='0' cpus='0-1' memory='2097152' unit='KiB' memAccess='shared' />
        </numa>
      </cpu>
      <on_reboot>restart</on_reboot>
      <devices>
        <emulator>/usr/libexec/qemu-kvm</emulator>
        <disk type='file' device='disk'>
          <driver name='qemu' type='qcow2' cache='none' />
          <source file='/var/lib/libvirt/images/CentOS-7-x86_64-GenericCloud.qcow2' />
          <target dev='vda' bus='virtio' />
        </disk>
        <interface type='vhostuser'>
          <mac address='00:00:00:0A:30:89' />
          <source type='unix' path='/var/run/vm.sock' mode='server' />
          <model type='virtio' />
          <driver queues='2'>
            <host mrg_rxbuf='off' />
          </driver>
        </interface>
        <serial type='pty'>
          <target type='isa-serial' port='0'>
            <model name='isa-serial' />
          </target>
        </serial>
        <console type='pty'>
          <target type='serial' port='0' />
        </console>
      </devices>
    </domain>

```

```

</console>
<channel type='unix'>
  <source mode='bind' path='/var/lib/libvirt/qemu/channel/target/domain-1-vm/org.qemu.guest_agent.0' />
  <target type='virtio' name='org.qemu.guest_agent.0' state='connected' />
  <alias name='channel0' />
</channel>

</devices>
</domain>
---
apiVersion: apps/v1
kind: Deployment
metadata:
  name: vm-deployment
  labels:
    app: vm
spec:
  replicas: 1
  selector:
    matchLabels:
      app: vm
  template:
    metadata:
      labels:
        app: vm
      annotations:
        k8s.v1.cni.cncf.io/networks: default/ovn-dpdk
        ovn-dpdk.default.ovn.kubernetes.io/ip_address: 10.16.0.96
        ovn-dpdk.default.ovn.kubernetes.io/mac_address: 00:00:00:0A:30:89
  spec:
    nodeSelector:
      ovn.kubernetes.io/ovs_dp_type: userspace
    securityContext:
      runAsUser: 0
    volumes:
      - name: vhostuser-sockets
        emptyDir: {}
      - name: xml
        configMap:
          name: vm-config
      - name: hugepage
        emptyDir:
          medium: HugePages-2Mi
      - name: libvirt-runtime
        emptyDir: {}
    containers:
      - name: vm
        image: vm-vhostuser:latest
        command: ["bash", "/root/vm/start.sh"]
        securityContext:
          capabilities:
            add:
              - NET_BIND_SERVICE
              - SYS_NICE
              - NET_RAW
              - NET_ADMIN
        privileged: false
        runAsUser: 0
        resources:
          limits:
            cpu: '2'
            devices.kubevirt.io/kvm: '1'
            memory: '8784969729'
            hugepages-2Mi: 2Gi
          requests:
            cpu: 666m
            devices.kubevirt.io/kvm: '1'
            ephemeral-storage: 50M
            memory: '4490002433'
        volumeMounts:
          - name: vhostuser-sockets
            mountPath: /var/run/vm
          - name: xml
            mountPath: /root/vm/
          - mountPath: /dev/hugepages
            name: hugepage
          - name: libvirt-runtime
            mountPath: /var/run/libvirt

```

## Pod

```

# virsh set-user-password vm root 12345
Password set successfully for root in vm

# virsh console vm
Connected to domain 'vm'
Escape character is ^] (Ctrl + ])

CentOS Linux 7 (Core)
Kernel 3.10.0-1127.el7.x86_64 on an x86_64

```

```
localhost login: root
Password:
Last login: Fri Feb 25 09:52:54 on ttys0
```

```
ip link set eth0 mtu 1400
ip addr add 10.16.0.96/16 dev eth0
ip ro add default via 10.16.0.1
ping 114.114.114.114
```

[PDF](#)[Slack](#)[Support](#)

⌚2022 7 16

⌚2022 5 24

⌚GitHub 

---

7.19.6

## 7.20 OpenStack



### 7.20.1



1. OpenStack Kubernetes CIDR
- 2.
3. IP
4. Kubernetes OpenStack VPC

#### OVN-IC

OVN-IC

```
docker run --name=ovn-ic-db -d --network=host -v /etc/ovn/:/etc/ovn -v /var/run/ovn:/var/run/ovn -v /var/log/ovn:/var/log/ovn kubeovn/kube-ovn:v1.15.0 bash start-ic-db.sh
```

#### Kubernetes

kube-system Namespace ovn-ic-config ConfigMap

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-ic-config
  namespace: kube-system
data:
  enable-ic: "true"
  az-name: "az1"
  ic-db-host: "192.168.65.3"
  ic-nb-port: "6645"
  ic-sb-port: "6646"
  gw-nodes: "az1-gw"
  auto-route: "true"
```

- enable-ic:
- az-name:
- ic-db-host: OVN-IC
- ic-nb-port: OVN-IC 6645
- ic-sb-port: OVN-IC 6646
- gw-nodes:
- auto-route:

#### OpenStack

Kubernetes

```
# openstack router create router0
# openstack router list
+-----+-----+-----+-----+
| ID      | Name   | Status | State | Project |
+-----+-----+-----+-----+
| d5b38655-249a-4192-8046-71aa4d2b4af1 | router0 | ACTIVE | UP    | 98a29ab7388347e7b5ff8bdd181ba4f9 |
+-----+-----+-----+-----+
```

## OpenStack OVN

```
ovn-nbctl set NB_Global . name=op-az
```

OVN-IC OVN-IC

```
/usr/share/ovn/scripts/ovn-ctl --ovn-ic-nb-db=tcp:192.168.65.3:6645 \
--ovn-ic-sb-db=tcp:192.168.65.3:6646 \
--ovn-northd-nb-db=unix:/run/ovnnb_db.sock \
--ovn-northd-sb-db=unix:/run/ovn/ovnsb_db.sock \
start_ic
```

- ovn-ic-nb-db ovn-ic-sb-db : OVN-IC
- ovn-northd-nb-db ovn-northd-sb-db : OVN

```
ovs-vsctl set open_vswitch . external_ids:ovn-is-interconn=true
```

## OpenStack OVN

ts router0

```
ovn-nbctl lrp-add router0 lrp-router0-ts 00:02:ef:11:39:4f 169.254.100.73/24
ovn-nbctl lsp-add ts lsp-ts-router0 -- lsp-set-addresses lsp-ts-router0 router \
-- lsp-set-type lsp-ts-router0 router \
-- lsp-set-options lsp-ts-router0 router-port=lrp-router0-ts
ovn-nbctl lrp-set-gateway-chassis lrp-router0-ts {gateway chassis} 1000
ovn-nbctl set NB_Global . options:ic-route-adv=true options:ic-route-learn=true
```

## Kubernetes

```
# ovn-nbctl lr-route-list router0
IPv4 Routes
      10.0.0.22          169.254.100.34 dst-ip (learned)
      10.16.0.0/16        169.254.100.34 dst-ip (learned)
```

router0 Kubernetes Pod

## 7.20.2 OVN

OpenStack	Kubernetes	OVN	VPC	Subnet			
Kube-OVN	OVN	OpenStack	Neutron	OVN	OpenStack	networking-ovn	Neutron

### Neutron

Neutron /etc/neutron/plugins/ml2/ml2\_conf.ini

```
[ovn]
...
ovn_nb_connection = tcp:[192.168.137.176]:6641,tcp:[192.168.137.177]:6641,tcp:[192.168.137.178]:6641
ovn_sb_connection = tcp:[192.168.137.176]:6642,tcp:[192.168.137.177]:6642,tcp:[192.168.137.178]:6642
ovn_l3_scheduler = OVN_L3_SCHEDULER
```

- ovn\_nb\_connection ovn\_sb\_connection : Kube-OVN ovn-central

### OVS

```
ovs-vsctl set open . external_ids:ovn-remote=tcp:[192.168.137.176]:6642,tcp:[192.168.137.177]:6642,tcp:[192.168.137.178]:6642
ovs-vsctl set open . external_ids:ovn-encap-type=geneve
ovs-vsctl set open . external_ids:ovn-encap-ip=192.168.137.200
```

- external-ids:ovn-remote : Kube-OVN ovn-central
- ovn-encap-ip : IP

## Kubernetes OpenStack

Kubernetes    OpenStack    OpenStack    Pod



kube-ovn-controller args --enable-external-vpc=true

## OpenStack

```
# openstack router list
+-----+-----+-----+
| ID      | Name   | Status | State | Project |
+-----+-----+-----+
| 22040ed5-0598-4f77-bffd-e7fd4db47e93 | router0 | ACTIVE | UP    | 62381a21d569404aa236a5d8712449c |
+-----+-----+-----+
# openstack network list
+-----+-----+
| ID      | Name   | Subnets |
+-----+-----+
| cd59e36a-37db-4c27-b709-d35379a7920f | provider | 01d73d9f-fdaa-426c-9b60-aa34abbfaeae |
+-----+-----+
# openstack subnet list
+-----+-----+-----+
| ID      | Name       | Network          | Subnet |
+-----+-----+-----+
| 01d73d9f-fdaa-426c-9b60-aa34abbfaeae | provider-v4 | cd59e36a-37db-4c27-b709-d35379a7920f | 192.168.1.0/24 |
+-----+-----+-----+
# openstack server list
+-----+-----+-----+-----+-----+
| ID      | Name       | Status | Networks          | Image | Flavor |
+-----+-----+-----+-----+-----+
| 8433d622-a8d6-41a7-8b31-49abfd64f639 | provider-instance | ACTIVE | provider=192.168.1.61 | ubuntu | m1 |
+-----+-----+-----+-----+-----+
```

## Kubernetes VPC

```
# kubectl get vpc
NAME           STANDBY   SUBNETS
neutron-22040ed5-0598-4f77-bffd-e7fd4db47e93  true      [ "neutron-cd59e36a-37db-4c27-b709-d35379a7920f" ]
ovn-cluster     true      [ "join", "ovn-default" ]
```

neutron-22040ed5-0598-4f77-bffd-e7fd4db47e93    OpenStack    VPC

Kube-OVN    VPC    Subnet    Pod

VPC, Subnet    Namespace net2    Pod:

```
apiVersion: v1
kind: Namespace
metadata:
  name: net2
---
apiVersion: kubeovn.io/v1
kind: Vpc
metadata:
  creationTimestamp: "2021-06-20T13:34:11Z"
  generation: 2
  labels:
    ovn.kubernetes.io/vpc_external: "true"
  name: neutron-22040ed5-0598-4f77-bffd-e7fd4db47e93
  resourceVersion: "583728"
  uid: 18d4c654-f511-4def-a3a0-a6434d237c1e
spec:
  namespaces:
    - net2
---
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: net2
spec:
  vpc: neutron-22040ed5-0598-4f77-bffd-e7fd4db47e93
  namespaces:
    - net2
  cidrBlock: 12.0.1.0/24
  natOutgoing: false
---
apiVersion: v1
kind: Pod
metadata:
  name: ubuntu
```

```
namespace: net2
spec:
  containers:
    - image: docker.io/kubeovn/kube-ovn:v1.8.0
      command:
        - "sleep"
        - "604800"
      imagePullPolicy: IfNotPresent
      name: ubuntu
      restartPolicy: Always
```

[!\[\]\(4675999fea142f23bb299d021e8ab1cd\_img.jpg\) PDF](#)[!\[\]\(6c8179f5b83bd44d4c434471682b5755\_img.jpg\) Slack](#)[!\[\]\(90b099590bcf3e27eafed9a9b8a09f8b\_img.jpg\) Support](#)

 2025 8 4

 2022 5 24



7.20.3

---

## 7.21 IPsec

v1.13.0      UDP 500 4500

### 7.21.1

```
kube-ovn-cni certificatesigningrequest kube-ovn-controller kube-ovn-controller approve kube-ovn-cni ipsec  
ipsec
```

### 7.21.2 IPsec

```
kube-ovn-controller kube-ovn-cni args --enable-ovn-ipsec=false --enable-ovn-ipsec=true
```

[!\[\]\(8c49e82ab6d3f94cd554ef387e42e1f4\_img.jpg\) PDF](#)[!\[\]\(59100576f433d0fae477f79533e862de\_img.jpg\) Slack](#)[!\[\]\(f4faeb491fb7969817afdfd3aa8a26a8\_img.jpg\) Support](#)

 2025 9 10

 2023 4 18



 GitHub



### 7.21.3

## 7.22 OVN

```
Pod           GRE/ERSPAN
|             |
Kube-OVN     v1.12
```

### 7.22.1 Multus-CNI

Multus-CNI    Multus

### 7.22.2

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: attachnet
  namespace: default
spec:
  config: |
    {
      "cniVersion": "0.3.1",
      "type": "kube-ovn",
      "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
      "provider": "attachnet.default.ovn"
    }
```

provider <NAME>.<NAMESPACE>.ovn

### 7.22.3 Underlay

MTU    LSP/Pod    Underlay

Underlay

```
apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
  name: net1
spec:
  defaultInterface: eth1
---
apiVersion: kubeovn.io/v1
kind: Vlan
metadata:
  name: vlan1
spec:
  id: 0
  provider: net1
---
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: subnet1
spec:
  protocol: IPv4
  cidrBlock: 172.19.0.0/16
  excludeIps:
  - 172.19.0.2..172.19.0.20
  gateway: 172.19.0.1
  vlan: vlan1
  provider: attachnet.default.ovn
```

provider    provider

### 7.22.4 Pod

Pod

```
apiVersion: v1
kind: Pod
```

```

metadata:
  name: pod1
  annotations:
    k8s.v1.cni.cncf.io/networks: default/attachnet
spec:
  containers:
  - name: bash
    image: docker.io/kubeovn/kube-ovn:v1.15.0
    args:
    - bash
    - -c
    - sleep infinity
    securityContext:
      privileged: true

```

### Pod IP

```
$ kubectl get ips | grep pod1
pod1.default          10.16.0.12  00:00:00:FF:34:24  kube-ovn-worker  ovn-default
pod1.default.attachnet.default.ovn  172.19.0.21  00:00:00:A0:30:68  kube-ovn-worker  subnet1
```

IP 172.19.0.21

## 7.22.5 OVN

### OVN

```
kubectl ko nbctl mirror-add mirror1 gre 99 from-lport 172.19.0.21
kubectl ko nbctl lsp-attach-mirror coredns-787d4945fb-gpnkb.kube-system mirror1
```

coredns-787d4945fb-gpnkb.kube-system OVN LSP <POD\_NAME>.<POD\_NAMESPACE>

### OVN

```
ovn-nbctl mirror-add <NAME> <TYPE> <INDEX> <FILTER> <IP>

NAME  - add a mirror with given name
TYPE  - specify TYPE 'gre' or 'erspan'
INDEX - specify the tunnel INDEX value
        (indicates key if GRE, erSPAN_idx if ERSPAN)
FILTER - specify FILTER for mirroring selection
        ('to-lport' / 'from-lport')
IP    - specify Sink / Destination i.e. Remote IP

ovn-nbctl mirror-del [NAME]      remove mirrors
ovn-nbctl mirror-list           print mirrors

ovn-nbctl lsp-attach-mirror PORT MIRROR  attach source PORT to MIRROR
ovn-nbctl lsp-detach-mirror PORT MIRROR  detach source PORT from MIRROR
```

## 7.22.6 Pod

### Pod

```
root@pod1:/kube-ovn# ip link add mirror1 type gretap local 172.19.0.21 key 99 dev net1
root@pod1:/kube-ovn# ip link set mirror1 up
```

### Pod

```
root@pod1:/kube-ovn# tcpdump -i mirror1 -nnve
tcpdump: listening on mirror1, link-type EN10MB (Ethernet), snapshot length 262144 bytes
05:13:30.328800 00:00:00:a3:f5:e2 > 00:00:00:97:0f:6e, ethertype ARP (0x0806), length 42: Ethernet (len 6), IPv4 (len 4), Request who-has 10.16.0.7 tell 10.16.0.4, length 28
05:13:30.559167 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 212: (tos 0x0, ttl 64, id 57364, offset 0, flags [DF], proto UDP (17), length 198)
  10.16.0.4.53 > 10.16.0.6.50472: 34511 NXDomain*- 0/1/1 (170)
05:13:30.560625 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 212: (tos 0x0, ttl 64, id 57365, offset 0, flags [DF], proto UDP (17), length 198)
  10.16.0.4.53 > 10.16.0.6.45177: 1659 NXDomain*- 0/1/1 (170)
05:13:30.562774 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 191: (tos 0x0, ttl 64, id 57368, offset 0, flags [DF], proto UDP (17), length 177)
  10.16.0.4.53 > 10.16.0.6.37755: 48737 NXDomain*- 0/1/1 (149)
05:13:30.563523 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 187: (tos 0x0, ttl 64, id 57369, offset 0, flags [DF], proto UDP (17), length 173)
  10.16.0.4.53 > 10.16.0.6.53887: 45519 NXDomain*- 0/1/1 (145)
05:13:30.564940 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 201: (tos 0x0, ttl 64, id 57370, offset 0, flags [DF], proto UDP (17),
```

```

length 187)
  10.16.0.4.53 > 10.16.0.6.40846: 25745 NXDomain*- 0/1/1 (159)
05:13:30.565140 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 201: (tos 0x0, ttl 64, id 57371, offset 0, flags [DF], proto UDP (17),
length 187)
  10.16.0.4.53 > 10.16.0.6.45214: 61875 NXDomain*- 0/1/1 (159)
05:13:30.566023 00:00:00:a3:f5:e2 > 00:00:00:55:e4:4e, ethertype IPv4 (0x0800), length 80: (tos 0x0, ttl 64, id 45937, offset 0, flags [DF], proto UDP (17),
length 66)
  10.16.0.4.44116 > 172.18.0.1.53: 16025+ [1au] AAAA? kube-ovn.io. (38)

```

## 7.22.7

1.	ERSPAN	OVN	Linux	4.14	ERSPAN	IPv6	Linux	4.16
2.		OVN						

[PDF](#)
[Slack](#)
[Support](#)

⌚2025 7 2

⌚2023 4 20



## 7.22.8

## 7.23 DNS Kube-OVN

NodeLocal DNSCache      DaemonSet      DNS      DNS      Kube-OVN

### 7.23.1 DNS

Kubernetes      DNS

Kubernetes      Nodelocaldnscache

```
#!/bin/bash

localdns=169.254.20.10
domain=cluster.local
kubedns=10.96.0.10

wget https://raw.githubusercontent.com/kubernetes/kubernetes/master/cluster/addons/dns/nodelocaldns/nodelocaldns.yaml
sed -i "s/_PILLAR__LOCAL__DNS__/$localdns/g; s/_PILLAR__DNS__DOMAIN__/$domain/g; s/_PILLAR__DNS__SERVER__//g; s/_PILLAR__CLUSTER__DNS__/$kubedns/g"
nodelocaldns.yaml

kubectl apply -f nodelocaldns.yaml
```

kubelet      /var/lib/kubelet/config.yaml      clusterDNS      DNS IP 169.254.20.10      kubelet

### Kube-OVN DNS

Kubernetes Nodelocal DNScache      Kube-OVN

UNDERLAY SUBNET      U20

Underlay Subnet      DNS      U20      kubectl edit subnet {your subnet}      spec.u2oInterconnection = true ,      Overlay Subnet

KUBE-OVN-CONTROLLER      DNS IP

```
kubectl edit deployment kube-ovn-controller -n kube-system

spec.template.spec.containers.args      --node-local-dns-ip=169.254.20.10
```

POD

Pod      /etc/resolv.conf      nameserver      DNS IP      Pod      nameserver      DNS ClusterIP      u2o      Pod      Pod

## 7.23.2 DNS

Pod      Pod      DNS      169.254.20.10

```
# kubectl exec -it pod1 -- nslookup github.com
Server: 169.254.20.10
Address: 169.254.20.10:53
```

```
Name: github.com
Address: 20.205.243.166
```

DNS      ovn0      DNS      DNS

```
# tcpdump -i any port 53

06:20:00.441889 659246098c56_h P  ifindex 17 00:00:00:73:f1:06 ethertype IPv4 (0x0800), length 75: 10.16.0.2.40230 > 169.254.20.10.53: 1291+ A? baidu.com. (27)
06:20:00.441889 ovn0 In  ifindex 7 00:00:00:50:32:cd ethertype IPv4 (0x0800), length 75: 10.16.0.2.40230 > 169.254.20.10.53: 1291+ A? baidu.com. (27)
06:20:00.441950 659246098c56_h P  ifindex 17 00:00:00:73:f1:06 ethertype IPv4 (0x0800), length 75: 10.16.0.2.40230 > 169.254.20.10.53: 1611+ AAAA?
baidu.com. (27)
06:20:00.441950 ovn0 In  ifindex 7 00:00:00:50:32:cd ethertype IPv4 (0x0800), length 75: 10.16.0.2.40230 > 169.254.20.10.53: 1611+ AAAA? baidu.com. (27)
06:20:00.442203 ovn0 Out ifindex 7 00:00:00:52:99:d8 ethertype IPv4 (0x0800), length 145: 169.254.20.10.53 > 10.16.0.2.40230: 1611* 0/1/0 (97)
```

```

06:20:00.442219 659246098c56_h Out ifindex 17 00:00:00:ea:b3:5e ethertype IPv4 (0x0800), length 145: 169.254.20.10.53 > 10.16.0.2.40230: 1611* 0/1/0 (97)
06:20:00.442273 ovn0 Out ifindex 7 00:00:00:52:99:d8 ethertype IPv4 (0x0800), length 125: 169.254.20.10.53 > 10.16.0.2.40230: 1291* 2/0/0 A 39.156.66.10, A
110.242.68.66 (77)
06:20:00.442278 659246098c56_h Out ifindex 17 00:00:00:ea:b3:5e ethertype IPv4 (0x0800), length 125: 169.254.20.10.53 > 10.16.0.2.40230: 1291* 2/0/0 A 39.
156.66.10, A 110.242.68.66 (77)

```

### 7.23.3



NetworkPolicy      NetworkPolicy      DNS IP 169.254.20.10      CIDR      NetworkPolicy      DNS      Pod

#### NetworkPolicy

Pod      DNS      NetworkPolicy

```

apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: allow-local-dns-and-node-cidr
  namespace: default #
spec:
  podSelector: {} # Pod
  policyTypes:
  - Ingress
  - Egress
  egress:
  # DNS
  - to:
    - ipBlock:
      cidr: 169.254.20.10/32
  # CIDR
  - to:
    - ipBlock:
      cidr: 10.0.0.0/8 # CIDR
  ingress:
  # DNS
  - from:
    - ipBlock:
      cidr: 169.254.20.10/32
  # CIDR
  - from:
    - ipBlock:
      cidr: 10.0.0.0/8 # CIDR

```

- 169.254.20.10/32      DNS      IP
- 10.0.0.0/8      CIDR

[PDF](#)

[Slack](#)

[Support](#)

⌚2025 7 3

⌚2023 5 5



GitHub



### 7.23.4

## 7.24 VPC NAT

### 7.24.1

VPC	Overlay	natOutgoing	Subnet	Pod	SNAT	IP	Pod	SNAT
NAT		CIDR	IP		SNAT			

### 7.24.2

subnet.Spec    natOutgoing    natOutgoingPolicyRules

```
spec:
  natOutgoing: true
  natOutgoingPolicyRules:
    - action: forward
      match:
        srcIPs: 10.0.11.0/30,10.0.11.254
    - action: nat
      match:
        srcIPs: 10.0.11.128/26
        dstIPs: 114.114.114.114,8.8.8.8
```

NAT

1. IP 10.0.11.0/30 10.0.11.254 SNAT
2. IP 10.0.11.128/26 IP 114.114.114.114 8.8.8.8 SNAT

action	match	action, action	forward	nat	forward	SNAT, nat	SNAT	natOutgoingPolicyRules			
SNAT											
match		srcIPs	dstIPs			IP	IP	match.srcIPs	match.dstIPs	CIDR	IP
match		natOutgoingPolicyRules				action					

[PDF](#)

[Slack](#)

[Support](#)

⌚2023 10 25

⌚2023 6 5



### 7.24.3

## 8.

## 8.1


## Kube-OVN

Kube-OVN	Kubernetes	OVN	SDN	Kube-OVN	OVN	Kubernetes	CNI Service	Networkpolicy
SDN	VPC	QoS ACL						
Kube-OVN			Cilium Submariner Prometheus KubeVirt					

## 8.1.1

## Kube-OVN

- OVN/OVS
- Agent
- 

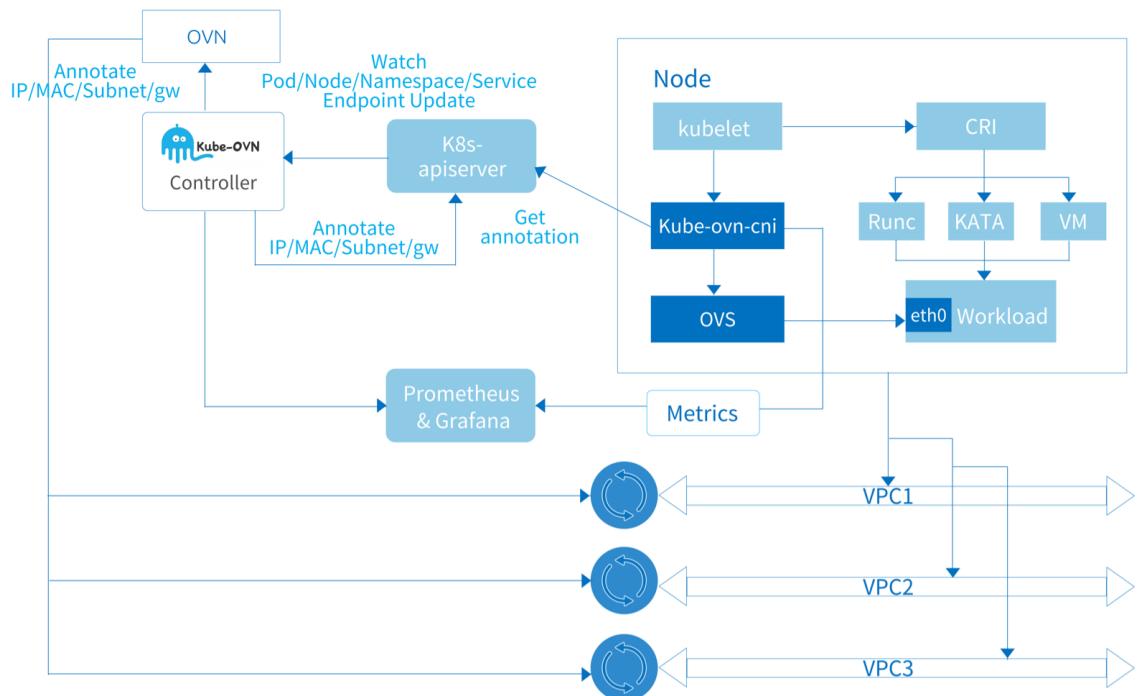

## OVN/OVS

OVN/OVS	Kube-OVN	OVN/OVS	SDN	Kube-OVN	ovn-architecture(7)
OVN	Kube-OVN	OVN	Kubernetes		
OVN/OVS		Kubernetes			

**OVN-CENTRAL**

```

ovn-central Deployment OVN          ovn-nb , ovn-sb , ovn-northd
  • ovn-nb           API      kube-ovn-controller   ovn-nb
  • ovn-sb           ovn-nb
  • ovn-northd     ovn-nb           ovn-sb
ovn-central       Raft

```

**OVS-OVN**

```

ovs-ovn  DaemonSet        Pod      openvswitch, ovsdb, ovn-controller    ovn-central  Agent

```

**Agent**

```
Kube-OVN      OVN  Kubernetes
```

**KUBE-OVN-CONTROLLER**

Deployment	Kubernetes	OVN	Kube-OVN	kube-ovn-controller	OVN
Pod	Service	Endpoint	Node	NetworkPolicy	VPC
Pod	annotation	IPAM	ovn-central	Subnet	Vlan
CIDR		annotation	kube-ovn-cni		ProviderNetwork

**KUBE-OVN-CNI**

DaemonSet	CNI	OVS
DaemonSet	kube-ovn	kubelet  kube-ovn-cni
		CNI      kube-ovn-cni
		/opt/cni/bin

```
kube-ovn-cni
```

1. ovn-controller vswitchd
2. CNI add/del
  - a. veth OVS
  - b. OVS
  - c. iptables/ipset/route
3. QoS.
4. ovn0
5. Vlan/Underlay/EIP
- 6.

**Kube-OVN****KUBE-OVN-SPEAKER**

DaemonSet	Pod IP
-----------	--------

```
BGP
```

**KUBE-OVN-PINGER**

DaemonSet	OVS	Kube-OVN
-----------	-----	----------

**KUBE-OVN-MONITOR**

Deployment	OVN	Kube-OVN
------------	-----	----------

KUBECTL-KO

kubectl

kubectl

 PDF

 Slack

 Support

 2025 9 10

 2022 5 24



 GitHub 



8.1.2

---

## 8.2 What's Next

---

This document lists the features merged into the master branch for the next minor release.

### 8.2.1 Post-v1.14.0

- AdminNetworkPolicy now supports specify egress peers using FQDNs. [#5703](#)
- Using ARP for IPv4 network ready check: now you don't need ACL allow rules for gateway to make Pod running. [#5716](#)
- Non-primary CNI mode: you can run Kube-OVN as the secondary only network, without annoying unused annotations and logical switch port allocations. [#5618](#)
- VPC NAT Gateway:
- Custom routes: you can control the route rules within the vpc-nat-gateway Pods to control traffic paths. [#5608](#)
- Gratuitous ARP: VPC NAT Gateway automatically sends gratuitous ARP packets during initialization to accelerate network convergence. [#5607](#)
- Healthchecks for static endpoints in `SwitchLBRules`: SLR with both selector or endpoints key can support healthchecks. [#5435](#)
- Underlay
- Node Selectors for `ProviderNetwork`: instead of adding/removing nodes to the `ProviderNetwork` one by one, you can use node selectors to simplify the workflow. [#5518](#)
- Different `NetworkProvider`s can now share the same VLAN. [#5471](#)
- Adding `pod_name` and `pod_namespace` labels to interface metrics. [#5463](#)
- IPSec
- Support `cert-manager` to issue certificates. [#5365](#)
- Request new certificate if current certificate is not trusted. [#5710](#)
- kubectl-ko
- Collect IPSec and xFRM information. [#5472](#)
- Replace `Endpoint` with `EndpointSlice`. [#5425](#)
- NetworkAttachment caching: reduce APIServer load in large-scale deployments with Multus. [#5386](#)
- Upgrade `ovs` to 3.5 and `ovn` to 25.03. [#5537](#)

[!\[\]\(bea26348a51bbd221a40e3392f753dd5\_img.jpg\) PDF](#)
[!\[\]\(cd1e149195234dd6a1fdd5f41e5ebb7e\_img.jpg\) Slack](#)
[!\[\]\(5342a38864e14f80dd2b2db275f5ad1d\_img.jpg\) Support](#)
 2025 9 15

 2025 9 15


### 8.2.2

## 8.3

---

### Kube-OVN

#### 8.3.1

##### Kube-OVN

```
1. default      Pod   IP          CIDR  10.16.0.0/16      10.16.0.1
2. join        Node  Pod          ,     CIDR  100.64.0.0/16    100.64.0.1
```

```
POD_CIDR="10.16.0.0/16"
POD_GATEWAY="10.16.0.1"
JOIN_CIDR="100.64.0.0/16"
EXCLUDE_IPS=""
```

```
EXCLUDE_IP    POD_CIDR           192.168.10.20..192.168.10.30
```

Overlay              Service CIDR

[Join](#)

#### 8.3.2 Service

```
kube-proxy  iptables  Kube-OVN  Kube-OVN  Service  CIDR
```

```
SVC_CIDR="10.96.0.0/12"
```

[kube-ovn-controller Deployment](#)

```
args:
- --service-cluster-ip-range=10.96.0.0/12
```

#### 8.3.3 Overlay

Kube-OVN      Kubernetes Node IP

```
IFACE=eth1
```

```
ens[a-z0-9]*,eth[a-z0-9]*
```

[kube-ovn-cni DaemonSet](#)

```
args:
- --iface=eth1
```

```
annotation ovn.kubernetes.io/tunnel_interface annotation iface annotation
```

```
kubectl annotate node no1 ovn.kubernetes.io/tunnel_interface=ethx
```

#### 8.3.4 MTU

```
Overlay           Kube-OVN          MTU      MTU      Overlay   Pod    MTU      MTU - 100 Underlay   Pod
MTU

Overlay     MTU      kube-ovn-cni DaemonSet

args:
- --mtu=1333
```

### 8.3.5

```
Kube-OVN           mirror0          tcpdump  
=true  
be-ovn-cni DaemonSet      :  
rror=true
```

### 8.3.6 LB

Kube-OVN OVN L2 LB Service Overlay kube-proxy Service , Kube-OVN LB

ENABLE\_LB=false

## kube-ovn-controller Deployment

```
args:  
- --enable-lb=false
```

LB

Kube-OVN v1.12.0	subnet crd	spec	enableLb	Kube-OVN	LB	LB	kube-ovn-controller
Deployment	enable-lb		load-balancer	enableLb		load-balancer	v1.12.0

### 8.3.7 NetworkPolicy

Kube-OVN   OVN   ACL   NetworkPolicy   NetworkPolicy   Cilium Chain   eBPF   NetworkPolicy   Kube-OVN  
NetworkPolicy

ENABLE\_NP=false

## kube-ovn-controller Deployment

args:

- --enable-np=false

### 8.5.8 EIP - SNAT

**ELB SNAT** **kube-ovn-controller**

```
ENABLE_EIP_SNAT=false
```

#### kube-ovn-controller Deployment

```
args:
- --enable-eip-snat=false
```

EIP SNAT

EIP SNAT

### 8.3.9 Load Balancer Service

VPC      Load Balancer Service

LoadBalancer Service

```
ENABLE_LB_SVC=true
```

#### kube-ovn-controller Deployment

```
args:
- --enable-lb-svc=true
```

### 8.3.10 ECMP

ECMP      ECMP

kube-ovn-controller Deployment

:

```
args:
- --enable-ecmp=true
```

Kube-OVN v1.12.0	subnet crd	spec enableEcmp	ECMP	ECMP	kube-ovn-controller
Deployment	enable-ecmp	v1.12.0			

### 8.3.11 Kubevirt VM

Kubevirt VM kube-ovn-controller

StatefulSet Pod

IP

VM

1.10.6

kube-ovn-controller Deployment

```
args:
- --keep-vm-ip=false
```

### 8.3.12 CNI

Kube-OVN /opt/cni/bin CNI /etc/cni/net.d CNI 01-kube-ovn.conflist CNI

```
CNI_CONF_DIR="/etc/cni/net.d"
CNI_BIN_DIR="/opt/cni/bin"
CNI_CONFIG_PRIORITY="01"
```

#### kube-ovn-cni DaemonSet Volume

```
volumes:
- name: cni-conf
  hostPath:
    path: "/etc/cni/net.d"
- name: cni-bin
  hostPath:
    path: "/opt/cni/bin"
...
args:
- --cni-conf-name=01-kube-ovn.conflist
```

### 8.3.13

Kube-OVN   Overlay   Geneve   Vxlan   STT

```
TUNNEL_TYPE="vxlan"
```

ovs-ovn DaemonSet

```
env:
- name: TUNNEL_TYPE
  value: "vxlan"
```

STT   ovs

### 8.3.14 SSL

OVN DB   API   SSL :

```
ENABLE_SSL=true
```

SSL

### 8.3.15 ip

kube-ovn-controller/kube-ovn-cni/kube-ovn-monitor   ip   0.0.0.0   ip

```
ENABLE_BIND_LOCAL_IP=true
```

kube-ovn-monitor   pod ip

```
# netstat -tunlp |grep kube-ovn
tcp        0      0 172.18.0.5:10661          0.0.0.0:*
                  LISTEN          2612/.kube-ovn-mon
```

deployment   daemonSet

```
env:
- name: ENABLE_BIND_LOCAL_IP
  value: "false"
```

[PDF](#)

[Slack](#)

[Support](#)

⌚2025 9 17

⌚2022 5 24



### 8.3.16

## 8.4

---

Kube-OVN	Minor	Patch	Minor	OVN/OVS	API	Patch	Bug	API
----------	-------	-------	-------	---------	-----	-------	-----	-----

### 8.4.1

Kube-OVN		master, release-1.12	release-1.11		release-1.12		Bug
backport							
		release-1.11	backport	Bug			

### 8.4.2

Minor		Patch	Bug	Bug
-------	--	-------	-----	-----

### 8.4.3 Patch

Patch	<a href="#">hack/release.sh</a>							
1.	Build							
2.	tag	Docker Hub						
3.	tag	Github						
4.								
5.								
6.	Release Note PR							
7.	Release Note ( )							
8.	Merge github action	Release Note PR						
9.	Github Release							
10.	Github Release	Release	v1.12.12		Release Note	Release		

### 8.4.4 Minor

Minor									
1.	Github	release-1.13	( )						
2.	VERSION, dist/images/install.sh, charts/kube-ovn/values.yaml	charts/kube-ovn/Chart.yaml		Minor	v1.14.0	( )			
3.	tag	Docker Hub ( )							
4.	tag	Github ( )							
5.	v1.13	mkdocs.yml	version branch ( )						
6.	Release Note PR								
7.	Release Note ( )								
8.	Merge github action	Release Note PR							
9.	Github Release								
10.	Github Release	Release	v1.13.0		Release Note	Release			
11.	VERSION	Patch	v1.13.1						



PDF




Slack



Support

⌚2024 5 16

⌚2024 5 8



8.4.5

---

## 8.5

---

Kube-OVN

**Alpha Beta GA**

### 8.5.1

---

#### **Alpha**

- 
- 
- API
- 
- 

#### **Beta**

- 
- 
- API
- 
- API

#### **GA**

- 
- 
- API
-

## 8.5.2

v1.8


			Since	Until
Namespaced Subnet	true	GA	1.8	
	true	GA	1.8	
	true	GA	1.8	
ECMP	false	Beta	1.8	
ACL	true	Alpha	1.9	
( ACL )	true	Beta	1.8	
Underlay	true	GA	1.8	
	true	Beta	1.8	
DHCP	false	Alpha	1.10	
	false	Alpha	1.8	
OVN-IC	false	Beta	1.8	
Submariner	false	Alpha	1.9	
VIP	true	Alpha	1.10	
VPC	true	Beta	1.8	
VPC IP/SNAT/DNAT	true	Alpha	1.10	
VPC	true	Alpha	1.10	
VPC	true	Alpha	1.10	
VPC	true	Alpha	1.10	
QoS	true	GA	1.8	
linux-netem QoS	true	Alpha	1.9	
Prometheus	false	GA	1.8	
Grafana	false	GA	1.8	
	false	GA	1.8	
VPC EIP/SNAT	false	Beta	1.8	
	false	GA	1.8	
NetworkPolicy	true	Beta	1.8	
Webhook	false	Alpha	1.10	
	false	Beta	1.8	
Overlay	false	Alpha	1.8	
Overlay BGP	false	Alpha	1.9	
Cilium	false	Alpha	1.10	
VPC	false	Alpha	1.10	
Mellanox Offload	false	Alpha	1.8	
Offload	false	Alpha	1.10	

			Since	Until
DPDK		false	Alpha	1.10
OpenStack		false	Alpha	1.9
Pod	IP/Mac	true	GA	1.8
Workload	IP	true	GA	1.8
StatefulSet	IP	true	GA	1.8
VM	IP	false	Beta	1.9
VPC Load Balancer	Service	false	Alpha	1.11
VPC	DNS	false	Alpha	1.11
Underlay	Overlay	false	Beta	1.12
VPC Egress Gateway		true	Alpha	1.14

[PDF](#)[Slack](#)[Support](#)

⌚2025 9 17

⌚2022 8 31




8.5.3


## 8.6 Underlay

### Underlay


#### 8.6.1

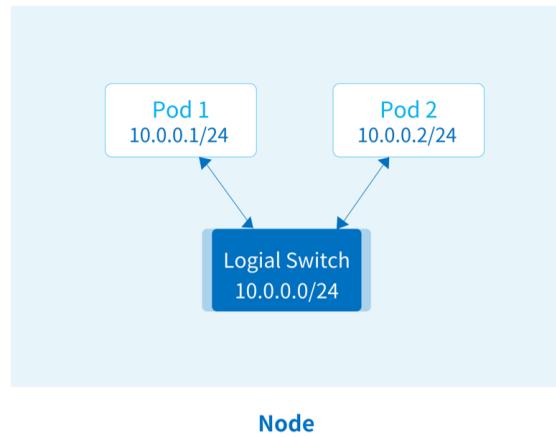

#### 8.6.2

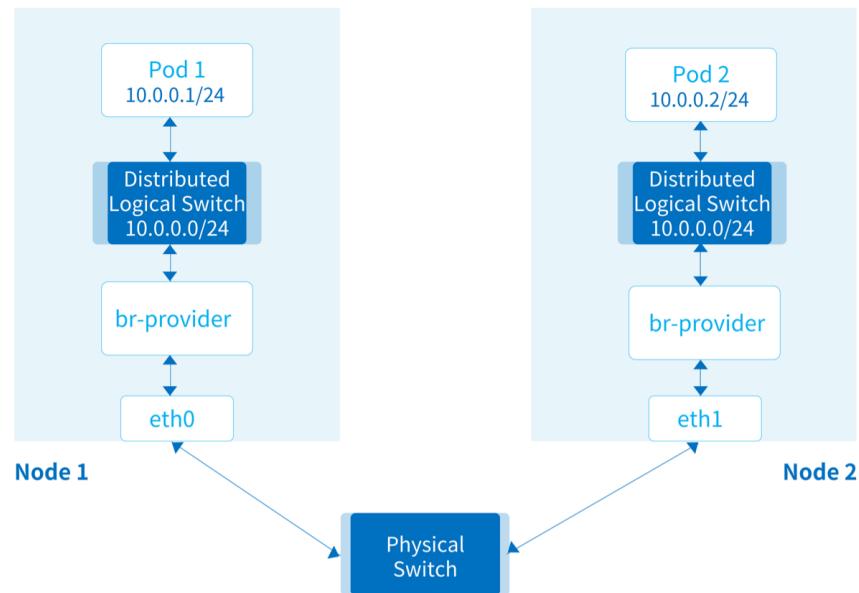

## 8.6.3

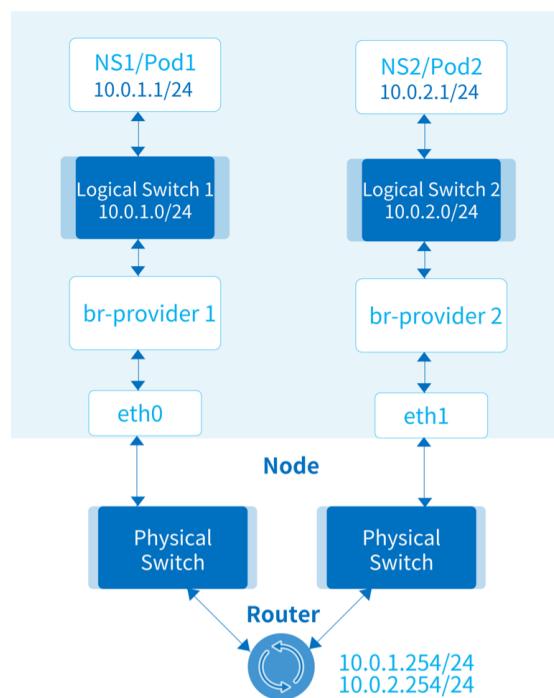


br-provider-1 br-provider-2


OVS

Provider Network

## 8.6.4

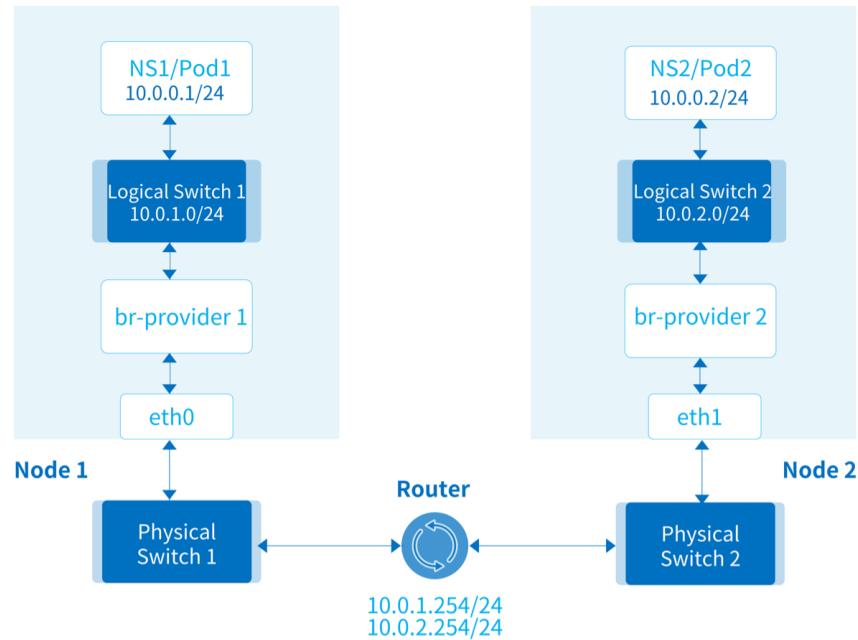


## 8.6.5

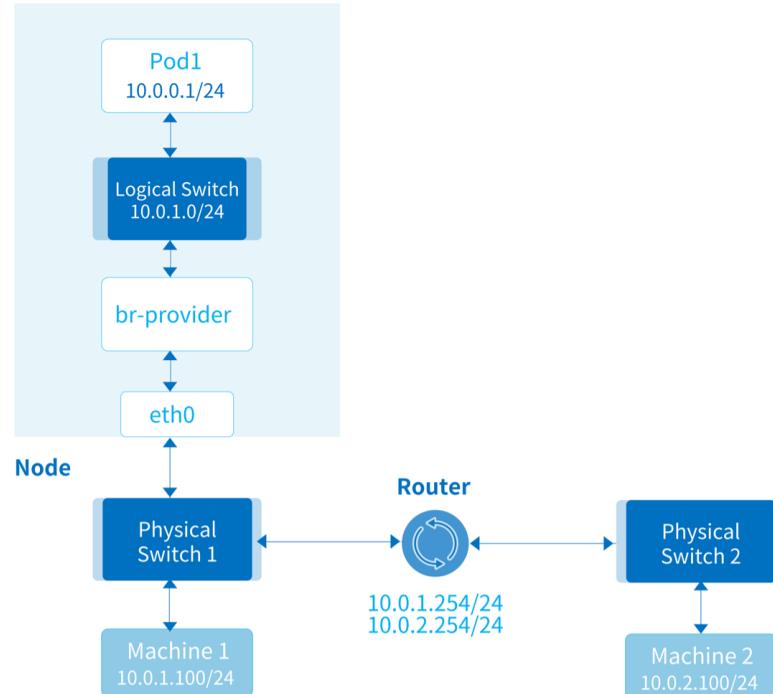


Pod

### 8.6.6 Vlan Tag


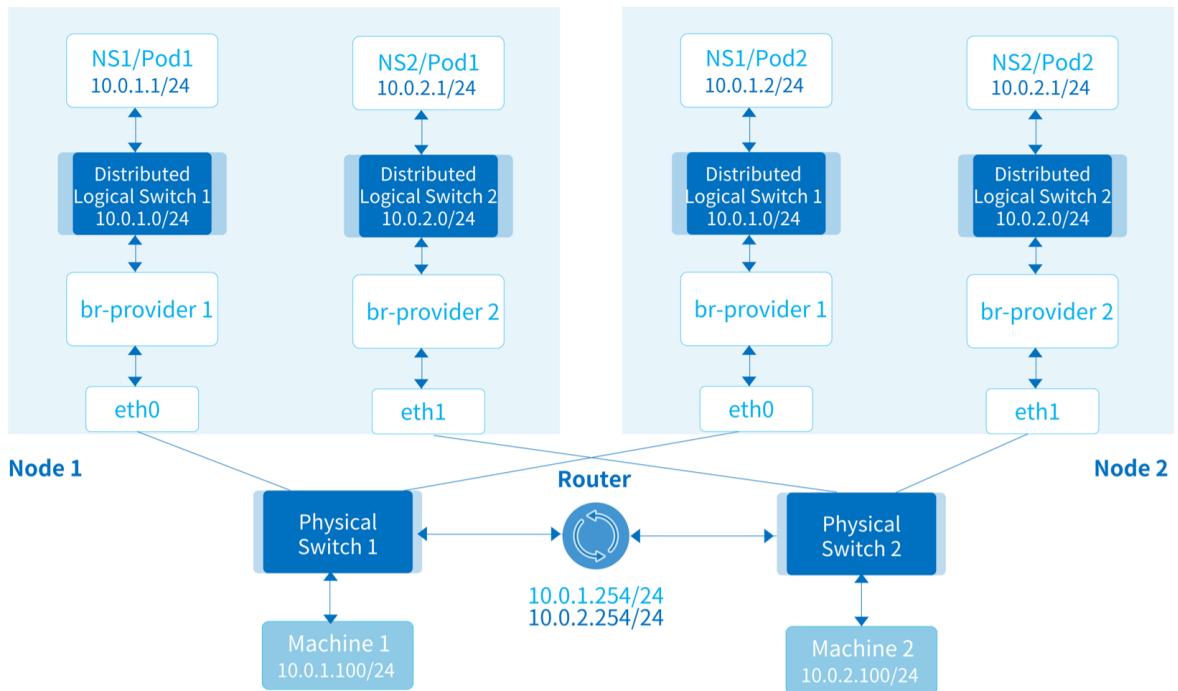


### 8.6.7 VLAN

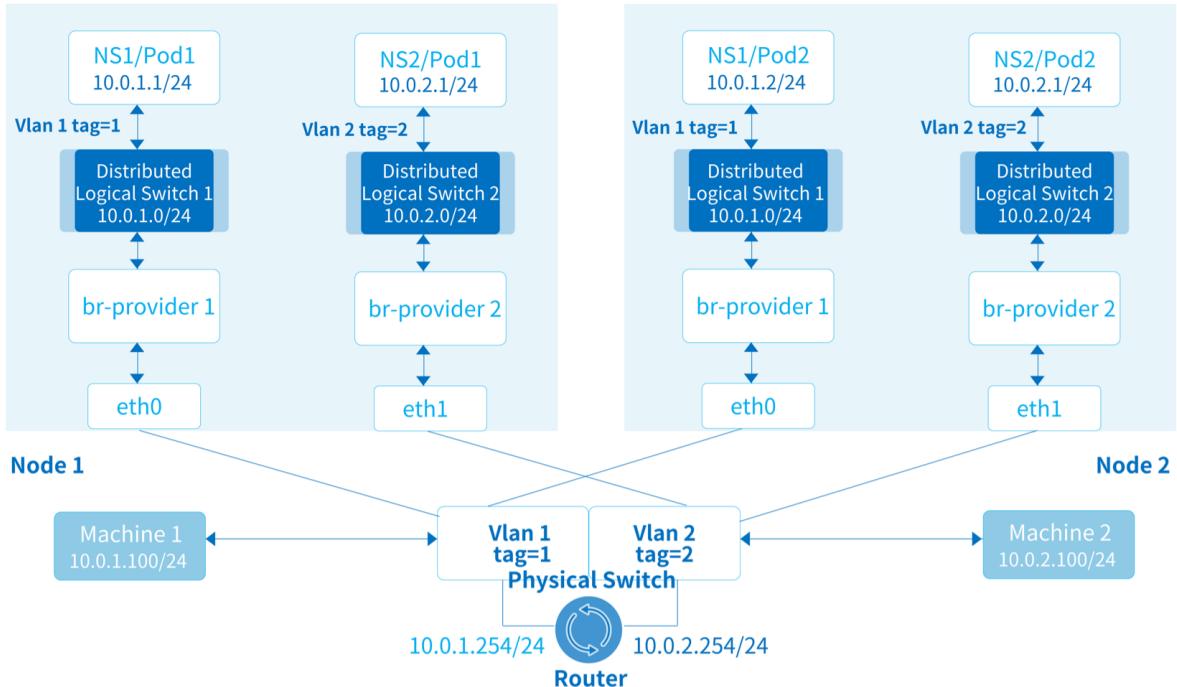

### 8.6.8 Pod Service IP

Kube-OVN	Kubernetes Service	DNAT	IP	Service	Pod Endpoint	Service IP IP	Pod MAC	Service IP MAC	MAC
----------	--------------------	------	----	---------	--------------	---------------	---------	----------------	-----

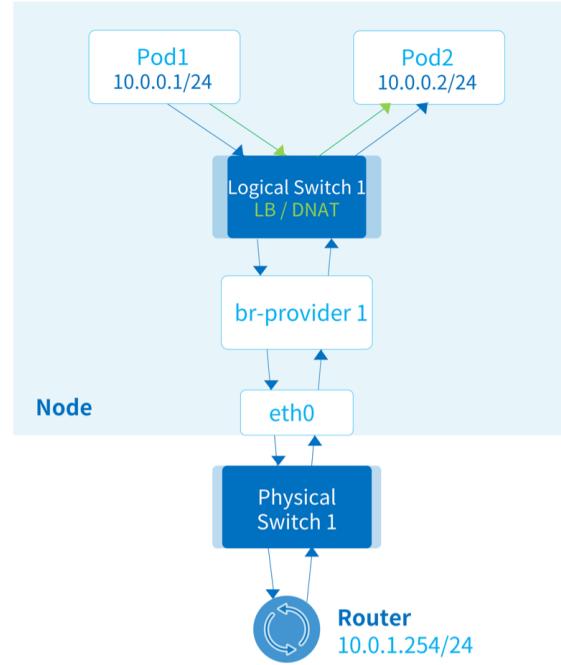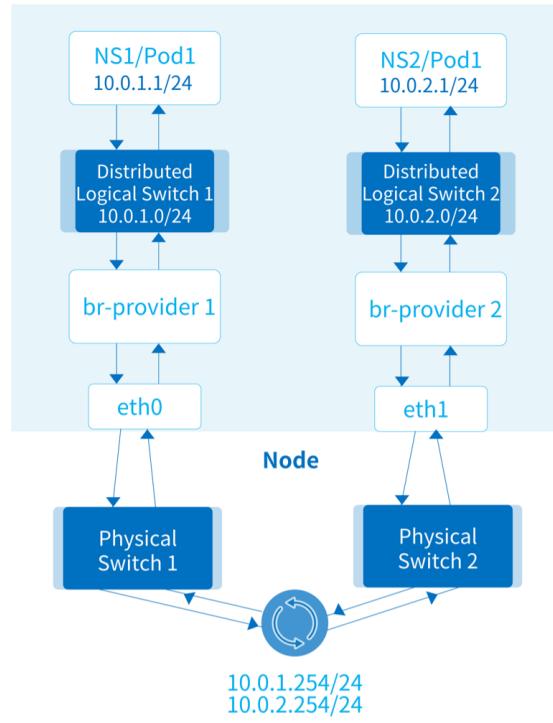**Service****Pod****Service****Pod**[PDF](#)[Slack](#)[Support](#)

⌚2022 9 23

⌚2022 5 20

⌚GitHub 🎉

8.6.9

---

## 8.7 Iptables

---

Kube-OVN    ipset    iptables    VPC    Overlay    NAT

ipset

IPv4/IPv6			
ovn40services/ovn60services	hash:net	Service	
ovn40subnets/ovn60subnets	hash:net	Overlay	NodeLocal DNS IP
ovn40subnets-nat/ovn60subnets-nat	hash:net	NatOutgoing	Overlay
ovn40subnets-distributed-gw/ovn60subnets-distributed-gw	hash:net	Overlay	
ovn40other-node/ovn60other-node	hash:net	IP	
ovn40local-pod-ip-nat/ovn60local-pod-ip-nat	hash:ip		
ovn40subnets-nat-policy	hash:net	natOutgoingPolicyRules	
ovn40natpr-418e79269dc5-dst	hash:net	natOutgoingPolicyRules	rule dstIPs
ovn40natpr-418e79269dc5-src	hash:net	natOutgoingPolicyRules	rule srcIPs

iptables IPv4

filter	INPUT	-m set --match-set ovn40services src -j ACCEPT	k8s Service Pod	--	
filter	INPUT	-m set --match-set ovn40services dst -j ACCEPT		--	
filter	INPUT	-m set --match-set ovn40subnets src -j ACCEPT		--	
filter	INPUT	-m set --match-set ovn40subnets dst -j ACCEPT		--	
filter	FORWARD	-m set --match-set ovn40services src -j ACCEPT		--	
filter	FORWARD	-m set --match-set ovn40services dst -j ACCEPT		--	
filter	FORWARD	-m set --match-set ovn40subnets src -j ACCEPT		--	
filter	FORWARD	-m set --match-set ovn40subnets dst -j ACCEPT		--	
filter	FORWARD	-s 10.16.0.0/16 -m comment --comment "ovn-subnet-gateway,ovn-default"	subnet	10.16.0.0/16 subnet cidr comment ovn-subnet-gateway subnet	iptables ovn-default subnet
filter	FORWARD	-d 10.16.0.0/16 -m comment --comment "ovn-subnet-gateway,ovn-default"	subnet		
filter	OUTPUT	-p udp -m udp --dport 6081 -j MARK --set-xmark 0x0	SNAT	UDP: bad checksum on VXLAN interface	
nat	PREROUTING	-m comment --comment "kube-ovn prerouting rules" -j OVN-PREROUTING	OVN-PREROUTING	--	
nat	POSTROUTING	-m comment --comment "kube-ovn postrouting rules" -j OVN-POSTROUTING	OVN-POSTROUTING	--	
nat	OVN-PREROUTING	-i ovn0 -m set --match-set ovn40subnets src -m set --match-set ovn40services dst -j MARK --set-xmark 0x4000/0x4000	Pod Service masquerade		LB
nat	OVN-PREROUTING	-p tcp -m addrtype --dst-type LOCAL -m set --match-		kube-proxy ipvs	


		set KUBE-NODE-PORT- LOCAL-TCP dst -j MARK -- set-xmark 0x80000/0x80000	ExternalTrafficPolicy Local Service TCP		
nat	OVN- PREROUTING	-p udp -m addrtype --dst- type LOCAL -m set --match- set KUBE-NODE-PORT- LOCAL-UDP dst -j MARK -- set-xmark 0x80000/0x80000	ExternalTrafficPolicy Local Service UDP		
nat	OVN- POSTROUTING	-m set --match-set ovn40services src -m set -- match-set ovn40subnets dst -m mark --mark 0x4000/0x4000 -j SNAT -- to-source	Service IP Overlay Pod IP		kube-proxy ipvs
nat	OVN- POSTROUTING	-m mark --mark 0x4000/0x4000 -j MASQUERADE	SNAT	--	
nat	OVN- POSTROUTING	-m set --match-set ovn40subnets src -m set -- match-set ovn40subnets dst -j MASQUERADE	Pod Service SNAT	--	
nat	OVN- POSTROUTING	-m mark --mark 0x80000/0x80000 -m set -- match-set ovn40subnets- distributed-gw dst -j RETURN	ExternalTrafficPolicy Local Service Endpoint SNAT	--	
nat	OVN- POSTROUTING	-m mark --mark 0x80000/0x80000 -j MASQUERADE	ExternalTrafficPolicy Local Service Endpoint SNAT	--	
nat	OVN- POSTROUTING	-p tcp -m tcp --tcp-flags SYN NONE -m conntrack -- ctstate NEW -j RETURN	Pod IP	SNAT	--
nat	OVN- POSTROUTING	-s 10.16.0.0/16 -m set ! -- match-set ovn40subnets dst -j SNAT --to-source 192.168.0.101	Pod NatOutgoing	IP SNAT	10.16.0.0/16 192.168.0.101
nat	OVN- POSTROUTING	-m set --match-set ovn40subnets-nat src -m set ! --match-set ovn40subnets dst -j MASQUERADE	Pod NatOutgoing	SNAT	--
nat	OVN- POSTROUTING	-m set --match-set ovn40subnets-nat-policy src -m set ! --match-set ovn40subnets dst -j OVN- NAT-POLICY	Pod natOutgoingPolicyRules SNAT		natOutgoingPolicyRules NAT-POLICY
nat					OVN

	OVN- POSTROUTING	-m mark --mark 0x90001/0x90001 -j MASQUERADE --random- fully	OVN-NAT-POLICY 0x90001/0x90001	tag SNAT
nat	OVN- POSTROUTING	-m mark --mark 0x90002/0x90002 -j RETURN	OVN-NAT-POLICY 0x90002/0x90002	, tag SNAT
nat	OVN-NAT-POLICY	-s 10.0.11.0/24 -m comment --comment natPolicySubnet-net1 -j OVN-NAT-PSUBNET- aa98851157c5	10.0.11.0/24 net1 CIDR OVN-NAT- PSUBNET-aa98851157c5 natOutgoingPolicyRules	
nat	OVN-NAT- PSUBNET- xxxxxxxxxxxx	-m set --match-set ovn40natpr-418e79269dc5- src src -m set --match-set ovn40natpr-418e79269dc5- dst dst -j MARK --set-xmark 0x90002/0x90002	418e79269dc5 natOutgoingPolicyRules ID status.natOutgoingPolicyRules[index].Rule srcIPs ovn40natpr-418e79269dc5- src dstIPS ovn40natpr-418e79269dc5- dst tag 0x90002	
mangle	OVN-OUTPUT	-d 10.241.39.2/32 -p tcp -m tcp -dport 80 -j MARK --set- xmark 0x90003/0x90003	kubelet tproxy	
mangle	OVN- PREROUTING	-d 10.241.39.2/32 -p tcp -m tcp -dport 80 -j TPROXY -- on-port 8102 --on-ip 172.18.0.3 --tproxy-mark 0x90004/0x90004	kubelet tproxy	

[PDF](#)[Slack](#)[Support](#)

⌚2025 9 10

⌚2022 9 6



8.7.1

## 8.8

---

### 8.8.1

Kube-OVN      Github      /      Github      Issue      PR      Maintainer      Review      Github Action

### 8.8.2

Kube-OVN      Go      Go Modules      G0111MODULE="on"

golangci-lint      local-installation

Kube-OVN      Docker buildx      Docker      buildx:

```
docker buildx create --use
```

### 8.8.3

Kube-OVN

```
git clone https://github.com/kubeovn/kube-ovn.git
cd kube-ovn
make release
```

ARM

```
make release-arm
```

### 8.8.4 base

OVS/OVN      base

base      Dockerfile      dist/images/Dockerfile.base

```
# build x86 base image
make base-amd64

# build arm base image
make base-arm64
```

### 8.8.5 E2E

Kube-OVN :

- KIND      Kubernetes      go install sigs.k8s.io/kind@latest
- jinjanator      : pip install jinjanator
- Ginkgo      go install github.com/onsi/ginkgo/v2/ginkgo; go get github.com/onsi/gomega/...

E2E

```
make kind-init
make kind-install
make e2e
```

Underlay E2E

```
make kind-init
make kind-install-underlay
make e2e-underlay-single-nic
```

ovn vpc nat gw eip, fip, snat, dnat

```
make kind-init
make kind-install
make ovn-vpc-nat-gw-conformance-e2e
```

iptables vpc nat gw eip, fip, snat, dnat

```
make kind-init
make kind-install-vpc-nat-gw
make iptables-vpc-nat-gw-conformance-e2e
```

loadbalancer service

```
make kind-init
make kind-install-lb-svc
make kube-ovn-lb-svc-conformance-e2e
```

make kind-clean


[!\[\]\(bf3f7c48997ebd3d04523421c0f20f52\_img.jpg\) PDF](#)

[!\[\]\(f1e96cdd18516a23ca7f2ad7669727f9\_img.jpg\) Slack](#)

[!\[\]\(65eefab5d15eb350efd214b4562a9ec2\_img.jpg\) Support](#)

 2025 6 29

 2022 5 20



8.8.6

---

## 8.9 OVS/OVN

---


OVN/OVS	SDN	Kubernetes	Kube-OVN
OVN/OVS	Kube-OVN		

- [4228eab1d7](#) vswitchd ofport\_usage
- [54056ea65d](#) timer
- [6b4dccb311f](#) fdb
- [f627b7721e](#) hairpin fdb
- [3f3e3a436f](#) ovsdb-tool join-cluster Server ID
- [a6cb8215a8](#) QoS
- [d4d76ddb2e](#) ovsdb-tool fix-cluster
- [ffd2328d4a](#) netdev CPU
- [d088c5d8c2](#) ovs-router kube-ipvs0
- [1b31f07dc6](#)
- [54b7678229](#) ovs-sandbox docker run
- [9ee66bd91b](#)
- [e889d46924](#) Underlay resubmit
- [f9e97031b5](#) ovn-controller Kube-OVN localnet GARP
- [78cade0187](#) conntrack
- [85aa6263ad](#) northd DNS IP conntrack
- [34dc3e3fcf](#) lflow lport conntrack
- [a297b840c2](#) DNAT lsp
- [03e35ed9c5](#) ovn-controller
- [e7d3ba53cd](#) ACL DNS IP conntrack
- [9286e1fd57](#)
- [e5916eb53a](#) lr-lb DNAT
- [e4e6ea9c5f](#) BFD LRP
- [e76880e792](#) northd nb version\_compatibility
- [477695a010](#) northd localnet lrp arp/nd
  
- [20626ea909](#) LB ACL
- [a2d9ff3cc0](#) Deb



⌚2025 9 10

⌚2022 5 24



8.9.1

---

## 8.10

Kube-OVN OVN/OVS Geneve Vxlan STT OVN  
[OVN Architecture Design Decision](#)

### 8.10.1 Geneve

Geneve	Kube-OVN	OVN	Offload	Geneve	24bit
datapath		datapath 32768			
Mellanox	OVS	Geneve 5.4	backport		
UDP	TCP over UDP	TCP	CPU		

### 8.10.2 Vxlan

Vxlan	OVN	Offload	OVN	datapath	4096 datapath
datapath	4096	inport ACL			
Mellanox	OVS	Vxlan			
UDP	TCP over UDP	TCP	CPU		

### 8.10.3 STT

#### ⚠ Warning

OpenVswitch 3.6 STT Tunnel

STT	OVN	TCP	TCP	TCP	OVN	datapath
		OVS				
		OVS				

### 8.10.4

- [VXLAN vs GENEVE: Understand The Difference](#)
- [OVN FAQ](#)
- [What is Geneve](#)


[!\[\]\(3987f177e7e6579aac4adc3852af1fc0\_img.jpg\) PDF](#)

[!\[\]\(2274c4b9c4171061b32b31a3f22eda0f\_img.jpg\) Slack](#)

[!\[\]\(339d2e8d20033e7235fc6ffe651df249\_img.jpg\) Support](#)

⌚2025 9 10

⌚2022 6 17



## 8.10.5

---

## 8.11 Kube-OVN

### Kube-OVN

#### 8.11.1 ovn-monitor

##### OVN

Gauge	kube_ovn_ovn_status	OVN	(2) follower	(1) leader	(0)
Gauge	kube_ovn_failed_req_count	OVN			
Gauge	kube_ovn_log_file_size_bytes	OVN			
Gauge	kube_ovn_db_file_size_bytes	OVN			
Gauge	kube_ovn_chassis_info	OVN chassis	(1)	(0)	
Gauge	kube_ovn_db_status	OVN	, (1)	(0)	
Gauge	kube_ovn_logical_switch_info	OVN logical switch	(1)	logical switch	
Gauge	kube_ovn_logical_switch_external_id	OVN logical switch external_id	(1)	external-id	
Gauge	kube_ovn_logical_switch_port_binding	OVN logical switch logical switch port	(1)		
Gauge	kube_ovn_logical_switch_tunnel_key	OVN logical switch tunnel key			
Gauge	kube_ovn_logical_switch_ports_num	OVN logical switch logical port			
Gauge	kube_ovn_logical_switch_port_info	OVN logical switch port	(1)		
Gauge	kube_ovn_logical_switch_port_tunnel_key	OVN logical switch port tunnel key			
Gauge	kube_ovn_cluster_enabled	(1) OVN	(0) OVN		
Gauge	kube_ovn_cluster_role		(1)		
Gauge	kube_ovn_cluster_status		(1)		
Gauge	kube_ovn_cluster_term	RAFT term			
Gauge	kube_ovn_cluster_leader_self		leader (1)	(0)	
Gauge	kube_ovn_cluster_vote_self		leader (1)	(0)	
Gauge	kube_ovn_cluster_election_timer	election timer			
Gauge	kube_ovn_cluster_log_not_committed	commit RAFT			
Gauge	kube_ovn_cluster_log_not_applied	apply RAFT			
Gauge	kube_ovn_cluster_log_index_start	RAFT			
Gauge	kube_ovn_cluster_log_index_next	RAFT			
Gauge	kube_ovn_cluster_inbound_connections_total				
Gauge	kube_ovn_cluster_outbound_connections_total				
Gauge	kube_ovn_cluster_inbound_connections_error_total				
Gauge	kube_ovn_cluster_outbound_connections_error_total				

## 8.11.2 ovs-monitor

ovsdb vswitchd

Gauge	ovs_status	OVS	(1)	(0)
Gauge	ovs_info	OVS	(1)	
Gauge	failed_req_count	OVS		
Gauge	log_file_size	OVS		
Gauge	db_file_size	OVS		
Gauge	datapath	Datapath	(1)	
Gauge	dp_total	OVS datapath		
Gauge	dp_if	Datapath	(1)	
Gauge	dp_if_total	datapath port		
Gauge	dp_flows_total	Datapath flow		
Gauge	dp_flows_lookup_hit	Datapath flow		
Gauge	dp_flows_lookup_missed	Datapath flow		
Gauge	dp_flows_lookup_lost	Datapath userspace		
Gauge	dp_masks_hit	Datapath mask		
Gauge	dp_masks_total	Datapath mask		
Gauge	dp_masks_hit_ratio	Datapath mask		
Gauge	interface	OVS (1)		
Gauge	interface_admin_state	(0) down, (1) up, (2)		
Gauge	interface_link_state	(0) down, (1) up, (2)		
Gauge	interface_mac_in_use	OVS Interface MAC		
Gauge	interface_mtu	OVS Interface MTU		
Gauge	interface_of_port	OVS Interface OpenFlow Port ID		
Gauge	interface_if_index	OVS Interface Index		
Gauge	interface_tx_packets	OVS Interface		
Gauge	interface_tx_bytes	OVS Interface		
Gauge	interface_rx_packets	OVS Interface		
Gauge	interface_rx_bytes	OVS Interface		
Gauge	interface_rx_crc_err	OVS Interface		
Gauge	interface_rx_dropped	OVS Interface		
Gauge	interface_rx_errors	OVS Interface		
Gauge	interface_rx_frame_err	OVS Interface		
Gauge	interface_rx_missed_err	OVS Interface miss		
Gauge	interface_rx_over_err	OVS Interface overrun		
Gauge	interface_tx_dropped	OVS Interface		

Gauge	interface_tx_errors	OVS Interface
Gauge	interface_collisions	OVS interface

### 8.11.3 kube-ovn-pinger

Gauge	pinger_ovs_up	OVS
Gauge	pinger_ovs_down	OVS
Gauge	pinger_ovn_controller_up	ovn-controller
Gauge	pinger_ovn_controller_down	ovn-controller
Gauge	pinger_inconsistent_port_binding	OVN-SB portbinding OVS interface
Gauge	pinger_apiserver_healthy	kube-ovn-pinger apiserver
Gauge	pinger_apiserver_unhealthy	kube-ovn-pinger apiserver
Histogram	pinger_apiserver_latency_ms	kube-ovn-pinger apiserver
Gauge	pinger_internal_dns_healthy	kube-ovn-pinger
Gauge	pinger_internal_dns_unhealthy	kube-ovn-pinger
Histogram	pinger_internal_dns_latency_ms	kube-ovn-pinger
Gauge	pinger_external_dns_health	kube-ovn-pinger
Gauge	pinger_external_dns_unhealthy	kube-ovn-pinger
Histogram	pinger_external_dns_latency_ms	kube-ovn-pinger
Histogram	pinger_pod_ping_latency_ms	kube-ovn-pinger ping Pod
Gauge	pinger_pod_ping_lost_total	kube-ovn-pinger ping Pod
Gauge	pinger_pod_ping_count_total	kube-ovn-pinger ping Pod
Histogram	pinger_node_ping_latency_ms	kube-ovn-pinger ping Node
Gauge	pinger_node_ping_lost_total	kube-ovn-pinger ping Node
Gauge	pinger_node_ping_count_total	kube-ovn-pinger ping Node
Histogram	pinger_external_ping_latency_ms	kube-ovn-pinger ping
Gauge	pinger_external_lost_total	kube-ovn-pinger ping

## 8.11.4 kube-ovn-controller


`kube-ovn-controller`

Histogram	rest_client_request_latency_seconds	apiserver
Counter	rest_client_requests_total	apiserver
Counter	lists_total	API list
Summary	list_duration_seconds	API list
Summary	items_per_list	API list
Counter	watches_total	API watch
Counter	short_watches_total	API watch
Summary	watch_duration_seconds	API watch
Summary	items_per_watch	API watch
Gauge	last_resource_version	resource version
Histogram	ovs_client_request_latency_milliseconds	OVN
Gauge	subnet_available_ip_count	IP
Gauge	subnet_used_ip_count	IP

## 8.11.5 kube-ovn-cni

`kube-ovn-cni`

Histogram	cni_op_latency_seconds	CNI
Counter	cni_wait_address_seconds_total	CNI
Counter	cni_wait_connectivity_seconds_total	CNI
Counter	cni_wait_route_seconds_total	CNI
Histogram	rest_client_request_latency_seconds	apiserver
Counter	rest_client_requests_total	apiserver
Counter	lists_total	API list
Summary	list_duration_seconds	API list
Summary	items_per_list	API list
Counter	watches_total	API watch
Counter	short_watches_total	API watch
Summary	watch_duration_seconds	API watch
Summary	items_per_watch	API watch
Gauge	last_resource_version	resource version
Histogram	ovs_client_request_latency_milliseconds	OVN



⌚2022 10 18

⌚2022 6 21

GitHub 

8.11.6

---

## 8.12 Kube-OVN

---

Kube-OVN      Kube-OVN      CRD      CRD

### 8.12.1 Condition

type	String			
status	String	True	False	Unknown
reason	String			
message	String			
observedGeneration	Int64			
lastUpdateTime	Time			
lastTransitionTime	Time			

CRD      Status      Condition

### 8.12.2

#### Subnet

SUBNET

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	Subnet
metadata	ObjectMeta	Kubernetes	
spec	SubnetSpec	Subnet	
status	SubnetStatus	Subnet	

**SubnetSpec**

default	Bool				
vpc	String	VPC	ovn-cluster		
protocol	String	IP	IPv4	IPv6	Dual
namespaces	[]String		namespace		
cidrBlock	String		10.16.0.0/16		
gateway	String		CIDRBlock		
excludelps	[]String				
provider	String	OVN Subnet	NetworkAttachmentDefinition	. Kube-OVN	
gatewayType	String	Overlay	distributed	centralized	
gatewayNode	String		centralized		
natOutgoing	Bool	NAT	externalEgressGateway		
externalEgressGateway	String		natOutgoing		
policyRoutingPriority	Uint32				
policyRoutingTableID	Uint32		TableID		
mtu	Uint32		MTU		
private	Bool				
allowSubnets	[]String				
vlan	String		Vlan		
vips	[]String	virtual	Isp	virtual-ip	
logicalGateway	Bool				
disableGatewayCheck	Bool		Pod		
disableInterConnection	Bool				
enableDHCP	Bool		Isp	dhcp	
dhcpV4Options	String		Isp	dhcpv4_options	DHCP_Options
dhcpV6Options	String		Isp	dhcpv6_options	DHCP_Options
enableIPv6RA	Bool		Irp	ipv6_ra_configs	
ipv6RAConfigs	String		Irp	ipv6_ra_configs	
acls	[]Acl		logical-switch	acls	
allowEWTraffic	Bool				
natOutgoingPolicyRules	[]NatOutgoingPolicyRule	NAT			
u2oInterconnectionIP	String	Underlay/Overlay	IP		
u2oInterconnection	Bool	Overlay/Underlay			
enableLb	*Bool	logical-switch	load-balancer		
enableEcmp	Bool	ECMP			

enableMulticastSnoop	Bool
enableExternalLBAddress	Bool
routeTable	String
namespaceSelectors	[]LabelSelector

**Acl**

direction	String	Acl	from-lport	to-lport
priority	Int	Acl	0	32767
match	String	Acl		
action	String	Acl	allow-related	allow-stateless
			allow	drop
			reject	

**NatOutgoingPolicyRule**

match	NatOutGoingPolicyMatch
action	String

**NatOutGoingPolicyMatch**

srcIPs	String	IP
dstIPs	String	IP

## SubnetStatus

conditions	>[]SubnetCondition	Condition	
v4availableIPs	Float64	IPv4 IP	
v4availableIPrange	String	IPv4	
v4usingIPs	Float64	IPv4 IP	
v4usingIPrange	String	IPv4	
v6availableIPs	Float64	IPv6 IP	
v6availableIPrange	String	IPv6	
v6usingIPs	Float64	IPv6 IP	
v6usingIPrange	String	IPv6	
activateGateway	String		
dhcpV4OptionsUUID	String	lsp dhcpv4_options	DHCP_Options
dhcpV6OptionsUUID	String	lsp dhcpv6_options	DHCP_Options
u2oInterconnectionIP	String	Overlay/Underlay	IP
u2oInterconnectionMAC	String	Overlay/Underlay	MAC
u2oInterconnectionVPC	String	Overlay/Underlay	VPC
natOutgoingPolicyRules	[]NatOutgoingPolicyRuleStatus	NAT	
mcastQuerierIP	String	IP	
mcastQuerierMAC	String	MAC	

## IP

## IP

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	IP
metadata	ObjectMeta	Kubernetes	
spec	IPSpec	IP	

**IPSpec**

IPSpec			
podName	String	Pod	
namespace	String	Pod Namespace	
subnet	String	IP Subnet	
attachSubnets	[]String	IP	
nodeName	String	Pod	
ipAddress	String	IP	v4IP v6IP
v4IpAddress	String	IPv4 IP	
v6IpAddress	String	IPv6 IP	
attachIps	[]String	IP	IP
macAddress	String	Pod	MAC
attachMacs	[]String	IP	MAC
containerID	String	Pod	Container ID
podType	String	Pod StatefulSet VirtualMachine	

**Vpc**

## VPC

VPC			
apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	Vpc
metadata	ObjectMeta	Kubernetes	
spec	VpcSpec	Vpc	
status	VpcStatus	Vpc	

## VpcSpec

VpcSpec			
defaultSubnet	String		
namespaces	[]String	Vpc	
staticRoutes	[]StaticRoute		
policyRoutes	[]PolicyRoute		
vpcPeerings	[]VpcPeering	VPC	
enableExternal	Bool		
extraExternalSubnets	[]String		
enableBfd	Bool	BFD ( )	
bfdPort	BFDPort	BFD	

## StaticRoute

policy	String	
cidr	String	
nextHopIP	String	IP
ecmpMode	String	ECMP
bfdId	String	BFD ID
routeTable	String	

## PolicyRoute

priority	Int	
match	String	
action	String	allow drop reroute
nextHopIP	String	IP action reroute

## VpcPeering

remoteVpc	String	VPC
localConnectIP	String	IP

## BFDPort

enabled	Bool	BFD
ip	String	BFD IP
nodeSelector	LabelSelector	BFD LRP

**VpcStatus**

conditions	IVpcCondition	Vpc	Condition
standby	Bool	VPC	
default	Bool	VPC	
defaultLogicalSwitch	String		
router	String		
tcpLoadBalancer	String	TCP	
udpLoadBalancer	String	UDP	
sctpLoadBalancer	String	SCTP	
tcpSessionLoadBalancer	String	TCP	
udpSessionLoadBalancer	String	UDP	
sctpSessionLoadBalancer	String	SCTP	
subnets	IString	VPC	
vpcPeerings	IString	VPC	
enableExternal	Bool		
extraExternalSubnets	IString		
enableBfd	Bool	BFD	

**8.12.3 Underlay****Vlan**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	Vlan
metadata	ObjectMeta	Kubernetes	
spec	VlanSpec	Vlan	
status	VlanStatus	Vlan	

**VLANSPEC**

id	Int	Vlan tag	0~4096
provider	String	Vlan	ProviderNetwork

**VLANSTATUS**

subnets	>[]String	Vlan	
conflict	Bool		
conditions	>[]VlanCondition	Vlan	Condition

**ProviderNetwork**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	ProviderNetwork
metadata	ObjectMeta	Kubernetes	
spec	ProviderNetworkSpec	ProviderNetwork	
status	ProviderNetworkStatus	ProviderNetwork	

**PROVIDERNETWORKSPEC**

defaultInterface	String				
customInterfaces	>[]CustomInterface				
nodeSelector	LabelSelector	OVS	matchLabels	matchExpressions	nodeSelector excludeNodes
excludeNodes	>[]String				
exchangeLinkName	Bool	OVS			

**CustomInterface**

interface	String	Underlay	
nodes	>[]String		

**PROVIDERNETWORKSTATUS**

ready	Bool		
readyNodes	>[]String		
notReadyNodes	>[]String		
vlans	>[]String	Vlan	
conditions	>[]ProviderNetworkCondition	ProviderNetwork	Condition

## 8.12.4

### SecurityGroup

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	SecurityGroup
metadata	ObjectMeta	Kubernetes	
spec	SecurityGroupSpec	SecurityGroup	
status	SecurityGroupStatus	SecurityGroup	

### SECURITYGROUPSPEC

ingressRules	[]SecurityGroupRule
egressRules	[]SecurityGroupRule
allowSameGroupTraffic	Bool

### SecurityGroupRule

ipVersion	String	IP	ipv4	ipv6		
protocol	SgProtocol		all	icmp	tcp	udp
priority	Int		1-200			
remoteType	SgRemoteType		address	securityGroup		
remoteAddress	String					
remoteSecurityGroup	String					
portRangeMin	Int		1			
portRangeMax	Int		65535			
policy	SgPolicy		allow	drop		

### SECURITYGROUPSTATUS

portGroup	String	
allowSameGroupTraffic	Bool	
ingressMd5	String	MD5
egressMd5	String	MD5
ingressLastSyncSuccess	Bool	
egressLastSyncSuccess	Bool	

## 8.12.5 IP

### Vip

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	Vip
metadata	ObjectMeta	Kubernetes	
spec	VipSpec	Vip	
status	VipStatus	Vip	

### VIPSPEC

namespace	String	VIP
subnet	String	VIP
type	String	VIP
v4ip	String	IPv4
v6ip	String	IPv6
macAddress	String	MAC
selector	[]String	
attachSubnets	[]String	

### VIPSTATUS

conditions	[]VipCondition	VIP	Condition
type	String	VIP	
v4ip	String	IPv4	
v6ip	String	IPv6	
mac	String	MAC	

### SwitchLBRule

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	SwitchLBRule
metadata	ObjectMeta	Kubernetes	
spec	SwitchLBRuleSpec	SwitchLBRule	
status	SwitchLBRuleStatus	SwitchLBRule	

**SWITCHLBRULESPEC**

vip	String	IP
namespace	String	
selector	[]String	
endpoints	[]String	
sessionAffinity	String	
ports	[]SwitchLBRulePort	

**SwitchLBRulePort**

name	String
port	Int32
targetPort	Int32
protocol	String

**SWITCHLBRULESTATUS**

conditions	[]SwitchLBRuleCondition	SwitchLBRule	Condition
ports	String	SwitchLBRule	
service	String	SwitchLBRule	service

---

**8.12.6 QoS IP****QoS Policy**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	QoS Policy
metadata	ObjectMeta	Kubernetes	
spec	QoS Policy Spec	QoS Policy	

**QOSPOLICYSPEC**

bandwidthLimitRules	QoS Policy Bandwidth Limit Rules
shared	Bool
bindingType	QoS Policy Binding Type

**IPPool**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	IPPool
metadata	ObjectMeta	Kubernetes	
spec	IPPoolSpec	IPPool	
status	IPPoolStatus	IPPool	

**IPPOOLSPEC**

subnet	String		
namespaces	[]String		
ips	[]String	IP	

**IPPOOLSTATUS**

v4AvailableIPs	BigInt	IPv4	IP
v4AvailableIPRange	String	IPv4	IP
v4UsingIPs	BigInt	IPv4	IP
v4UsingIPRange	String	IPv4	IP
v6AvailableIPs	BigInt	IPv6	IP
v6AvailableIPRange	String	IPv6	IP
v6UsingIPs	BigInt	IPv6	IP
v6UsingIPRange	String	IPv6	IP
conditions	[]IPPoolCondition	IP	Condition

## 8.12.7 NAT IP

**IptablesEIP**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	IptablesEIP
metadata	ObjectMeta	Kubernetes	
spec	IptablesEIPSpec	IptablesEIP	
status	IptablesEIPStatus	IptablesEIP	

## IPTABLESEIPSPEC

v4ip	String	IPv4
v6ip	String	IPv6
macAddress	String	MAC
natGwDp	String	NAT
qosPolicy	String	QoS
externalSubnet	String	

## IPTABLESEIPSTATUS

ready	Bool	IptablesEIP			
ip	String	IptablesEIP	IP	IPv4	
redo	String	IptablesEIP	CRD		
nat	String	IptablesEIP	fip	snat	dnat
qosPolicy	String	QoS			
conditions	[]IptablesEIPCondition	IptablesEIP		Condition	

## OvnEip

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	OvnEip
metadata	ObjectMeta	Kubernetes	
spec	OvnEipSpec	OvnEip	
status	OvnEipStatus	OvnEip	

## OVNEIPSPEC

externalSubnet	String	
v4Ip	String	IPv4
v6Ip	String	IPv6
macAddress	String	MAC
type	String	fip lsp nat

**IptablesFIPRule**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	IptablesFIPRule
metadata	ObjectMeta	Kubernetes	
spec	IptablesFIPRuleSpec	IptablesFIPRule	

## IPTABLESFIPRULESPEC

eip	String	IP
internalIP	String	IP

**OvnFip**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	OvnFip
metadata	ObjectMeta	Kubernetes	
spec	OvnFipSpec	OvnFip	
status	OvnFipStatus	OvnFip	

## OVNFIPSPEC

ovnEip	String	OVN EIP	
ipType	String	IP	vip ip
ipName	String	IP	
vpc	String	VPC	
v4Ip	String	IPv4	
v6Ip	String	IPv6	
type	String	distributed	centralized

**IptablesDnatRule**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	IptablesDnatRule
metadata	ObjectMeta	Kubernetes	
spec	IptablesDnatRuleSpec	IptablesDnatRule	

## IPTABLESDNATRULESPEC

eip	String	IP
externalPort	String	
protocol	String	
internalIP	String	IP
internalPort	String	

## OvnDnatRule

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	OvnDnatRule
metadata	ObjectMeta	Kubernetes	
spec	OvnDnatRuleSpec	OvnDnatRule	
status	OvnDnatRuleStatus	OvnDnatRule	

## OVNDNATRULESPEC

ovnEip	String	OVN EIP
ipType	String	IP vip ip
ipName	String	IP
internalPort	String	
externalPort	String	
protocol	String	
vpc	String	VPC
v4Ip	String	IPv4
v6Ip	String	IPv6

**OVNDNATRULESTATUS**

vpc	String	VPC	
v4Eip	String	IPv4 EIP	
v6Eip	String	IPv6 EIP	
externalPort	String		
v4Ip	String	IPv4	
v6Ip	String	IPv6	
internalPort	String		
protocol	String		
ipName	String	IP	
ready	Bool	DNAT	
conditions	[]OvnDnatRuleCondition	OVN DNAT	Condition

**IptablesSnatRule**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	IptablesSnatRule
metadata	ObjectMeta	Kubernetes	
spec	IptablesSnatRuleSpec	IptablesSnatRule	

**IPTABLESSNATRULESPEC**

eip	String	IP
internalCIDR	String	CIDR

**OvnSnatRule**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	OvnSnatRule
metadata	ObjectMeta	Kubernetes	
spec	OvnSnatRuleSpec	OvnSnatRule	
status	OvnSnatRuleStatus	OvnSnatRule	

## OVNSNATRULESPEC

ovnEip	String	OVN EIP
vpcSubnet	String	VPC
ipName	String	IP
vpc	String	VPC
v4IpCidr	String	IPv4 CIDR
v6IpCidr	String	IPv6 CIDR

## 8.12.8 VPC

## VpcNatGateway

apiVersion	String	Kubernetes	kubeovn.io/v1	
kind	String	Kubernetes	VpcNatGateway	
metadata	ObjectMeta	Kubernetes		
spec	VpcNatGatewaySpec	VpcNatGateway		
status	VpcNatGatewayStatus	VpcNatGateway		

## VPCNATGATEWAYSPEC

vpc	String	VPC	Pod	VPC
subnet	String	VPC	Pod	
externalSubnets	[]String			
lanIp	String	VPC	Pod	IP
selector	[]String	Kubernetes Selector		
tolerations	[]Toleration	Kubernetes		
affinity	Affinity	Kubernetes		
qosPolicy	String	QoS		
bgpSpeaker	VpcBgpSpeaker	BGP speaker		
routes	[]Route			

**VpcBgpSpeaker**

enabled	Bool	BGP speaker
asn	Uint32	
remoteAsn	Uint32	
neighbors	[]String	BGP
holdTime	Duration	BGP
routerId	String	BGP ID
password	String	BGP
enableGracefulRestart	Bool	
extraArgs	[]String	

**Route**

cidr	String	CIDR
nextHopIP	String	IP

**VPCNATGATEWAYSTATUS**

qosPolicy	String	QoS
externalSubnets	[]String	
selector	[]String	Kubernetes Selector
tolerations	[]Toleration	Kubernetes
affinity	Affinity	Kubernetes

**VpcEgressGateway**

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	VpcEgressGateway
metadata	ObjectMeta	Kubernetes	
spec	VpcEgressGatewaySpec	VpcEgressGateway	
status	VpcEgressGatewayStatus	VpcEgressGateway	

## VPCEGRESSGATEWAYSPEC

vpc	String	VPC
replicas	Int32	
prefix	String	
image	String	
internalSubnet	String	
externalSubnet	String	
internalIPs	[]String	IP
externalIPs	[]String	IP
trafficPolicy	String	

## VpcDns

apiVersion	String	Kubernetes	kubeovn.io/v1
kind	String	Kubernetes	VpcDns
metadata	ObjectMeta	Kubernetes	
spec	VpcDNSSpec	VpcDns	
status	VpcDNSStatus	VpcDns	


## VPCDNSSPEC

replicas	Int32	
vpc	String	VPC
subnet	String	



⌚2025 9 2

⌚2023 2 16



## 8.12.9

---

## 8.13 Annotation

---

Kube-OVN      Pod    Node Annotation      Annotation  
|                  |                  |  
Annotation

### 8.13.1 Pod Annotation

Key	Value	Description									
ovn.kubernetes.io/allocated	true or false	Pod									
ovn.kubernetes.io/routed	true or false	Pod	OVN								
ovn.kubernetes.io/routes	String	Pod									
ovn.kubernetes.io/mac_address	String	Pod	Mac	Pod	Annotation	Mac					
ovn.kubernetes.io/ip_address	String	Pod	IP	Pod	Annotation	IP					
ovn.kubernetes.io/cidr	String	Pod	CIDR								
ovn.kubernetes.io/gateway	String	Pod	Gateway								
ovn.kubernetes.io/ip_pool	IP	Pod	Workload		IP						
ovn.kubernetes.io/bgp	true, cluster, local	BGP	Pod								
ovn.kubernetes.io/snat	String	Pod	SNAT								
ovn.kubernetes.io/eip	String	Pod	EIP								
ovn.kubernetes.io/vip	String	Pod	VIP	Annotation	VIP						
ovn.kubernetes.io/aaps	String	Pod	AAPs (Additional Allowed Addresses Pairs)								
ovn.kubernetes.io/virtualmachine	String	Pod	VirtualMachineInstance								
ovn.kubernetes.io/activation_strategy	String	Pod									
ovn.kubernetes.io/logical_router	String	Pod	VPC								
ovn.kubernetes.io/layer2_forward	true or false	Pod	OVN LSP	unknown							
ovn.kubernetes.io/port_security	true or false	Pod	Port Security								
ovn.kubernetes.io/logical_switch	String	Pod									
ovn.kubernetes.io/vlan_id	Int	Pod	Vlan ID								
ovn.kubernetes.io/ingress_rate	Int	Pod	Mbits/s								
ovn.kubernetes.io/egress_rate	Int	Pod	Mbits/s								
ovn.kubernetes.io/security_groups	String	Pod	Security Group								
ovn.kubernetes.io/default_route	true or false										
ovn.kubernetes.io/provider_network	String	Pod	ProviderNetwork								
ovn.kubernetes.io/mirror	true or false	Pod									
ovn.kubernetes.io/north_gateway	String	Pod									
ovn.kubernetes.io/latency	Int	Pod	ms								
ovn.kubernetes.io/limit	Int	Pod	qdisc								
ovn.kubernetes.io/loss	Float	Pod									
ovn.kubernetes.io/jitter	Int	Pod	ms								
ovn.kubernetes.io/generate-hash	true or false	Pod									
ovn.kubernetes.io/attachmentprovider	String	Pod									

### 8.13.2 Node Annotation

Key	Value	Description		
ovn.kubernetes.io/allocated	true or false	ovn0	join	
ovn.kubernetes.io/mac_address	String	Node ovn0	Mac	
ovn.kubernetes.io/ip_address	String	Node ovn0	IP	
ovn.kubernetes.io/cidr	String	Node ovn0	join	CIDR
ovn.kubernetes.io/gateway	String	Node ovn0	join	Gateway
ovn.kubernetes.io/chassis	String	Node OVN-SouthBoundDB	Chassis ID	
ovn.kubernetes.io/port_name	String	Node ovn0	OVN-NorthboundDB	LSP
ovn.kubernetes.io/logical_switch	String	Node ovn0		
ovn.kubernetes.io/tunnel_interface	String			

### 8.13.3 Namespace Annotation

Key	Value	Description	
ovn.kubernetes.io/cidr	CIDR	Namespace	CIDR
ovn.kubernetes.io/exclude_ips	excludelPs	Namespace	excludelPs

### 8.13.4 Subnet Annotation

Key	Value	Description
ovn.kubernetes.io/bgp	true, cluster, local	BGP

### 8.13.5 Service Annotation

Key	Value	Description		
ovn.kubernetes.io/bgp	true or false	BGP	Service	
ovn.kubernetes.io/switch_lb_vip	String	Service	Kube-OVN	VIP
ovn.kubernetes.io/vpc	String	Service	VPC	
ovn.kubernetes.io/service_external_ip_from_subnet	true or false	Service	IP	
ovn.kubernetes.io/service_health_check	true or false	Service		
ovn.kubernetes.io/lb_svc_img	String			


### 8.13.6 Networkpolicy Annotation

Key	Value	Description
ovn.kubernetes.io/enable_log	true or false	NetworkPolicy
ovn.kubernetes.io/log_acl_actions	"allow,drop,pass"	Action ACL

[PDF](#)[Slack](#)[Support](#)

⌚2025 9 10

⌚2024 6 12



8.13.7

---

## 8.14

### 8.14.1

Bad	Good

Bad	Good
Kube-OVN 1.10	Kube-OVN 1.10

Bad	Good
wget 127.0.0.1	wget 127.0.0.1

### 8.14.2

yaml        yaml

Bad	Good
.... apiVersion: kubeovn.io/v1 kind: Subnet metadata: name: attach-subnet ....	.... ```yaml apiVersion: kubeovn.io/v1 kind: Subnet metadata: name: attach-subnet ....

bash

Bad	Good
.... wget 127.0.0.1 ....	.... ```bash wget 127.0.0.1 ....

#

**Bad**

```
oilbeater@macdeMac-3 ~ ping 114.114.114.114 -c 3
PING 114.114.114.114 (114.114.114.114): 56 data bytes
64 bytes from 114.114.114.114: icmp_seq=0 ttl=83 time=10.429 ms
64 bytes from 114.114.114.114: icmp_seq=1 ttl=79 time=11.360 ms
64 bytes from 114.114.114.114: icmp_seq=2 ttl=76 time=10.794 ms

--- 114.114.114.114 ping statistics ---
3 packets transmitted, 3 packets received, 0.0% packet loss
round-trip min/avg/max/stddev = 10.429/10.861/11.360/0.383 ms
```

**Good**

```
# ping 114.114.114.114 -c 3
PING 114.114.114.114 (114.114.114.114): 56 data bytes
64 bytes from 114.114.114.114: icmp_seq=0 ttl=83 time=10.429 ms
64 bytes from 114.114.114.114: icmp_seq=1 ttl=79 time=11.360 ms
64 bytes from 114.114.114.114: icmp_seq=2 ttl=76 time=10.794 ms

--- 114.114.114.114 ping statistics ---
3 packets transmitted, 3 packets received, 0.0% packet loss
round-trip min/avg/max/stddev = 10.429/10.861/11.360/0.383 ms
```

#

**Bad**

```
# mv /etc/origin/ovn/ovnnb_db.db /tmp
# mv /etc/origin/ovn/ovnsb_db.db /tmp
```

**Good**

```
mv /etc/origin/ovn/ovnnb_db.db /tmp
mv /etc/origin/ovn/ovnsb_db.db /tmp
```

## 8.14.3

md

**Bad**

```
[ ](http://kubeovn.github.io/prepare)
```

**Good**

```
[ ](../prepare.md)
```

**Bad**

```
[Kubernetes ](http://kubernetes.io)
```

**Good**

```
[Kubernetes ](http://kubernetes.io){: target="_blank" }
```

## 8.14.4

**Bad**

```
```bash
wget 127.0.0.1
```

```

**Good**

```
```bash
wget 127.0.0.1
```

```

**Bad**

```
```bash
wget 127.0.0.1
```

```

**Good**

```
```bash
wget 127.0.0.1
```

```



PDF




Slack



Support

⌚2025 9 10

⌚2022 7 19



8.14.5

---


9.

---

 [PDF](#) [Slack](#) [Support](#)

⌚2025 9 10

⌚2022 6 20



9.1

---