

Kube-OVN Document

v1.17.0

Kube-OVN Team

2025 Kube-OVN Team

Table of contents

1. Kube-OVN	5
1.1 What is Kube-OVN?	5
1.2 Why Kube-OVN?	5
1.3 CNI	6
1.4 OVN/ovn-kubernetes/Kube-OVN	6
1.5	7
2.	8
2.1	8
2.2	10
2.3 Underlay	12
2.4 CNI	18
2.5 Talos	23
2.6	24
2.7	26
3.	27
3.1	27
3.2	35
3.3 IP	38
3.4	40
3.5 EIP SNAT	41
3.6 QoS	44
3.7	46
3.8 Webhook	48
3.9	50
3.10 LoadBalancer Service	56
3.11	61
3.12	65
4. KubeVirt	74
4.1 VM IP	74
4.2	77
4.3	79
4.4	81
4.5	86
4.6 DHCP	89

5. VPC	91
5.1 VPC	91
5.2 VPC Egress Gateway	100
5.3 VPC Egress Gateway	113
5.4 Egress Gateway BGP EVPN	117
5.5 VPC QoS	121
5.6 VPC	124
5.7 VPC DNS	128
5.8 SecurityGroup	131
5.9 OVN EIP FIP SNAT DNAT	135
5.10 OVN SNAT ECMP BFD L3 HA	145
5.11 VPC	149
6.	151
6.1 kubectl	151
6.2	161
6.3 ovn-central	163
6.4 OVN	167
6.5 CIDR	170
6.6 Join CIDR	171
6.7	172
6.8	173
7.	177
7.1	177
7.2	184
7.3 FastPath	189
7.4 eBPF TCP	191
7.5 OVN-IC	195
7.6 Submariner	201
7.7 Overlay	203
7.8 Overlay	205
7.9 BGP	208
7.10 MetalLB Kube-OVN Underlay	214
7.11 Cilium	218
7.12 Cilium NetworkPolicy	221
7.13 Cilium	225
7.14	230
7.15 VIP IP	231
7.16 Mellanox Offload	235

7.17	Offload	244
7.18	Offload	248
7.19	Offload	251
7.20	DPDK	254
7.21	OpenStack	258
7.22	IPsec	262
7.23	OVN	263
7.24	DNS Kube-OVN	266
7.25	VPC NAT	268
8.		269
8.1		269
8.2	What's Next	272
8.3		275
8.4		281
8.5	Underlay	283
8.6	Iptables	290
8.7		295
8.8	OVS/OVN	297
8.9		299
8.10	Kube-OVN	301
8.11	Kube-OVN	307
8.12	Annotation	333
8.13		338
9.		341
9.1		341
9.2		341
9.3		341
9.4		341

1. Kube-OVN



1.1 What is Kube-OVN?



1.2 Why Kube-OVN?



1.3 CNI

Kubernetes	CNI		
1.			
2.			
Kube-OVN	CNI	Kube-OVN	Kube-OVN

1.3.1 eBPF

Cilium	Calico eBPF
Kube-OVN	Open vSwitch

1.3.2 CNI, Ingress, Service Mesh Observability All in One

Cilium

Kube-OVN CNI

1.3.3 OpenShift

OpenShift CNI [Cluster Network Operator](#) Kube-OVN RedHat Kubernetes

1.3.4 Kubernetes EKS/AKS/GKE

Kubernetes	CNI
------------	-----

1.3.5 AI

Hostnetwork [host-device](#)

AI

1.4 OVN/ovn-kubernetes/Kube-OVN

1.4.1 OVN

OVN	Open vSwitch	OpenStack, Kubernetes	CMS	ovn-kubernetes	Kube-OVN	OVN
	Kubernetes					

1.4.2 ovn-kubernetes

ovn-kubernetes Acceleration	OVN	OVN	Kubernetes	CNI	OpenShift	OpenShift	UDN, Multihoming, Hardware
--------------------------------	-----	-----	------------	-----	-----------	-----------	----------------------------

1.4.3 Kube-OVN

Kube-OVN	IP	Namespace	OVN	ovn-kubernetes	annotation	Pod	join
		Underlay VPC KubeVirt					

 PDF

 Slack

 Support

 2026 4 28

 2022 5 20

 GitHub



1.5

2.

2.1

Kube-OVN CNI Kubernetes

2.1.1

- Kubernetes >= 1.29
- Docker >= 1.12.6, Containerd >= 1.3.4
- : CentOS 7/8, Ubuntu 16.04/18.04/20.04
- Linux geneve, openvswitch, ip_tables iptable_nat Kube-OVN

1. 3.10.0-862 netfilter bug Kube-OVN CentOS bug [Floating IPs broken](#)
after kernel upgrade to Centos/RHEL 7.5 - DNAT not working
2. Rocky Linux 8.6 4.18.0-372.9.1.el8.x86_64 TCP [TCP connection failed in Rocky Linux 8.6](#) 4.18.0-372.13.1.el8_6.x86_64
3. 4.4 openvswitch openvswitch
4. Geneve IPv6 cat /proc/cmdline bug [Geneve tunnels don't work when ipv6 is disabled](#)

2.1.2

- IPv6 ipv6.disable=1 0
- kube-proxy Kube-OVN Service ClusterIP kube-apiserver
- kubelet CNI , kubelet --network-plugin=cni --cni-bin-dir=/opt/cni/bin --cni-conf-dir=/etc/cni/net.d
- /etc/cni/net.d/

2.1.3

ovn-central	6641/tcp	ovn nb db server
ovn-central	6642/tcp	ovn sb db server
ovn-central	6643/tcp	ovn northd server
ovn-central	6644/tcp	ovn raft server
ovn-ic	6645/tcp	ovn ic nb db server
ovn-ic	6646/tcp	ovn ic sb db server
ovs-ovn	Geneve 6081/udp, STT 7471/tcp, Vxlan 4789/udp	
kube-ovn-controller	10660/tcp	
kube-ovn-daemon	10665/tcp	
kube-ovn-monitor	10661/tcp	

firewalld Packet Forwarding Masquerade

```
# Packet Forwarding
firewall-cmd --add-forward --permanent
```

```
# IPv4 Masquerade
firewall-cmd --add-masquerade --permanent
# Kube-OVN IPv6/      Masquerade
firewall-cmd --permanent --add-rich-rule 'rule family="ipv6" source address="fd00:10:16::/112" masquerade'

firewall-cmd --reload
```


 PDF

 Slack

 Support


 2025 11 20

 2022 5 20



2.1.4

2.2

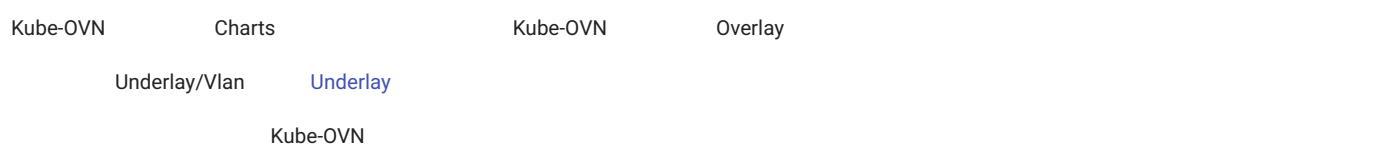

2.2.1

release

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/refs/tags/v1.17.0/dist/images/install.sh
```

master

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/images/install.sh
```

```
REGISTRY="docker.io/kubeovn" #
VERSION="v1.17.0" # /Tag
POD_CIDR="10.16.0/16" # CIDR SVC/NODE/JOIN CIDR
SVC_CIDR="10.96.0/12" # apiserver service-cluster-ip-range
JOIN_CIDR="100.64.0/16" # Pod CIDR SVC/NODE/POD CIDR
LABEL="node-role.kubernetes.io/control-plane" # OVN DB
IFACE="" # Kubernetes Node IP
TUNNEL_TYPE="geneve" # geneve, vxlan stt stt ovs
```

```
IFACE=enp6s0f0,eth.*
```

root

```
bash install.sh
```

Kube-OVN

- 1. [Step 4/6] Pod
- 2. Kube-OVN

2.2.2 Helm Chart

Kube-OVN

Helm

Kube-OVN

IP

```
# kubectl get node -o wide
```

NAME	STATUS	ROLES	AGE	VERSION	INTERNAL-IP	EXTERNAL-IP	OS-IMAGE	KERNEL-VERSION	CONTAINER-RUNTIME
kube-ovn-control-plane	NotReady	control-plane	20h	v1.26.0	172.18.0.3	<none>	Ubuntu 22.04.1 LTS	5.10.104-linuxkit	containerd://1.6.9
kube-ovn-worker	NotReady	<none>	20h	v1.26.0	172.18.0.2	<none>	Ubuntu 22.04.1 LTS	5.10.104-linuxkit	containerd://1.6.9

label

```
# kubectl label node -lbeta.kubernetes.io/os=linux kubernetes.io/os=linux --overwrite
node/kube-ovn-control-plane not labeled
node/kube-ovn-worker not labeled

# kubectl label node -lnode-role.kubernetes.io/control-plane kube-ovn/role=master --overwrite
node/kube-ovn-control-plane labeled

# label dpdk dpdk
# kubectl label node -lovn.kubernetes.io/ovs_dp_type!=userspace ovn.kubernetes.io/ovs_dp_type=kernel --overwrite
node/kube-ovn-control-plane labeled
node/kube-ovn-worker labeled
```

Helm Repo

```
# helm repo add kubeovn https://kubeovn.github.io/kube-ovn/
"kubeovn" has been added to your repositories

# helm repo list
NAME      URL
kubeovn   https://kubeovn.github.io/kube-ovn/

# helm repo update kubeovn
Hang tight while we grab the latest from your chart repositories...
...Successfully got an update from the "kubeovn" chart repository
Update Complete. *Happy Helming!*
```

NAME	CHART VERSION	APP VERSION	DESCRIPTION
kubeovn/kube-ovn	v1.17.0	v1.17.0	Helm chart for Kube-OVN

helm install Kube-OVN

Chart values.yaml

```
# helm install kube-ovn kubeovn/kube-ovn --wait -n kube-system --version v1.17.0
NAME: kube-ovn
LAST DEPLOYED: Thu Apr 24 08:30:13 2025
NAMESPACE: kube-system
STATUS: deployed
REVISION: 1
TEST SUITE: None
```

Helm values.yaml

```
helm upgrade -f values.yaml kube-ovn kubeovn/kube-ovn --wait -n kube-system --version v1.17.0
```




🕒 2026 4 28

🕒 2022 5 20



GitHub

2.3 Underlay

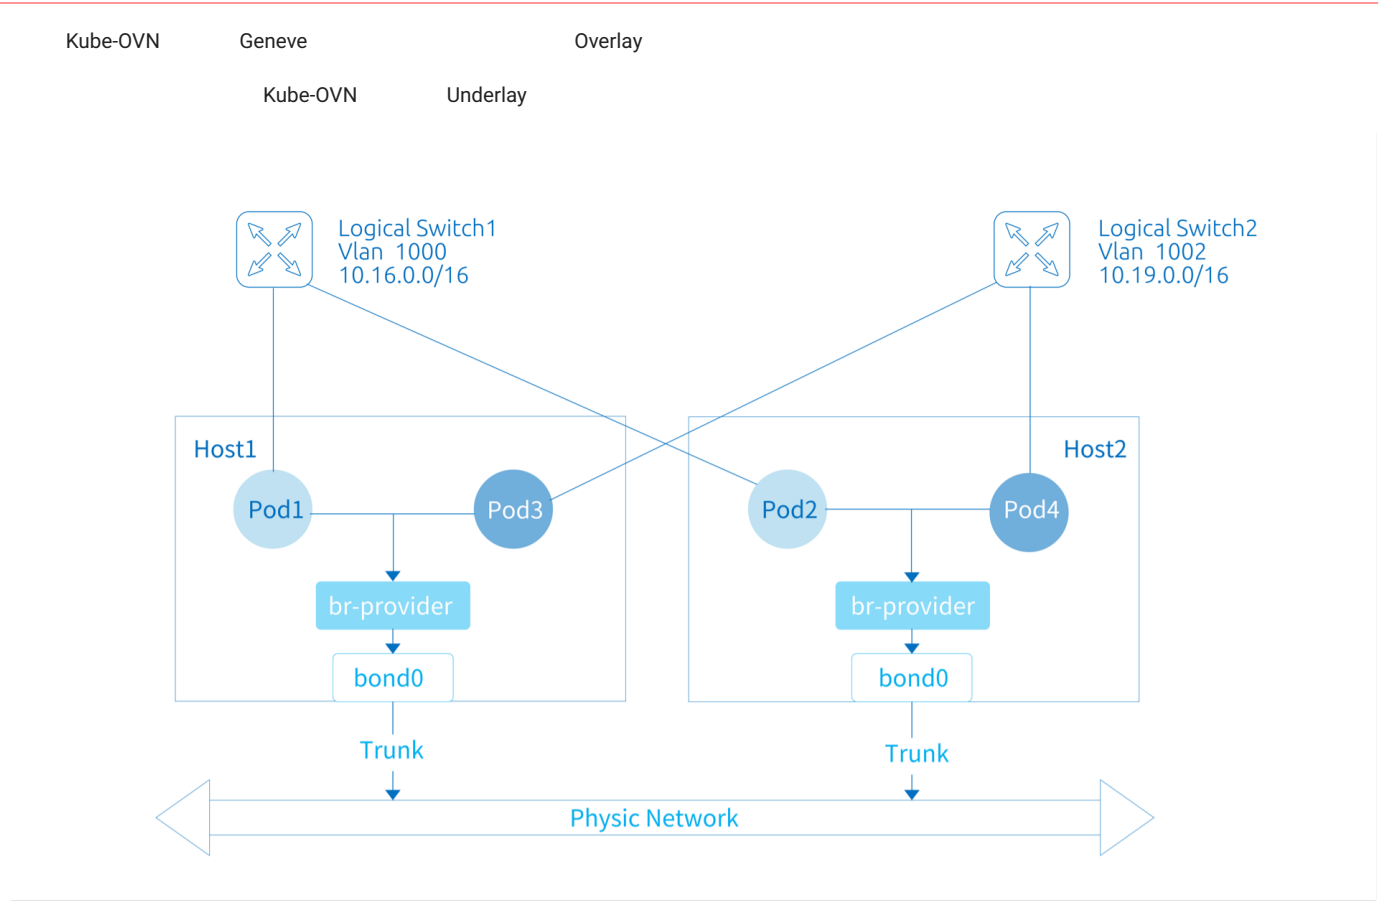

2.3.1

Overlay	SNAT/EIP	/	L3	VPC	Underlay
---------	----------	---	----	-----	----------

2.3.2 Macvlan

Kube-OVN	Underlay	Macvlan							
1.	Macvlan	OVS	Macvlan						
2.	Kube-OVN	arp-proxy	arp						
3.	Macvlan	netfilter	Service	NetworkPolicy	Kube-OVN	OVS	Service	NetworkPolicy	
4.	Kube-OVN	Underlay	Macvlan	IP	QoS				

2.3.3

	Underlay	OVS	OVS	L2/L3		Vlan
1.	OpenStack	VM	PortSecurity			
2.	VMware	vSwitch	MAC Address Changes, Forged Transmits	Promiscuous Mode Operation		allow
3.	VMware	NSX-T	Underlay			
4.	Hyper-V		MAC Address Spoofing			
5.	AWS	GCE	Mac	Underlay	Underlay	VPC-CNI
6.	Linux Bridge					
	Kube-OVN	Underlay			Underlay	
	Underlay					
		Kube-OVN	Mac	IP	MTU	OVS Bridge
	PROVIDER_NAME	ProviderNetwork		provider		Underlay
					OVS Bridge	br-PROVIDER_NAME
1.	OVS Bridge	NetworkManager			DHCP	
2.	OVS Bridge	OVS	Kube-OVN		OVS	
	Underlay					

2.3.4

Underlay

Pod

Underlay

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/dist/images/install.sh
```

```
ENABLE_ARP_DETECT_IP_CONFLICT #          vlan  arp
NETWORK_TYPE                  #          vlan
VLAN_INTERFACE_NAME           #          eth1
VLAN_ID                        #          VLAN Tag  0      VLAN
POD_CIDR                      #          CIDR    192.168.1.0/24
POD_GATEWAY                   #          192.168.1.1
EXCLUDE_IPS                   #          IP      192.168.1.1..192.168.1.100
ENABLE_LB                     #  Underlay  Service true
EXCHANGE_LINK_NAME            #  provider-network OVS      false
LS_DNAT_MOD_DL_DST            # DNAT      MAC      Service true
```

```
bash install.sh
```

2.3.5 CRD Underlay

Underlay

Pod

ProviderNetwork

Vlan

Subnet

ProviderNetwork

ProviderNetwork

ProviderNetwork :

```
apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
  name: net1
```

```
spec:
  defaultInterface: eth1
  customInterfaces:
    - interface: eth2
      nodes:
        - node1
  nodeSelector:
    matchLabels:
      kubernetes.io/arch: amd64
      network-type: underlay
  matchExpressions:
    - key: kubernetes.io/hostname
      operator: In
      values:
        - node1
        - node2
```

ProviderNetwork 12

- defaultInterface: Bond Vlan ProviderNetwork excludeNodes br-net1 br-NAME OVS
- customInterfaces:
- nodeSelector: OVS matchLabels matchExpressions
- excludeNodes: net1.provider-network.ovn.kubernetes.io/exclude=true nodeSelector
- autoCreateVlanSubinterfaces: false true VLAN <interface>.<vlanid>

Key	Value
net1.provider-network.ovn.kubernetes.io/ready	true ProviderNetwork
net1.provider-network.ovn.kubernetes.io/interface	eth1
net1.provider-network.ovn.kubernetes.io/mtu	1500 MTU

IP IP OVS

VLAN

ProviderNetwork autoCreateVlanSubinterfaces: true VLAN VLAN

```
apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
  name: vlan-provider
spec:
  defaultInterface: eth0.341
  autoCreateVlanSubinterfaces: true
  customInterfaces:
    - interface: eth2.341
      nodes:
        - worker-node-1
        - worker-node-2
```

<interface>.<vlanid> VLAN VLAN ProviderNetwork

VLAN

Vlan Vlan Tag ProviderNetwork

VLAN

```
apiVersion: kubeovn.io/v1
kind: Vlan
metadata:
```

```
name: vlan1
spec:
  id: 0
  provider: net1
```

- id: VLAN ID/Tag Kube-OVN Vlan Vlan 0 vlan localnet
- provider: ProviderNetwork VLAN ProviderNetwork

Subnet

Vlan

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: subnet1
spec:
  protocol: IPv4
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  vlan: vlan1
  disableGatewayCheck: false
```

- vlan VLAN Subnet VLAN
- disableGatewayCheck Underlay true

2.3.6

IP

IP Pod IP Mac

2.3.7

Kube-OVN Underlay spec.logicalGateway true

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: subnet1
spec:
  protocol: IPv4
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  vlan: vlan1
  logicalGateway: true
```

Pod Kube-OVN Logical Router

2.3.8 Underlay Overlay

Underlay Overlay Overlay Pod NAT Underlay Pod IP Underlay Pod Overlay
 Overlay Underlay Pod Pod IP Overlay Pod
Underlay Overlay u2oInterconnection true Kube-OVN Underlay IP Underlay ovn-cluster
 Kube-OVN Underlay Overlay

Warning

Vlan Underlay Underlay u2o

IP

subnet IP Underlay Subnet u2oInterconnectionIP

Underlay Subnet	VPC						
Underlay Subnet	VPC	Overlay Subnet	VPC	u2oInterconnection	true	subnet.spec.vpc	VPC

2.3.9

IP	Netplan	Ubuntu	Netplan	renderer	NetworkManager	IP	DHCP
<pre>network: renderer: NetworkManager ethernet: eth0: dhcp4: no addresses: - 172.16.143.129/24 version: 2</pre>							
IP	netplan						
<pre>netplan generate nmcli connection reload netplan-eth0 nmcli device set eth0 managed yes</pre>							
Kube-OVN	IP	OVS					
NetworkManager	CentOS						
<pre>nmcli connection reload eth0 nmcli device set eth0 managed yes nmcli -t -f GENERAL.STATE device show eth0 grep -qw unmanaged nmcli device reapply eth0</pre>							
IP	MAC						

2.3.10

hairpin Pod															
hairpin	Pod	Pod	OVS	MAC											
hairpin	Kube-OVN														
Pod	Pod														
Pod	300	ARP	OVS	resubmit											
<pre>2022-11-13T08:43:46.782Z 00222 ofproto_dpif_upcall(handler5) WARN Flow: arp,in_port=331,vlan_tci=0x0000,d1_src=00:00:00:25:eb:39,d1_dst=ff:ff:ff:ff:ff:ff,arp_spa=10.213.131.240,arp_tpa=10.213.159.254,arp_op=1,arp_sha=00:00:00:25:eb:39,arp_tha=ff:ff:ff:ff:ff:ff bridge("br-int") ----- 0. No match. >>>> received packet on unknown port 331 <<<< drop Final flow: unchanged MegafLOW: recirc_id=0,eth,arp,in_port=331,d1_src=00:00:00:25:eb:39 Datapath actions: drop 2022-11-13T08:44:34.077Z 00224 ofproto_dpif_xlate(handler5) WARN over 4096 resubmit actions on bridge br-int while processing arp,in_port=13483,vlan_tci=0x0000,d1_src=00:00:00:59:ef:13,d1_dst=ff:ff:ff:ff:ff:ff,arp_spa=10.213.152.3,arp_tpa=10.213.159.254,arp_op=1,arp_sha=00:00:00:59:ef:13,arp_tha=ff:ff:ff:ff:ff:ff</pre>															
OVN NB	bcast_arp_req_flood	false													
<pre>kubectrl ko nbctl set NB_Global . options:bcast_arp_req_flood=false</pre>															
 PDF  Slack  Support															

🕒2025 12 22

🕒2022 5 20



🐙GitHub



2.3.11

2.4 CNI

Kube-OVN CNI CNI Cilium Calico Flannel

2.4.1

- CNI Kube-OVN CNI Pod CNI eth0
- CNI Kube-OVN VPC
 -
 - Pod
 - Kube-OVN VPC NAT

2.4.2

- CNI Kubernetes CNI Cilium Calico Flannel
- Multus CNI
- Kube-OVN

- CNI
- Multus CNI
- Kube-OVN

2.4.3

Helm Chart v2

```
# values.yaml
cni:
  nonPrimaryCNI: true
```

Helm

```
helm install kube-ovn ./charts/kube-ovn-v2 \
--namespace kube-system \
--set cni.nonPrimaryCNI=true
```

Helm Chart v1

```
# values.yaml
cni_conf:
  NON_PRIMARY_CNI: true
```

Helm

```
helm install kube-ovn ./charts/kube-ovn \
--namespace kube-system \
--set cni_conf.NON_PRIMARY_CNI=true
```

kube-ovn-controller Deployment kube-ovn-cni DaemonSet Pod

```
# kube-ovn-controller Deployment
containers:
- name: kube-ovn-controller
  args:
  - --non-primary-cni-mode=true
```

```
# kube-ovn-cni DaemonSet
containers:
- name: kube-ovn-cni
  args:
  - --non-primary-cni-mode=true
```

2.4.4

NADs

NAD

```
apiVersion: k8s.cni.cncf.io/v1
kind: NetworkAttachmentDefinition
metadata:
  name: kube-ovn-vpc-network
  namespace: default
spec:
  config: |
    {
      "cniVersion": "0.3.1",
      "type": "kube-ovn",
      "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
      "provider": "kube-ovn-vpc-network.default.ovn"
    }
```

VPC

VPC

```
apiVersion: kubeovn.io/v1
kind: Vpc
metadata:
  name: vpc-secondary
spec:
  namespaces:
  - default
---
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: subnet-secondary
spec:
  vpc: vpc-secondary
  cidr: "10.100.0.0/16"
  gateway: "10.100.0.1"
  provider: kube-ovn-vpc-network.default.ovn
```

Pod

Pod

```
apiVersion: v1
kind: Pod
metadata:
  name: multi-network-pod
  annotations:
    k8s.v1.cni.cncf.io/networks: default/kube-ovn-vpc-network
spec:
  containers:
  - name: app
    image: nginx
```

2.4.5

eth0

- CNI Cilium Calico
-

- Kubernetes

net1 net2...

- Kube-OVN
-
- VPC
- Kube-OVN QoS NAT

2.4.6

1.

```
# Pod
apiVersion: v1
kind: Pod
metadata:
  name: frontend
  annotations:
    k8s.v1.cni.cncf.io/networks: |
    [
      {"name": "default/public-network"},
      {"name": "default/internal-network"}
    ]
```

2.

```
# A Pod
apiVersion: v1
kind: Pod
metadata:
  name: tenant-a-app
  annotations:
    k8s.v1.cni.cncf.io/networks: default/tenant-a-network

---
# B Pod
apiVersion: v1
kind: Pod
metadata:
  name: tenant-b-app
  annotations:
    k8s.v1.cni.cncf.io/networks: default/tenant-b-network
```

3. VPC NAT

```
apiVersion: kubeovn.io/v1
kind: VpcNatGateway
metadata:
  name: vpc-nat-gw
spec:
  vpc: vpc-secondary
  subnet: subnet-secondary
  lanIp: "10.100.0.254"
```

2.4.7

Pod

```
metadata:
  annotations:
    k8s.v1.cni.cncf.io/networks: |
    [
```



```
{ "name": "default/kube-ovn-network-1", "interface": "net1"},  
  { "name": "default/kube-ovn-network-2", "interface": "net2"}  
]
```

IP

IP

```
# IP  
metadata:  
  annotations:  
    k8s.v1.cni.cncf.io/networks: |  
    [{  
      "name": "default/kube-ovn-network",  
      "ips": ["10.100.0.100/16"]  
    }]
```

QoS

QoS

```
metadata:  
  annotations:  
    ovn.kubernetes.io/ingress_rate: "1000"  
    ovn.kubernetes.io/egress_rate: "1000"
```

2.4.8

- 1. **Pod** - NAD - kube-ovn-cni - Multus
- 2. - VPC - Pod -
- 3. **IP** - CIDR - IP - IPAM

```
# Pod  
kubectl get pod <pod-name> -o yaml | grep -A 10 "networks-status"  
  
# Pod  
kubectl exec <pod-name> -- ip addr show  
  
#  
kubectl exec <pod-name> -- ip route show  
  
# kube-ovn-cni  
kubectl logs -n kube-system daemonset/kube-ovn-cni
```

2.4.9

- 1. Kubernetes
- 2.
- 3. **DNS** Pod DNS

2.4.10

- 1. IP
- 2.
- 3.
- 4.
- 5.

2.4.11

- [Multus CNI](#)
-
- [Kube-OVN](#)

 [PDF](#)

 [Slack](#)

 [Support](#)

 2026 4 28

 2025 10 30

 GitHub



2.4.12

2.5 Talos

Talos Linux Kubernetes Linux

2.5.1 Helm Chart Kube-OVN

Talos Linux Kube-OVN

```
helm install kube-ovn kubeovn/kube-ovn --wait \
-n kube-system \
--version v1.17.0 \
--set OVN_DIR=/var/lib/ovn \
--set OPENVSWITCH_DIR=/var/lib/openvswitch \
--set DISABLE_MODULES_MANAGEMENT=true \
--set cni_conf.MOUNT_LOCAL_BIN_DIR=false
```

Underlay Helm Chart

```
helm install kubeovn kubeovn/kube-ovn --wait \
-n kube-system \
--version v1.17.0 \
--set OVN_DIR=/var/lib/ovn \
--set OPENVSWITCH_DIR=/var/lib/openvswitch \
--set DISABLE_MODULES_MANAGEMENT=true \
--set cni_conf.MOUNT_LOCAL_BIN_DIR=false \
--set networking.NETWORK_TYPE=vlan \
--set networking.vlan.VLAN_INTERFACE_NAME=enp0s5f1 \
--set networking.vlan.VLAN_ID=0 \ # VLAN_ID=0    VLAN tag    untagged    chart    100
--set networking.NET_STACK=ipv4 \
--set-json networking.EXCLUDE_IPS="'172.99.99.11..172.99.99.99'" \
--set-json ipv4.POD_CIDR="'172.99.99.0/24'" \
--set-json ipv4.POD_GATEWAY="'172.99.99.1'"
```



Note

VLAN Bond Bridge Underlay Underlay Talos ignore=true

```
machine:
  network:
    interfaces:
      - interface: enp0s5f1
        ignore: true
```



PDF



Slack



Support

🕒 2026 4 28

🕒 2025 4 16



2.5.2

2.6

Kube-OVN	pre-v0.0.1	Kube-OVN
----------	------------	----------

2.6.1

- [Linkerd](#)
- [Elasticsearch](#)
- [EMQX](#)
- [KubeSphere](#)

2.6.2 OpenVswitch/OVN

Kube-OVN	OpenVswitch	OVN
• OVN • OpenVswitch		
ovn-architecture		

2.6.3 Kube-OVN

Kube-OVN		
Kube-OVN	Kube-OVN	kubectl bash

2.6.4

Kube-OVN	Kube-OVN	Kube-OVN E2E
----------	----------	--------------

2.6.5

Kube-OVN	OpenTelemetry	DeepFlow
----------	-------------------------------	--------------------------

2.6.6

Kube-OVN	7*24	Github Issue
Github Issue	AI	AI
 PDF	 Slack	 Support

 2025 9 22

 2025 8 29

 GitHub 

2.6.7

2.7

Kube-OVN

Kube-OVN

OVS

issue

Kube-OVN

2.7.1 Kubernetes

Script Uninstall

Helm Uninstall

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/dist/images/cleanup.sh
bash cleanup.sh

helm uninstall kube-ovn -n kube-system
```

2.7.2

ovsdb

openvswitch

```
rm -rf /var/run/openvswitch
rm -rf /var/run/ovn
rm -rf /etc/origin/openvswitch/
rm -rf /etc/origin/ovn/
rm -rf /etc/cni/net.d/01-kube-ovn.conflist
#      v1.10      00-kube-ovn.conflist
rm -rf /etc/cni/net.d/00-kube-ovn.conflist
rm -rf /var/log/openvswitch
rm -rf /var/log/ovn
rm -fr /var/log/kube-ovn
```

2.7.3

iptables/ipset

reboot


 PDF

 Slack

 Support

 2026 4 28


 2022 5 24



2.7.4

3.

3.1

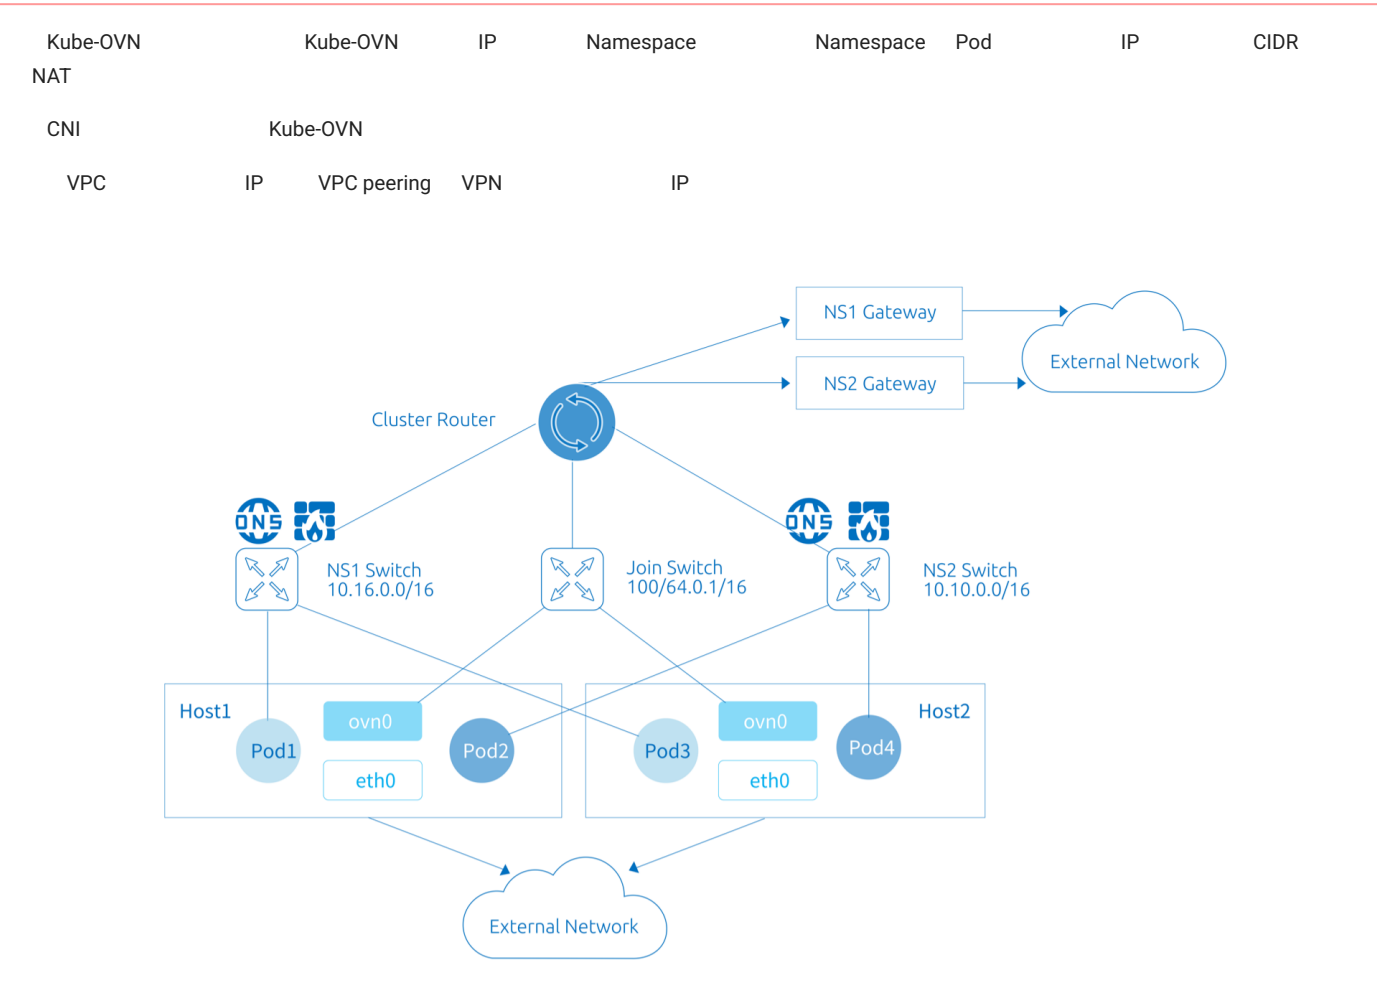

Overlay Underlay

3.1.1

Kube-OVN	Namespace	IP	CIDR
Overlay	NAT	Flannel	
Underlay	arping		

spec	default	true	ovn-default
------	---------	------	-------------

```
# kubectl get subnet ovn-default -o yaml
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  creationTimestamp: "2019-08-06T09:33:43Z"
  generation: 1
  name: ovn-default
  resourceVersion: "1571334"
```

```

selfLink: /apis/kubeovn.io/v1/subnets/ovn-default
uid: 7e2451f8-fb44-4f7f-b3e0-cfd27f6fd5d6
spec:
  cidrBlock: 10.16.0.0/16
  default: true
  excludeIps:
    - 10.16.0.1
  gateway: 10.16.0.1
  gatewayType: distributed
  natOutgoing: true
  private: false
  protocol: IPv4

```

3.1.2 Join

Kubernetes	Node	Pod	Overlay	Kube-OVN	join	Node	ovn0	join
Pods	Nodes	ovn0	Node	Pod	ovn0	ovn0		
		join	CIDR	Join				

Join

Pod	hostport	externalTrafficPolicy: Local	NodePort	Service
join	CIDR			

```

# kubectl get subnet join -o yaml
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  creationTimestamp: "2019-08-06T09:33:43Z"
  generation: 1
  name: join
  resourceVersion: "1571333"
  selfLink: /apis/kubeovn.io/v1/subnets/join
  uid: 9c744810-c678-4d50-8a7d-b8ec12ef91b8
spec:
  cidrBlock: 100.64.0.0/16
  default: false
  excludeIps:
    - 100.64.0.1
  gateway: 100.64.0.1
  gatewayNode: ""
  gatewayType: ""
  natOutgoing: false
  private: false
  protocol: IPv4

```

Node ovn0

```

# ifconfig ovn0
ovn0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1420
    inet 100.64.0.4 netmask 255.255.0.0 broadcast 100.64.255.255
    inet6 fe80::800:ff:fe40:5 prefixlen 64 scopeid 0x20<link>
    ether 0a:00:00:40:00:05 txqueuelen 1000 (Ethernet)
    RX packets 18 bytes 1428 (1.3 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 19 bytes 1810 (1.7 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

```

3.1.3

Namespace

```

cat <<EOF | kubectl create -f -
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: subnet1
spec:
  protocol: IPv4
  cidrBlock: 10.66.0.0/16
  excludeIps:

```



```
- 10.66.0.1..10.66.0.10
- 10.66.0.101..10.66.0.151
gateway: 10.66.0.1
gatewayType: distributed
natOutgoing: true
routeTable: ""
namespaces:
- ns1
- ns2
EOF
```

- cidrBlock: CIDR VPC Subnet CIDR
- excludeIps: IP Underlay
- gateway Overlay Kube-OVN Underlay
- namespaces: Namespace Namespace Pod
- routeTable:

```
# kubectl create ns ns1
namespace/ns1 created

# kubectl run nginx --image=docker.io/library/nginx:alpine -n ns1
deployment.apps/nginx created

# kubectl get pod -n ns1 -o wide
NAME READY STATUS RESTARTS AGE IP NODE NOMINATED NODE READINESS GATES
nginx-74d5899f46-n8wtg 1/1 Running 0 10s 10.66.0.11 node1 <none> <none>
```

Workload

Pod Namespace IP Namespace Workload Pod Annotation ovn.kubernetes.io/logical_switch


```
apiVersion: v1
kind: Pod
metadata:
  name: another-subnet
  annotations:
    ovn.kubernetes.io/logical_switch: subnet1
spec:
  containers:
  - name: another-subnet
    image: docker.io/library/nginx:alpine
```

Workload Deployment StatefulSet ovn.kubernetes.io/logical_switch Annotation

spec.template.metadata.annotations

3.1.4 Overlay



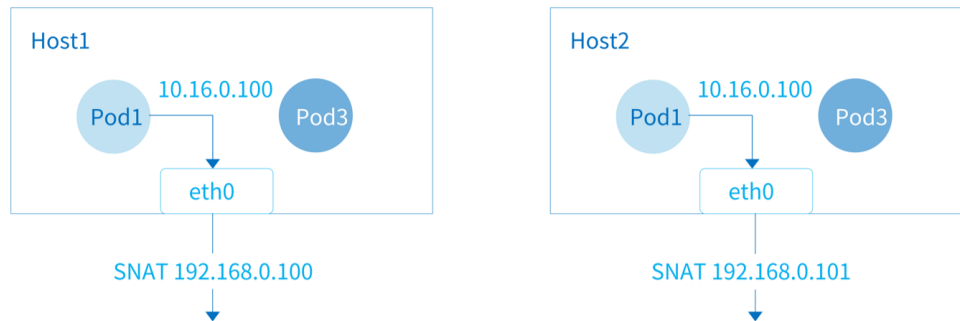


gatewayType distributed

```

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: distributed
spec:
  protocol: IPv4
  cidrBlock: 10.166.0.0/16
  default: false
  excludeIps:
    - 10.166.0.1
  gateway: 10.166.0.1
  gatewayType: distributed
  natOutgoing: true

```

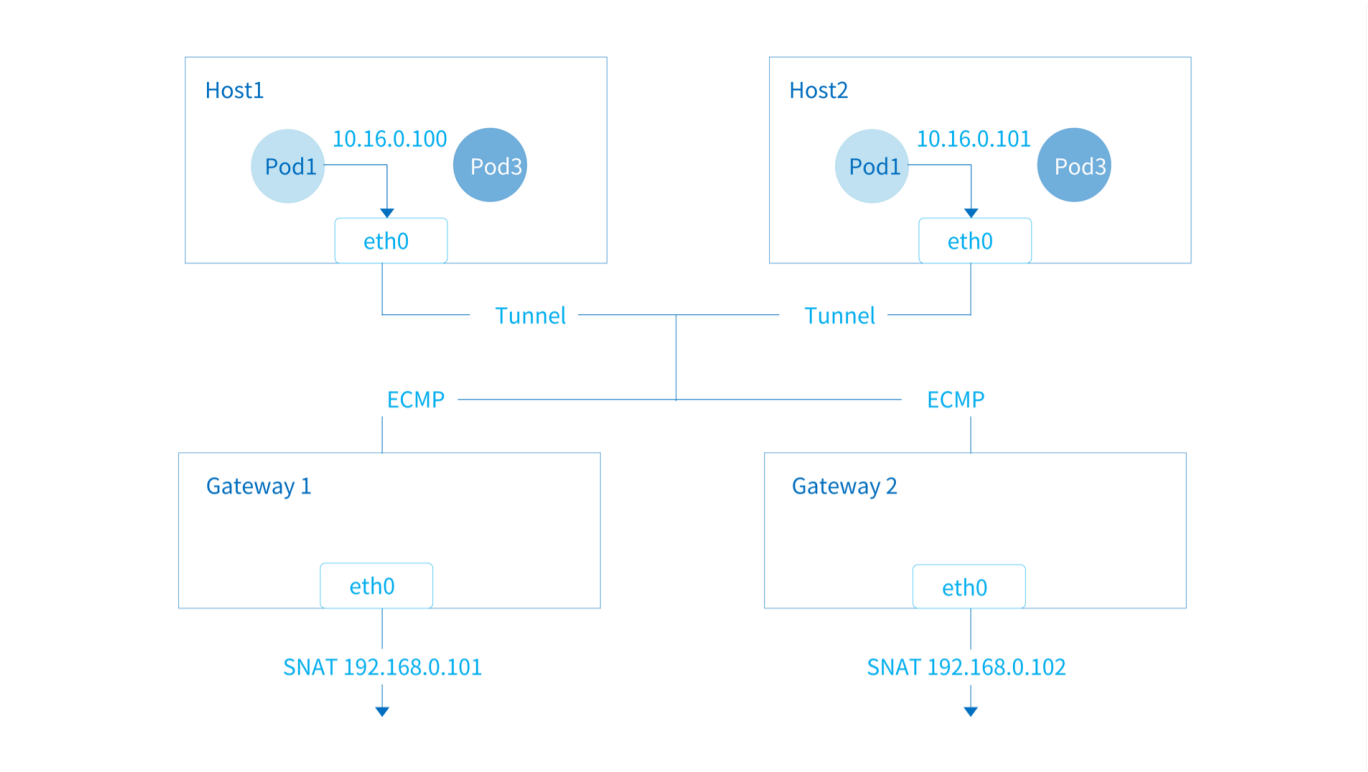

Pod	IP	Pod	ovn0	natOutgoing	true
	IP				
gatewayType	centralized	gatewayNode	Kubernetes	nodeName	gatewayNode

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: centralized
spec:
  protocol: IPv4
  cidrBlock: 10.166.0.0/16
  default: false
  excludeIps:
    - 10.166.0.1
  gateway: 10.166.0.1
  gatewayType: centralized
  gatewayNode: "node1,node2"
  natOutgoing: true
```

- gatewayNode kube-ovn-worker:172.18.0.2, kube-ovn-control-plane:172.18.0.3
- ECMP ECMP
- Kube-OVN v1.12.0 subnet crd spec enableEcmp ECMP ECMP kube-ovn-
controller Deployment enable-ecmp v1.12.0

ECMP	kube-ovn-controller	ping	5s	5s-10s
Node Ready				

gatewayNodeSelectors

 gatewayNodeSelectors

- gatewayNode gatewayNode gatewayNodeSelectors
- OR
-

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: centralized-selector
spec:
  protocol: IPv4
  cidrBlock: 10.166.0.0/16
  default: false
  excludeIps:
    - 10.166.0.1
  gateway: 10.166.0.1
  gatewayType: centralized
  gatewayNodeSelectors:
    - matchLabels:
        role: gateway
    - matchExpressions:
        - key: node-type
          operator: In
          values: ["gateway", "egress"]
  natOutgoing: true
```

3.1.5 ACL

 Warning

Kube-OVN NetworkPolicy Network Policy API Subnet ACL Security Group OVN ACL NetworkPolicy NetworkPolicy API

	ACL	Kube-OVN	Subnet	ACL		
Subnet	ACL	OVN	ACL	ovn-nb ACL Table	match	ovn-sb Logical Flow Table
IP	10.10.0.2	Pod		ACL		

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: acl
spec:
  allowEWTraffic: false
  acls:
    - action: drop
      direction: to-lport
      match: ip4.dst == 10.10.0.2 && ip
      priority: 1002
    - action: allow-related
      direction: from-lport
      match: ip4.src == 10.10.0.2 && ip
      priority: 1002
  cidrBlock: 10.10.0.0/24
```

ACL allowEWTraffic: true

3.1.6

ACL		ACL
Kube-OVN	Pod	
	CRD	private true allowSubnets allowSubnets

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: private
spec:
  protocol: IPv4
  default: false
  namespaces:
    - ns1
    - ns2
  cidrBlock: 10.69.0.0/16
  private: true
  allowSubnets:
    - 10.16.0.0/16
    - 10.18.0.0/16
```

3.1.7 Underlay

```
Underlay
```

```
• vlan: Underlay Subnet Vlan CR Underlay
```

```
• logicalGateway: Underlay OVN Underlay Overlay false
```

3.1.8

kube-ovn-cni	Pod	ICMP	ARP	Underlay	ICMP
--------------	-----	------	-----	----------	------

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: disable-gw-check
spec:
  disableGatewayCheck: true
```

3.1.9 Multicast-Snoop

subnet	Pod	OVN	Pod	subnet	multicast snoop	OVN	South Database	Multicast_Group
--------	-----	-----	-----	--------	-----------------	-----	----------------	-----------------

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: sample1
spec:
  enableMulticastSnoop: true
```

3.1.10 Subnet MTU

Subnet	Pod	MTU	Subnet	Pod
--------	-----	-----	--------	-----

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: sample1
spec:
  mtu: 1300
```

3.1.11

- IP
- VPC NAT
- QoS
-
- DHCP
-
-

• IP

 PDF

 Slack

 Support

 2025 12 1

 2022 5 24



GitHub 



3.1.12

3.2

Kube-OVN	Pod	Namespace	IP	Mac	Kube-OVN
	• Pod	IP/Mac			
	•	IP/MAC			
	• Workload	IP Pool			
	• StatefulSet				
	• KubeVirt VM				
	• Multus				

3.2.1 Pod IP Mac

Pod	annotation	Pod	IP/Mac, kube-ovn-controller
<pre>apiVersion: v1 kind: Pod metadata: name: static-ip annotations: ovn.kubernetes.io/ip_address: 10.16.0.15 # 10.16.0.15, fd00:10:16::15 ovn.kubernetes.io/mac_address: 00:00:00:53:6B:B6 spec: containers: - name: static-ip image: docker.io/library/nginx:alpine</pre>			
	annotation	Pod IP/Mac	
1.	IP/Mac	IP/Mac	
2.	IP	CIDR	
3.	IP	Mac	

3.2.2 IP/MAC

Pod	VM	Multus	IP/MAC	Multus	k8s.v1.cni.cncf.io/networks	interface
annotation						
• <nadName>.<nadNamespace>.kubernetes.io/ip_address.<interfaceName>			IP			
• <nadName>.<nadNamespace>.kubernetes.io/mac_address.<interfaceName>			MAC			
<nadName>	<nadNamespace>	NetworkAttachmentDefinition	<interfaceName>	Multus	interface	annotation
annotation ovn.kubernetes.io/ip_address / ovn.kubernetes.io/mac_address						
NAD		IP/MAC				

<pre>apiVersion: v1 kind: Pod metadata: name: multi-if-static namespace: default annotations: k8s.v1.cni.cncf.io/networks: '[{"name": "attachnet", "namespace": "default", "interface": "net1"}, {"name": "attachnet", "namespace": "default", "interface": "net2"}]' attachnet.default.kubernetes.io/ip_address.net1: 172.17.0.100 attachnet.default.kubernetes.io/mac_address.net1: 00:00:00:53:6B:B1 attachnet.default.kubernetes.io/ip_address.net2: 172.17.0.101 attachnet.default.kubernetes.io/mac_address.net2: 00:00:00:53:6B:B2 spec: containers: - name: multi-if-static image: docker.io/library/nginx:alpine</pre>						
---	--	--	--	--	--	--

3.2.3 Workload IP Pool

Kube-OVN	annotation	ovn.kubernetes.io/ip_pool	Workload	Deployment/StatefulSet/DaemonSet/Job/CronJob	IP	kube-ovn-
controller		ovn.kubernetes.io/ip_pool	IP			
IP Pool	Annotation	template	annotation	Kubernetes	Workload	Workload

Deployment IP

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: ippool
  labels:
    app: ippool
spec:
  replicas: 2
  selector:
    matchLabels:
      app: ippool
  template:
    metadata:
      labels:
        app: ippool
      annotations:
        ovn.kubernetes.io/ip_pool: 10.16.0.15,10.16.0.16,10.16.0.17 # 10.16.0.15, fd00:10:16::000E;10.16.0.16, fd00:10:16::000F;
        10.16.0.17, fd00:10:16::0010
    spec:
      containers:
        - name: ippool
          image: docker.io/library/nginx:alpine
```

Workload	IP								
1.	ovn.kubernetes.io/ip_pool	IP	CIDR						
2.	ovn.kubernetes.io/ip_pool	IP	IP						
3.	ovn.kubernetes.io/ip_pool	IP	replicas	Pod	Workload	ovn.kubernetes.io/ip_pool	IP		

3.2.4 StatefulSet

StatefulSet	IP	Workload	ovn.kubernetes.io/ip_pool	Pod	IP				
StatefulSet		Kube-OVN							
1.	Pod	ovn.kubernetes.io/ip_pool	IP	StatefulSet	web	web-0	ovn.kubernetes.io/ip_pool	IP	web-1
2.	StatefulSet Pod	OVN	logical_switch_port	Pod	interface	Pod	IP/Mac	StatefulSet	Volume
3.	2	ovn.kubernetes.io/ip_pool	StatefulSet Pod		IP/Mac	StatefulSet			

StatefulSet

```
apiVersion: apps/v1
kind: StatefulSet
metadata:
  name: web
spec:
  serviceName: "nginx"
  replicas: 2
  selector:
    matchLabels:
      app: nginx
  template:
    metadata:
      labels:
        app: nginx
    spec:
      containers:
        - name: nginx
          image: docker.io/library/nginx:alpine
          ports:
            - containerPort: 80
              name: web
```


StatefulSet Pod Pod IP

StatefulSet Pod IP

StatefulSet	IP	Pod Name	Statefulset	ovn.kubernetes.io/ip_pool	Annotation	Pod	IP
StatefulSet	Pod IP	StatefulSet	scale	0	Annotation	StatefulSet	

3.2.5 KubeVirt VM

KubeVirt	VM	kube-ovn-controller	StatefulSet Pod	IP	VM
VM	IP				

3.2.6 Multus

Multus	Pod	Kube-OVN	annotation	Kube-OVN	CNI	Kube-OVN	IPAM	CNI
--------	-----	----------	------------	----------	-----	----------	------	-----

 PDF

 Slack

 Support

🕒2026 7 4

🕒2022 5 20





 GitHub 



 +3

3.2.7

3.3 IP

IP	IPPool	Subnet	IPAM	IP	Namespace	Workload
----	--------	--------	------	----	-----------	----------

3.3.1

```
apiVersion: kubeovn.io/v1
kind: IPPool
metadata:
  name: pool-1
spec:
  subnet: ovn-default
  ips:
    - "10.16.0.201"
    - "10.16.0.210/30"
    - "10.16.0.220..10.16.0.230"
  namespaces:
    - ns-1
  enableAddressSet: true
```

Workload

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: ippool
  labels:
    app: ippool
spec:
  replicas: 2
  selector:
    matchLabels:
      app: ippool
  template:
    metadata:
      labels:
        app: ippool
      annotations:
        ovn.kubernetes.io/ip_pool: pool-1
    spec:
      containers:
        - name: ippool
          image: docker.io/library/nginx:alpine
```

subnet						
ips	IP	..	IPv6			
namespaces				Pod	IP	IP
enableAddressSet	AddressSet	false	true	ACL	AddressSet	

3.3.2

1.	Workload	IP Pool	IP	IP		
2.	IP	.spec.ips	IP	IP	.spec.ips	CIDR
3.	IP	IP				
4.	IP	.spec.ips				
5.	IP	IP	IP	IP	IP	IP
6.	IP	IP				
7.	IP	Namespace				

8. IP `.spec.enableAddressSet` `false` `true` IP OVN NB AddressSet IP IP AddressSet
NetworkPolicy VPC AddressSet

 PDF

 Slack

 Support

 2026 1 14

 2023 7 10



GitHub 



3.3.3

3.4

Pod Annotations

```
apiVersion: v1
kind: Pod
metadata:
  name: custom-routes
  annotations:
    ovn.kubernetes.io/routes: |
      [{
        "dst": "192.168.0.101/24",
        "gw": "10.16.0.254"
      }, {
        "gw": "10.16.0.254"
      }]
spec:
  containers:
    - name: nginx
      image: docker.io/library/nginx:alpine
```

dst

Deployment DaemonSet StatefulSet Annotation .spec.template.metadata.annotations

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: custom-routes
  labels:
    app: nginx
spec:
  replicas: 2
  selector:
    matchLabels:
      app: nginx
  template:
    metadata:
      labels:
        app: nginx
      annotations:
        ovn.kubernetes.io/routes: |
          [{
            "dst": "192.168.0.101/24",
            "gw": "10.16.0.254"
          }, {
            "gw": "10.16.0.254"
          }]
    spec:
      containers:
        - name: nginx
          image: docker.io/library/nginx:alpine
```

 PDF

 Slack

 Support

🕒 2023 9 26

🕒 2023 2 16

 GitHub




3.4.1

3.5 EIP SNAT

- VPC NAT
- VPC iptables NAT
- VPC OVN NAT

- VPC ,
- VPC OVN NAT pod annotation
- VPC OVN NAT provider-network vlan subnet CRD ovn-eip ovn-dnat ovn-fip ovn-snat CRD EIP
NAT VPC OVN NAT
- VPC Iptables NAT VPC iptables NAT

Kube-OVN OVN L3 Gateway Pod SNAT EIP SNAT Pod IP EIP Pod IP
EIP Pod Pod EIP

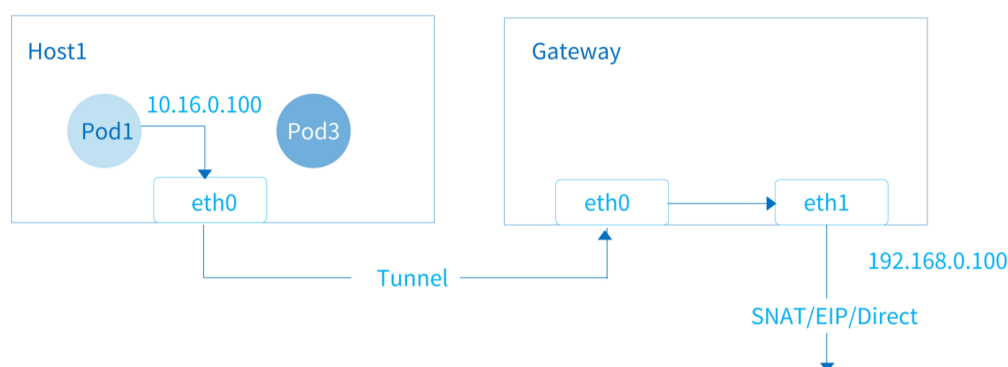

3.5.1

- OVN L3 Gateway OVS Overlay Underlay
- NAT Underlay
- EIP SNAT

3.5.2

```
kube-system ConfigMap ovn-external-gw-config
```

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-external-gw-config
  namespace: kube-system
data:
  type: "centralized"
  enable-external-gw: "true"
  external-gw-nodes: "kube-ovn-worker"
  external-gw-nic: "eth1"
  external-gw-addr: "172.56.0.1/16"
```

```
nic-ip: "172.56.0.254/16"
nic-mac: "16:52:f3:13:6a:25"
```

- enable-external-gw: SNAT EIP
- type: centralized distributed centralized distributed
- external-gw-nodes: centralized
- external-gw-nic:
- external-gw-addr: IP
- nic-ip, nic-mac: IP Mac IP Mac

3.5.3 OVN OVS

OVN-NB ovn-external ovn-cluster-ovn-external chassis

```
# kubectl ko nbctl show
switch 3de4cea7-1a71-43f3-8b62-435a57ef16a6 (external)
  port localnet.external
    type: localnet
    addresses: ["unknown"]
  port external-ovn-cluster
    type: router
    router-port: ovn-cluster-external
router e1eb83ad-34be-4ed5-9a02-fcc8b1d357c4 (ovn-cluster)
  port ovn-cluster-external
    mac: "ac:1f:6b:2d:33:f1"
    networks: ["172.56.0.100/16"]
    gateway chassis: [a5682814-2e2c-46dd-9c1c-6803ef0dab66]
```

OVS br-external

```
# kubectl ko vsctl ${gateway node name} show
e7d81150-7743-4d6e-9e6f-5c688232e130
Bridge br-external
  Port br-external
    Interface br-external
      type: internal
  Port eth1
    Interface eth1
  Port patch-localnet.external-to-br-int
    Interface patch-localnet.external-to-br-int
      type: patch
      options: {peer=patch-br-int-to-localnet.external}
```

3.5.4 Pod EIP SNAT

Pod ovn.kubernetes.io/snat ovn.kubernetes.io/eip annotation SNAT EIP

```
apiVersion: v1
kind: Pod
metadata:
  name: pod-snat
  annotations:
    ovn.kubernetes.io/snat: 172.56.0.200
spec:
  containers:
  - name: pod-snat
    image: docker.io/library/nginx:alpine
---
apiVersion: v1
kind: Pod
metadata:
  name: pod-eip
  annotations:
    ovn.kubernetes.io/eip: 172.56.0.233
spec:
  containers:
  - name: pod-eip
    image: docker.io/library/nginx:alpine
```

kubectl Pod EIP SNAT ovn.kubernetes.io/routed annotation

```
kubectl annotate pod pod-eip ovn.kubernetes.io/eip=172.56.0.221 --overwrite
kubectl annotate pod pod-eip ovn.kubernetes.io/routed-
```

EIP SNAT ovn.kubernetes.io/routed annotation

3.5.5

```
kube-ovn-controller SNAT EIP

• --external-gateway-config-ns: Configmap ovn-external-gw-config Namespace kube-system
• --external-gateway-net: external
• --external-gateway-vlanid: Vlan Tag 0 Vlan
```

 PDF

 Slack

 Support

 2026 4 28

 2022 5 24

 GitHub



3.5.6

3.6 QoS

The diagram illustrates the components of Kube-OVN. It shows a hierarchy where 'Kube-OVN' is the root, branching into 'Pod' and 'QoS'. 'Pod' further branches into 'QoS' and 'linux-netem'. 'linux-netem' branches into 'Pod', 'QoS', 'Namespace', 'Subnet', and 'QoS'.

3.6.1 QoS

```
QoS      Pod annotation      Pod      Mbit/s

apiVersion: v1
kind: Pod
metadata:
  name: qos
  namespace: ls1
  annotations:
    ovn.kubernetes.io/ingress_rate: "3"
    ovn.kubernetes.io/egress_rate: "1"
spec:
  containers:
  - name: qos
    image: docker.io/library/nginx:alpine

annotation      QoS

kubect1 annotate --overwrite pod nginx-74d5899f46-d7qkn ovn.kubernetes.io/ingress_rate=3
```

QoS

```
kind: DaemonSet
apiVersion: apps/v1
metadata:
  name: perf
  namespace: ls1
  labels:
    app: perf
spec:
  selector:
    matchLabels:
      app: perf
  template:
    metadata:
      labels:
        app: perf
    spec:
      containers:
        - name: nginx
          image: docker.io/kubeovn/perf
```

Pod

iperf3 server

```
# kubectl exec -it perf-4n4gt -n ls1 sh
# iperf3 -s
-----
Server listening on 5201
-----
```

```
Pod      Pod
# kubectl exec -it perf-d4mqc -n ls1 sh
# iperf3 -c 10.66.0.12
Connecting to host 10.66.0.12, port 5201
[  4] local 10.66.0.14 port 51544 connected to 10.66.0.12 port 5201
[ ID] Interval           Transfer     Bandwidth       Retr   Cwnd
[  4]  0.00-1.00    sec    86.4 MBytes    725 Mbits/sec     3    350 KBytes
[  4]  1.00-2.00    sec    89.9 MBytes    754 Mbits/sec    118   473 KBytes
[  4]  2.00-3.00    sec    101 MBytes    848 Mbits/sec    184   586 KBytes
[  4]  3.00-4.00    sec    104 MBytes    875 Mbits/sec    217   671 KBytes
[  4]  4.00-5.00    sec    111 MBytes    935 Mbits/sec    175   772 KBytes
```



```
[ 4] 5.00-6.00 sec 100 MBytes 840 Mbits/sec 658 598 KBytes
[ 4] 6.00-7.00 sec 106 MBytes 890 Mbits/sec 742 668 KBytes
[ 4] 7.00-8.00 sec 102 MBytes 857 Mbits/sec 764 724 KBytes
[ 4] 8.00-9.00 sec 97.4 MBytes 817 Mbits/sec 1175 764 KBytes
[ 4] 9.00-10.00 sec 111 MBytes 934 Mbits/sec 1083 838 KBytes
-----
[ ID] Interval      Transfer    Bandwidth    Retr
[ 4] 0.00-10.00 sec 1010 MBytes 848 Mbits/sec 5119          sender
[ 4] 0.00-10.00 sec 1008 MBytes 846 Mbits/sec          receiver

iperf Done.
```

Pod QoS

```
kubectl annotate --overwrite pod perf-4n4gt -n ls1 ovn.kubernetes.io/ingress_rate=30
```

Pod Pod

```
# iperf3 -c 10.66.0.12
Connecting to host 10.66.0.12, port 5201
[ 4] local 10.66.0.14 port 52372 connected to 10.66.0.12 port 5201
[ ID] Interval      Transfer    Bandwidth    Retr  Cwnd
[ 4] 0.00-1.00 sec 3.66 MBytes 30.7 Mbits/sec 2 76.1 KBytes
[ 4] 1.00-2.00 sec 3.43 MBytes 28.8 Mbits/sec 0 104 KBytes
[ 4] 2.00-3.00 sec 3.50 MBytes 29.4 Mbits/sec 0 126 KBytes
[ 4] 3.00-4.00 sec 3.50 MBytes 29.3 Mbits/sec 0 144 KBytes
[ 4] 4.00-5.00 sec 3.43 MBytes 28.8 Mbits/sec 0 160 KBytes
[ 4] 5.00-6.00 sec 3.43 MBytes 28.8 Mbits/sec 0 175 KBytes
[ 4] 6.00-7.00 sec 3.50 MBytes 29.3 Mbits/sec 0 212 KBytes
[ 4] 7.00-8.00 sec 3.68 MBytes 30.9 Mbits/sec 0 294 KBytes
[ 4] 8.00-9.00 sec 3.74 MBytes 31.4 Mbits/sec 0 398 KBytes
[ 4] 9.00-10.00 sec 3.80 MBytes 31.9 Mbits/sec 0 526 KBytes
-----
[ ID] Interval      Transfer    Bandwidth    Retr
[ 4] 0.00-10.00 sec 35.7 MBytes 29.9 Mbits/sec 2          sender
[ 4] 0.00-10.00 sec 34.5 MBytes 29.0 Mbits/sec          receiver

iperf Done.
```

3.6.2 linux-netem QoS

RHEL netem yum install -y kernel-modules-extra && modprobe sch_netem

Pod annotation linux-netem QoS netem QoS Pod Ingress

- ovn.kubernetes.io/latency Pod ms
- ovn.kubernetes.io/jitter Pod ms
- ovn.kubernetes.io/limit qdisc 1000
- ovn.kubernetes.io/loss float 20 20%


 PDF

 Slack

 Support

🕒2025 10 10

🕒2022 5 24



3.6.3

3.7

Kube-OVN	IPv4 IPv6
	Kubernetes Kubernetes

3.7.1

CIDR	cidr=<IPv4 CIDR>,<IPv6 CIDR>	CIDR	IPv4	IPv6
<pre>apiVersion: kubeovn.io/v1 kind: Subnet metadata: name: ovn-test spec: cidrBlock: 10.16.0.0/16,fd00:10:16::/64 excludeIps: - 10.16.0.1 - fd00:10:16::1 gateway: 10.16.0.1,fd00:10:16::1</pre>				
	install.sh	/112	ULA	/64 /Service CIDR
<pre>POD_CIDR="10.16.0.0/16,fd00:10:16::/112" JOIN_CIDR="100.64.0.0/16,fd00:100:64::/112"</pre>				

3.7.2 Pod

Pod	IPv4 IPv6	Pod	annotation :
<pre>apiVersion: v1 kind: Pod metadata: annotations: ovn.kubernetes.io/allocated: "true" ovn.kubernetes.io/cidr: 10.16.0.0/16,fd00:10:16::/64 ovn.kubernetes.io/gateway: 10.16.0.1,fd00:10:16::1 ovn.kubernetes.io/ip_address: 10.16.0.9,fd00:10:16::9 ovn.kubernetes.io/logical_switch: ovn-default ovn.kubernetes.io/mac_address: 00:00:00:14:88:09 ovn.kubernetes.io/routed: "true" ... podIP: 10.16.0.9 podIPs: - ip: 10.16.0.9 - ip: fd00:10:16::9</pre>			

3.7.3 Pod IP

Pod	IPv4 IPv6	Pod	ip_family annotation	annotation	Kube-OVN	Pod
Subnet			ovn.kubernetes.io/ip_family			
<pre>apiVersion: v1 kind: Pod metadata: name: ipv4-only annotations: ovn.kubernetes.io/ip_family: ipv4 spec: containers: - name: nginx image: docker.io/library/nginx:alpine</pre>						
ipv4	ipv6	IPv4	ipv6	IPv6	ipv4	Pod
Multus	<provider>.kubernetes.io/ip_family	<provider>	NetworkAttachmentDefinition	Subnet	provider	
<pre>apiVersion: v1 kind: Pod metadata:</pre>						

```
name: attach-ipv6-only
annotations:
  k8s.v1.cni.cncf.io/networks: default/attachnet
  attachnet.default.ovn.kubernetes.io/ip_family: ipv6
spec:
  containers:
    - name: nginx
      image: docker.io/library/nginx:alpine
```

NetworkAttachmentDefinition interface Kube-OVN provider annotation net1 IPv4 net2 IPv6

```
apiVersion: v1
kind: Pod
metadata:
  name: attach-mixed-family
  annotations:
    k8s.v1.cni.cncf.io/networks: '[{"name": "attachnet", "namespace": "default", "interface": "net1"}, {"name": "attachnet", "namespace": "default", "interface": "net2"}]'
    attachnet.default.ovn.net1.kubernetes.io/ip_family: ipv4
    attachnet.default.ovn.net2.kubernetes.io/ip_family: ipv6
spec:
  containers:
    - name: nginx
      image: docker.io/library/nginx:alpine
```

IP `ovn.kubernetes.io/ip_address` `<provider>.kubernetes.io/ip_address` NetworkAttachmentDefinition
`<nadName>.<nadNamespace>.kubernetes.io/ip_address.<interfaceName>` IP `ip_family`

 PDF

 Slack

 Support

 2026 7 3

 2022 5 24

 GitHub



3.8 Webhook

Webhook	Kube-OVN	CRD	Webhook	IP	Subnet CIDR
Webhook	Subnet	Pod	Kube-OVN	Webhook	Pod

3.8.1 Cert-Manager

Webhook	cert-manager	Webhook	cert-manager
cert-manager:			
<pre>kubectl apply -f https://github.com/cert-manager/cert-manager/releases/download/v1.8.0/cert-manager.yaml</pre>			
cert-manager	cert-manager		

3.8.2 Webhook

Webhook	yaml	:
<pre># kubectl apply -f https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/yamls/webhook.yaml deployment.apps/kube-ovn-webhook created service/kube-ovn-webhook created validatingwebhookconfiguration.admissionregistration.k8s.io/kube-ovn-webhook created certificate.cert-manager.io/kube-ovn-webhook-serving-cert created issuer.cert-manager.io/kube-ovn-webhook-selfsigned-issuer created</pre>		

3.8.3 Webhook

Pod Pod IP 10.16.0.15

kubectl get pod -o wide

NAME	READY	STATUS	RESTARTS	AGE	IP	NODE	NOMINATED NODE	READINESS GATES
static-7584848b74-fw9dm	1/1	Running	0	2d13h	10.16.0.15	kube-ovn-worker	<none>	

yaml IP Pod

apiVersion: v1

kind: Pod

metadata:

annotations:

ovn.kubernetes.io/ip_address: 10.16.0.15

ovn.kubernetes.io/mac_address: 00:00:00:53:6B:B6

labels:

app: static

managedFields:

name: staticip-pod

namespace: default

spec:

containers:

- image: docker.io/library/nginx:alpine

imagePullPolicy: IfNotPresent

name: qatest

yaml Pod IP

kubectl apply -f pod-static.yaml

Error from server (annotation static-ip 10.16.0.15 is conflict with ip crd static-7584848b74-fw9dm.default, ip 10.16.0.15): error when creating "pod-static.yaml": admission webhook "pod-ip-validating.kube-ovn.io" denied the request: annotation static-ip 10.16.0.15 is conflict with ip crd static-7584848b74-fw9dm.default, ip 10.16.0.15

PDF

Slack

Support

 2026 4 28

 2022 5 24

 GitHub 

3.8.4


3.9

CPU

5%~10%

CPU

NPM

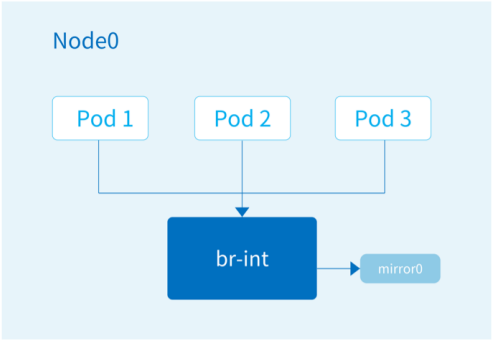

3.9.1

kube-ovn-cni DaemonSet

- --enable-mirror=true
- --mirror-iface=mirror0:

br-int Kube-OVN

tcpdump mirror0

tcpdump -ni mirror0

3.9.2 Pod

Pod Pod ovn.kubernetes.io/mirror annotation Pod

```
apiVersion: v1
kind: Pod
metadata:
  name: mirror-pod
  namespace: ls1
  annotations:
    ovn.kubernetes.io/mirror: "true"
spec:
  containers:
    - name: mirror-pod
      image: docker.io/library/nginx:alpine
```

3.9.3

1. Pod to Pod in the same Nodes

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	12.7 us	289 Mbits/sec	12.6 us	(1.8%)	77.9 Mbits/sec
128	15.5 us	517 Mbits/sec	12.7 us	(0%)	155 Mbits/sec
512	12.2 us	1.64 Gbits/sec	12.4 us	(0%)	624 Mbits/sec
1k	13 us	2.96 Gbits/sec	11.4 us	(0.53%)	1.22 Gbits/sec
4k	18 us	7.67 Gbits/sec	25.7 us	(0.41%)	1.50 Gbits/sec

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	11.9 us	324 Mbits/sec	12.2 us	(0.22%)	102 Mbits/sec
128	10.5 us	582 Mbits/sec	9.5 us	(0.21%)	198 Mbits/sec
512	11.6 us	1.84 Gbits/sec	9.32 us	(0.091%)	827 Mbits/sec
1k	10.5 us	3.44 Gbits/sec	10 us	(1.2%)	1.52 Gbits/sec
4k	16.7 us	8.52 Gbits/sec	18.2 us	(1.3%)	2.42 Gbits/sec

2. Pod to Pod in the different Nodes

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	258 us	143 Mbits/sec	237 us	(61%)	28.5 Mbits/sec
128	240 us	252 Mbits/sec	231 us	(64%)	54.9 Mbits/sec
512	236 us	763 Mbits/sec	256 us	(68%)	194 Mbits/sec
1k	242 us	969 Mbits/sec	225 us	(62%)	449 Mbits/sec
4k	352 us	1.12 Gbits/sec	382 us	(0.71%)	21.4 Mbits/sec

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	278 us	140 Mbits/sec	227 us	(24%)	59.6 Mbits/sec
128	249 us	265 Mbits/sec	265 us	(23%)	114 Mbits/sec
512	233 us	914 Mbits/sec	235 us	(21%)	468 Mbits/sec
1k	238 us	1.14 Gbits/sec	240 us	(15%)	891 Mbits/sec
4k	370 us	1.25 Gbits/sec	361 us	(0.43%)	7.54 Mbits/sec

3. Node to Node

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	205 us	162 Mbits/sec	183 us	(11%)	74.2 Mbits/sec
128	222 us	280 Mbits/sec	206 us	(6.3%)	155 Mbits/sec
512	220 us	1.04 Gbits/sec	177 us	(20%)	503 Mbits/sec
1k	213 us	2.06 Gbits/sec	201 us	(8.6%)	1.14 Gbits/sec
4k	280 us	5.01 Gbits/sec	315 us	(37%)	1.20 Gbits/sec

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	204 us	157 Mbits/sec	204 us	(8.8%)	81.9 Mbits/sec
128	213 us	262 Mbits/sec	225 us	(19%)	136 Mbits/sec
512	220 us	1.02 Gbits/sec	227 us	(21%)	486 Mbits/sec
1k	217 us	1.79 Gbits/sec	218 us	(29%)	845 Mbits/sec
4k	275 us	5.27 Gbits/sec	336 us	(34%)	1.21 Gbits/sec

4. Pod to the Node where the Pod is located

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	12.2 us	295 Mbits/sec	12.7 us	(0.27%)	74.1 Mbits/sec
128	14.1 us	549 Mbits/sec	10.6 us	(0.41%)	153 Mbits/sec
512	13.5 us	1.83 Gbits/sec	12.7 us	(0.23%)	586 Mbits/sec
1k	12 us	2.69 Gbits/sec	13 us	(1%)	1.16 Gbits/sec
4k	18.9 us	4.51 Gbits/sec	21.8 us	(0.42%)	1.81 Gbits/sec

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	10.4 us	335 Mbits/sec	12.2 us	(0.75%)	95.4 Mbits/sec
128	12.1 us	561 Mbits/sec	11.3 us	(0.25%)	194 Mbits/sec
512	11.6 us	1.87 Gbits/sec	10.7 us	(0.66%)	745 Mbits/sec
1k	12.7 us	3.12 Gbits/sec	10.9 us	(1.2%)	1.46 Gbits/sec
4k	16.5 us	8.23 Gbits/sec	17.9 us	(1.5%)	2.51 Gbits/sec

5. Pod to the Node where the Pod is not located

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	234 us	153 Mbits/sec	232 us	(63%)	29.4 Mbits/sec
128	237 us	261 Mbits/sec	238 us	(49%)	76.1 Mbits/sec
512	231 us	701 Mbits/sec	238 us	(57%)	279 Mbits/sec
1k	256 us	1.05 Gbits/sec	228 us	(56%)	524 Mbits/sec
4k	330 us	1.08 Gbits/sec	359 us	(1.5%)	35.7 Mbits/sec

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	283 us	141 Mbits/sec	230 us	(26%)	55.8 Mbits/sec
128	234 us	255 Mbits/sec	234 us	(25%)	113 Mbits/sec
512	246 us	760 Mbits/sec	234 us	(22%)	458 Mbits/sec
1k	268 us	1.23 Gbits/sec	242 us	(20%)	879 Mbits/sec
4k	326 us	1.20 Gbits/sec	369 us	(0.5%)	7.87 Mbits/sec

6. Pod to the cluster ip service

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	237 us	133 Mbits/sec	213 us	(65%)	25.5 Mbits/sec
128	232 us	271 Mbits/sec	222 us	(62%)	54.8 Mbits/sec
512	266 us	800 Mbits/sec	234 us	(60%)	232 Mbits/sec
1k	248 us	986 Mbits/sec	239 us	(50%)	511 Mbits/sec
4k	314 us	1.03 Gbits/sec	367 us	(0.6%)	13.2 Mbits/sec

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	14305.17	0.87ms	1.48ms	24.46ms
100	29082.07	3.87ms	4.35ms	102.85ms

Size	TCP Latency	TCP Bandwidth	UDP Latency	UDP Lost Rate	UDP Bandwidth
64	241 us	145 Mbits/sec	225 us	(19%)	60.2 Mbits/sec
128	245 us	261 Mbits/sec	212 us	(15%)	123 Mbits/sec
512	252 us	821 Mbits/sec	219 us	(14%)	499 Mbits/sec
1k	253 us	1.08 Gbits/sec	242 us	(16%)	852 Mbits/sec
4k	320 us	1.32 Gbits/sec	360 us	(0.47%)	6.70 Mbits/sec

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	13634.07	0.96ms	1.72ms	30.07ms
100	30215.23	3.59ms	3.20ms	77.56ms

7. Host to the Node port service where the Pod is not located on the target Node

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	14802.73	0.88ms	1.66ms	31.49ms
100	29809.58	3.78ms	4.12ms	105.34ms

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	14273.33	0.90ms	1.60ms	37.16ms
100	30757.81	3.62ms	3.41ms	59.78ms

8. Host to the Node port service where the Pod is located on the target Node

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	15402.39	802.50us	1.42ms	30.91ms
100	29424.66	4.05ms	4.31ms	90.60ms

TCP-Conn-Number	QPS	Avg-Resp-Time	Stdev-Resp-Time	Max-Resp-Time
10	14649.21	0.91ms	1.72ms	43.92ms
100	32143.61	3.66ms	3.76ms	67.02ms


[PDF](#)

[Slack](#)

[Support](#)

🕒2025 11 20

🕒2022 5 24

 GitHub



3.9.4

3.10 LoadBalancer Service

Kube-OVN VPC VPC VPC
 VPC VPC VPC LoadBalancer Service LoadBalancerIP VPC Service

1. multus-cni macvlan cni
2. LoadBalancer Service VPC vpc-nat-gw macvlan
3. VPC VPC LoadBalancer VPC VPC

3.10.1 VPC LoadBalancer Service

kube-system namespace deployment kube-ovn-controller args --enable-lb-svc=true false

```
containers:
- args:
  - /kube-ovn/start-controller.sh
  - --default-cidr=10.16.0.0/16
  - --default-gateway=10.16.0.1
  - --default-gateway-check=true
  - --enable-lb-svc=true # true
```

NetworkAttachmentDefinition CRD

yaml net-attach-def

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: lb-svc-attachment
  namespace: kube-system
spec:
  # master eth0 / ens192 / bond0
  config: '{
    "cniVersion": "0.3.0",
    "type": "macvlan",
    "master": "eth0",
    "mode": "bridge"
  }'
```

eth0 master

Subnet

Subnet LoadBalancer Service LoadBalancerIP Underlay Subnet

yaml

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: attach-subnet
spec:
  protocol: IPv4
  provider: lb-svc-attachment.kube-system # provider net-attach-def Name.Namespace
  cidrBlock: 172.18.0.0/16
  gateway: 172.18.0.1
  excludeIps:
  - 172.18.0.0..172.18.0.10
```

Subnet provider ovn .ovn Kube-OVN logical switch

provider ovn .ovn Kube-OVN IPAM IP

LoadBalancer Service

yaml LoadBalancer Service

```
apiVersion: v1
kind: Service
metadata:
  annotations:
    lb-svc-attachment.kube-system.kubernetes.io/logical_switch: attach-subnet #
    ovn.kubernetes.io/attachmentprovider: lb-svc-attachment.kube-system #
  labels:
    app: dynamic
    name: test-service
    namespace: default
spec:
  loadBalancerIP: 172.18.0.18 #
  ports:
    - name: test
      protocol: TCP
      port: 80
      targetPort: 80
  selector:
    app: dynamic
  sessionAffinity: None
  type: LoadBalancer
```

yaml annotation ovn.kubernetes.io/attachmentprovider net-attach-def Name.Namespace net-attach-def Pod

annotation annotation key net-attach-def Name.Namespace.kubernetes.io/logical_switch LoadBalancerIP LoadBalancerIP LoadBalancerIP spec.loadBalancerIP

yaml Service Service Namespace Pod

```
# kubectl get pod
NAME lb-svc-test-service-6869d98dd8-cjv1l READY STATUS RESTARTS AGE
lb-svc-test-service-6869d98dd8-cjv1l 1/1 Running 0 107m

# kubectl get svc
NAME TYPE CLUSTER-IP EXTERNAL-IP PORT(S) AGE
test-service LoadBalancer 10.109.201.193 172.18.0.18 80:30056/TCP 107m
```

service.spec.loadBalancerIP service external-ip

Pod yaml

```
# kubectl get pod -o yaml lb-svc-test-service-6869d98dd8-cjv1l
apiVersion: v1
kind: Pod
metadata:
  annotations:
    k8s.v1.cni.cncf.io/network-status: |-
      [{"name": "kube-ovn", "ips": [{"ip": "10.16.0.2"}], "default": true, "dns": {}}]
    k8s.v1.cni.cncf.io/networks: default/test-service
    k8s.v1.cni.cncf.io/networks-status: |-
      [{"name": "kube-ovn", "ips": [{"ip": "10.16.0.2"}], "default": true, "dns": {}}]
    k8s.v1.cni.cncf.io/networks-status: |-
      [{"name": "default/test-service", "interface": "net1", "mac": "ba:85:f7:02:9f:42", "dns": {}}]
  labels:
    app: dynamic
    name: test-service
    namespace: default
spec:
  containers:
    - name: test-service
      image: nginx
      ports:
        - containerPort: 80
  dnsPolicy: ClusterFirst
  nodeName: kube-ovn
  restartPolicy: Always
  schedulerName: default-scheduler
  securityContext: {}
  serviceAccountName: default
  terminationGracePeriodSeconds: 30
  volumes: {}
```

```

ovn.kubernetes.io/ip_address: 10.16.0.2
ovn.kubernetes.io/logical_router: ovn-cluster
ovn.kubernetes.io/logical_switch: ovn-default
ovn.kubernetes.io/mac_address: 00:00:00:45:F4:29
ovn.kubernetes.io/pod_nic_type: veth-pair
ovn.kubernetes.io/routed: "true"
test-service.default.kubernetes.io/allocated: "true"
test-service.default.kubernetes.io/cidr: 172.18.0.0/16
test-service.default.kubernetes.io/gateway: 172.18.0.1
test-service.default.kubernetes.io/ip_address: 172.18.0.18
test-service.default.kubernetes.io/logical_switch: attach-subnet
test-service.default.kubernetes.io/mac_address: 00:00:00:AF:AA:BF
test-service.default.kubernetes.io/pod_nic_type: veth-pair

```

Service

```

# kubectl get svc -o yaml test-service
apiVersion: v1
kind: Service
metadata:
  annotations:
    kubectl.kubernetes.io/last-applied-configuration: |
      {"apiVersion":"v1","kind":"Service","metadata":{"annotations":{"test-service.default.kubernetes.io/logical_switch":"attach-subnet"},"labels":{"app":"dynamic"},"name":"test-service","namespace":"default"},"spec":{"ports":[{"name":"test","port":80,"protocol":"TCP","targetPort":80}],"selector":{"app":"dynamic"},"sessionAffinity":"None","type":"LoadBalancer"}}
    ovn.kubernetes.io/vpc: ovn-cluster
    test-service.default.kubernetes.io/logical_switch: attach-subnet
  creationTimestamp: "2022-06-15T09:01:58Z"
  labels:
    app: dynamic
  name: test-service
  namespace: default
  resourceVersion: "38485"
  uid: 161ede1-7f6e-40f5-9e09-5a52c44267d0
spec:
  allocateLoadBalancerNodePorts: true
  clusterIP: 10.109.201.193
  clusterIPs:
    - 10.109.201.193
  externalTrafficPolicy: Cluster
  internalTrafficPolicy: Cluster
  ipFamilies:
    - IPv4
  ipFamilyPolicy: SingleStack
  ports:
    - name: test
      nodePort: 30056
      port: 80
      protocol: TCP
      targetPort: 80
  selector:
    app: dynamic
  sessionAffinity: None
  type: LoadBalancer
status:
  loadBalancer:
    ingress:
      - ip: 172.18.0.18

```

3.10.2 LoadBalancerIP

yaml, Pod Service Endpoints

```

apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: dynamic
  name: dynamic
  namespace: default
spec:
  replicas: 2
  selector:
    matchLabels:
      app: dynamic
  strategy:
    rollingUpdate:
      maxSurge: 25%
      maxUnavailable: 25%
    type: RollingUpdate
  template:
    metadata:
      creationTimestamp: null
      labels:
        app: dynamic
    spec:
      containers:
        - image: docker.io/library/nginx:alpine

```

```

imagePullPolicy: IfNotPresent
name: nginx
dnsPolicy: ClusterFirst
restartPolicy: Always

```

Service LoadBalancerIP:Port

```

# curl 172.18.0.18:80
<html>
<head>
  <title>Hello World!</title>
  <link href="//fonts.googleapis.com/css?family=Open+Sans:400,700" rel="stylesheet" type="text/css">
  <style>
    body {
      background-color: white;
      text-align: center;
      padding: 50px;
      font-family: "Open Sans", "Helvetica Neue", Helvetica, Arial, sans-serif;
    }
    #logo {
      margin-bottom: 40px;
    }
  </style>
</head>
<body>
  <h1>Hello World!</h1>
  <h3>Links found</h3>
  <h3>I am on dynamic-7d8d7874f5-hsgc4</h3>
  <h3>Cookie =</h3>
  <b>KUBERNETES</b> listening in 443 available at tcp://10.96.0.1:443<br />
  <h3>my name is hanhouchao!</h3>
  <h3> RequestURI='/'</h3>
</body>
</html>

```

Service Pod

```

# ip a
4: net1@if62: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether ba:85:f7:02:9f:42 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 172.18.0.18/16 scope global net1
        valid_lft forever preferred_lft forever
    inet6 fe80::b885:f7ff:fe02:9f42/64 scope link
        valid_lft forever preferred_lft forever
36: eth0@if37: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1400 qdisc noqueue state UP group default
    link/ether 00:00:00:45:f4:29 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 10.16.0.2/16 brd 10.16.255.255 scope global eth0
        valid_lft forever preferred_lft forever
    inet6 fe80::200:ff:fe45:f429/64 scope link
        valid_lft forever preferred_lft forever

# ip rule
0: from all lookup local
32764: from all iif eth0 lookup 100
32765: from all iif net1 lookup 100
32766: from all lookup main
32767: from all lookup default

# ip route show table 100
default via 172.18.0.1 dev net1
10.109.201.193 via 10.16.0.1 dev eth0
172.18.0.0/16 dev net1 scope link

# iptables -t nat -L -n -v
Chain PREROUTING (policy ACCEPT 0 packets, 0 bytes)
  pkts bytes target    prot opt in     out     source    destination
    0     0 DNAT      tcp -- *      *        0.0.0.0/0 172.18.0.18      tcp dpt:80 to:10.109.201.193:80

Chain INPUT (policy ACCEPT 0 packets, 0 bytes)
  pkts bytes target    prot opt in     out     source    destination

Chain OUTPUT (policy ACCEPT 0 packets, 0 bytes)
  pkts bytes target    prot opt in     out     source    destination

Chain POSTROUTING (policy ACCEPT 0 packets, 0 bytes)
  pkts bytes target    prot opt in     out     source    destination
    0     0 MASQUERADE all -- *      *        0.0.0.0/0 10.109.201.193

```

lb service Pod nodeSelector

```

ovn-vpc-nat-config ConfigMap nodeSelector LoadBalancer service Pod

```

```

apiVersion: v1
data:
  image: docker.io/kubeovn/vpc-nat-gateway:v1.17.0
  nodeSelector: |
    kubernetes.io/hostname: kube-ovn-control-plane

```

```
kubernetes.io/os: linux
kind: ConfigMap
metadata:
  name: ovn-vpc-nat-config
  namespace: kube-system
```

 PDF

 Slack

 Support

 2026 7 4

 2022 7 19









3.10.3

3.11

Kube-OVN	Prometheus					
kube-prometheus	CRD	Prometheus	kube-prometheus	CRD	Kube-OVN	Kube-OVN

3.11.1 Prometheus Monitor

Kube-OVN Prometheus Monitor CRD

```
#
kubectl apply -f https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/pinger-monitor.yaml
# kube-ovn-controller
kubectl apply -f https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/controller-monitor.yaml
# kube-ovn-cni
kubectl apply -f https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/cni-monitor.yaml
# ovn
kubectl apply -f https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/ovn-monitor.yaml
```

Prometheus 15s yml interval

3.11.2 Grafana


Kube-OVN Grafana Dashboard

Dashboard


```
#
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/pinger-grafana.json
# kube-ovn-controller
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/controller-grafana.json
# kube-ovn-cni
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/cni-grafana.json
# ovn
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/ovn-grafana.json
# ovs
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/master/dist/monitoring/ovs-grafana.json
```

Grafana Prometheus Dashboard

kube-ovn-controller

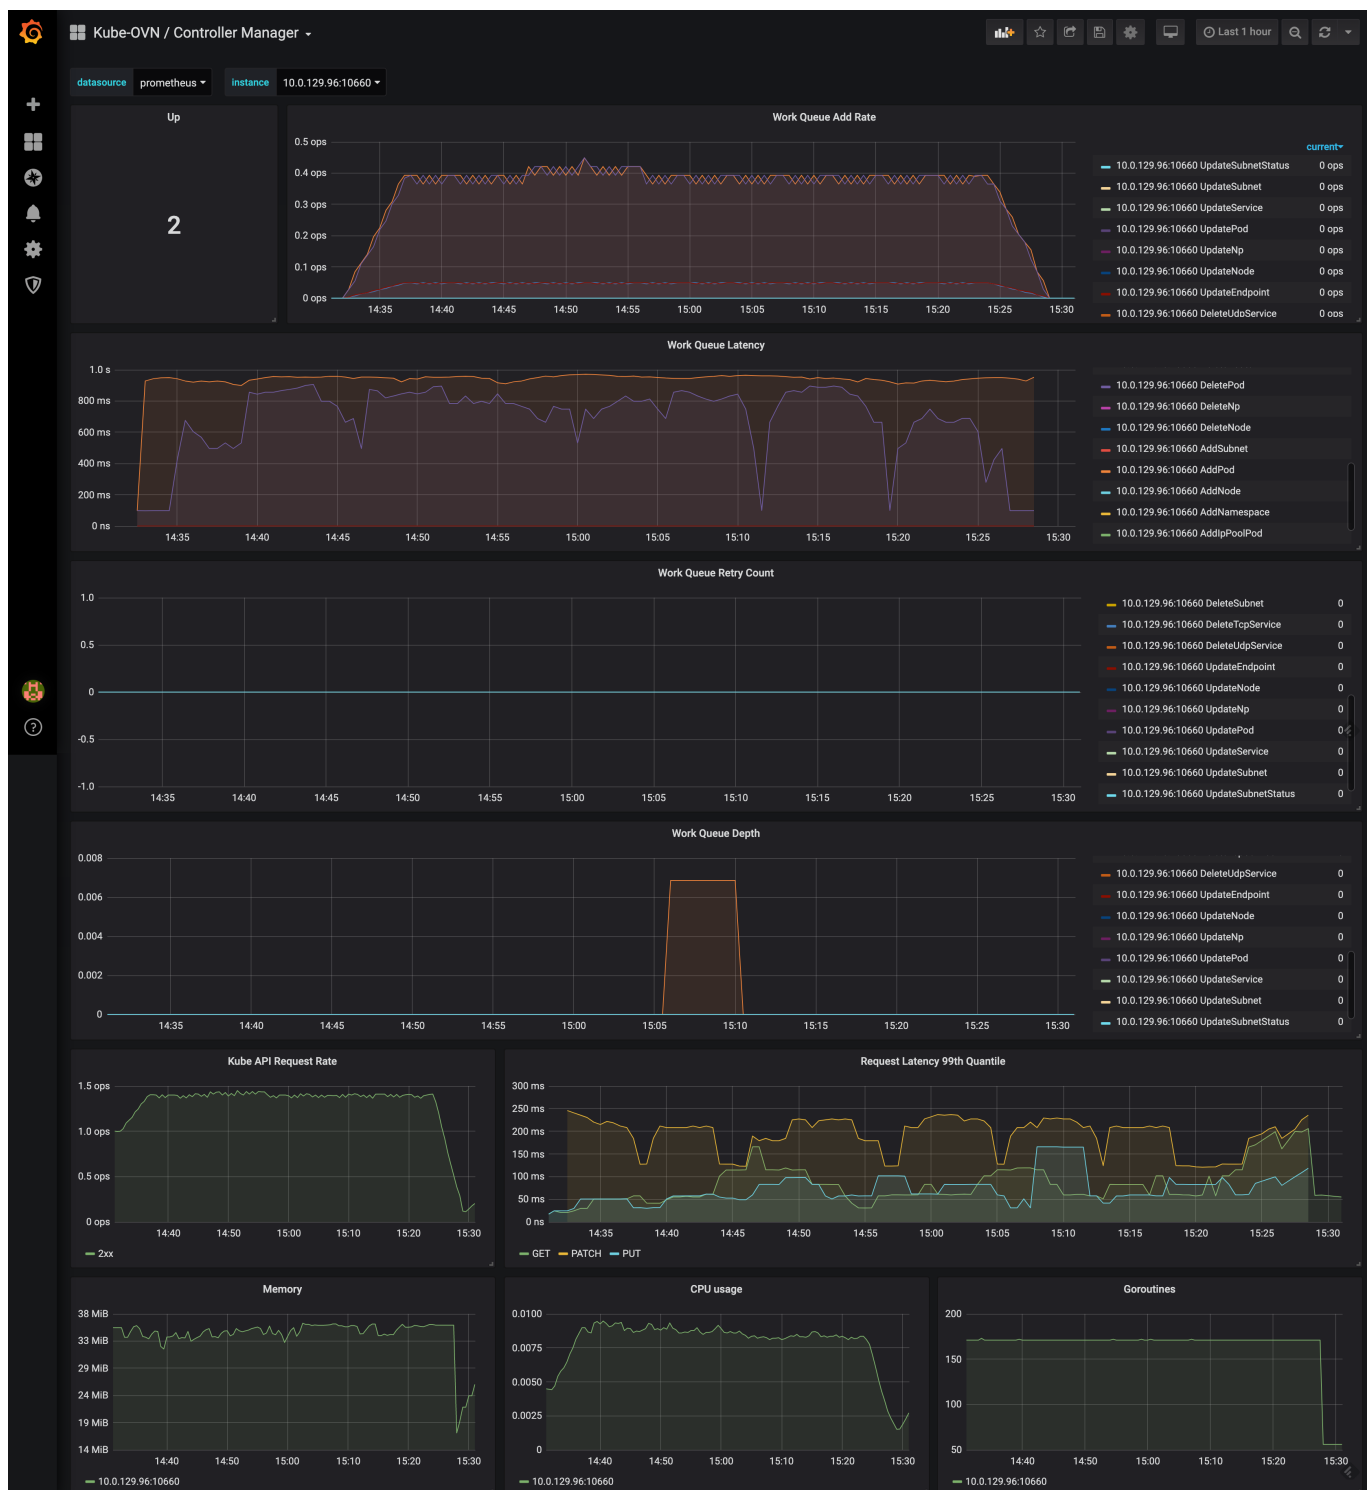

kube-ovn-pinger

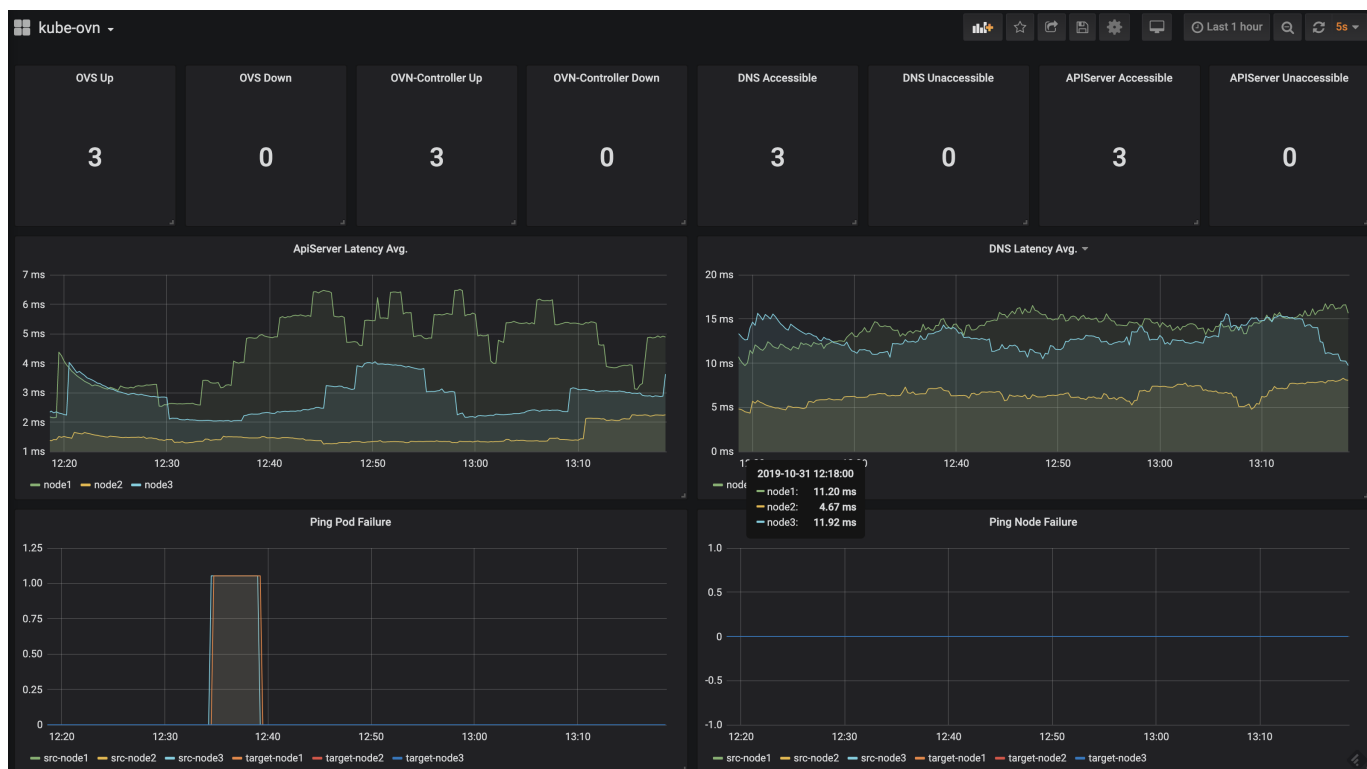

kube-ovn-cni



PDF



Slack



Support

 2025 9 17

 2022 5 23

 GitHub



3.11.3

3.12

3.12.1 NetworkPolicy

NetworkPolicy	Kubernetes	Pod	Pod	Kube-OVN	OVN	ACL	Kubernetes NetworkPolicy
	NetworkPolicy						

Kube-OVN

Kube-OVN	OVN	Open Virtual Network	NetworkPolicy	OVN
----------	-----	----------------------	---------------	-----

PORT GROUP

NetworkPolicy	Kube-OVN	Port Group	podSelector	Pod	Port Group	<	>	<	>	-	.
---------------	----------	------------	-------------	-----	------------	---	---	---	---	---	---

ADDRESS SET

Address Set	NetworkPolicy	IP	NetworkPolicy	Kube-OVN	podSelector	namespaceSelector	ipBlock
IP	Address Set						

NetworkPolicy	Ingress	Egress	Allow	Except	Address Set
• < > . < > . ingress . allow			IP		
• < > . < > . ingress . except			IP		
• < > . < > . egress . allow			IP		
• < > . < > . egress . except			IP		

ACL

ACL	OVN	Kube-OVN	NetworkPolicy	OVN ACL	Port Group	ACL
-----	-----	----------	---------------	---------	------------	-----

Kube-OVN	NetworkPolicy	ACL
----------	---------------	-----

• Ingress Allow	2001		
• Egress Allow	2001		
• Default Deny	2000		
Kube-OVN	Kubernetes NetworkPolicy	OVN	ACL

Kube-OVN

• NetworkPolicy	Kubernetes	
• Network Policy API	AdminNetworkPolicy	BaselineAdminNetworkPolicy
• Subnet ACL		
• Security Group		
	OVN ACL	NetworkPolicy Network Policy API

NAMED PORT

NetworkPolicy	Named Port
---------------	------------

```
ports:
- protocol: TCP
  port: http
```

Kube-OVN	Named Port		Named Port							
	Pod	Named Port	NetworkPolicy		Pod A	http	8080	Pod B	http	8081
	port: http	NetworkPolicy								

Named Port Pod

IPBLOCK EXCEPT

NetworkPolicy ipBlock except IP

```
egress:
- to:
  - ipBlock:
      cidr: 10.0.0.0/8
      except:
        - 10.0.1.0/24
        - 10.0.2.0/24
```

OVN except except ACL OVN

except IP

- CIDR
- podSelector namespaceSelector IP

NetworkPolicy

Kube-OVN NetworkPolicy

Warning

NetworkPolicy CPU

ovn.kubernetes.io/acl_log_meter_rate annotation ACL

NetworkPolicy annotation ovn.kubernetes.io/enable_log

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: default-deny-ingress
  namespace: default
  annotations:
    ovn.kubernetes.io/enable_log: "true"
spec:
  podSelector: {}
  policyTypes:
    - Ingress
```

Drop

Pod /var/log/ovn/ovn-controller.log

```
# tail -f /var/log/ovn/ovn-controller.log
2022-07-20T05:55:03.229Z|00394|acl_log(ovn_pinctrl0)|INFO|name="np/default-deny-ingress.default/IPv4/0", verdict=drop, severity=warning, direction=to-lport:
udp,vlan_tci=0x0000,d1_src=00:00:00:21:b7:d1,d1_dst=00:00:00:8d:0b:86,nw_src=10.16.0.10,nw_dst=10.16.0.7,nw_tos=0,nw_ecn=0,nw_ttl=63,tp_src=54343,tp_dst=53
```

IP IP

Kube-OVN v1.13.0 ovn.kubernetes.io/log_acl_actions annotation Allow

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: allow-from-client
  namespace: default
  annotations:
    ovn.kubernetes.io/enable_log: "true"
    ovn.kubernetes.io/log_acl_actions: "allow"
spec:
  podSelector:
    matchLabels:
      app: web
  policyTypes:
    - Ingress
  ingress:
    - from:
      - podSelector:
          matchLabels:
            app: client
```

ovn.kubernetes.io/log_acl_actions

- drop
- allow
- allow, drop

```
# tail -f /var/log/ovn/ovn-controller.log
2024-08-14T09:27:49.590Z|00004|acl_log(ovn_pinctrl0)|INFO|name="np/allow-from-client.default/ingress/IPv4/0", verdict=allow, severity=info, direction=to-
lport: icmp, vlan_tci=0x0000, dl_src=96:7b:b0:2f:a0:1a, dl_dst=a6:e5:1b:c2:1b:f8, nw_src=10.16.0.7, nw_dst=10.
16.0.12, nw_tos=0, nw_ecn=0, nw_ttl=64, nw_frag=no, icmp_type=8, icmp_code=0
```

ovn.kubernetes.io/acl_log_meter_rate annotation

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: allow-from-client
  namespace: default
  annotations:
    ovn.kubernetes.io/enable_log: "true"
    ovn.kubernetes.io/log_acl_actions: "allow"
    ovn.kubernetes.io/acl_log_meter_rate: "100"
spec:
  podSelector:
    matchLabels:
      app: web
  policyTypes:
    - Ingress
  ingress:
    - from:
      - podSelector:
          matchLabels:
            app: client
```

ovn.kubernetes.io/acl_log_meter_rate / 100 100

annotation ovn.kubernetes.io/enable_log false

```
kubectctl annotate networkpolicy -n default allow-from-client ovn.kubernetes.io/enable_log=false --overwrite
```

Kube-OVN

• standard	NetworkPolicy	IP						
• lax		TCP/UDP/SCTP	ICMP	L4	IP	DHCP	UDP	
	NetworkPolicy	annotation						

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: example-policy
  namespace: default
  annotations:
    ovn.kubernetes.io/network_policy_enforcement: "lax"
spec:
  podSelector: {}
  policyTypes:
  - Ingress
```

Kube-OVN

`--np-enforcement`

- NetworkPolicy



PDF



Slack



Support

2026 4 28


2025 10 23



GitHub



3.12.2 NetworkPolicy

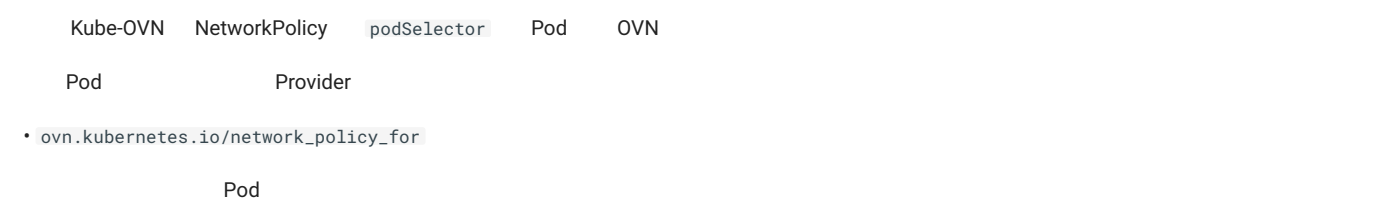

```
metadata:
  annotations:
    ovn.kubernetes.io/network_policy_for: "ovn,default/net-a,default/net-b"
```

- ovn OVN Provider
- <namespace>/<net-attach-def>
- ovn
- default/net-a
- ovn,default/net-a

Provider

- OVN Provider
- Provider
- <namespace>/<net-attach-def> Kube-OVN Provider
- <nad-name>.<nad-namespace>.ovn

- Pod
- OVN Provider ovn
 - default/net-a
 - default/net-b

- `network_policy_for`
- `ovn net-a net-b`
- `network_policy_for: default/net-a`
- `net-a`
- `network_policy_for: ovn,default/net-b`
- `ovn net-b`

- Provider/ Kubernetes NetworkPolicy
-

 PDF

 Slack

 Support

 2026 4 28

 2026 2 24

 GitHub



3.12.3

Kubernetes	NetworkPolicy	L3	L4	AdminNetworkPolicy (ANP)				Pod
DNSNameResolver		CoreDNS						
NetworkPolicy		OVN	AddressSet	IP	IP	OVN	AddressSet	DNS
1. kube-ovn-controller		AdminNetworkPolicy		DNSNameResolver CR				
2. CoreDNS		DNSNameResolver CR		IP	DNSNameResolver status			
3. kube-ovn-controller		DNSNameResolver CR		status	AddressSet			
IP		Deny		Allow		Allow		Deny

ANP BANP CRD

AdminNetworkPolicy CRD

```
kubectl apply -f https://raw.githubusercontent.com/kubernetes-sigs/network-policy-api/refs/heads/main/config/crd/experimental/policy.networking.k8s.io_adminnetworkpolicies.yaml
kubectl apply -f https://raw.githubusercontent.com/kubernetes-sigs/network-policy-api/refs/heads/main/config/crd/experimental/policy.networking.k8s.io_baselineadminnetworkpolicies.yaml
```

DNSNAMERESOLVER

DNSNameResolver

```
kubectl apply -f https://raw.githubusercontent.com/kubeovn/dnsnameresolver/refs/heads/main/manifest/crd.yaml
kubectl apply -f https://raw.githubusercontent.com/kubeovn/dnsnameresolver/refs/heads/main/manifest/rbac.yaml
kubectl apply -f https://raw.githubusercontent.com/kubeovn/dnsnameresolver/refs/heads/main/manifest/cm.yaml
```

COREDNS

DNSNameResolver CoreDNS tag dev kubeovn/dnsnameresolver releases

```
kubectl set image deployment/coredns coredns=kubeovn/dnsnameresolver:<release-tag> -n kube-system
```

CoreDNS

```
kubectl get pod -n kube-system -l k8s-app=kube-dns
```

ANP

kube-ovn-controller

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: kube-ovn-controller
spec:
  template:
    spec:
      containers:
        - name: kube-ovn-controller
          args:
            - --enable-anp=true
            - --enable-dns-name-resolver=true
            # ...
```

```
apiVersion: policy.networking.k8s.io/v1alpha1
kind: AdminNetworkPolicy
metadata:
  name: deny-external-domains
spec:
  priority: 55
  subject:
    namespaces:
      matchLabels:
        kubernetes.io/metadata.name: kube-system
  egress:
    - action: Deny
      name: deny-baidu-google
      to:
        - domainNames:
            - '*.baidu.com.'
            - '*.google.com.'
```

priority		
subject	Pod	
egress		
action	Allow Deny Pass	
domainNames	.	

kube-ovn-pinger

```
#
kubectl exec -it -n kube-system kube-ovn-pinger-xxxxx -- ping baidu.com
```

DNS ACL

DNSNameResolver

kubectl get dnsnameresolver

NAME	DNS NAME	RESOLVED IPS
anp-deny-external-domains-88dc32ab	*.google.com.	
anp-deny-external-domains-fb3029ce	*.baidu.com.	220.181.7.203


PDF

Slack

Support

🕒2026 4 28

🕒2025 9 17



3.12.4

	Pod	Pod	Kube-OVN IPAM	MAC	IP
•	Pod	IP			
•	Pod	MAC	ARP		
•					

	OVN	Port Security	Pod	Kube-OVN	OVN
•		MAC	IP		
•	OVN	MAC	IP		
•	IPAM				
•	OVN				
	OVN				

Pod `ovn.kubernetes.io/port_security` annotation

```
apiVersion: v1
kind: Pod
metadata:
  name: secure-pod
  annotations:
    ovn.kubernetes.io/port_security: "true"
spec:
  containers:
    - name: nginx
      image: docker.io/library/nginx:alpine
```

 PDF

 Slack

 Support

 2025 10 24

 2025 10 24



4. KubeVirt

4.1 VM IP

IP	VM	VM	IP
CNI			
• IP VM VM IP			
• IP Node VM IP			
• IP VM IP			
KubeVirt masquerade iptables VM VM IP masquerade bridge			
• Pod IP VM IP Pod IP			
• masquerade iptables bridge			
• masquerade			
• masquerade conntrack			
Kube-OVN KubeVirt bridge managedTap IP VM IP VM annotation VM IP			
Kube-OVN Multus			

4.1.1 IP VM

VM	IP	IP	VM	Kube-OVN	IPAM	VM	VM	IP
bridge		VM	IP					

1. VM

```
apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: testvm
spec:
  runStrategy: Always
  template:
    metadata:
      labels:
        kubevirt.io/size: small
        kubevirt.io/domain: testvm
      annotations:
        kubevirt.io/allow-pod-bridge-network-live-migration: "true"
    spec:
      domain:
        devices:
          disks:
            - name: containerdisk
              disk:
                bus: virtio
            - name: cloudinitdisk
              disk:
                bus: virtio
          interfaces:
            - name: default
              bridge: {}
      resources:
        requests:
          memory: 64M
      networks:
        - name: default
          pod: {}
      volumes:
        - name: containerdisk
          containerDisk:
            image: quay.io/kubevirt/cirros-container-disk-demo
        - name: cloudinitdisk
```

```
cloudInitNoCloud:
  userDataBase64: SGkuXG4=
```

1. VM

```
kubecttl get vmi testvm
```

1. VM

```
virtctl restart testvm
```

1. VM

```
virtctl migrate testvm
```

bridge VM IP

4.1.2 IP/Mac

VM	IP/Mac	VM	annotation	VM	IP	KubeVirt	VM	IP/Mac
<nadName>.<nadNamespace>.kubernetes.io/ip_address.<interfaceName>		<nadName>.<nadNamespace>.kubernetes.io/mac_address.<interfaceName>		-	IP/MAC			

```
apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: testvm
spec:
  runStrategy: Always
  template:
    metadata:
      labels:
        kubevirt.io/size: small
        kubevirt.io/domain: testvm
    annotations:
      ovn.kubernetes.io/ip_address: 10.16.0.15 #(1)
      ovn.kubernetes.io/mac_address: 00:00:00:53:68:B6 #(2)
      kubevirt.io/allow-pod-bridge-network-live-migration: "true"
  spec:
    domain:
      devices:
        disks:
          - name: containerdisk
            disk:
              bus: virtio
          - name: cloudinitdisk
            disk:
              bus: virtio
        interfaces:
          - name: default
            bridge: {}
        resources:
          requests:
            memory: 64M
    networks:
      - name: default
        pod: {}
    volumes:
      - name: containerdisk
        containerDisk:
          image: quay.io/kubevirt/cirros-container-disk-demo
      - name: cloudinitdisk
        cloudInitNoCloud:
          userDataBase64: SGkuXG4=
```

- 1. 🧑 IP
- 2. 🧑 Mac

 **Warning**

KubeVirt VM API	spec.template.spec.domain.devices.interfaces.macAddress	Mac	Mac	Kube-OVN
	annotation	Mac	Mac	

4.1.3 VM IP

- Kube-OVNVM IPIPVM
- VM IP
1. VM AnnotationIP

2. virtctl restart <vm name>VMIP

4.1.4

VMIPVMovn.kubernetes.io/logical_switch

```
apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: testvm
spec:
  runStrategy: Always
  template:
    metadata:
      labels:
        kubevirt.io/size: small
        kubevirt.io/domain: testvm
    annotations:
      ovn.kubernetes.io/logical_switch: subnet1 #(1)
      kubevirt.io/allow-pod-bridge-network-live-migration: "true"
  spec:
    domain:
      devices:
        disks:
          - name: containerdisk
            disk:
              bus: virtio
          - name: cloudinitdisk
            disk:
              bus: virtio
        interfaces:
          - name: default
            bridge: {}
        resources:
          requests:
            memory: 64M
    networks:
      - name: default
        pod: {}
    volumes:
      - name: containerdisk
        containerDisk:
          image: quay.io/kubevirt/cirros-container-disk-demo
      - name: cloudinitdisk
        cloudInitNoCloud:
          userDataBase64: SGkuXG4=
```

1. 🧑 VM


📄 PDF

🗨️ Slack

✉️ Support

🕒 2026 2 11

🕒 2025 3 3



4.1.5

4.2

KubeVirt Clone

Label Annotation

Kube-OVN Annotation

IP MAC

4.2.1 Annotation

VirtualMachineClone

Kube-OVN

Annotation

```
kind: VirtualMachineClone
apiVersion: "clone.kubevirt.io/v1beta1"
metadata:
  name: testclone
spec:
  source:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-source
  target:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-target
  template:
    annotationFilters:
      - "ovn.kubernetes.io/*"
```

4.2.2

Note

patches KubeVirt 1.6

IP

```
kind: VirtualMachineClone
apiVersion: "clone.kubevirt.io/v1beta1"
metadata:
  name: testclone
spec:
  source:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-source
  target:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-target
  patches:
    - '{"op": "replace", "path": "/spec/template/metadata/annotations/ovn.kubernetes.io~1ip_address", "value": "10.16.0.15"}'
```

```
kind: VirtualMachineClone
apiVersion: "clone.kubevirt.io/v1beta1"
metadata:
  name: testclone
spec:
  source:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-source
  target:
    apiGroup: kubevirt.io
    kind: VirtualMachine
    name: vm-target
  patches:
    - '{"op": "remove", "path": "/spec/template/metadata/annotations/ovn.kubernetes.io~1ip_address"}'
```

Annotation

KubeVirt Clone API

PDF

Slack

Support

 2025 9 10

 2025 8 13

 GitHub 

4.2.3

4.3

KubeVirt	Bridge	DHCP	virt-launcher	KubeVirt	IPv4	DHCP	Bridge	KubeVirt VM	RA	IPv6	Kube-
OVN	DHCP RA	KubeVirt	DHCP/RA								
KubeVirt 1.4.0		Network Binding Plugin	Bridge	managedTap		KubeVirt	DHCP	managedTap		Kube-OVN	
DHCP/RA	VM										

4.3.1 DHCP

Kube-OVN	Subnet	DHCP	IPv6 RA	YAML
----------	--------	------	---------	------

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: dual-stack-subnet
spec:
  cidrBlock: "10.244.0.0/16,fd00:10:244::/64"
  enableDHCP: true
  enableIPv6RA: true
```

4.3.2 managedTap

KubeVirt	managedTap	Network Binding Plugin:
----------	------------	-------------------------

```
# kubectl patch kubevirt -n kubevirt kubevirt --type=json -p=\
' [{"op": "add", "path": "/spec/configuration/network", "value": {
  "binding": {
    "managedtap": {
      "domainAttachmentType": "managedTap"
    }
  }
} ]'
}}
```

4.3.3 managedTap

```
apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: dual-stack-vm
  namespace: default
spec:
  running: false
  template:
    spec:
      domain:
        devices:
          interfaces:
            - name: default
              binding:
                name: managedtap
      networks:
        - name: default
      pod: {}
```

VM DHCP IPv6 RA IPv4/IPv6


PDF

Slack

Support

🕒 2025 9 10

🕒 2025 3 3



4.3.4

4.4

KubeVirt

- KubeVirt Bridge
- KubeVirt
- IP
-

Kube-OVN

0.5

TCP

4.4.1

VM Spec `kubevirt.io/allow-pod-bridge-network-live-migration: "true"` annotation Kube-OVN

1. VM

```
kubectl apply -f - <<EOF
apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: testvm
spec:
  runStrategy: Always
  template:
    metadata:
      labels:
        kubevirt.io/size: small
        kubevirt.io/domain: testvm
      annotations:
        kubevirt.io/allow-pod-bridge-network-live-migration: "true"
    spec:
      domain:
        devices:
          disks:
            - name: containerdisk
              disk:
                bus: virtio
            - name: cloudinitdisk
              disk:
                bus: virtio
          interfaces:
            - name: default
              bridge: {}
          resources:
            requests:
              memory: 64M
        networks:
          - name: default
            pod: {}
        volumes:
          - name: containerdisk
            containerDisk:
              image: quay.io/kubevirt/cirros-container-disk-demo
          - name: cloudinitdisk
            cloudInitNoCloud:
              userDataBase64: SGkuXG4=
EOF
```

1. SSH

```
# password: gocubsgo
virtctl ssh cirros@testvm
ping 8.8.8.8
```

1.

```
virtctl migrate testvm
```


VM SSH ping

4.4.2


Kube-OVN [Live migration - Reducing downtime with multichassis port bindings](#)

IP


1. KubeVirt Pod

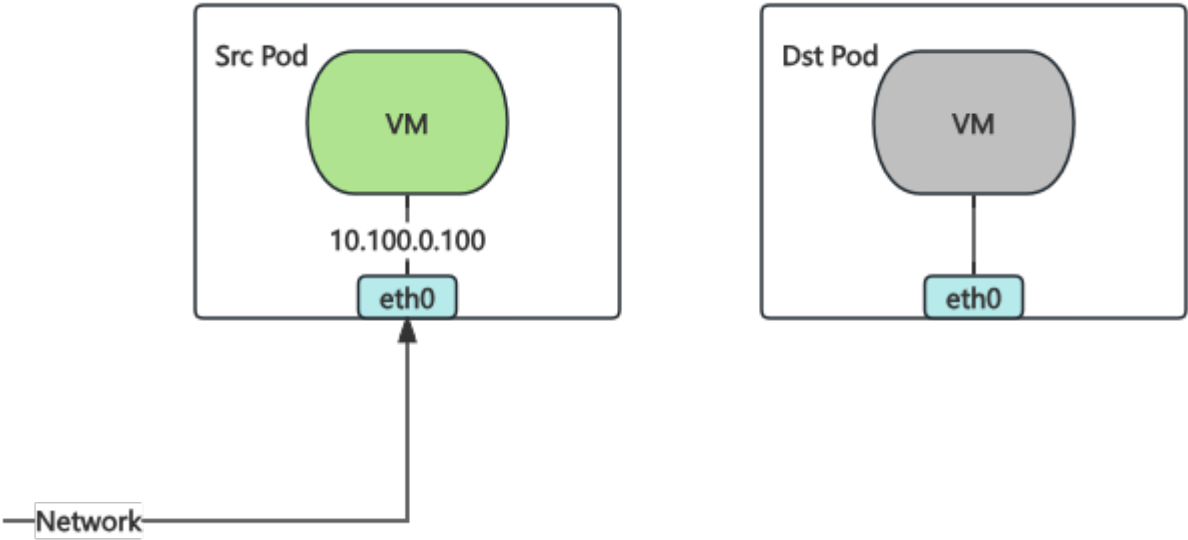


1. Kube-OVN Pod Pod Pod

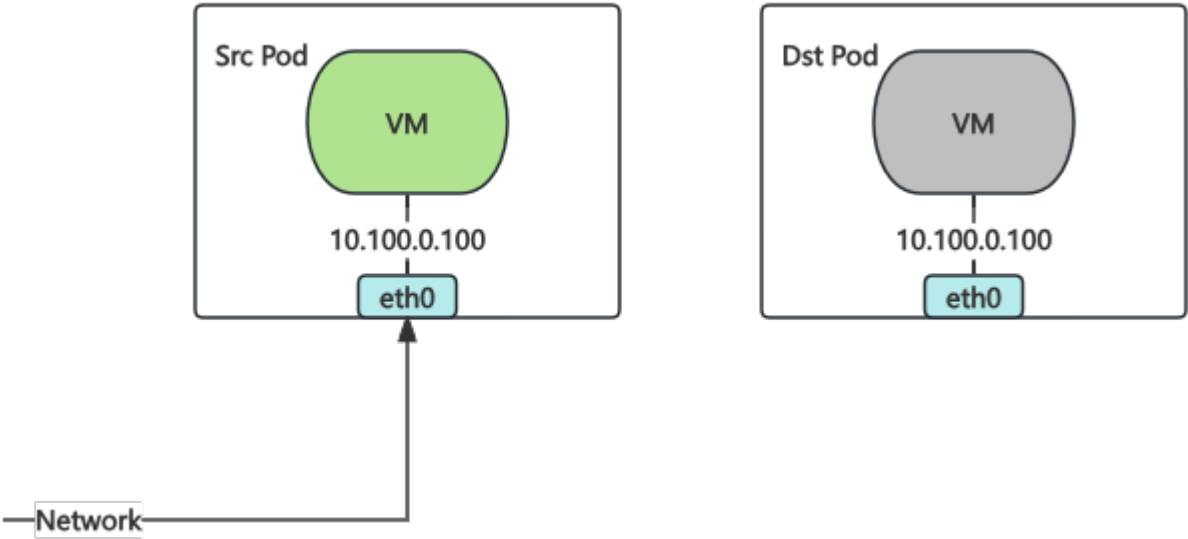


1. Kube-OVN Pod Pod Pod Pod Pod

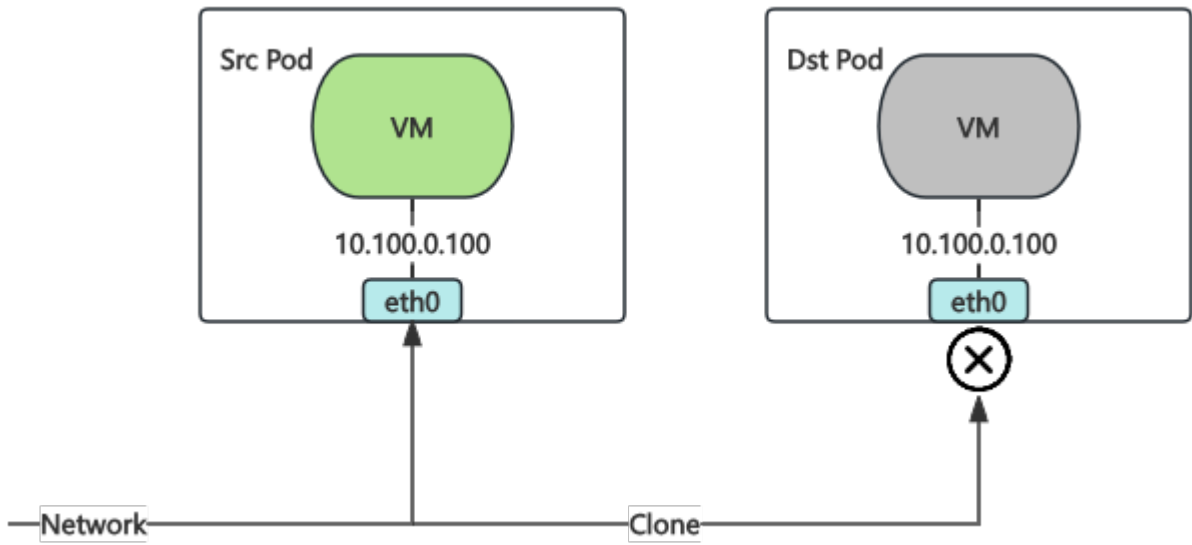


1. KubeVirt VM

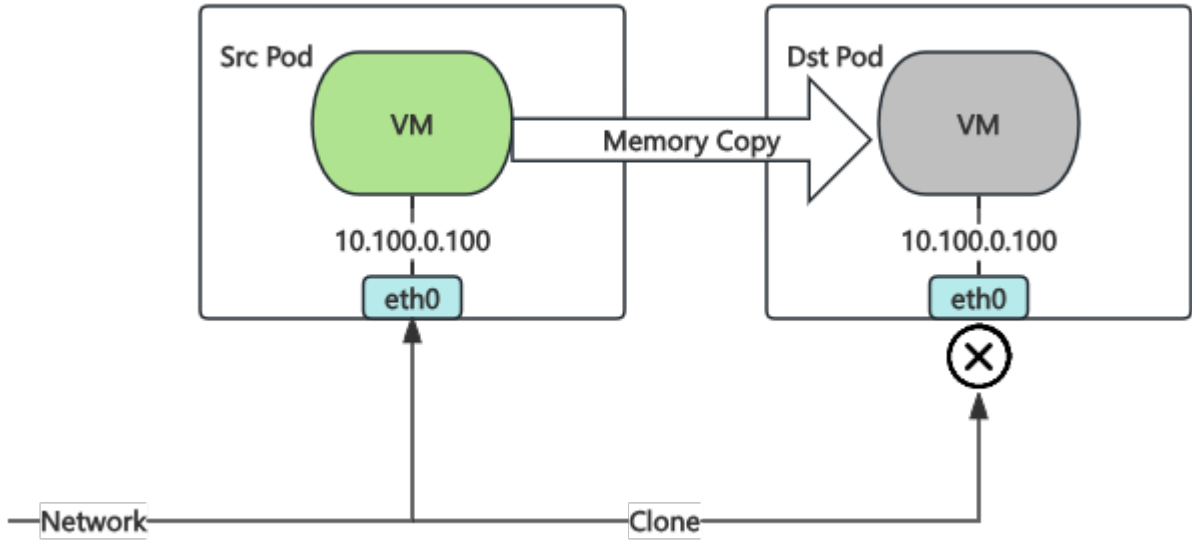


1. KubeVirt Pod Pod

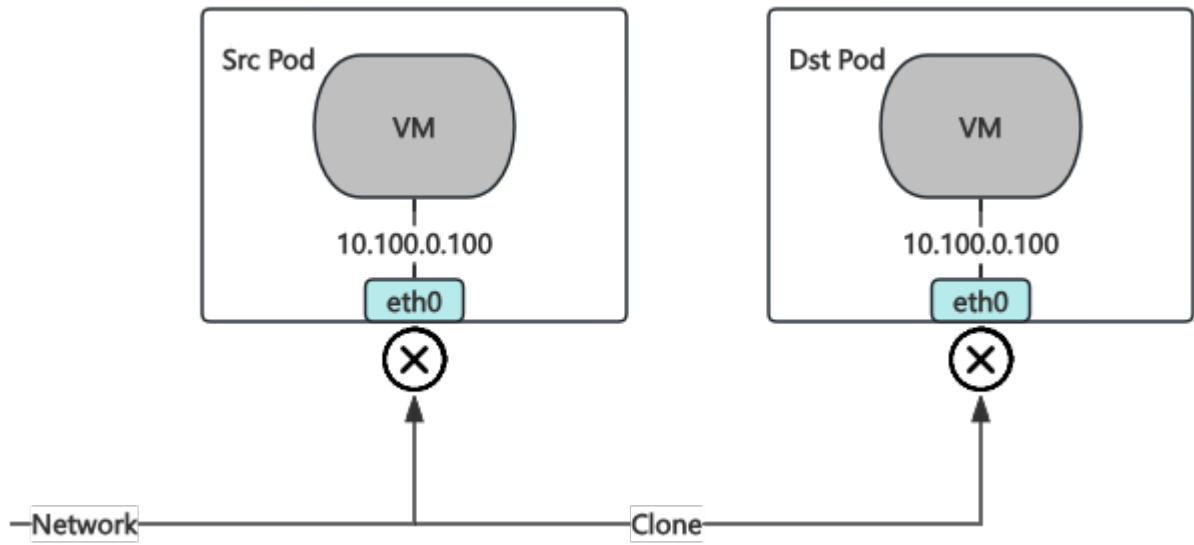

1. KubeVirt Pod libvirt RARP Pod Pod

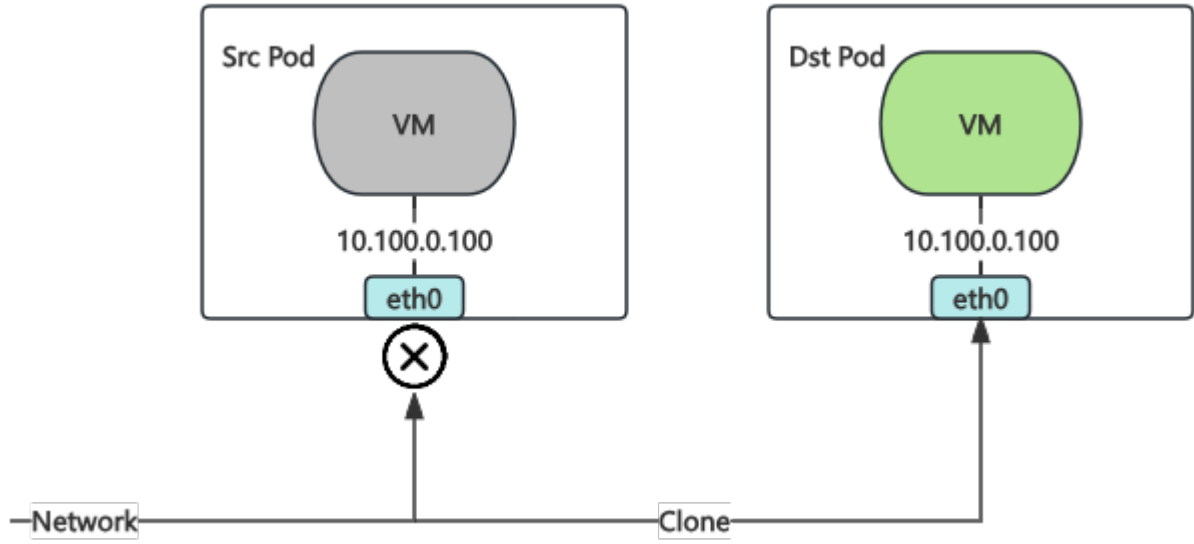

1. KubeVirt Pod Kube-OVN Watch Migration CR

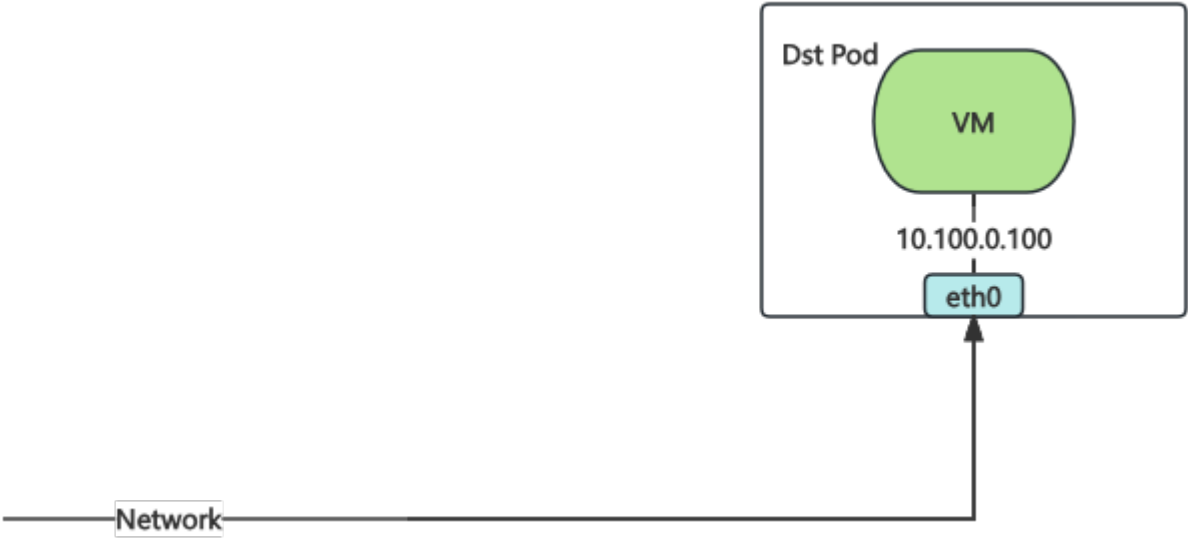

5 6 libvirt RARP 0.5 TCP

PDF

Slack

Support

🕒 2025 9 10

🕒 2025 3 3

GitHub

4.4.3

4.5

Kube-OVN

Multus Dynamic Networks Controller

KubeVirt

v1.4.0

VM

4.5.1

Thick

Multus

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/multus-cni/refs/heads/master/deployments/multus-daemonset-thick.yaml
```

Multus Dynamic Networks Controller

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/multus-dynamic-networks-controller/refs/heads/main/manifests/dynamic-networks-controller.yaml
```

4.5.2

NetworkAttachmentDefinition

provider

ovn

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: attachnet
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "kube-ovn",
    "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
    "provider": "attachnet.default.ovn"
  }'
```

- spec.config.type: kube-ovn CNI Kube-OVN
- server_socket: Kube-OVN socket /run/openvswitch/kube-ovn-daemon.sock
- provider: NetworkAttachmentDefinition <name>.<namespace>.ovn , Kube-OVN Subnet ovn

Kube-OVN Subnet

Kube-OVN

provider

NetworkAttachmentDefinition

<name>.<namespace>.ovn

ovn

Kube-OVN

Subnet

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: attachnet
spec:
  protocol: IPv4
  provider: attachnet.default.ovn
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  excludeIps:
    - 172.17.0.0..172.17.0.10
```

4.5.3 VM

yaml

VM

```
apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: vm-fedora
spec:
  runStrategy: Always
  template:
    spec:
      domain:
```

```

    devices:
      disks:
        - disk:
            bus: virtio
            name: containerdisk
      interfaces:
        - masquerade: {}
          name: defaultnetwork
      rng: {}
    resources:
      requests:
        memory: 1024M
    networks:
      - name: defaultnetwork
        pod: {}
    terminationGracePeriodSeconds: 0
    volumes:
      - containerDisk:
          image: quay.io/kubevirt/fedora-with-test-tooling-container-disk:devel
          name: containerdisk

```

VM Spec

```

apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: vm-fedora
template:
  spec:
    domain:
      devices:
        interfaces:
          - name: defaultnetwork
            masquerade: {}
          # new interface
          - name: dyniface1
            bridge: {}
        networks:
          - name: defaultnetwork
            pod: {}
          # new network
          - name: dyniface1
        multus:
          networkName: attachnet

```

interface state absent

```

apiVersion: kubevirt.io/v1
kind: VirtualMachine
metadata:
  name: vm-fedora
template:
  spec:
    domain:
      devices:
        interfaces:
          - name: defaultnetwork
            masquerade: {}
          # set the interface state to absent
          - name: dyniface1
            state: absent
            bridge: {}
        networks:
          - name: defaultnetwork
            pod: {}
          - name: dyniface1
        multus:
          networkName: attachnet

```


[PDF](#)

[Slack](#)

[Support](#)

 2025 11 18

 2025 11 18

  GitHub

4.5.4

4.6 DHCP

managedTapDHCP

SR-IOVIP

DPDKKube-OVN

KubeVirtDHCP

DHCPDHCPv6, IPv6RA, DNS

Kube-OVNTFTP

OVNDHCP

PodDHCP

DHCP

KubeVirt

Warning

bridgeKubeVirtDHCPKube-OVNDHCPKube-OVNDHCPKube-OVNbridgemanagedTapmanagedTap

4.6.1 DHCP

DHCP

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: sn-dual
spec:
  cidrBlock: "10.0.0.0/24,240e::a00/120"
  default: false
  disableGatewayCheck: true
  disableInterConnection: false
  excludeIps:
    - 10.0.0.1
    - 240e::a01
  gateway: 10.0.0.1,240e::a01
  gatewayNode: ''
  gatewayType: distributed
  natOutgoing: false
  private: false
  protocol: Dual
  provider: ovn
  vpc: vpc-test
  enableDHCP: true
  dhcpV4Options: "lease_time=3600,router=10.0.0.1,server_id=169.254.0.254,server_mac=00:00:00:2E:2F:B8"
  dhcpV6Options: "server_id=00:00:00:2E:2F:C5"
  enableIPv6RA: true
  ipv6RAConfigs: "address_mode=dhcpv6_stateful,max_interval=30,min_interval=5,send_periodic=true"
```

enableDHCP:DHCP

dhcpV4Options,dhcpV6Options:ovn-nbDHCPDHCP Options"lease_time=3600, router=\$ipv4_gateway,server_id=169.254.0.254, server_mac=\$random_mac"server_id=\$random_mac

enableIPv6RA:DHCPv6

ipv6RAConfigsovn-nbLogical_Router_PortLogical Router Portaddress_mode=dhcpv6_stateful, max_interval=30,min_interval=5, send_periodic=true

4.6.2 Pod DHCP

DHCPKube-OVNPoDPoDHCPPoDHCPDHCPenableDHCP

```
# provider "ovn"
ovn.kubernetes.io/dhcp-v4-options: "lease_time=3600,router=10.0.0.1,dns_server=8.8.8.8"
ovn.kubernetes.io/dhcp-v6-options: "server_id=00:00:00:00:00:01"

# provider "net1.ns1.ovn"
net1.ns1.ovn.kubernetes.io/dhcp-v4-options: "lease_time=7200"
```

key<provider>.kubernetes.io/dhcp-v4-options<provider>.kubernetes.io/dhcp-v6-options<provider>

providerovnMultusprovider<net-attach-def-name>.<namespace>.ovn

Pod DHCPv4

```
apiVersion: v1
kind: Pod
metadata:
  name: dhcp-pod
  annotations:
    ovn.kubernetes.io/dhcp-v4-options: "lease_time=3600,router=10.0.0.1,dns_server=8.8.8.8"
    ovn.kubernetes.io/dhcp-v6-options: "server_id=00:00:00:00:00:01"
spec:
  containers:
    - name: test
      image: docker.io/library/nginx:alpine
```

Multus provider DHCP

```
apiVersion: v1
kind: Pod
metadata:
  name: multi-nic-dhcp-pod
  annotations:
    k8s.v1.cni.cncf.io/networks: '[{"name": "net1", "namespace": "ns1"}]'
    ovn.kubernetes.io/dhcp-v4-options: "lease_time=3600,router=10.0.0.1"
    net1.ns1.ovn.kubernetes.io/dhcp-v4-options: "lease_time=7200,router=10.0.1.1"
spec:
  containers:
    - name: test
      image: docker.io/library/nginx:alpine
```

DHCP

1. Pod <provider>.kubernetes.io/dhcp-v4-options <provider>.kubernetes.io/dhcp-v6-options Pod DHCP
2. Subnet CRD dhcpV4Options dhcpV6Options DHCP
- Pod DHCP Pod DHCP

Note

Pod DHCP DHCP Pod

PDF

Slack

Support


🕒2026 3 30

🕒2022 5 24

GitHub

5. VPC

5.1 VPC

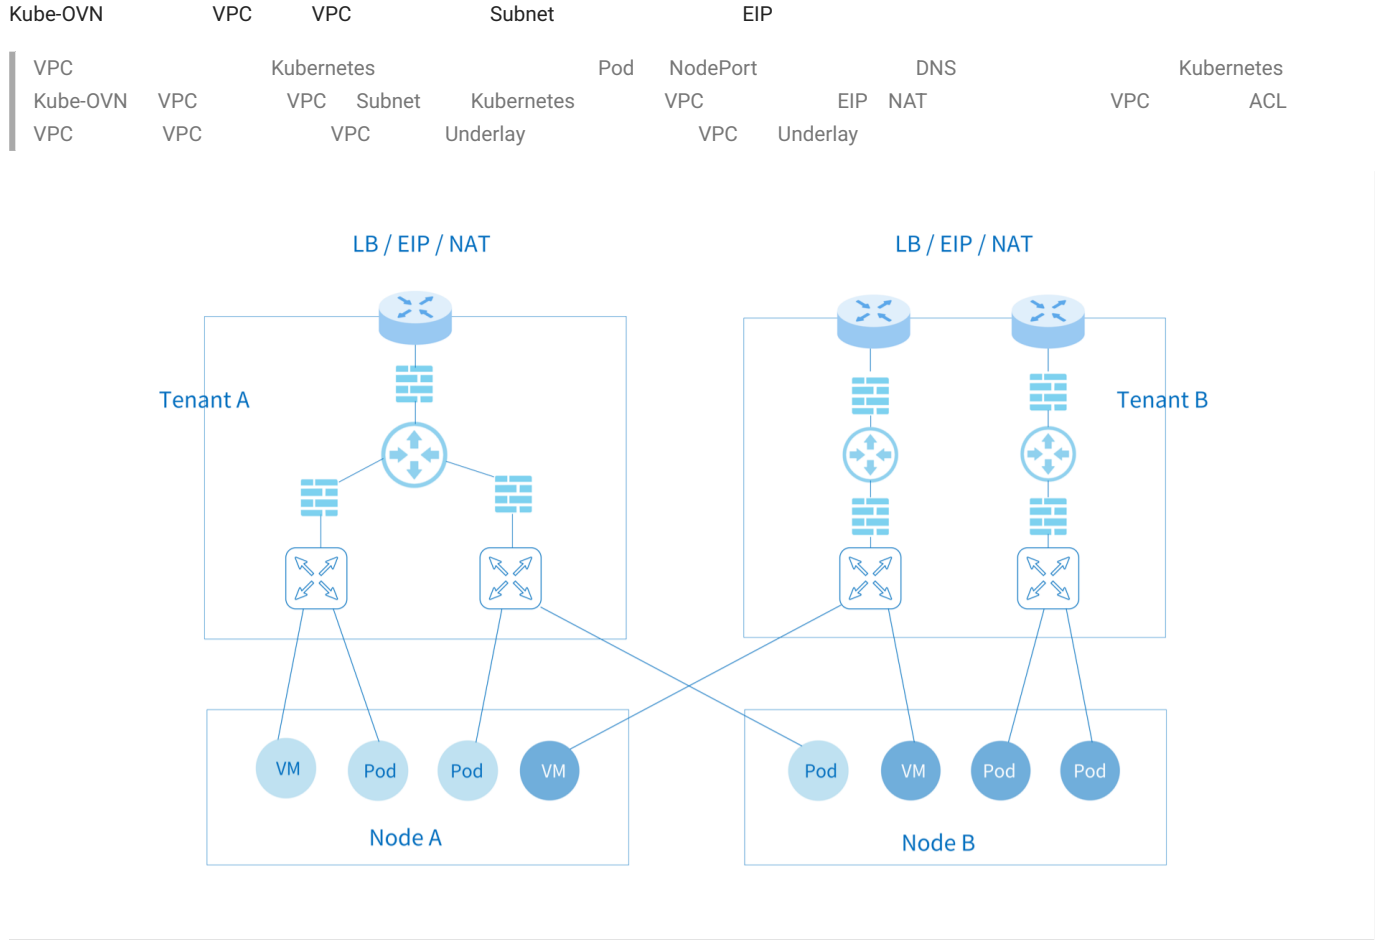

5.1.1



5.1.2 VPC

VPC

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: test-vpc-1
spec:
  namespaces:
    - ns1
---
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: test-vpc-2
spec:
  namespaces:
    - ns2
```

namespaces

Namespace

VPC

VPC CIDR:

```
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: net1
spec:
  vpc: test-vpc-1
  cidrBlock: 10.0.1.0/24
  protocol: IPv4
  namespaces:
    - ns1
---
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: net2
spec:
  vpc: test-vpc-2
  cidrBlock: 10.0.1.0/24
  protocol: IPv4
  namespaces:
    - ns2
```

Namespace Pod:

```
apiVersion: v1
kind: Pod
metadata:
  namespace: ns1
  name: vpc1-pod
spec:
  containers:
    - name: vpc1-pod
      image: docker.io/library/nginx:alpine
---
apiVersion: v1
kind: Pod
metadata:
  namespace: ns2
  name: vpc2-pod
spec:
  containers:
    - name: vpc2-pod
      image: docker.io/library/nginx:alpine
```

Pod CIDR VPC Pod

5.1.3 VPC

VPC	VPC	VPC	IP SNAT	DNAT
VPC	Multus-CNI	multus-cni		

 **Note**

VPC	VPC								
VPC	VPC NAT	OVN	Egress Gateway	VPC NAT	Kube-OVN	VPC NAT	Pod	VPC	
Macvlan	Pod	iptables							
OVN	OVN	NAT	OVN	BFD	OVN	OVN			
Egress Gateway	VPC NAT								

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: ovn-vpc-external-network
spec:
  protocol: IPv4
  provider: ovn-vpc-external-network.kube-system
  cidrBlock: 192.168.0.0/24
  gateway: 192.168.0.1 # IP address of the physical gateway
  excludeIps:
```



```
- 192.168.0.1..192.168.0.10
---
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: ovn-vpc-external-network
  namespace: kube-system
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "macvlan",
    "master": "eth1",
    "mode": "bridge",
    "ipam": {
      "type": "kube-ovn",
      "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
      "provider": "ovn-vpc-external-network.kube-system"
    }
  }'

      'ipam'      VPC      net1      Kube-OVN      IP

---
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: ovn-vpc-external-network
  namespace: kube-system
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "macvlan",
    "master": "eth1",
    "mode": "bridge"
  }'
```

- Subnet Macvlan VPC IP
 - VPC Macvlan NetworkAttachmentDefinition master
 - name
- | Macvlan | L2/L3 | Vlan |
|-------------------------|---------------------------------------|-------------------------------------|
| 1. OpenStack VM | PortSecurity | |
| 2. VMware vSwitch | MAC Address Changes, Forged Transmits | Promiscuous Mode Operation allow |
| 3. Hyper-V | MAC Address Spoofing | |
| 4. AWS GCE | Mac Macvlan | |
| 5. Macvlan Macvlan | | VpcNATGateway Pod Pod |
| 6. Trunk | Macvlan | |

VPC

VPC kube-system ovn-vpc-nat-gw-config ovn-vpc-nat-config ConfigMap image Pod

nodeSelector nodeSelector LoadBalancer Service lb-svc VpcNATGateway Pod VpcNatGateway.spec.selector

```
---
kind: ConfigMap
apiVersion: v1
metadata:
  name: ovn-vpc-nat-config
  namespace: kube-system
data:
  image: 'docker.io/kubeovn/vpc-nat-gateway:v1.17.0'
  nodeSelector: |
    kubernetes.io/hostname: kube-ovn-control-plane
---
kind: ConfigMap
apiVersion: v1
metadata:
  name: ovn-vpc-nat-gw-config
  namespace: kube-system
data:
  enable-vpc-nat-gw: 'true'
```

- image: Pod
- enable-vpc-nat-gw VPC

VPC

```
kind: VpcNatGateway
apiVersion: kubeovn.io/v1
metadata:
  name: gw1
spec:
  vpc: test-vpc-1
  subnet: net1
  lanIp: 10.0.1.254
  selector:
    - "kubernetes.io/hostname: kube-ovn-worker"
    - "kubernetes.io/os: linux"
  externalSubnets:
    - ovn-vpc-external-network
  noDefaultEIP: false
```

- vpc VpcNatGateway VPC
- subnet VPC Subnet VPC Pod lanIp
- lanIp subnet IP VPC Pod IP VPC VpcNatGateway nextHopIP lanIp
- selector VpcNatGateway Pod Kubernetes NodeSelector
- externalSubnets VPC ovn-vpc-external-network
- noDefaultEIP VPC EIP false v1.15 BGP true Underlay
- tolerations VPC
- affinity VPC Pod

VPC-NAT-GW

1. nat gw pod net1 arp ping eip arp ping

EIP

EIP IP VPC DNAT SNAT IP

EIP

```
kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eip-random
spec:
  natGwDp: gw1
```

EIP

```
kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eip-static
spec:
  natGwDp: gw1
  v4ip: 192.168.0.100
```

EIP

```
kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eip-random
spec:
  natGwDp: gw1
  externalSubnet: ovn-vpc-external-network
```

- externalSubnet EIP ovn-vpc-external-network IptablesEIP VpcNatGateway externalSubnets EIP

DNAT

DNATEIPVPCIP

```
kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eipd01
spec:
  natGwDp: gw1

---
kind: IptablesDnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: dnat01
spec:
  eip: eipd01
  externalPort: '8888'
  internalIp: 10.0.1.10
  internalPort: '80'
  protocol: tcp
```

SNAT

SNATVPCPodEIPSNAT

```
---
kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eips01
spec:
  natGwDp: gw1
---
kind: IptablesSnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: snat01
spec:
  eip: eips01
  internalCIDR: 10.0.1.0/24
```

IP

IPVPCIP EIP EIPVPCIP VPCIP SNATEIP

```
---
kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eipf01
spec:
  natGwDp: gw1

---
kind: IptablesFIPRule
apiVersion: kubeovn.io/v1
metadata:
  name: fip01
spec:
  eip: eipf01
  internalIp: 10.0.1.5
```

5.1.4

VCKube-OVN

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: test-vpc-1
spec:
  staticRoutes:
    - cidr: 0.0.0.0/0
      nextHopIP: 10.0.1.254
      policy: policyDst
```

```
- cidr: 172.31.0.0/24
  nextHopIP: 10.0.1.253
  policy: policySrc
  routeTable: "rtb1"
```

- policy: policyDst policySrc
- CIDR
- routeTable:

OVN Logical Router Policy

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: test-vpc-1
spec:
  policyRoutes:
    - action: drop
      match: ip4.src==10.0.1.0/24 && ip4.dst==10.0.1.250
      priority: 11
    - action: reroute
      match: ip4.src==10.0.1.0/24
      nextHopIP: 10.0.1.252
      priority: 10
```

5.1.5

Kubernetes	Service	Kubernetes	Service	IP	VPC	VPC
Kubernetes	Service					

Kube-OVN SwitchLBRule

SwitchLBRule

```
apiVersion: kubeovn.io/v1
kind: SwitchLBRule
metadata:
  name: cjh-slr-nginx
spec:
  vip: 1.1.1.1
  sessionAffinity: ClientIP
  namespace: default
  selector:
    - app: nginx
  ports:
    - name: dns
      port: 8888
      targetPort: 80
      protocol: TCP
```

- vip
- namespace Pod Namespace
- sessionAffinity Service sessionAffinity
- selector Service selector
- ports Service port

# kubectl get slr					
NAME	VIP	PORT(S)	SERVICE	AGE	
vpc-dns-test-cjh2	10.96.0.3	53/UDP, 53/TCP, 9153/TCP	kube-system/slr-vpc-dns-test-cjh2	88m	

5.1.6 vpc-dns

VPC	VPC	VPC	Pod	coredns	VPC	CoreDNS	Service	Kube-OVN	vpc-dns
-----	-----	-----	-----	---------	-----	---------	---------	----------	---------

```

apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: ovn-nad
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "kube-ovn",
    "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
    "provider": "ovn-nad.default.ovn"
  }'

```

vpc-dns ConfigMap

kube-system configmap vpc-dns vpc-dns

```

apiVersion: v1
kind: ConfigMap
metadata:
  name: vpc-dns-config
  namespace: kube-system
data:
  coredns-vip: 10.96.0.3
  enable-vpc-dns: "true"
  nad-name: ovn-nad
  nad-provider: ovn-nad.default.ovn

```

- enable-vpc-dns true false true
- coredns-image dns coredns
- coredns-vip coredns lb vip
- nad-name network-attachment-definitions
- nad-provider provider
- k8s-service-host coredns k8s apiserver ip
- k8s-service-port coredns k8s apiserver port

vpc-dns

```

apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRole
metadata:
  labels:
    kubernetes.io/bootstrapping: rbac-defaults
  name: system:vpc-dns
rules:
- apiGroups:
  - ""
  resources:
  - endpoints
  - services
  - pods
  - namespaces
  verbs:
  - list
  - watch
- apiGroups:
  - discovery.k8s.io
  resources:
  - endpointslices
  verbs:
  - list
  - watch
---
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRoleBinding
metadata:
  annotations:
    rbac.authorization.kubernetes.io/autoupdate: "true"
  labels:
    kubernetes.io/bootstrapping: rbac-defaults
  name: vpc-dns
roleRef:
  apiGroup: rbac.authorization.k8s.io
  kind: ClusterRole
  name: system:vpc-dns
subjects:

```

```
- kind: ServiceAccount
  name: vpc-dns
  namespace: kube-system
---
apiVersion: v1
kind: ServiceAccount
metadata:
  name: vpc-dns
  namespace: kube-system
---
apiVersion: v1
kind: ConfigMap
metadata:
  name: vpc-dns-corefile
  namespace: kube-system
data:
  Corefile: |
    .:53 {
      errors
      health {
        lameduck 5s
      }
      ready
      kubernetes cluster.local in-addr.arpa ip6.arpa {
        pods insecure
        fallthrough in-addr.arpa ip6.arpa
      }
      prometheus :9153
      forward . /etc/resolv.conf {
        prefer_udp
      }
      cache 30
      loop
      reload
      loadbalance
    }
  }
```

vpc-dns

```
kind: VpcDns
apiVersion: kubeovn.io/v1
metadata:
  name: test-cjh1
spec:
  vpc: cjh-vpc-1
  subnet: cjh-subnet-1
```

- vpc dns vpc
- subnet dns

```
[root@hci-dev-mst-1 kubeovn]# kubectl get vpc-dns
NAME      ACTIVE  VPC      SUBNET
test-cjh1 false   cjh-vpc-1 cjh-subnet-1
test-cjh2 true    cjh-vpc-1 cjh-subnet-2
```

- ACTIVE: true dns false
- VPC DNS
- VPC vpc-dns VPC subnet vpc-dns true false
- true vpc-dns false vpc-dns

5.1.7

VPC VPC

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: test-vpc-1
spec:
  namespaces:
```

```
- ns1
defaultSubnet: test
```

• defaultSubnet VPC

Namespace ovn.kubernetes.io/logical_switch ovn.kubernetes.io/logical_switch Pod

VPC Pod livenessProbe readinessProbe

VPC Pod kubelet VPC Pod Kube-OVN TProxy kubelet VPC Pod

DaemonSet kube-ovn-cni --enable-tproxy=true

```
spec:
  template:
    spec:
      containers:
      - args:
        - --enable-tproxy=true
```

- 1. VPC Pod IP
- 2. tcpSocket httpGet

 PDF

 Slack

 Support

 2026 4 28

 2022 5 24

 GitHub



5.1.8

5.2 VPC Egress Gateway

 **Note**

VPC	VPC								
VPC		VPC NAT	OVN	Egress Gateway	VPC NAT	Kube-OVN	VPC NAT	Pod	VPC
Macvlan		Pod	iptables						
OVN	OVN	NAT		OVN	BFD	OVN	OVN		
Egress Gateway	VPC NAT								

VPC Egress Gateway VPC VPC Pod

- ECMP Active-Active
- BFD <1s
- IPv6
- Namespace Pod
- Node Egress Gateway

VPC Egress Gateway BGP EVPN/VXLAN [Egress Gateway BGP/EVPN](#)


 conntrack NAT JSON [VPC Egress Gateway](#)

VPC Egress Gateway


- Macvlan [Underlay](#)
- Gateway Egress IP
- SNAT EIP DNAT
-

5.2.1


Egress Gateway Pod Pod VPC Macvlan Egress Gateway NAT

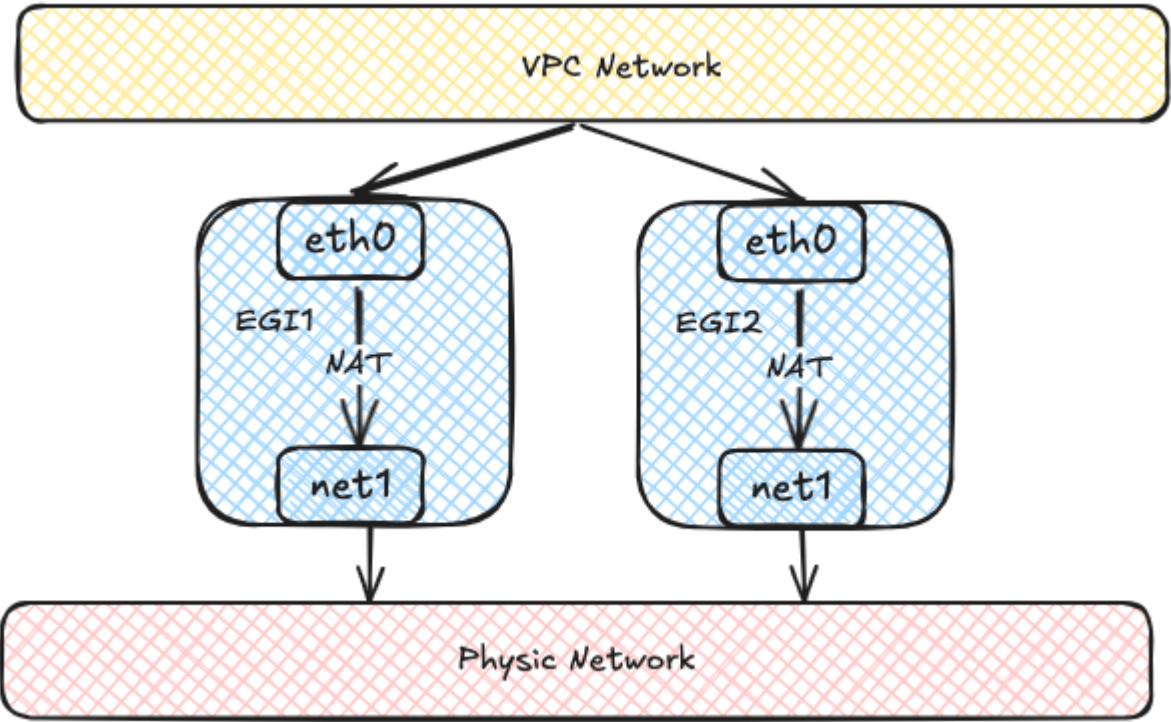

Egress Gateway OVN VPC Pod OVN Egress Gateway Egress Gateway

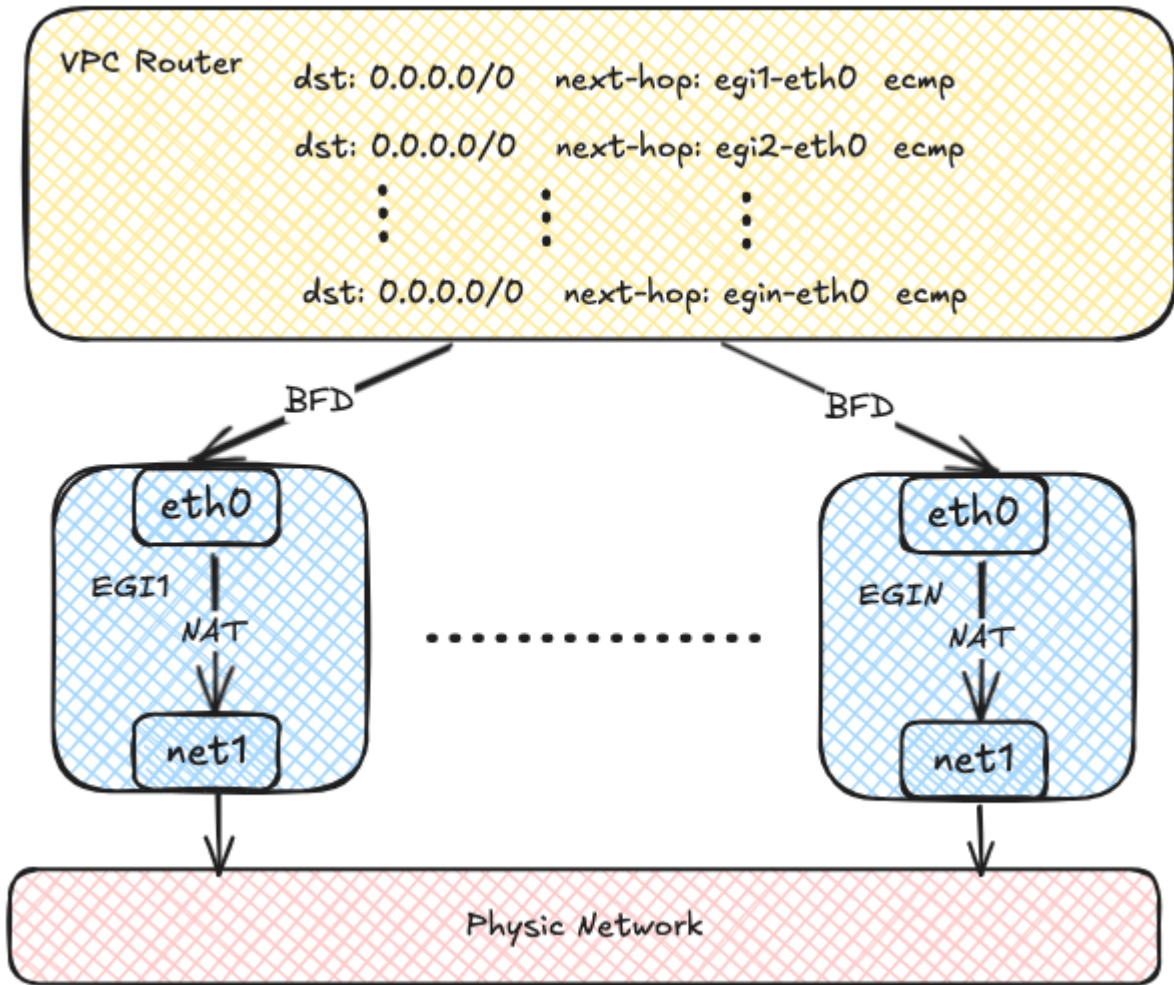

OVN BFD Egress Gateway Egress Gateway OVN

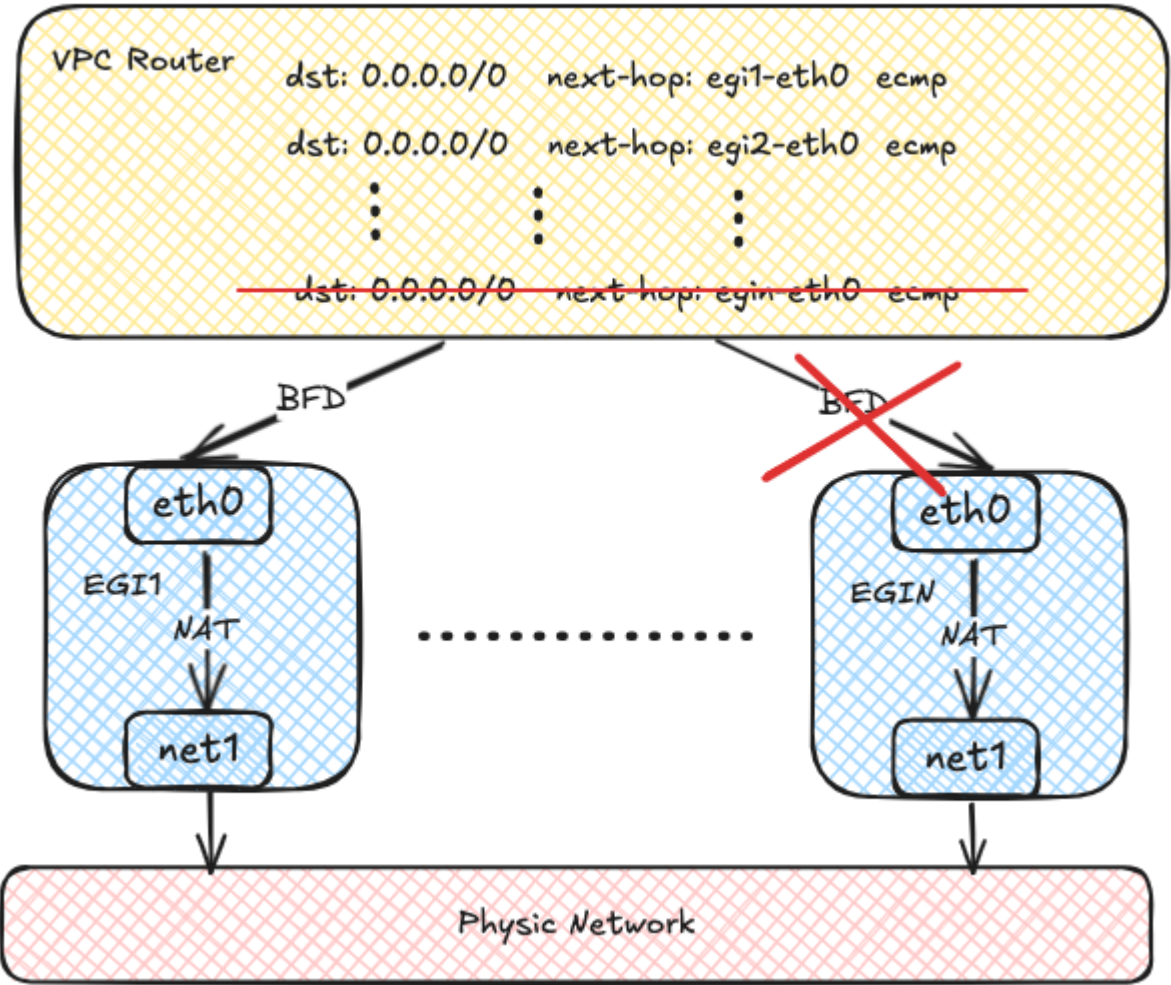

5.2.2

VPC Egress Gateway VPC NAT Gateway [Multus-CNI](#)

VPC Egress Gateway ConfigMap

5.2.3

NetworkAttachmentDefinition

VPC Egress Gateway VPC NetworkAttachmentDefinition `macvlan` Kube-OVN IPAM

```
apiVersion: k8s.cni.cncf.io/v1
kind: NetworkAttachmentDefinition
metadata:
  name: eth1
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "macvlan",
    "master": "eth1",
    "mode": "bridge",
    "ipam": {
      "type": "kube-ovn",
      "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
      "provider": "eth1.default"
    }
  }'
```

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: macvlan1
```

```
spec:
  protocol: IPv4
  provider: eth1.default
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  excludeIps:
    - 172.17.0.0..172.17.0.10
```

CNI NetworkAttachmentDefinition VPC Egress Gateway

VPC Egress Gateway

VPC Egress Gateway

```
apiVersion: kubeovn.io/v1
kind: VpcEgressGateway
metadata:
  name: gateway1
  namespace: default
spec:
  vpc: ovn-cluster
  replicas: 1
  externalSubnet: macvlan1
  policies:
    - snat: true
      subnets:
        - ovn-default
```

default VPC ovn-cluster gateway1 VPC Egress Gateway ovn-cluster ovn-default 10.16.0.0/16 Pod
macvlan1 SNAT

VPC Egress Gateway

```
$ kubectl get veg gateway1
NAME      VPC      REPLICAS  BFD ENABLED  EXTERNAL SUBNET  PHASE      READY  AGE
gateway1  ovn-cluster  1          false        macvlan1         Completed  true   13s
```

```
kubectl get veg gateway1 -o wide
NAME      VPC      REPLICAS  BFD ENABLED  EXTERNAL SUBNET  PHASE      READY  INTERNAL IPS  EXTERNAL IPS  WORKING NODES  AGE
gateway1  ovn-cluster  1          false        macvlan1         Completed  true   ["10.16.0.12"]  ["172.17.0.11"]  ["kube-ovn-worker"]  82s
```

```
$ kubectl get deployment -l ovn.kubernetes.io/vpc-egress-gateway=gateway1
NAME      READY  UP-TO-DATE  AVAILABLE  AGE
gateway1  1/1    1           1          4m40s

$ kubectl get pod -l ovn.kubernetes.io/vpc-egress-gateway=gateway1 -o wide
NAME      READY  STATUS    RESTARTS  AGE  IP        NODE      NOMINATED NODE  READINESS GATES
gateway1-b9f8b4448-76lhm  1/1    Running   0          4m48s  10.16.0.12  kube-ovn-worker  <none>          <none>
```

Pod IP iptables

```
$ kubectl exec gateway1-b9f8b4448-76lhm -c gateway -- ip address show
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: net1@if13: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default qlen 1000
    link/ether 62:d8:71:90:7b:86 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 172.17.0.11/16 brd 172.17.255.255 scope global net1
        valid_lft forever preferred_lft forever
    inet6 fe80::60d8:71ff:fe90:7b86/64 scope link
        valid_lft forever preferred_lft forever
17: eth0@if18: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1400 qdisc noqueue state UP group default
    link/ether 36:7c:6b:c7:82:6b brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 10.16.0.12/16 brd 10.16.255.255 scope global eth0
        valid_lft forever preferred_lft forever
    inet6 fe80::347c:6bff:fec7:826b/64 scope link
        valid_lft forever preferred_lft forever

$ kubectl exec gateway1-b9f8b4448-76lhm -c gateway -- ip route show
default via 172.17.0.1 dev net1
10.16.0.0/16 dev eth0 proto kernel scope link src 10.16.0.12
```

```
172.17.0.0/16 dev net1 proto kernel scope link src 172.17.0.11

$ kubectl exec gateway1-b9f8b4448-76lhm -c gateway -- iptables -t nat -S
-P PREROUTING ACCEPT
-P INPUT ACCEPT
-P OUTPUT ACCEPT
-P POSTROUTING ACCEPT
-A POSTROUTING -s 10.16.0.0/16 -j MASQUERADE --random-fully
```

Gateway Pod

```
$ kubectl exec -ti gateway1-b9f8b4448-76lhm -c gateway -- bash
nobody@gateway1-b9f8b4448-76lhm:/kube-ovn$ tcpdump -i any -nnve icmp and host 172.17.0.1
tcpdump: data link type LINUX_SLL2
tcpdump: listening on any, link-type LINUX_SLL2 (Linux cooked v2), snapshot length 262144 bytes
06:50:58.936528 eth0 In ifindex 17 92:26:b8:9e:f2:1c ethertype IPv4 (0x0800), length 104: (tos 0x0, ttl 63, id 30481, offset 0, flags [DF], proto ICMP (1), length 84)
    10.16.0.9 > 172.17.0.1: ICMP echo request, id 37989, seq 0, length 64
06:50:58.936574 net1 Out ifindex 2 62:d8:71:90:7b:86 ethertype IPv4 (0x0800), length 104: (tos 0x0, ttl 62, id 30481, offset 0, flags [DF], proto ICMP (1), length 84)
    172.17.0.11 > 172.17.0.1: ICMP echo request, id 39449, seq 0, length 64
06:50:58.936613 net1 In ifindex 2 02:42:39:79:7f:08 ethertype IPv4 (0x0800), length 104: (tos 0x0, ttl 64, id 26701, offset 0, flags [none], proto ICMP (1), length 84)
    172.17.0.1 > 172.17.0.11: ICMP echo reply, id 39449, seq 0, length 64
06:50:58.936621 eth0 Out ifindex 17 36:7c:6b:c7:82:6b ethertype IPv4 (0x0800), length 104: (tos 0x0, ttl 63, id 26701, offset 0, flags [none], proto ICMP (1), length 84)
    172.17.0.1 > 10.16.0.9: ICMP echo reply, id 37989, seq 0, length 64
```

OVN Logical Router

```
$ kubectl ko nbctl lr-policy-list ovn-cluster
Routing Policies
31000 ip4.dst == 10.16.0.0/16 allow
31000 ip4.dst == 100.64.0.0/16 allow
30000 ip4.dst == 172.18.0.2 reroute 100.64.0.3
30000 ip4.dst == 172.18.0.3 reroute 100.64.0.2
30000 ip4.dst == 172.18.0.4 reroute 100.64.0.4
29100 ip4.src == 10.16.0.0/16 reroute 10.16.0.12
29000 ip4.src == $ovn.default.kube.ovn.control.plane_ip4 reroute 100.64.0.2
29000 ip4.src == $ovn.default.kube.ovn.worker2_ip4 reroute 100.64.0.4
29000 ip4.src == $ovn.default.kube.ovn.worker_ip4 reroute 100.64.0.3
```

.spec.replicas

```
$ kubectl scale veg gateway1 --replicas=2
vpcgressgateway.kubeovn.io/gateway1 scaled

$ kubectl get veg gateway1
NAME VPC REPLICAS BFD ENABLED EXTERNAL SUBNET PHASE READY AGE
gateway1 ovn-cluster 2 false macvlan Completed true 39m

$ kubectl get pod -l ovn.kubernetes.io/vpc-egress-gateway=gateway1 -o wide
NAME READY STATUS RESTARTS AGE IP NODE NOMINATED NODE READINESS GATES
gateway1-b9f8b4448-76lhm 1/1 Running 0 40m 10.16.0.12 kube-ovn-worker <none> <none>
gateway1-b9f8b4448-zd4dl 1/1 Running 0 64s 10.16.0.13 kube-ovn-worker2 <none> <none>

$ kubectl ko nbctl lr-policy-list ovn-cluster
Routing Policies
31000 ip4.dst == 10.16.0.0/16 allow
31000 ip4.dst == 100.64.0.0/16 allow
30000 ip4.dst == 172.18.0.2 reroute 100.64.0.3
30000 ip4.dst == 172.18.0.3 reroute 100.64.0.2
30000 ip4.dst == 172.18.0.4 reroute 100.64.0.4
29100 ip4.src == 10.16.0.0/16 reroute 10.16.0.12, 10.16.0.13
29000 ip4.src == $ovn.default.kube.ovn.control.plane_ip4 reroute 100.64.0.2
29000 ip4.src == $ovn.default.kube.ovn.worker2_ip4 reroute 100.64.0.4
29000 ip4.src == $ovn.default.kube.ovn.worker_ip4 reroute 100.64.0.3
```

Egress Gateway IP

externalIPs nodeSelector Egress Gateway Pods Egress IP

```
apiVersion: kubeovn.io/v1
kind: VpcEgressGateway
metadata:
  name: gateway1
  namespace: default
spec:
  vpc: ovn-cluster
  replicas: 2
  externalSubnet: macvlan1
  policies:
    - snat: true
      subnets:
        - ovn-default
```

```
externalIPs:
  - 172.17.0.10
  - 172.17.0.11
nodeSelector:
  - matchLabels:
      kubernetes.io/hostname: kube-ovn-worker
```

IP internalIPPool externalIPPool IPPool IPPool internalSubnet externalSubnet

internalIPs externalIPs

```
spec:
  internalIPPool: veg-internal
  externalIPPool: veg-external
```

BFD

BFD VPC BFD LRP VPC BFD Port

```
apiVersion: kubeovn.io/v1
kind: Vpc
metadata:
  name: vpc1
spec:
  bfdPort:
    enabled: true
    ip: 10.255.255.255
---
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: subnet1
spec:
  vpc: vpc1
  protocol: IPv4
  cidrBlock: 192.168.0.0/24
```

BFD Port OVN LR BFD LRP

```
$ kubectl ko nbctl show vpc1
router 0c1d1e8f-4c86-4d96-88b2-c4171c7ff824 (vpc1)
  port bfd@vpc1
    mac: "8e:51:4b:16:3c:90"
    networks: ["10.255.255.255"]
  port vpc1-subnet1
    mac: "de:c9:5c:38:7a:61"
    networks: ["192.168.0.1/24"]
```

VPC Egress Gateway .spec.bfd.enabled true

```
apiVersion: kubeovn.io/v1
kind: VpcEgressGateway
metadata:
  name: gateway2
  namespace: default
spec:
  vpc: vpc1
  replicas: 2
  internalSubnet: subnet1
  externalSubnet: macvlan
  bfd:
    enabled: true
  policies:
    - snat: true
      ipBlocks:
        - 192.168.0.0/24
```

VPC Egress Gateway

```
$ kubectl get veg gateway2 -o wide
NAME      VPC  REPLICAS  BFD  ENABLED  EXTERNAL SUBNET  PHASE  READY  INTERNAL IPS  EXTERNAL IPS  WORKING
gateway2  vpc1  2         true  macvlan  Completed  true   ["192.168.0.2","192.168.0.3"]  ["172.17.0.13","172.17.0.14"]  ["kube-ovn-worker","kube-ovn-worker2"]  58s

$ kubectl get pod -l ovn.kubernetes.io/vpc-egress-gateway=gateway2 -o wide
NAME      READY  STATUS  RESTARTS  AGE  IP      NODE      NOMINATED NODE  READINESS GATES
gateway2-fcc6b8b87-8lgvx  1/1    Running  0         2m18s  192.168.0.3  kube-ovn-worker2  <none>          <none>
gateway2-fcc6b8b87-wmmw6  1/1    Running  0         2m18s  192.168.0.2  kube-ovn-worker   <none>          <none>

$ kubectl ko nbctl lr-policy-list vpc1
Routing Policies
29100                                ip4.src == 192.168.0.0/24                                reroute                                192.168.0.2, 192.168.0.3
```

```
29090 ip4.src == 192.168.0.0/24 drop

$ kubectl ko nbctl list bfd
 _uuid      : 223ede10-9169-4c7d-9524-a546e24bfab5
 detect_mult : 3
 dst_ip      : "192.168.0.2"
 external_ids : {af="4", vendor=kube-ovn, vpc-egress-gateway="default/gateway2"}
 logical_port : "bfd@vpc1"
 min_rx      : 1000
 min_tx      : 1000
 options     : {}
 status      : up

 _uuid      : b050c75e-2462-470b-b89c-7bd38889b758
 detect_mult : 3
 dst_ip      : "192.168.0.3"
 external_ids : {af="4", vendor=kube-ovn, vpc-egress-gateway="default/gateway2"}
 logical_port : "bfd@vpc1"
 min_rx      : 1000
 min_tx      : 1000
 options     : {}
 status      : up
```

Pod BFD

```
$ kubectl exec gateway2-fcc6b8b87-8lgvx -c bfdd -- bfdd-control status
There are 1 sessions:
Session 1
 id=1 local=192.168.0.3 (p) remote=10.255.255.255 state=Up

$ kubectl exec gateway2-fcc6b8b87-wmww6 -c bfdd -- bfdd-control status
There are 1 sessions:
Session 1
 id=1 local=192.168.0.2 (p) remote=10.255.255.255 state=Up
```

VPC BFD PORT

enabled	boolean	false	BFD Port	true
ip	string	-	BFD Port IP IPv6	169.255.255.255 169.255.255.255
nodeSelector	object	-	BFD Port BFD Port	-
			OVN HA Chassis Group Active/Backup Active nodeSelector Kube-OVN	
			kubectl ko nbctl list ha_chassis_group OVN HA Chassis Group	
nodeSelector.matchLabels	dict/map	-		-
nodeSelector.matchExpressions	object array	-		-

VPC EGRESS GATEWAY

Spec

vpc	string	VPC cluster	ovn-	VPC	vpc1
replicas	integer/int32	1			2
prefix	string	-		Deployment	veg-
image	string	-		Deployment	docker.io/kubeovn/kube-
internalSubnet	string	VPC		VPC	subnet1
externalSubnet	string	-			ext1
internalIPs	string array	-		VPC IPv6 IP IP	10.16.0.101 / fd00::11
				<replicas> + 1 Pod	
externalIPs	string array	-		IP IPv6 IP	10.16.0.101 / fd00::11
				<replicas> + 1 Pod	
internalIPPool	string	-		IPPool IPPool internalSubnet internalIPs	veg-internal
externalIPPool	string	-		IPPool IPPool externalSubnet externalIPs	veg-external
bfd	object	-		BFD	-
policies	object array	-		Egress selectors	-
selectors	object array	-		Namespace Selector Pod Selector Egress Pod SNAT/ MASQUERADE policies	-
nodeSelector	object array	-		Deployment/Pod	-
trafficPolicy	string	Cluster		Cluster / Local BFD Local Egress VPC	Local

		Egress Gateway VPC Egress Gateway Egress	
bandwidth	object	-	-
bandwidth.ingress	integer string	-	VPC 1024 / 1Gi
bandwidth.egress	integer string	-	VPC 1024 / 1Gi

MbpsM Mi G Giquantitybit/sMbps100M100Mi1G1Gi10010510001074 Mbps

9223372036854 Mbps

ingressegress

```
spec:
  bandwidth:
    ingress: 1024
    egress: 1Gi
```



0 9223372036854MbpsKube-OVNvpc-egress-gateways.kubeovn.io CRDx-kubernetes-int-or-

string: true

HelmChartcrds/CRDkube-ovn-v2 ChartKUBE_OVN_VERSIONKube-OVNCRD bundle

kubectl apply -f "https://raw.githubusercontent.com/kubeovn/kube-ovn/\${KUBE_OVN_VERSION}/charts/kube-ovn-v2/crds/kube-ovn-crd.yaml"

quantityMbps

BFD

enabled	boolean	false	BFD	true
minRX	integer/int32	1000	BFD minRX ms	500
minTX	integer/int32	1000	BFD minTX ms	500
multiplier	integer/int32	3	BFD multiplier	1

Egress

snat	boolean	false	SNAT/ MASQUERADE	true
ipBlocks	string array	-	Gateway IP IPv6	192.168.0.1 / 192.168.0.0/24
subnets	string array	-	Gateway VPC IPv6	subnet1

Selectors

namespaceSelector	object	-	Namespace	-
			Namespace	
namespaceSelector.matchLabels	dict/map	-		-
namespaceSelector.matchExpressions	object array	-		-
podSelector	object	-	Pod Pod	-
podSelector.matchLabels	dict/map	-		-
podSelector.matchExpressions	object array	-		-

matchLabels	dict/map	-	-
matchExpressions	object array	-	-
matchFields	object array	-	-

Status

ready	boolean	Gateway	true
phase	string	Gateway	Pending / Processing / Completed
internalIPs	string array	VPC IP	-
externalIPs	string array	IP	-
workload	object		-
workload.apiVersion	string	API	apps/v1
workload.kind	string		Deployment
workload.name	string		gateway1
workload.nodes	string array		-
conditions	object array	-	-

 PDF

 Slack

 Support

🕒2026 8 21

🕒2024 12 12

 GitHub



5.2.4

5.3 VPC Egress Gateway

VPC Egress Gateway Pod sidecar sidecar conntrack NAT NAT

5.3.1

- observer [restartable init container](#) Kubernetes 1.29 [SidecarContainers](#) Deployment dry-run API Server
 restartable init observer [ObservabilityConfigured=False](#)
- [spec.observability](#) [vpc-egress-gateways.kubeovn.io](#) CRD Helm CRD CRD Kube-OVN CRD
- conntrack Pod [NET_ADMIN](#) observer binary [CAP_NET_ADMIN](#) file capability security context [NET_ADMIN](#)
 capability bounding set [allowPrivilegeEscalation](#) file capability root launcher [exec](#) observer UID GID 65534
 capability
- Prometheus Operator ServiceMonitor CRD

5.3.2

JSON

```
apiVersion: kubeovn.io/v1
kind: VpcEgressGateway
metadata:
  name: gateway1
  namespace: default
spec:
  vpc: ovn-cluster
  replicas: 2
  externalSubnet: macvlan1
  policies:
    - snat: true
      subnets:
        - ovn-default
  observability:
    resources:
      requests:
        cpu: 20m
        memory: 64Mi
      limits:
        cpu: 200m
        memory: 256Mi
  interfaceMetrics:
    enabled: true
  conntrack:
    metrics:
      enabled: true
  log:
    enabled: true
    events: [start, end]
    rateLimit:
      recordsPerSecond: 100
      burst: 1000
    filters:
      include: []
      exclude: []
  serviceMonitor:
    labels:
      monitoring: platform
    annotations: {}
```

resources observer request 20m CPU 64Mi limit 200m CPU 256Mi interface-only 20MiB request
 conntrack cache

ConfigMap filter rate limit Pod Deployment Pod

-
-
- [observability.resources](#)
-

ConfigMap	Service	condition	observer	volume		Pod
	/kube-ovn/vpc-egress-gateway-observer	launcher	sleep	infinity	binary	observer
CAP_NET_ADMIN	file capability	conntrack				

5.3.3

observer	TCP	10666	/metrics	/healthz	observer	Prometheus registry	go_*	process_*	promhttp_*
namespace	name	pod	node						
	liveness probe	observer binary	loopback	/healthz	observer	Pod		observer binary	sleep
infinity									

scrape	/proc/net/dev	observer	scrape	Pod	network-status	annotation	Multus
--------	---------------	----------	--------	-----	----------------	------------	--------

kube-ovn_vpc_egress_gateway_interface_rx_bytes_total	interface	type	
kube-ovn_vpc_egress_gateway_interface_tx_bytes_total	interface	type	
kube-ovn_vpc_egress_gateway_interface_rx_packets_total	interface	type	
kube-ovn_vpc_egress_gateway_interface_tx_packets_total	interface	type	
kube-ovn_vpc_egress_gateway_interface_drops_total	interface	type	direction
kube-ovn_vpc_egress_gateway_interface_errors_total	interface	type	direction

type	internal	external	direction	rx	tx
------	----------	----------	-----------	----	----

Conntrack

Conntrack	IP
-----------	----

kube_ovn_vpc_egress_gateway_conntrack_nat_flows_active	address_family	protocol	nat_type	NAT
				conntrack table dump
kube_ovn_vpc_egress_gateway_conntrack_nat_flows_started_total	address_family	protocol	nat_type	observer
				NAT
kube_ovn_vpc_egress_gateway_conntrack_nat_flows_ended_total	address_family	protocol	nat_type	NAT
kube_ovn_vpc_egress_gateway_conntrack_nat_packets_total	address_family	protocol	nat_type	direction
				conntrack accounting
kube_ovn_vpc_egress_gateway_conntrack_nat_bytes_total	address_family	protocol	nat_type	direction
				conntrack accounting

address_family	ipv4	ipv6	protocol	tcp	udp	scpt	icmp	icmpv6	other	nat_type	snat	dnat	snat_dnat
direction	original	reply											

kube_ovn_vpc_egress_gateway_observability_*	conntrack	cache	conntrack
accounting	/metrics		

5.3.4 ServiceMonitor

	publishNotReadyAddresses: true	headless	Service	targetPort	10666	ServiceMonitor
observability.serviceMonitor	label	annotation	ServiceMonitor	selector	label	
ServiceMonitor CRD	ServiceMonitorReady=False	CRD	ServiceMonitor	condition	Ready	condition

5.3.5 JSON

JSON Linesobservability

kubectll logs -n default <gateway-pod> -c observability

v1 schema start end conntrack update

```
{ "schemaVersion": "v1", "timestamp": "2026-08-05T03:40:00Z", "event": "end", "conntrackID": "2471802592", "zone": 0, "namespace": "default", "name": "gateway1", "pod": "gateway1-7c9b8f8db7-r9x8m", "node": "worker-1", "addressFamily": "ipv4", "protocol": "tcp", "protocolNumber": 6, "natType": [ "snat" ], "original": { "sourceIP": "10.16.0.25", "sourcePort": 42136, "destinationIP": "203.0.113.10", "destinationPort": 443 }, "translated": { "sourceIP": "172.17.0.11", "sourcePort": 42136, "destinationIP": "203.0.113.10", "destinationPort": 443 }, "counters": { "originalPackets": 8, "originalBytes": 624, "replyPackets": 7, "replyBytes": 591 } }
```

other	protocolNumber	IP	natType	dnat	snat	conntrack	accounting	counters	observer		
nf_conntrack_acct											
observer	dump	conntrack table	conntrack	NAT	active-flow	cache	start	cache	65,536	netlink	channel
	4,096	consumer			conntrack						
	NAT	Pod	100	1,000	best-effort						

5.3.6 Filter

include	exclude	NAT	tuple	OR	AND	OR	exclude	include	include
	NAT								
		10.16.0.0/16	80 443	TCP	SNAT			192.0.2.0/24	

```
spec:
  observability:
    conntrack:
      log:
        enabled: true
        filters:
          include:
            - protocols: [tcp]
              natTypes: [snat]
              original:
                sourceCIDRs: [10.16.0.0/16]
                destinationPorts:
                  - start: 80
                    end: 443
          exclude:
            - translated:
                destinationCIDRs: [192.0.2.0/24]
```


PDF

Slack

Support

🕒 2026 8 10

🕒 2026 8 10



5.3.7

5.4 Egress Gateway BGP EVPN



BGP EVPN

- L3VPN L2VPN
- FRR Pod
- BGP BFD

5.4.1

VPC Egress Gateway

BGP EVPN/VXLAN

Egress Gateway Pod

FRR Free Range Routing

BGP EVPN

Gateway init

BgpConf EvpnConf

FRR

BGP Egress Gateway

BGP

EVPN init

Pod

Linux VRF bridge VXLAN

L2VPN EVPN

VXLAN

Egress Gateway Pod

Kubernetes

Geneve

BGP

kube-ovn-speaker

Pod/ /Service

5.4.2

BGP/EVPN

VPC Egress Gateway

Multus-CNI

BGP

EVPN

BGP

5.4.3

BgpConf

BgpConf

BGP

```
apiVersion: kubeovn.io/v1
kind: BgpConf
metadata:
  name: bgp-conf-6502
spec:
  localASN: 65002
  peerASN: 65001
  neighbours:
    - 10.0.1.1
  holdTime: 90s
  keepaliveTime: 30s
  connectTime: 10s
  ebgpMultiHop: true
```

AS 65002

AS 65001

BGP

10.0.1.1

EBGP Multi-Hop

EvpnConf

EvpnConf

EVPN

EvpnConf

BgpConf

```
apiVersion: kubeovn.io/v1
kind: EvpnConf
metadata:
  name: evpn-conf-1016
spec:
  vni: 1016
  routeTargets:
    - "65000:1016"
```

VNI 1016 EVPN Route Target 65000:1016

BGP/EVPN VPC Egress Gateway

VPC Egress Gateway NetworkAttachmentDefinition

VpcEgressGateway .spec bgpConf evpnConf

```
apiVersion: kubeovn.io/v1
kind: VpcEgressGateway
metadata:
  name: gateway1
  namespace: default
spec:
  vpc: ovn-cluster
  replicas: 1
  externalIPs:
    - 10.0.1.13
  internalIPs:
    - 10.16.0.13
  externalSubnet: macvlan1
  bgpConf: bgp-conf-6502
  evpnConf: evpn-conf-1016
  policies:
    - snat: false
      subnets:
        - ovn-default
    - snat: false
      ipBlocks:
        - 10.17.0.0/16
```

	BGP	EVPN	VPC Egress Gateway	Gateway Pod	FRR	BGP EVPN	VXLAN	BGP/EVPN
snat	false							

BGP EVPN

BGP EVPN/VXLAN bgpConf evpnConf FRR BGP IPv4 Unicast

```
apiVersion: kubeovn.io/v1
kind: VpcEgressGateway
metadata:
  name: gateway-bgp-only
  namespace: default
spec:
  vpc: ovn-cluster
  replicas: 1
  externalSubnet: macvlan1
  bgpConf: bgp-conf-6502
  policies:
    - snat: true
      subnets:
        - ovn-default
```

5.4.4

BgpConf

localASN	uint32	-	AS	65002
peerASN	uint32	-	AS	65001
routerId	string	Pod IP	BGP Router ID	10.0.1.13
neighbours	string array	-	BGP IP	10.0.1.1
password	string	-	BGP	secret
holdTime	string (duration)	-	BGP Hold	90s
keepaliveTime	string (duration)	-	BGP Keepalive	30s
connectTime	string (duration)	-	BGP	10s
ebgpMultiHop	boolean	false	EBGP Multi-Hop	true

EvpnConf

vni	uint32	-	VXLAN Network Identifier	1016
routeTargets	string array	-	Route Target	65000:1016

VpcEgressGateway

VpcEgressGateway .spec BGP/EVPN VpcEgressGateway Egress Gateway

bgpConf	string	-	BgpConf Egress Gateway BGP	bgp-conf-6502
evpnConf	string	-	EvpnConf	evpn-conf-1016
			bgpConf Egress Gateway EVPN/VXLAN	

 PDF

 Slack

 Support

🕒2026 4 8

🕒2026 4 8



5.4.5

5.5 VPC QoS

Kube-OVN QoSPolicy CRD VPC

5.5.1

QoSPolicy	priority	QoS
-----------	----------	-----

EIP QoS		1	EIP	
NATGW	QoS	2	NATGW	IP
NATGW net1	QoS	3		

- shared=false QoS shared=true
- EIP QoS NATGW QoS

5.5.2 EIP QoS

EIP	1Mbps	1	shared=false	QoSPolicy	EIP	QoSPolicy	QoS
-----	-------	---	--------------	-----------	-----	-----------	-----

QoS Policy

```
apiVersion: kubeovn.io/v1
kind: QoSPolicy
metadata:
  name: qos-eip-example
spec:
  shared: false
  bindingType: EIP
  bandwidthLimitRules:
  - name: eip-ingress
    rateMax: "1" # Mbps
    burstMax: "1" # Mbps
    priority: 1
    direction: ingress
  - name: eip-egress
    rateMax: "1" # Mbps
    burstMax: "1" # Mbps
    priority: 1
    direction: egress
```

IptablesEIP

```
kind: IptablesEIP
apiVersion: kubeovn.io/v1
metadata:
  name: eip-1
spec:
  natGwDp: gw1
  qosPolicy: qos-eip-example
```

```
.spec.qosPolicy
```

5.5.3 QoS EIP

```
label      qos  eip
```

```
# kubectl get eip -l ovn.kubernetes.io/qos=qos-eip-example
```

NAME	IP	MAC	NAT	NATGWDP	READY
eip-1	172.18.11.24	00:00:00:34:41:0B	fip	gw1	true

5.5.4 VPC NATGW net1 QoS

VPC NATGW	net1	10Mbps	3	shared=true	QoSPolicy	QoSPolicy
-----------	------	--------	---	-------------	-----------	-----------

QoSPolicy

```
apiVersion: kubeovn.io/v1
kind: QoSPolicy
metadata:
  name: qos-natgw-example
spec:
  shared: true
  bindingType: NATGW
  bandwidthLimitRules:
  - name: net1-ingress
    interface: net1
    rateMax: "10" # Mbps
    burstMax: "10" # Mbps
    priority: 3
    direction: ingress
  - name: net1-egress
    interface: net1
    rateMax: "10" # Mbps
    burstMax: "10" # Mbps
    priority: 3
    direction: egress
```

VpcNatGateway

```
kind: VpcNatGateway
apiVersion: kubeovn.io/v1
metadata:
  name: gw1
spec:
  vpc: test-vpc-1
  subnet: net1
  lanIp: 10.0.1.254
  qosPolicy: qos-natgw-example
  selector:
  - "kubernetes.io/hostname: kube-ovn-worker"
  - "kubernetes.io/os: linux"
```

`.spec.qosPolicy`

5.5.5 net1 QoS

net1	5Mbps	2	shared=true	QoSPolicy	QoSPolicy
------	-------	---	-------------	-----------	-----------

QoSPolicy

```
apiVersion: kubeovn.io/v1
kind: QoSPolicy
metadata:
  name: qos-natgw-example
spec:
  shared: true
  bindingType: NATGW
  bandwidthLimitRules:
  - name: net1-extip-ingress
    interface: net1
    rateMax: "5" # Mbps
    burstMax: "5" # Mbps
    priority: 2
    direction: ingress
    matchType: ip
    matchValue: src 172.18.11.22/32
  - name: net1-extip-egress
    interface: net1
    rateMax: "5" # Mbps
    burstMax: "5" # Mbps
    priority: 2
    direction: egress
    matchType: ip
    matchValue: dst 172.18.11.23/32
```

VpcNatGateway

```
kind: VpcNatGateway
apiVersion: kubeovn.io/v1
metadata:
  name: gw1
spec:
```

```
vpc: test-vpc-1
subnet: net1
lanIp: 10.0.1.254
qosPolicy: qos-natgw-example
selector:
  - "kubernetes.io/hostname: kube-ovn-worker"
  - "kubernetes.io/os: linux"
```

5.5.6 QoS NATGW

label qos eip

kubectl get vpc-nat-gw -l ovn.kubernetes.io/qos=qos-natgw-example

NAME	VPC	SUBNET	LANIP
gw1	test-vpc-1	net1	10.0.1.254

5.5.7 qos

```
# kubectl get qos -A
NAME          SHARED  BINDINGTYPE
qos-eip-example  false   EIP
qos-natgw-example true     NATGW
```

5.5.8

• QoS QoS QoS EIP NATGW spec.qosPolicy

PDF

Slack

Support

🕒2026 1 29

🕒2023 5 9

GitHub

5.5.9

5.6 VPC

Kubernetes	Service	VPC	Service
1. Service IP	VPC		
2.	IP		
Kube-OVN	1.11	SwitchLBRule CRD	VPC
SwitchLBRule	VPC		

5.6.1 Selector

selectorlabelpod

SwitchLBRule

```
apiVersion: kubeovn.io/v1
kind: SwitchLBRule
metadata:
  name: cjh-slr-nginx
spec:
  vip: 1.1.1.1
  sessionAffinity: ClientIP
  namespace: default
  selector:
    - app: nginx
  ports:
    - name: dns
      port: 8888
      targetPort: 80
      protocol: TCP
```

- selector, sessionAffinity port Kubernetes Service
- vip IP
- namespace selector Pod

Kube-OVN SwitchLBRule Pod Pod VPC L2 LB

5.6.2 Endpoints

endpointsselectorkubevirtvm

SwitchLBRule

```
apiVersion: kubeovn.io/v1
kind: SwitchLBRule
metadata:
  name: cjh-slr-nginx
spec:
  vip: 1.1.1.1
  sessionAffinity: ClientIP
  namespace: default
  endpoints:
    - 192.168.0.101
    - 192.168.0.102
    - 192.168.0.103
  ports:
    - name: dns
      port: 8888
      targetPort: 80
      protocol: TCP
```

- sessionAffinity port Kubernetes Service
- vip IP
- namespace
- endpoints IP

selector endpoints, selector

5.6.3

OVN IPv4

[Health Checks](https://www.ovn.org/support/dist-docs/ovn-nb.5.html)

ovn SwitchLBRule SwitchLBRule VPC subnet vip ip_port_mappings

load_balancer_health_check

- vip subnet subnet SwitchLBRule
- Selector

```
root@server:~# kubectl get po -o wide -n vulpecula
NAME          READY   STATUS    RESTARTS   AGE   IP           NODE   NOMINATED NODE   READINESS GATES
nginx-78d9578975-f4qn4  1/1     Running   3           4d16h  10.16.0.4    worker  <none>           <none>
nginx-78d9578975-t8tm5  1/1     Running   3           4d16h  10.16.0.6    worker  <none>           <none>
```

```
# slr
root@server:~# cat << END > slr.yaml
apiVersion: kubeovn.io/v1
kind: SwitchLBRule
metadata:
  name: nginx
  namespace: vulpecula
spec:
  vip: 1.1.1.1
  sessionAffinity: ClientIP
  namespace: default
  selector:
    - app: nginx
  ports:
    - name: dns
      port: 8888
      targetPort: 80
      protocol: TCP
END
root@server:~# kubectl apply -f slr.yaml
root@server:~# kubectl get slr
NAME          VIP      PORT(S)   SERVICE                     AGE
vulpecula-nginx  1.1.1.1  8888/TCP  default/slr-vulpecula-nginx  3d21h
```

subnet vip

```
# vip
root@server:~# kubectl get vip
NAME          NS      V4IP      MAC              V6IP      PMAC      SUBNET      READY   TYPE
vulpecula-subnet  10.16.0.2  00:00:00:39:95:C1 <nil>      vulpecula-subnet  true
```

Load_Balancer_Health_Check Service_Monitor

```
root@server:~# kubectl ko nbctl list Load_Balancer
 _uuid      : 3cbb6d43-44aa-4028-962f-30d2dba9f0b8
external_ids : {}
health_check : [5bee3f12-6b54-411c-9cc8-c9def8f67356]
ip_port_mappings : {"10.16.0.4"="nginx-78d9578975-f4qn4.default:10.16.0.2", "10.16.0.6"="nginx-78d9578975-t8tm5.default:10.16.0.2"}
name        : cluster-tcp-session-loadbalancer
options     : {affinity_timeout="10800"}
protocol    : tcp
selection_fields : [ip_src]
vips       : {"1.1.1.1:8888"="10.16.0.4:80,10.16.0.6:80"}
```

```
root@server:~# kubectl ko nbctl list Load_Balancer_Health_Check
 _uuid      : 5bee3f12-6b54-411c-9cc8-c9def8f67356
external_ids : {switch_lb_subnet=vulpecula-subnet}
options     : {failure_count="3", interval="5", success_count="3", timeout="20"}
vip        : "1.1.1.1:8888"
```

```
root@server:~# kubectl ko sbctl list Service_Monitor
 _uuid      : 1bddc541-cc49-44ea-9935-a4208f627a91
external_ids : {}
ip          : "10.16.0.4"
logical_port : nginx-78d9578975-f4qn4.default
options     : {failure_count="3", interval="5", success_count="3", timeout="20"}
port       : 80
protocol    : tcp
```

```

src_ip      : "10.16.0.2"
src_mac     : "c6:d4:b8:08:54:e7"
status      : online

_uuid       : 84dd24c5-e1b4-4e97-9daa-13687ed59785
external_ids : {}
ip          : "10.16.0.6"
logical_port : nginx-78d9578975-t8tm5.default
options     : {failure_count="3", interval="5", success_count="3", timeout="20"}
port        : 80
protocol    : tcp
src_ip      : "10.16.0.2"
src_mac     : "c6:d4:b8:08:54:e7"
status      : online

```

vip

```

root@server:~# kubectl exec -it -n vulpecula nginx-78d9578975-t8tm5 -- curl 1.1.1.1:8888
<!DOCTYPE html>
<html>
<head>
<title>Welcome to nginx!</title>
<p><em>Thank you for using nginx.</em></p>
</body>
</html>

```

pod

```

kubectl delete po nginx-78d9578975-f4qn4
kubectl get po -o wide -n vulpecula

```

NAME	READY	STATUS	RESTARTS	AGE	IP	NODE	NOMINATED NODE	READINESS GATES
nginx-78d9578975-lxmvh	1/1	Running	0	31s	10.16.0.8	worker	<none>	<none>
nginx-78d9578975-t8tm5	1/1	Running	3	4d16h	10.16.0.6	worker	<none>	<none>

Load_Balancer_Health_Check Service_Monitor

```

root@server:~# kubectl ko nbctl list Load_Balancer
_uuid       : 3cbb6d43-44aa-4028-962f-30d2dba9f0b8
external_ids : {}
health_check : [5bee3f12-6b54-411c-9cc8-c9def8f67356]
ip_port_mappings : {"10.16.0.4"="nginx-78d9578975-f4qn4.default:10.16.0.2", "10.16.0.6"="nginx-78d9578975-t8tm5.default:10.16.0.2", "10.16.0.8"="nginx-78d9578975-lxmvh.default:10.16.0.2"}
name        : cluster-tcp-session-loadbalancer
options     : {affinity_timeout="10800"}
protocol    : tcp
selection_fields : [ip_src]
vips        : {"1.1.1.1:8888"="10.16.0.6:80,10.16.0.8:80"}

root@server:~# kubectl ko nbctl list Load_Balancer_Health_Check
_uuid       : 5bee3f12-6b54-411c-9cc8-c9def8f67356
external_ids : {switch_lb_subnet=vulpecula-subnet}
options     : {failure_count="3", interval="5", success_count="3", timeout="20"}
vip         : "1.1.1.1:8888"

root@server:~# kubectl ko sbctl list Service_Monitor
_uuid       : 84dd24c5-e1b4-4e97-9daa-13687ed59785
external_ids : {}
ip          : "10.16.0.6"
logical_port : nginx-78d9578975-t8tm5.default
options     : {failure_count="3", interval="5", success_count="3", timeout="20"}
port        : 80
protocol    : tcp
src_ip      : "10.16.0.2"
src_mac     : "c6:d4:b8:08:54:e7"
status      : online

_uuid       : 5917b7b7-a999-49f2-a42d-da81f1eeb28f
external_ids : {}
ip          : "10.16.0.8"
logical_port : nginx-78d9578975-lxmvh.default
options     : {failure_count="3", interval="5", success_count="3", timeout="20"}
port        : 80
protocol    : tcp
src_ip      : "10.16.0.2"
src_mac     : "c6:d4:b8:08:54:e7"
status      : online

```

SwitchLBRule

Load_Balancer_Health_Check

Service_Monitor

vip

```

root@server:~# kubectl delete -f slr.yaml
switchlbrule.kubeovn.io "vulpecula-nginx" deleted
root@server:~# kubectl get vip
No resources found


```

```
root@server:~# kubectl ko sbctl list Service_Monitor
root@server:~#
root@server:~# kubectl ko nbctl list Load_Balancer_Health_Check
root@server:~#
```



 2026 4 28

 2022 12 15



5.6.4

5.7 VPC DNS

VPC	VPC	VPC	VPC	coredns	VPC	Kubernetes	vpc-dns CRD
CRD	coredns	Pod	VPC	VPC	VPC	VPC	
 Note DNSPod VMWebhook/etc/resolv.conf							

5.7.1 vpc-dns

```
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRole
metadata:
  labels:
    kubernetes.io/bootstrapping: rbac-defaults
  name: system:vpc-dns
rules:
- apiGroups:
  - ""
  resources:
  - endpoints
  - services
  - pods
  - namespaces
  verbs:
  - list
  - watch
- apiGroups:
  - discovery.k8s.io
  resources:
  - endpointslices
  verbs:
  - list
  - watch
---
apiVersion: rbac.authorization.k8s.io/v1
kind: ClusterRoleBinding
metadata:
  annotations:
    rbac.authorization.kubernetes.io/autoupdate: "true"
  labels:
    kubernetes.io/bootstrapping: rbac-defaults
  name: vpc-dns
roleRef:
  apiGroup: rbac.authorization.k8s.io
  kind: ClusterRole
  name: system:vpc-dns
subjects:
- kind: ServiceAccount
  name: vpc-dns
  namespace: kube-system
---
apiVersion: v1
kind: ServiceAccount
metadata:
  name: vpc-dns
  namespace: kube-system
---
apiVersion: v1
kind: ConfigMap
metadata:
  name: vpc-dns-corefile
  namespace: kube-system
data:
  Corefile: |
    .:53 {
      errors
      health {
        lameduck 5s
      }
      ready
      kubernetes cluster.local in-addr.arpa ip6.arpa {
        pods insecure
        fallthrough in-addr.arpa ip6.arpa
      }
      prometheus :9153
      forward . /etc/resolv.conf {
        prefer_udp
      }
      cache 30
```

```

    loop
    reload
    loadbalance
  }

```

nat-gw-pod

5.7.2

```

apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: ovn-nad
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "kube-ovn",
    "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
    "provider": "ovn-nad.default.ovn"
  }'

```

5.7.3 vpc-dns Configmap

kube-system configmap vpc-dns vpc-dns

```

apiVersion: v1
kind: ConfigMap
metadata:
  name: vpc-dns-config
  namespace: kube-system
data:
  coredns-vip: 10.96.0.3
  enable-vpc-dns: "true"
  nad-name: ovn-nad
  nad-provider: ovn-nad.default.ovn

```

- enable-vpc-dns true
- coredns-image dns coredns
- coredns-vip coredns lb vip
- nad-name network-attachment-definitions
- nad-provider provider
- k8s-service-host coredns k8s apiserver ip apiserver
- k8s-service-port coredns k8s apiserver port apiserver

5.7.4 vpc-dns

vpc-dns yaml

```

kind: VpcDns
apiVersion: kubeovn.io/v1
metadata:
  name: test-cjh1
spec:
  vpc: cjh-vpc-1
  subnet: cjh-subnet-1
  replicas: 2

```

- vpc dns vpc
- subnet dns
- replicas : vpc dns deployment replicas

```

# kubectl get vpc-dns
NAME      ACTIVE  VPC      SUBNET
test-cjh1 false   cjh-vpc-1  cjh-subnet-1
test-cjh2 true    cjh-vpc-1  cjh-subnet-2

```

ACTIVE : true dns false

VPC DNS

• VPC vpc-dns VPC subnet vpc-dns true false

• true vpc-dns false vpc-dns

5.7.5

vpc-dns Pod label app=vpc-dns vpc-dns Pod

```
# kubectl -n kube-system get pods -l app=vpc-dns
NAME                                READY   STATUS    RESTARTS   AGE
vpc-dns-test-cjh1-7b878d96b4-g5979 1/1     Running   0           28s
vpc-dns-test-cjh1-7b878d96b4-ltmf9 1/1     Running   0           28s
```

slr

```
# kubectl -n kube-system get slr
NAME      VIP      PORT(S)      SERVICE      AGE
vpc-dns-test-cjh1 10.96.0.3 53/UDP, 53/TCP, 9153/TCP kube-system/slr-vpc-dns-test-cjh1 113s
```

VPC Pod dns :

```
nslookup kubernetes.default.svc.cluster.local 10.96.0.3
```

VPC switch lb rule VPC Pod

 PDF

 Slack

 Support

 2026 4 28

 2022 12 26

 GitHub



5.7.6

5.8 SecurityGroup

Kube-OVN Pod

 **Warning**

Kube-OVN

[NetworkPolicy](#) [Network Policy API](#) [Subnet ACL](#) [Security Group](#) [OVN ACL](#) [NetworkPolicy](#) [NetworkPolicy API](#)

5.8.1

```
apiVersion: kubeovn.io/v1
kind: SecurityGroup
metadata:
  name: sg-example
spec:
  allowSameGroupTraffic: true
  egressRules:
    - ipVersion: ipv4
      policy: allow
      priority: 1
      protocol: all
      remoteAddress: 10.16.0.13 # 10.16.0.0/16
      remoteType: address
  ingressRules:
    - ipVersion: ipv4
      policy: deny
      priority: 1
      protocol: icmp
      remoteAddress: 10.16.0.14
      remoteType: address
```

Kube-OVN

Pod `ovn.kubernetes.io/security_groups` annotation

```
ovn.kubernetes.io/security_groups: sg-example
```

Port Security

5.8.2



```
apiVersion: kubeovn.io/v1
kind: SecurityGroup
metadata:
  name: sg-tier0
spec:
  tier: 0
  allowSameGroupTraffic: true
  ingressRules:
    - ipVersion: ipv4
      policy: pass
      priority: 1
      protocol: tcp
      remoteAddress: 10.16.0.0/16
```

```
remoteType: address
- ipVersion: ipv4
  policy: deny
  priority: 2
  protocol: all
  remoteAddress: 0.0.0.0/0
  remoteType: address
---
apiVersion: kubeovn.io/v1
kind: SecurityGroup
metadata:
  name: sg-tier1
spec:
  tier: 1
  allowSameGroupTraffic: true
  ingressRules:
  - ipVersion: ipv4
    policy: allow
    priority: 1
    protocol: tcp
    remoteAddress: 10.16.0.0/16
    remoteType: address
    portRangeMin: 80
    portRangeMax: 443
```

sg-tier0	10.16.0.0/16	TCP	tier 1	sg-tier1	80-443	TCP
----------	--------------	-----	--------	----------	--------	-----

Pod annotation

```
apiVersion: v1
kind: Pod
metadata:
  labels:
    app: web
  annotations:
    ovn.kubernetes.io/security_groups: 'sg-tier0,sg-tier1'
  name: multi-tier-pod
  namespace: default
spec:
  nodeName: kube-ovn-worker
  containers:
  - image: docker.io/library/nginx:alpine
    imagePullPolicy: IfNotPresent
    name: nginx
```

5.8.3

localAddress						
--------------	--	--	--	--	--	--

- localAddress IP CIDR
- sourcePortRangeMin / sourcePortRangeMax 1-65535 TCP UDP

```
apiVersion: kubeovn.io/v1
kind: SecurityGroup
metadata:
  name: sg-local-filter
spec:
  allowSameGroupTraffic: true
  ingressRules:
  - ipVersion: ipv4
    policy: allow
    priority: 1
    protocol: tcp
    remoteAddress: 10.16.0.0/16
    remoteType: address
    portRangeMin: 8080
    portRangeMax: 8080
    localAddress: 10.16.0.100
    sourcePortRangeMin: 1024
    sourcePortRangeMax: 65535
```

10.16.0.0/16	10.16.0.100	8080	TCP	1024-65535
--------------	-------------	------	-----	------------

5.8.4

- ACL OVN ACL ACL

•	priority	1-16384	ACL	ACL	ACL	= 18484	-	ACL
•	tier	0	1	policy: pass	tier 0	tier 1		
•		Kube-OVN	CNI	Pod	Pod	Pod	ContainerCreating	Running

5.8.5

YAML Pod annotation

```
apiVersion: v1
kind: Pod
metadata:
  labels:
    app: static
  annotations:
    ovn.kubernetes.io/security_groups: 'sg-example'
  name: sg-test-pod
  namespace: default
spec:
  nodeName: kube-ovn-worker
  containers:
  - image: docker.io/library/nginx:alpine
    imagePullPolicy: IfNotPresent
    name: qatest
```

```
# kubectl get pod -o wide
```

NAME	READY	STATUS	RESTARTS	AGE	IP	NODE	NOMINATED NODE	READINESS GATES
sg-test-pod	0/1	ContainerCreating	0	5h32m	<none>	kube-ovn-worker	<none>	<none>
test-99fff7f86-52h9r	1/1	Running	0	5h41m	10.16.0.14	kube-ovn-control-plane	<none>	<none>
test-99fff7f86-qcgjw	1/1	Running	0	5h43m	10.16.0.13	kube-ovn-worker	<none>	<none>

kubectl describe pod Pod

```
# kubectl describe pod sg-test-pod
Name: sg-test-pod
Namespace: default
Priority: 0
Node: kube-ovn-worker/172.18.0.2
Start Time: Tue, 28 Feb 2023 10:29:36 +0800
Labels: app=static
Annotations: ovn.kubernetes.io/allocated: true
              ovn.kubernetes.io/cidr: 10.16.0.0/16
              ovn.kubernetes.io/gateway: 10.16.0.1
              ovn.kubernetes.io/ip_address: 10.16.0.15
              ovn.kubernetes.io/logical_router: ovn-cluster
              ovn.kubernetes.io/logical_switch: ovn-default
              ovn.kubernetes.io/mac_address: 00:00:00:FA:17:97
              ovn.kubernetes.io/pod_nic_type: veth-pair
              ovn.kubernetes.io/port_security: true
              ovn.kubernetes.io/routed: true
              ovn.kubernetes.io/security_groups: sg-allow-reject
Status: Pending
IP:
IPs: <none>
.
.
.
Events:
  Type      Reason      Age      From      Message
  ----      -
Warning    FailedCreatePodSandBox    5m3s (x70 over 4h59m) kubelet (combined from similar events): Failed to create pod sandbox: rpc error: code = Unknown desc = failed to setup network for sandbox "40636e0c7f1ade5500fa958486163d74f2e2300051a71522a9afd7ba0538afb6": plugin type="kube-ovn" failed (add): RPC failed; request ip return 500 configure nic failed 10.16.0.15 network not ready after 200 ping 10.16.0.1
```

```
apiVersion: kubeovn.io/v1
kind: SecurityGroup
metadata:
  name: sg-gw-both
spec:
  allowSameGroupTraffic: true
  egressRules:
  - ipVersion: ipv4
    policy: allow
    priority: 2
    protocol: all
    remoteAddress: 10.16.0.13
    remoteType: address
```

```
- ipVersion: ipv4
  policy: allow
  priority: 1
  protocol: all
  remoteAddress: 10.16.0.1
  remoteType: address
ingressRules:
- ipVersion: ipv4
  policy: deny
  priority: 2
  protocol: icmp
  remoteAddress: 10.16.0.14
  remoteType: address
- ipVersion: ipv4
  policy: allow
  priority: 1
  protocol: icmp
  remoteAddress: 10.16.0.1
  remoteType: address
```

yamlPodPod

```
apiVersion: v1
kind: Pod
metadata:
  labels:
    app: static
  annotations:
    ovn.kubernetes.io/security_groups: 'sg-gw-both'
  name: sg-gw-both
  namespace: default
spec:
  nodeName: kube-ovn-worker
  containers:
  - image: docker.io/library/nginx:alpine
    imagePullPolicy: IfNotPresent
    name: qatest
```

Pod

# kubectl get pod -o wide									
NAME	READY	STATUS	RESTARTS	AGE	IP	NODE	NOMINATED	NODE	READINESS GATES
sg-test-pod	0/1	ContainerCreating	0	5h41m	<none>	kube-ovn-worker	<none>		<none>
sg-gw-both	1/1	Running	0	5h37m	10.16.0.19	kube-ovn-worker	<none>		<none>

 PDF

 Slack

 Support

🕒 2026 3 17

🕒 2023 2 28







5.8.6

5.9 OVN EIP FIP SNAT DNAT

 **Note**

VPC	VPC								
VPC	VPC NAT	OVN	Egress Gateway	VPC NAT	Kube-OVN		VPC NAT	Pod	VPC
Macvlan	Pod	iptables							
OVN	OVN	NAT		OVN	BFD	OVN	OVN		
Egress Gateway	VPC NAT								

VPC OVN NAT provider-network vlan (external) subnet VPC EIP/SNAT

5.9.1

- kube-ovn-controller kube-ovn-cni ovn-external-gw-config VPC spec enableExternal
- CRD provider-network vlan subnet VPC spec extraExternalSubnets ovn-eip ovn-dnat ovn-fip ovn-snat CRD

```
graph LR
pod-->subnet-->vpc-->lrp--bind-->gw-chassis-->snat-->lsp-->external-subnet
lrp-.peer-.lsp
```

Pod SNAT Pod Fip

```
graph LR
pod-->subnet-->vpc-->lrp--bind-->local-chassis-->snat-->lsp-->external-subnet

lrp-.peer-.lsp
```

Pod FIP (dnat_and_snat)

CRD iptables nat gw

- ovn eip: ip underlay provider network vlan subnet
- ovn fip dnat snat VPC ip vip
- ovn snat VPC ip snat
- ovn dnat router lb , ip + VPC endpoints

5.9.2 1.

OpenStack Neutron ovn

provider network

VPC EIP/SNAT

vlan

vlan 0

vlan id

```
#
# 1. kube-ovn-controller
- --external-gateway-vlanid=204
- --external-gateway-switch=external204

# 2. kube-ovn-cni :
- --external-gateway-switch=external204
```

```
###          vlan id          underlay
```

- provider network vlan subnet
- VPC enable_eip_snat vlan subnet ip ipam
- VPC enable_eip_snat , pod annotation fip snat
- VPC enable_eip_snat vlan subnet VPC eip snat

1.1 underlay

```
# provider-network vlan subnet
# cat 01-provider-network.yaml

apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
  name: external204
spec:
  defaultInterface: vlan

# cat 02-vlan.yaml

apiVersion: kubeovn.io/v1
kind: Vlan
metadata:
  name: vlan204
spec:
  id: 204
  provider: external204

# cat 03-vlan-subnet.yaml

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: external204
spec:
  protocol: IPv4
  cidrBlock: 10.5.204.0/24
  gateway: 10.5.204.254
  vlan: vlan204
  excludeIps:
    - 10.5.204.1..10.5.204.100
```

1.2 VPC eip_snat

```
# VPC underlay provider subnet
# cat 00-centralized-external-gw-no-ip.yaml

apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-external-gw-config
  namespace: kube-system
data:
  enable-external-gw: "true"
  external-gw-nodes: "pc-node-1,pc-node-2,pc-node-3"
  type: "centralized"
  external-gw-nic: "vlan" # ovs
  external-gw-addr: "10.5.204.254/24" # underlay ip
```

```
logical router port (lrp) ip mac          underlay          lrp          ovn eip
ip          lrp          ovn-eip          lrp          ovn eip
```

1.3 VPC eip snat fip

node

```
# external-gw-nodes
kubectl label nodes pc-node-1 pc-node-2 pc-node-3 ovn.kubernetes.io/external-gw=true

# cat 00-ns.yaml

apiVersion: v1
```

```
kind: Namespace
metadata:
  name: vpc1

# cat 01-vpc-ecmp-enable-external-bfd.yml
```

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc1
spec:
  namespaces:
    - vpc1
  enableExternal: true
  staticRoutes:
    - cidr: 0.0.0.0/0
      nextHopIP: 10.5.204.254
      policy: policyDst
```

```
# VPC      enableExternal      lrp
```

```
# cat 02-subnet.yml
```

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: vpc1-subnet1
spec:
  cidrBlock: 192.168.0.0/24
  default: false
  disableGatewayCheck: false
  disableInterConnection: true
  enableEcmp: true
  gatewayNode: ""
  gatewayType: distributed
  #gatewayType: centralized
  natOutgoing: false
  private: false
  protocol: IPv4
  provider: ovn
  vpc: vpc1
  namespaces:
    - vpc1
```

```
# subnet
```

```
# kubectl ko nbctl show vpc1
```

```
router 87ad06fd-71d5-4ff8-a1f0-54fa3bba1a7f (vpc1)
  port vpc1-vpc1-subnet1
    mac: "00:00:00:ED:8E:C7"
    networks: ["192.168.0.1/24"]
  port vpc1-external204
    mac: "00:00:00:EF:05:C7"
    networks: ["10.5.204.105/24"]
  gateway chassis: [7cedd14f-265b-42e5-ac17-e03e7a1f2342 276baccb-fe9c-4476-b41d-05872a94976d fd9f140c-c45d-43db-a6c0-0d4f8ea298dd]
  nat 21d853b0-f7b4-40bd-9a53-31d2e2745739
    external ip: "10.5.204.115"
    logical ip: "192.168.0.0/24"
    type: "snat"
```

```
# kubectl ko nbctl lr-route-list vpc1
```

```
IPv4 Routes
Route Table <main>:
      0.0.0.0/0      10.5.204.254 dst-ip
# VPC CRD
```

enableExternal

VPC CRD

1.4

1.4.1 UNDERLAY

eip snat fip 1 eip snat fip

```
# provider-network vlan subnet
# cat 01-extra-provider-network.yaml
apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
  name: extra
spec:
  defaultInterface: vlan
# cat 02-extra-vlan.yaml
```

```
apiVersion: kubeovn.io/v1
kind: Vlan
metadata:
  name: vlan0
spec:
  id: 0
  provider: extra
# cat 03-extra-vlan-subnet.yaml
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: extra
spec:
  protocol: IPv4
  cidrBlock: 10.10.204.0/24
  gateway: 10.10.204.254
  vlan: vlan0
  excludeIps:
    - 10.10.204.1..10.10.204.100
```

1.4.2 VPC

```
apiVersion: kubeovn.io/v1
kind: Vpc
metadata:
  name: vpc1
spec:
  namespaces:
    - vpc1
  enableExternal: true # enableExternal VPC external ls
  extraExternalSubnets: # extraExternalSubnets
    - extra

# kubectl ko nbctl show vpc1
router 87ad06fd-71d5-4ff8-a1f0-54fa3bba1a7f (vpc1)
  port vpc1-vpc1-subnet1
    mac: "00:00:00:ED:8E:C7"
    networks: ["192.168.0.1/24"]
  port vpc1-external204
    mac: "00:00:00:EF:05:C7"
    networks: ["10.5.204.105/24"]
  gateway chassis: [7cedd14f-265b-42e5-ac17-e03e7a1f2342 276baccb-fe9c-4476-b41d-05872a94976d fd9f140c-c45d-43db-a6c0-0d4f8ea298dd]
  port vpc1-extra
    mac: "00:00:00:EF:6A:C7"
    networks: ["10.10.204.105/24"]
  gateway chassis: [7cedd14f-265b-42e5-ac17-e03e7a1f2342 276baccb-fe9c-4476-b41d-05872a94976d fd9f140c-c45d-43db-a6c0-0d4f8ea298dd]
```

5.9.3 2. ovn-eip

iptables-eip		ovn-eip		type	
• nat:	ovn dnat fip, snat	nat			
• lrp:	underlay	lrp	ip	dnat snat	
• lsp:	ovn bfd ecmp			ovs internal port	ecmp

```
---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-static
spec:
  externalSubnet: external204
  type: nat

# eip fip
```

externalSubnet	external204
externalSubnet	extra

2.1 ovn-fip pod fip

```
# kubectl get po -o wide -n vpc1 vpc-1-busybox01
NAME READY STATUS RESTARTS AGE IP NODE
vpc-1-busybox01 1/1 Running 0 3d15h 192.168.0.2 pc-node-2

# kubectl get ip vpc-1-busybox01.vpc1
```

```

NAME          V4IP          V6IP          MAC          NODE          SUBNET
vpc-1-busybox01.vpc1  192.168.0.2          00:00:00:0A:DD:27  pc-node-2    vpc1-subnet1

```

```
---
```

```

kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-static
spec:
  externalSubnet: external204
  type: nat

```

```
---
```

```

kind: OvnFip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-static
spec:
  ovnEip: eip-static
  ipName: vpc-1-busybox01.vpc1 # ip crd
  type: "centralized" # centralized distributed

```

```
--
```

```

#          VPC      ip

kind: OvnFip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-static
spec:
  ovnEip: eip-static
  vpc: vpc1
  v4Ip: 192.168.0.2
  type: "centralized" # centralized distributed

```

```

# kubectl get ofip
NAME      VPC      V4EIP          V4IP          READY  IPTYPE  IPNAME
eip-for-vip  vpc1    10.5.204.106  192.168.0.3  true   vip     test-fip-vip
eip-static  vpc1    10.5.204.101  192.168.0.2  true
# kubectl get ofip eip-static
NAME      VPC      V4EIP          V4IP          READY  IPTYPE  IPNAME
eip-static  vpc1    10.5.204.101  192.168.0.2  true   vip     vpc-1-busybox01.vpc1

```

```

[root@pc-node-1 03-cust-vpc]# ping 10.5.204.101
PING 10.5.204.101 (10.5.204.101) 56(84) bytes of data.
64 bytes from 10.5.204.101: icmp_seq=2 ttl=62 time=1.21 ms
64 bytes from 10.5.204.101: icmp_seq=3 ttl=62 time=0.624 ms
64 bytes from 10.5.204.101: icmp_seq=4 ttl=62 time=0.368 ms
^C
--- 10.5.204.101 ping statistics ---
4 packets transmitted, 3 received, 25% packet loss, time 3049ms
rtt min/avg/max/mdev = 0.368/0.734/1.210/0.352 ms
[root@pc-node-1 03-cust-vpc]#

```

```
#          node ping      VPC      pod      ip
```

```

#          ip
# kubectl ko nbctl show vpc1
router 87ad06fd-71d5-4ff8-a1f0-54fa3bba1a7f (vpc1)
  port vpc1-vpc1-subnet1
    mac: "00:00:00:ED:8E:C7"
    networks: ["192.168.0.1/24"]
  port vpc1-external204
    mac: "00:00:00:EF:05:C7"
    networks: ["10.5.204.105/24"]
  gateway chassis: [7cedd14f-265b-42e5-ac17-e03e7a1f2342 276baccb-fe9c-4476-b41d-05872a94976d fd9f140c-c45d-43db-a6c0-0d4f8ea298dd]
  nat 813523e7-c68c-408f-bd8c-cba30cb2e4f4
    external ip: "10.5.204.101"
    logical ip: "192.168.0.2"
    type: "dnat_and_snat"

```

2.2 ovn-fip vip fip

```
vip          kubevirt          vip          keepalived kube-vip
```

```
fip  VPC  vip          vip
```

```

#          vip eip      eip      vip
# cat vip.yaml

apiVersion: kubeovn.io/v1
kind: Vip
metadata:
  name: test-fip-vip
spec:
  subnet: vpc1-subnet1

```

```
# cat 04-fip.yaml

---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-for-vip
spec:
  externalSubnet: external204
  type: nat

---
kind: OvnFip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-for-vip
spec:
  ovnEip: eip-for-vip
  ipType: vip # fip pod ip vip
  ipName: test-fip-vip

---
# VPC ip

kind: OvnFip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-for-vip
spec:
  ovnEip: eip-for-vip
  ipType: vip # fip pod ip vip
  vpc: vpc1
  v4Ip: 192.168.0.3
```

```
# kubectl get ofip
NAME      VPC    V4EIP      V4IP      READY  IPTYPE  IPNAME
eip-for-vip vpc1    10.5.204.106 192.168.0.3 true    vip     test-fip-vip

[root@pc-node-1 fip-vip]# ping 10.5.204.106
PING 10.5.204.106 (10.5.204.106) 56(84) bytes of data.
64 bytes from 10.5.204.106: icmp_seq=1 ttl=62 time=0.694 ms
64 bytes from 10.5.204.106: icmp_seq=2 ttl=62 time=0.436 ms

# node ping

# pod ip

[root@pc-node-1 fip-vip]# kubectl -n vpc1 exec -it vpc1-busybox03 -- bash
[root@vpc1-busybox03 /]#
[root@vpc1-busybox03 /]#
[root@vpc1-busybox03 /]# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
1568: eth0@if1569: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether 00:00:00:56:40:e5 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 192.168.0.5/24 brd 192.168.0.255 scope global eth0
        valid_lft forever preferred_lft forever
    inet 192.168.0.3/24 scope global secondary eth0 # vip
        valid_lft forever preferred_lft forever
    inet6 fe80::200:ff:fe56:40e5/64 scope link
        valid_lft forever preferred_lft forever

[root@vpc1-busybox03 /]# tcpdump -i eth0 host 192.168.0.3 -netvv
tcpdump: listening on eth0, link-type EN10MB (Ethernet), capture size 262144 bytes
00:00:00:ed:8e:c7 > 00:00:00:56:40:e5, ethertype IPv4 (0x0800), length 98: (tos 0x0, ttl 62, id 44830, offset 0, flags [DF], proto ICMP (1), length 84)
    10.5.32.51 > 192.168.0.3: ICMP echo request, id 177, seq 1, length 64
00:00:00:56:40:e5 > 00:00:00:ed:8e:c7, ethertype IPv4 (0x0800), length 98: (tos 0x0, ttl 64, id 43962, offset 0, flags [none], proto ICMP (1), length 84)
    192.168.0.3 > 10.5.32.51: ICMP echo reply, id 177, seq 1, length 64

# pod fip icmp
```

5.9.4.3. ovn-snat

3.1 ovn-snat subnet cidr

iptables-snat

```
# cat 03-subnet-snat.yaml

---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
```



```

name: snat-for-subnet-in-vpc
spec:
  externalSubnet: external204
  type: nat
---
kind: OvnSnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: snat-for-subnet-in-vpc
spec:
  ovnEip: snat-for-subnet-in-vpc
  vpcSubnet: vpc1-subnet1 # eip
---
#           VPC      subnet cidr

kind: OvnSnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: snat-for-subnet-in-vpc
spec:
  ovnEip: snat-for-subnet-in-vpc
  vpc: vpc1
  v4IpCidr: 192.168.0.0/24 #      cidr      ip

```

externalSubnet

extra

3.2 ovn-snat pod ip

iptables-snat

```

# cat 03-pod-snat.yaml
---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: snat-for-pod-vpc-ip
spec:
  externalSubnet: external204
  type: nat
---
kind: OvnSnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: snat01
spec:
  ovnEip: snat-for-pod-vpc-ip
  ipName: vpc-1-busybox02.vpc1 # eip      pod ip
---
#           VPC      ip

kind: OvnSnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: snat-for-subnet-in-vpc
spec:
  ovnEip: snat-for-subnet-in-vpc
  vpc: vpc1
  v4IpCidr: 192.168.0.4

```

externalSubnet

extra

snat

```

# kubectl ko nbctl show vpc1
router 87ad06fd-71d5-4ff8-a1f0-54fa3bba1a7f (vpc1)
  port vpc1-vpc1-subnet1
    mac: "00:00:00:ED:8E:C7"
    networks: ["192.168.0.1/24"]
  port vpc1-external204
    mac: "00:00:00:EF:05:C7"
    networks: ["10.5.204.105/24"]
  gateway chassis: [7cedd14f-265b-42e5-ac17-e03e7a1f2342 276baccb-fe9c-4476-b41d-05872a94976d fd9f140c-c45d-43db-a6c0-0d4f8ea298dd]
  nat 21d853b0-f7b4-40bd-9a53-31d2e2745739
    external ip: "10.5.204.115"
    logical ip: "192.168.0.0/24"
    type: "snat"
  nat da77a11f-c523-439c-b1d1-72c664196a0f
    external ip: "10.5.204.116"
    logical ip: "192.168.0.4"
    type: "snat"

```

```
[root@pc-node-1 03-cust-vpc]# kubectl get po -A -o wide | grep busy
vpc1          vpc-1-busybox01          1/1    Running    0          3d15h    192.168.0.2    pc-node-2    <none>      <none>
vpc1          vpc-1-busybox02          1/1    Running    0          17h      192.168.0.4    pc-node-1    <none>      <none>
vpc1          vpc-1-busybox03          1/1    Running    0          17h      192.168.0.5    pc-node-1    <none>      <none>
vpc1          vpc-1-busybox04          1/1    Running    0          17h      192.168.0.6    pc-node-3    <none>      <none>
vpc1          vpc-1-busybox05          1/1    Running    0          17h      192.168.0.7    pc-node-1    <none>      <none>

# kubectl exec -it -n vpc1          vpc-1-busybox04    bash
kubectl exec [POD] [COMMAND] is DEPRECATED and will be removed in a future version. Use kubectl exec [POD] -- [COMMAND] instead.
[root@vpc-1-busybox04 /]#
[root@vpc-1-busybox04 /]#
[root@vpc-1-busybox04 /]# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
17895: eth0@if17895: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether 00:00:00:76:94:55 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 192.168.0.6/24 brd 192.168.0.255 scope global eth0
        valid_lft forever preferred_lft forever
    inet6 fe80::200:ff:fe76:9455/64 scope link
        valid_lft forever preferred_lft forever
[root@vpc-1-busybox04 /]# ping 223.5.5.5
PING 223.5.5.5 (223.5.5.5) 56(84) bytes of data.
64 bytes from 223.5.5.5: icmp_seq=1 ttl=114 time=22.2 ms
64 bytes from 223.5.5.5: icmp_seq=2 ttl=114 time=21.8 ms

[root@pc-node-1 03-cust-vpc]# kubectl exec -it -n vpc1          vpc-1-busybox02    bash
kubectl exec [POD] [COMMAND] is DEPRECATED and will be removed in a future version. Use kubectl exec [POD] -- [COMMAND] instead.
[root@vpc-1-busybox02 /]#
[root@vpc-1-busybox02 /]#
[root@vpc-1-busybox02 /]#
[root@vpc-1-busybox02 /]# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
1566: eth0@if1567: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP group default
    link/ether 00:00:00:b:e9:d0 brd ff:ff:ff:ff:ff:ff link-netnsid 0
    inet 192.168.0.4/24 brd 192.168.0.255 scope global eth0
        valid_lft forever preferred_lft forever
    inet6 fe80::200:ff:fe0b:e9d0/64 scope link
        valid_lft forever preferred_lft forever
[root@vpc-1-busybox02 /]# ping 223.5.5.5
PING 223.5.5.5 (223.5.5.5) 56(84) bytes of data.
64 bytes from 223.5.5.5: icmp_seq=2 ttl=114 time=22.7 ms
64 bytes from 223.5.5.5: icmp_seq=3 ttl=114 time=22.6 ms
64 bytes from 223.5.5.5: icmp_seq=4 ttl=114 time=22.1 ms
^C
--- 223.5.5.5 ping statistics ---
4 packets transmitted, 3 received, 25% packet loss, time 3064ms
rtt min/avg/max/mdev = 22.126/22.518/22.741/0.278 ms

#          pod          snat
```

5.9.5 4. ovn-dnat

4.1 ovn-dnat pod dnat

```
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: eip-dnat
spec:
  externalSubnet: underlay

---
kind: OvnDnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: eip-dnat
spec:
  ovnEip: eip-dnat
  ipName: vpc-1-busybox01.vpc1 #          pod ip crd
  protocol: tcp
  internalPort: "22"
  externalPort: "22"

---
#          VPC          ip

kind: OvnDnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: eip-dnat
```

```
spec:
  ovnEip: eip-dnat
  protocol: tcp
  internalPort: "22"
  externalPort: "22"
  vpc: vpc1
  v4Ip: 192.168.0.3
```

externalSubnet

extra

OvnDnatRule

IptablesDnatRule

```
# kubect1 get oeip eip-dnat
NAME          V4IP          V6IP          MAC          TYPE          READY
eip-dnat      10.5.49.4     10.5.49.4     00:00:00:4D:CE:49    dnat          true

# kubect1 get ondat
NAME          EIP          EIP-dnat          PROTOCOL          V4EIP          V4IP          INTERNALPORT          EXTERNALPORT          IPNAME          READY
eip-dnat      10.5.49.4     10.5.49.4         tcp               10.5.49.4      192.168.0.3      22                  22                  vpc-1-busbox01.vpc1      true
```

4.2 ovn-dnat vip dn

```
kind: OvnDnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: eip-dnat
spec:
  ipType: vip # dnat pod ip vip
  ovnEip: eip-dnat
  ipName: test-dnat-vip
  protocol: tcp
  internalPort: "22"
  externalPort: "22"

---
# VPC ip

kind: OvnDnatRule
apiVersion: kubeovn.io/v1
metadata:
  name: eip-dnat
spec:
  ipType: vip # dnat pod ip vip
  ovnEip: eip-dnat
  ipName: test-dnat-vip
  protocol: tcp
  internalPort: "22"
  externalPort: "22"
  vpc: vpc1
  v4Ip: 192.168.0.4
```

OvnDnatRule

IptablesDnatRule

```
# kubectl get vip test-dnat-vip
NAME          V4IP          PV4IP          MAC          PMAC          V6IP          PV6IP          SUBNET          READY
test-dnat-vip 192.168.0.4   192.168.0.4   08:00:00:D0:C0:B5  08:00:00:D0:C0:B5  192.168.0.4  192.168.0.4  vpc1-subnet1  true

# kubectl get oeip eip-dnat
NAME          V4IP          V6IP          MAC          TYPE          READY
eip-dnat      10.5.49.4     10.5.49.4     08:00:00:4D:CE:49  dnat          true

# kubectl get odnat eip-dnat
NAME          EIP          PROTOCOL          V4EIP          V4IP          INTERNALPORT          EXTERNALPORT          IPNAME          READY
eip-dnat      eip-dnat     tcp               10.5.49.4     192.168.0.4   22                   22                   test-dnat-vip  true
```



PDF




Slack



Support

🕒 2025 9 30

🕒 2023 3 3



5.9.6

5.10 OVN SNAT ECMP BFD L3 HA

VPC OVN SNAT ECMP

Gateway Node ovnext0

- bfd
- hash

```
graph LR
pod-->vpc-subnet-->vpc-->snat-->ecmp-->external-subnet-->gw-node1-ovnext0--> node1-external-switch
external-subnet-->gw-node2-ovnext0--> node2-external-switch
external-subnet-->gw-node3-ovnext0--> node3-external-switch
```

ovn-eip-fip-snat.md

install.sh

provider-network

vlan

subnet

lsp

ovn-eip

vpc

enable_bfd

bfd

ecmp

5.10.1 1.

1.1 underlay

1.2 vpc eip_snat

1.3 VPC eip snat fip

ovn-eip-fip-snat.md

VPC ecmp bfd

VPC

2

ovn-eip

```
# cat gw-node-eip.yaml
---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: pc-node-1
spec:
  externalSubnet: external204
  type: lsp

---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: pc-node-2
spec:
  externalSubnet: external204
  type: lsp

---
kind: OvnEip
apiVersion: kubeovn.io/v1
metadata:
  name: pc-node-3
spec:
  externalSubnet: external204
  type: lsp
```

vpc ecmp

vpc bfd

enable bfd

lsp ovn eip

bfd

5.10.2.2. vpc ecmp bfd L3 HA

```
# cat 01-vpc-ecmp-enable-external-bfd.yml
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc1
spec:
  namespaces:
    - vpc1
    enableExternal: true
    enableBfd: true # bfd
    #enableBfd: false
```

bfd ecmp

```
# cat 02-subnet.yml
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: vpc1-subnet1
spec:
  cidrBlock: 192.168.0.0/24
  default: false
  disableGatewayCheck: false
  disableInterConnection: true
  enableEcmp: true # ecmp
  gatewayNode: ""
  gatewayType: distributed
  #gatewayType: centralized
  natOutgoing: false
  private: false
  protocol: IPv4
  provider: ovn
  vpc: vpc1
  namespaces:
    - vpc1
```

:

- 1. vpc ecmp ecmp bfd vpc enableBfd subnet enableEcmp ecmp bfd
- 2.
- 3. VPC VPC VPC snat
- 4. vpc subnet enableEcmp gatewayType
- 5. EnableExternal vpc
- 6. EnableExternal EnableBfd

```
# ovn
# vpc
# k get vpc
NAME      ENABLEEXTERNAL  ENABLEBFD  STANDBY  SUBNETS                                NAMESPACES
ovn-cluster true            true       true     ["external1204","join","ovn-default"] ["vpc1"]
vpc1      true            true       true     ["vpc1-subnet1"]

# vpc ENABLEBFD
# vpc

# 1. bfd
# k ko nbctl list bfd
_uuid      : be7df545-2c4c-4751-878f-b3507987f050
detect_mult : 3
dst_ip      : "10.5.204.121"
external_ids : {}
logical_port : vpc1-external1204
min_rx      : 100
min_tx      : 100
options     : {}
status      : up

_uuid      : 684c4489-5b59-4693-8d8c-3beab93f8093
detect_mult : 3
dst_ip      : "10.5.204.109"
external_ids : {}
logical_port : vpc1-external1204
min_rx      : 100
min_tx      : 100
options     : {}
status      : up

_uuid      : f0f62077-2ae9-4e79-b4f8-a446ec6e784c
detect_mult : 3
dst_ip      : "10.5.204.108"
external_ids : {}
logical_port : vpc1-external1204
min_rx      : 100
min_tx      : 100
options     : {}
status      : up

###      status      up

# 2. bfd
# k ko nbctl lr-route-list vpc1
IPv4 Routes
Route Table <main>:
192.168.0.0/24      10.5.204.108 src-ip ecmp ecmp-symmetric-reply bfd
192.168.0.0/24      10.5.204.109 src-ip ecmp ecmp-symmetric-reply bfd
192.168.0.0/24      10.5.204.121 src-ip ecmp ecmp-symmetric-reply bfd

# 3.
```

```
# k ko nbctl find Logical_Router_Static_Route policy=src-ip options=ecmp_symmetric_reply="true"
_uuid      : 3aacb384-d5ee-4b14-aebf-59e8c11717ba
bfd        : 684c4489-5b59-4693-8d8c-3beab93f8093
external_ids : {}
ip_prefix   : "192.168.0.0/24"
nexthop     : "10.5.204.109"
options     : {ecmp_symmetric_reply="true"}
output_port : []
policy      : src-ip
route_table : ""

_uuid      : 18bcc585-bc05-430b-925b-ef673c8e1aef
bfd        : f0f62077-2ae9-4e79-b4f8-a446ec6e784c
external_ids : {}
ip_prefix   : "192.168.0.0/24"
nexthop     : "10.5.204.108"
options     : {ecmp_symmetric_reply="true"}
output_port : []
policy      : src-ip
route_table : ""

_uuid      : 7d0a4e6b-cde0-4110-8176-fbaf19738498
bfd        : be7df545-2c4c-4751-878f-b3507987f050
external_ids : {}
ip_prefix   : "192.168.0.0/24"
nexthop     : "10.5.204.121"
options     : {ecmp_symmetric_reply="true"}
output_port : []
policy      : src-ip
route_table : ""
```

```
#
[root@pc-node-1 ~]# ip netns exec ovnext ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
1541: ovnext0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1400 qdisc noqueue state UNKNOWN group default qlen 1000
    link/ether 00:00:00:ab:bd:87 brd ff:ff:ff:ff:ff:ff
    inet 10.5.204.108/24 brd 10.5.204.255 scope global ovnext0
        valid_lft forever preferred_lft forever
    inet6 fe80::200:ff:feab:bd87/64 scope link
        valid_lft forever preferred_lft forever
[root@pc-node-1 ~]#
[root@pc-node-1 ~]# ip netns exec ovnext route -n
Kernel IP routing table
Destination Gateway Genmask Flags Metric Ref Use Iface
0.0.0.0 10.5.204.254 0.0.0.0 UG 0 0 0 ovnext0
10.5.204.0 0.0.0.0 255.255.255.0 U 0 0 0 ovnext0

## internal port unerlay pod ns ns
[root@pc-node-1 ~]# ip netns exec ovnext bfd-control status
There are 1 sessions:
Session 1
id=1 local=10.5.204.108 (p) remote=10.5.204.122 state=Up

## lrp bfd lrp ecmp
[root@pc-node-1 ~]# ip netns exec ovnext ping -c1 223.5.5.5
PING 223.5.5.5 (223.5.5.5) 56(84) bytes of data.
64 bytes from 223.5.5.5: icmp_seq=1 ttl=115 time=21.6 ms

#
```

ovnext ns

```
[root@pc-node-3 ~]# ip netns exec ovnext bash
[root@pc-node-3 ~]# tcpdump -i ovnext0 host 223.5.5.5 -netvv
dropped privs to tcpdump
tcpdump: listening on ovnext0, link-type EN10MB (Ethernet), capture size 262144 bytes
00:00:00:2d:f8:ce > 00:00:00:fd:b2:a4, ethertype IPv4 (0x0800), length 98: (tos 0x0, ttl 63, id 57978, offset 0, flags [DF], proto ICMP (1), length 84)
    10.5.204.102 > 223.5.5.5: ICMP echo request, id 22, seq 71, length 64
00:00:00:fd:b2:a4 > dc:ef:80:5a:44:1a, ethertype IPv4 (0x0800), length 98: (tos 0x0, ttl 62, id 57978, offset 0, flags [DF], proto ICMP (1), length 84)
    10.5.204.102 > 223.5.5.5: ICMP echo request, id 22, seq 71, length 64
^C
2 packets captured
2 packets received by filter
0 packets dropped by kernel
[root@pc-node-3 ~]#

# down pod
# 3
```

5.10.3.3. bfd

vpc enable_eip_snat

```
# cat 01-vpc-ecmp-enable-external-bfd.yml
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc2
spec:
  namespaces:
  - vpc2
  enableExternal: true
  #enableBfd: true
  enableBfd: false

##  bfd

# k ko nbctl lr-route-list vpc2
IPv4 Routes
Route Table <main>:
      0.0.0.0/0          10.5.204.254 dst-ip

#
# nbctl list bfd      lrp      bfd
# ovnext ns      bfd
#      vpc subnet      ping      ( )
#      ( )
```

 PDF

 Slack

 Support

 2026 7 3

 2023 3 3

 GitHub





5.10.4

5.11 VPC

VPC	VPC	VPC	NAT
-----	-----	-----	-----

5.11.1

1.	VPC	
2.	VPC	CIDR
3.	VPC	VPC

5.11.2

VPC	VPC	Subnet	Subnet	CIDR
-----	-----	--------	--------	------

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc-1
spec: {}
---
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: net1
spec:
  vpc: vpc-1
  cidrBlock: 10.0.0.0/16
---
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc-2
spec: {}
---
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: net2
spec:
  vpc: vpc-2
  cidrBlock: 172.31.0.0/16
```

VPC	vpcPeerings
-----	-------------

```
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc-1
spec:
  vpcPeerings:
    - remoteVpc: vpc-2
      localConnectIP: 169.254.0.1/30
  staticRoutes:
    - cidr: 172.31.0.0/16
      nextHopIP: 169.254.0.2
      policy: policyDst
---
kind: Vpc
apiVersion: kubeovn.io/v1
metadata:
  name: vpc-2
spec:
  vpcPeerings:
    - remoteVpc: vpc-1
      localConnectIP: 169.254.0.2/30
  staticRoutes:
    - cidr: 10.0.0.0/16
      nextHopIP: 169.254.0.1
      policy: policyDst
```

• remoteVpc:	VPC			
• localConnectIP:	IP	CIDR	IP	CIDR
• cidr	Subnet	CIDR		
• nextHopIP	VPC	localConnectIP		

Subnet Pod

```
apiVersion: v1
kind: Pod
metadata:
  annotations:
    ovn.kubernetes.io/logical_switch: net1
  name: vpc-1-pod
spec:
  containers:
    - name: vpc-1-pod
      image: docker.io/library/nginx:alpine
---
apiVersion: v1
kind: Pod
metadata:
  annotations:
    ovn.kubernetes.io/logical_switch: net2
  name: vpc-2-pod
spec:
  containers:
    - name: vpc-2-pod
      image: docker.io/library/nginx:alpine
```

```
# kubectl exec -it vpc-1-pod -- ping $(kubectl get pod vpc-2-pod -o jsonpath='{.status.podIP}')
PING 172.31.0.2 (172.31.0.2): 56 data bytes
64 bytes from 172.31.0.2: seq=0 ttl=62 time=0.655 ms
64 bytes from 172.31.0.2: seq=1 ttl=62 time=0.086 ms
64 bytes from 172.31.0.2: seq=2 ttl=62 time=0.098 ms
^C
--- 172.31.0.2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.086/0.279/0.655 ms
# kubectl exec -it vpc-2-pod -- ping $(kubectl get pod vpc-1-pod -o jsonpath='{.status.podIP}')
PING 10.0.0.2 (10.0.0.2): 56 data bytes
64 bytes from 10.0.0.2: seq=0 ttl=62 time=0.594 ms
64 bytes from 10.0.0.2: seq=1 ttl=62 time=0.093 ms
64 bytes from 10.0.0.2: seq=2 ttl=62 time=0.088 ms
^C
--- 10.0.0.2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.088/0.258/0.594 ms
```



PDF




Slack



Support

🕒 2025 7 2

🕒 2022 5 24



5.11.3

6.

6.1 kubectl

Kube-OVN kubectl OVN OVN OVS tcpdump

6.1.1

Kube-OVN kubectl

kubectl-ko

wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/dist/images/kubectl-ko

\$PATH

mv kubectl-ko /usr/local/bin/kubectl-ko

chmod +x /usr/local/bin/kubectl-ko

kubectl plugin list
The following compatible plugins are available:

/usr/local/bin/kubectl-ko

6.1.2

kubectl ko

```
# kubectl ko
kubectl ko {subcommand} [option...]
Available Subcommands:
[nb|sb] [status|kick|backup|dbstatus|restore]      ovn-db operations show cluster status, kick stale server, backup database, get db consistency status or
restore ovn nb db when met 'inconsistent data' error
nbctl [ovn-nbctl options ...]      invoke ovn-nbctl
sbctl [ovn-sbctl options ...]      invoke ovn-sbctl
vsctl {nodeName} [ovs-vsctl options ...]      invoke ovs-vsctl on the specified node
ofctl {nodeName} [ovs-ofctl options ...]      invoke ovs-ofctl on the specified node
dpctl {nodeName} [ovs-dpctl options ...]      invoke ovs-dpctl on the specified node
appctl {nodeName} [ovs-appctl options ...]      invoke ovs-appctl on the specified node
tcpdump {namespace/podname} [tcpdump options ...]      capture pod traffic
{trace|ovn-trace} ...      trace ovn microflow of specific packet
{trace|ovn-trace} {namespace/podname} {target ip address} [target mac address] {icmp|tcp|udp} [target tcp/udp port]      trace ICMP/TCP/UDP
{trace|ovn-trace} {namespace/podname} {target ip address} [target mac address] arp {request|reply}      trace ARP request/reply
{trace|ovn-trace} {node//nodename} {target ip address} [target mac address] {icmp|tcp|udp} [target tcp/udp port]      trace ICMP/TCP/UDP
{trace|ovn-trace} {node//nodename} {target ip address} [target mac address] arp {request|reply}      trace ARP request/reply
diagnose {all|node|subnet|IPPorts} [nodename|subnetName|{proto1}-{IP1}-{Port1},{proto2}-{IP2}-{Port2}]      diagnose connectivity of all nodes or a specific
node or specify subnet's ds pod or IPPorts like 'tcp-172.18.0.2-53,udp-172.18.0.3-53'
env-check      check the environment configuration
reload      restart all kube-ovn components
log {kube-ovn|ovn|ovs|linux|all}      save log to ./kubectl-ko-log/
perf [image] performance test default image is docker.io/kubeovn/test:v1.13.0
icnbctl [ovn-nbctl options ...]      invoke ovn-ic-nbctl
icsbctl [ovn-sbctl options ...]      invoke ovn-ic-sbctl
```

[nb | sb] [status | kick | backup | dbstatus | restore]

OVN

OVN leader ovs-appctl cluster/status :

```
# kubectl ko nb status
306b
Name: OVN_Northbound
Cluster ID: 9a87 (9a872522-3e7d-47ca-83a3-d74333e1a7ca)
Server ID: 306b (306b256b-b5e1-4eb0-be91-4ca96adf6bad)
Address: tcp:[172.18.0.2]:6643
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 280309 ms ago, reason: timeout
Last Election won: 280309 ms ago
Election timer: 5000
Log: [139, 139]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-8723 ->8723 <-85d6 ->85d6
Disconnections: 0
Servers:
  85d6 (85d6 at tcp:[172.18.0.4]:6643) next_index=139 match_index=138 last msg 763 ms ago
  8723 (8723 at tcp:[172.18.0.3]:6643) next_index=139 match_index=138 last msg 763 ms ago
  306b (306b at tcp:[172.18.0.2]:6643) (self) next_index=2 match_index=138
status: ok
```

Server	match_index	last msg	Server
--------	-------------	----------	--------

OVN 172.18.0.3 :

```
# kubectl ko nb kick 8723
started removal
```

```
# kubectl ko nb status
306b
Name: OVN_Northbound
Cluster ID: 9a87 (9a872522-3e7d-47ca-83a3-d74333e1a7ca)
Server ID: 306b (306b256b-b5e1-4eb0-be91-4ca96adf6bad)
Address: tcp:[172.18.0.2]:6643
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 324356 ms ago, reason: timeout
Last Election won: 324356 ms ago
Election timer: 5000
Log: [140, 140]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-85d6 ->85d6
Disconnections: 2
Servers:
  85d6 (85d6 at tcp:[172.18.0.4]:6643) next_index=140 match_index=139 last msg 848 ms ago
  306b (306b at tcp:[172.18.0.2]:6643) (self) next_index=2 match_index=139
status: ok
```

OVN

```
# kubectl ko nb backup
tar: Removing leading '/' from member names
backup ovn-nb db to /root/ovnnb_db.060223191654183154.backup
```

```
# kubectl ko nb dbstatus
status: ok
```

inconsistent data

inconsistent data

```
# kubectl ko nb restore
deployment.apps/ovn-central scaled
ovn-central original replicas is 3
first nodeIP is 172.18.0.5
ovs-ovn pod on node 172.18.0.5 is ovs-ovn-8jxv9
ovs-ovn pod on node 172.18.0.3 is ovs-ovn-sjzb6
ovs-ovn pod on node 172.18.0.4 is ovs-ovn-t87zk
backup nb db file
restore nb db file, operate in pod ovs-ovn-8jxv9
deployment.apps/ovn-central scaled
finish restore nb db file and ovn-central replicas
recreate ovs-ovn pods
pod "ovs-ovn-8jxv9" deleted
pod "ovs-ovn-sjzb6" deleted
pod "ovs-ovn-t87zk" deleted
```

[nbctl | sbctl] [options ...]

OVN

leader

ovn-nbctl

ovn-sbctl

OVN

ovn-nbctl(8)

ovn-sbctl(8)

```
# kubectl ko nbctl show
switch c7cd17e8-ceee-4a91-9bb3-e5a313fe1ece (snat)
  port snat-ovn-cluster
    type: router
    router-port: ovn-cluster-snat
switch 20e0c6d0-023a-4756-aec5-200e0c60f95d (join)
  port node-liumengxin-ovn3-192.168.137.178
    addresses: ["00:00:00:64:FF:A8 100.64.0.4"]
  port node-liumengxin-ovn1-192.168.137.176
    addresses: ["00:00:00:AF:98:62 100.64.0.2"]
  port node-liumengxin-ovn2-192.168.137.177
    addresses: ["00:00:00:D9:58:B8 100.64.0.3"]
  port join-ovn-cluster
    type: router
    router-port: ovn-cluster-join
switch 0191705c-f827-427b-9de3-3c3b7d971ba5 (central)
  port central-ovn-cluster
    type: router
    router-port: ovn-cluster-central
switch 2a45ff05-388d-4f85-9daf-e6fccd5833dc (ovn-default)
  port alertmanager-main-0.monitoring
    addresses: ["00:00:00:6C:DF:A3 10.16.0.19"]
  port kube-state-metrics-5d6885d89-4nf8h.monitoring
    addresses: ["00:00:00:6F:02:1C 10.16.0.15"]
  port fake-kubelet-67c55dfd89-pv86k.kube-system
    addresses: ["00:00:00:5C:12:E8 10.16.19.177"]
  port ovn-default-ovn-cluster
    type: router
    router-port: ovn-cluster-ovn-default
router 212f73dd-d63d-4d72-864b-a537e9afbee1 (ovn-cluster)
  port ovn-cluster-snat
    mac: "00:00:00:7A:82:8F"
    networks: ["172.22.0.1/16"]
  port ovn-cluster-join
    mac: "00:00:00:F8:18:5A"
    networks: ["100.64.0.1/16"]
  port ovn-cluster-central
    mac: "00:00:00:4D:8C:F5"
    networks: ["192.101.0.1/16"]
  port ovn-cluster-ovn-default
    mac: "00:00:00:A3:F8:18"
    networks: ["10.16.0.1/16"]
```

vsctl {nodeName} [options ...]

nodeName

ovs-ovn

ovs-vsctl

vswitchd

OVS

ovs-vsctl(8)

```
# kubectl ko vsctl kube-ovn-01 show
0d4c4675-c9cc-440a-8c1a-878e17f81b88
  Bridge br-int
    fail_mode: secure
    datapath_type: system
    Port a2c1a8a8b83a_h
      Interface a2c1a8a8b83a_h
      Port "4fa5c4cbb1a5_h"
      Interface "4fa5c4cbb1a5_h"
    Port ovn-eef07d-0
      Interface ovn-eef07d-0
      type: stt
      options: {csum="true", key=flow, remote_ip="192.168.137.178"}
    Port ovn0
```

```

    Interface ovn0
      type: internal
    Port mirror0
      Interface mirror0
        type: internal
    Port ovn-efa253-0
      Interface ovn-efa253-0
        type: stt
        options: {csum="true", key=flow, remote_ip="192.168.137.177"}
    Port br-int
      Interface br-int
        type: internal
    ovs_version: "2.17.2"

```

ofctl {nodeName} [options ...]

nodeName ovs-ovn ovs-ofctl OpenFlow OVS ovs-ofctl(8)

```

# kubectl ko ofctl kube-ovn-01 dump-flows br-int
NXST_FLOW reply (xid=0x4): flags=[more]
cookie=0xcfc3429e6, duration=671791.432s, table=0, n_packets=0, n_bytes=0, idle_age=65534, hard_age=65534, priority=100,in_port=2 actions=load:0x4->NXM_NX_REG13[],load:0x9->NXM_NX_REG11[],load:0xb->NXM_NX_REG12[],load:0x4->OXM_OF_METADATA[],load:0x1->NXM_NX_REG14[],resubmit(,8)
cookie=0xc91413c6, duration=671791.431s, table=0, n_packets=907489, n_bytes=99978275, idle_age=0, hard_age=65534, priority=100,in_port=7 actions=load:0x1->NXM_NX_REG13[],load:0x9->NXM_NX_REG11[],load:0xb->NXM_NX_REG12[],load:0x4->OXM_OF_METADATA[],load:0x4->NXM_NX_REG14[],resubmit(,8)
cookie=0xf180459, duration=671791.431s, table=0, n_packets=17348582, n_bytes=2667811214, idle_age=0, hard_age=65534, priority=100,in_port=6317 actions=load:0xa->NXM_NX_REG13[],load:0x9->NXM_NX_REG11[],load:0xb->NXM_NX_REG12[],load:0x4->OXM_OF_METADATA[],load:0x9->NXM_NX_REG14[],resubmit(,8)
cookie=0x7806dd90, duration=671791.431s, table=0, n_packets=3235428, n_bytes=833821312, idle_age=0, hard_age=65534, priority=100,in_port=1 actions=load:0xd->NXM_NX_REG13[],load:0x9->NXM_NX_REG11[],load:0xb->NXM_NX_REG12[],load:0x4->OXM_OF_METADATA[],load:0x3->NXM_NX_REG14[],resubmit(,8)
...

```

dpctl {nodeName} [options ...]

nodeName ovs-ovn ovs-dpctl OVS datapath OVS ovs-dpctl(8)

```

# kubectl ko dpctl kube-ovn-01 show
system@ovs-system:
  lookups: hit:350805055 missed:21983648 lost:73
  flows: 105
  masks: hit:1970748791 total:22 hit/pkt:5.29
  port 0: ovs-system (internal)
  port 1: ovn0 (internal)
  port 2: mirror0 (internal)
  port 3: br-int (internal)
  port 4: stt_sys_7471 (stt: packet_type=ptap)
  port 5: eeb4d9e51b5d_h
  port 6: a2c1a8a8b83a_h
  port 7: 4fa5c4cbb1a5_h

```

apctl {nodeName} [options ...]

nodeName ovs-ovn ovs-apctl daemon OVS ovs-apctl(8)

```

# kubectl ko apctl kube-ovn-01 vlog/list
      console      syslog      file
      -----
backtrace      OFF      ERR      INFO
bfd            OFF      ERR      INFO
bond           OFF      ERR      INFO
bridge         OFF      ERR      INFO
bundle         OFF      ERR      INFO
bundles        OFF      ERR      INFO
...

```

tcpdump {namespace/podname} [tcpdump options ...]

namespace/podname kube-ovn-cni tcpdump veth

```

# kubectl ko tcpdump default/ds1-l6n7p icmp
+ kubectl exec -it kube-ovn-cni-wlg4s -n kube-ovn -- tcpdump -nn -i d7176fe7b4e0_h icmp
tcpdump: verbose output suppressed, use -v or -vv for full protocol decode
listening on d7176fe7b4e0_h, link-type EN10MB (Ethernet), capture size 262144 bytes
06:52:36.619688 IP 100.64.0.3 > 10.16.0.4: ICMP echo request, id 2, seq 1, length 64
06:52:36.619746 IP 10.16.0.4 > 100.64.0.3: ICMP echo reply, id 2, seq 1, length 64
06:52:37.619588 IP 100.64.0.3 > 10.16.0.4: ICMP echo request, id 2, seq 2, length 64
06:52:37.619630 IP 10.16.0.4 > 100.64.0.3: ICMP echo reply, id 2, seq 2, length 64
06:52:38.619933 IP 100.64.0.3 > 10.16.0.4: ICMP echo request, id 2, seq 3, length 64
06:52:38.619973 IP 10.16.0.4 > 100.64.0.3: ICMP echo reply, id 2, seq 3, length 64

```

trace [arguments ...]

Pod	OVN	Openflow
-----	-----	----------

```
kubectl ko trace {namespace/podname} {target ip address} [target mac address] {icmp|tcp|udp} [target tcp/udp port]
kubectl ko trace {namespace/podname} {target ip address} [target mac address] arp {request|reply}
kubectl ko trace {node//nodename} {target ip address} [target mac address] {icmp|tcp|udp} [target tcp/udp port]
kubectl ko trace {node//nodename} {target ip address} [target mac address] arp {request|reply}
```

```
# kubectl ko trace default/ds1-l6n7p 8.8.8.8 icmp
+ kubectl exec ovn-central-5bc494cb5-np9hm -n kube-ovn -- ovn-trace --ct=new ovn-default 'inport == "ds1-l6n7p.default" && ip.ttl == 64 && icmp && eth.src ==
0a:00:00:10:00:05 && ip4.src == 10.16.0.4 && eth.dst == 00:00:00:b8:ca:43 && ip4.dst == 8.8.8.8'
# icmp, reg14=0xf, vlan_tci=0x0000, dl_src=0a:00:00:10:00:05, dl_dst=00:00:00:b8:ca:
43, nw_src=10.16.0.4, nw_dst=8.8.8.8, nw_tos=0, nw_ecn=0, nw_ttl=64, icmp_type=0, icmp_code=0

ingress(dp="ovn-default", inport="ds1-l6n7p.default")
-----
0. ls_in_port_sec_l2 (ovn-northd.c:4143): inport == "ds1-l6n7p.default" && eth.src == {0a:00:00:10:00:05}, priority 50, uuid 39453393
  next;
1. ls_in_port_sec_ip (ovn-northd.c:2898): inport == "ds1-l6n7p.default" && eth.src == 0a:00:00:10:00:05 && ip4.src == {10.16.0.4}, priority 90, uuid 81bcd485
  next;
3. ls_in_pre_acl (ovn-northd.c:3269): ip, priority 100, uuid 7b4f4971
  reg0[0] = 1;
  next;
5. ls_in_pre_stateful (ovn-northd.c:3396): reg0[0] == 1, priority 100, uuid 36cdd577
  ct_next;

ct_next(ct_state=new|trk)
-----
6. ls_in_acl (ovn-northd.c:3759): ip && (!ct.est || (ct.est && ct_label.blocked == 1)), priority 1, uuid 7608af5b
  reg0[1] = 1;
  next;
10. ls_in_stateful (ovn-northd.c:3995): reg0[1] == 1, priority 100, uuid 2aba1b90
  ct_commit(ct_label=0/0x1);
  next;
16. ls_in_l2_lkup (ovn-northd.c:4470): eth.dst == 00:00:00:b8:ca:43, priority 50, uuid 5c9c3c9f
  output = "ovn-default-ovn-cluster";
  output;

...
```

trace	Underlay	Mac
-------	----------	-----

```
kubectl ko trace default/virt-handler-7lvm1 8.8.8.8 82:7c:9f:83:8c:01 icmp
```

diagnose {all|node|subnet|IPPorts} [nodename|subnetName|{proto1}-{IP1}-{Port1},{proto2}-{IP2}-{Port2}]

```
kube-ovn-pinger
```

```
# kubectl ko diagnose all
switch c7cd17e8-ceee-4a91-9bb3-e5a313fe1ece (snat)
  port snat-ovn-cluster
    type: router
    router-port: ovn-cluster-snat
switch 20e0c6d0-023a-4756-aec5-200e0c60f95d (join)
  port node-liumengxin-ovn3-192.168.137.178
    addresses: ["00:00:00:64:FF:A8 100.64.0.4"]
  port node-liumengxin-ovn1-192.168.137.176
    addresses: ["00:00:00:AF:98:62 100.64.0.2"]
  port join-ovn-cluster
    type: router
    router-port: ovn-cluster-join
switch 0191705c-f827-427b-9de3-3c3b7d971ba5 (central)
  port central-ovn-cluster
    type: router
    router-port: ovn-cluster-central
switch 2a45ff05-388d-4f85-9daf-e6fccd5833dc (ovn-default)
  port ovn-default-ovn-cluster
    type: router
    router-port: ovn-cluster-ovn-default
  port prometheus-k8s-1.monitoring
    addresses: ["00:00:00:AA:37:DF 10.16.0.23"]
router 212f73dd-d63d-4d72-864b-a537e9afbee1 (ovn-cluster)
  port ovn-cluster-snat
    mac: "00:00:00:7A:82:8F"
    networks: ["172.22.0.1/16"]
  port ovn-cluster-join
    mac: "00:00:00:F8:18:5A"
    networks: ["100.64.0.1/16"]
  port ovn-cluster-central
```

```

    mac: "00:00:00:4D:8C:F5"
    networks: ["192.101.0.1/16"]
  port ovn-cluster-ovn-default
    mac: "00:00:00:A3:F8:18"
    networks: ["10.16.0.1/16"]
Routing Policies
31000 ip4.dst == 10.16.0.0/16 allow
31000 ip4.dst == 100.64.0.0/16 allow
30000 ip4.dst == 192.168.137.177 reroute 100.64.0.3
30000 ip4.dst == 192.168.137.178 reroute 100.64.0.4
29000 ip4.src == $ovn.default.fake.6_ip4 reroute 100.64.0.22
29000 ip4.src == $ovn.default.fake.7_ip4 reroute 100.64.0.21
29000 ip4.src == $ovn.default.fake.8_ip4 reroute 100.64.0.23
20000 ip4.src == $ovn.default.liumengxin.ovn3.192.168.137.178_ip4 reroute 100.64.0.4
20000 ip4.src == $ovn.default.liumengxin.ovn1.192.168.137.176_ip4 && ip4.dst != $ovn.cluster.overlay.subnets.IPV4 reroute 100.
64.0.2
20000 ip4.src == $ovn.default.liumengxin.ovn2.192.168.137.177_ip4 && ip4.dst != $ovn.cluster.overlay.subnets.IPV4 reroute 100.
64.0.3
20000 ip4.src == $ovn.default.liumengxin.ovn3.192.168.137.178_ip4 && ip4.dst != $ovn.cluster.overlay.subnets.IPV4 reroute 100.
64.0.4
IPv4 Routes
Route Table <main>:
0.0.0.0/0 100.64.0.1 dst-ip
UUID LB PROTO VIP IPs
e9bcbfd9d-793e-4431-9073-6dec96b75d71 cluster-tcp-load tcp 10.100.209.132:10660 192.168.137.176:10660
tcp 10.101.239.192:6641 192.168.137.177:6641
tcp 10.101.240.101:3000 10.16.0.7:3000
tcp 10.103.184.186:6642 192.168.137.177:6642
35d2b7a5-e3a7-485a-a4b7-b4970eb0e63b cluster-tcp-sess tcp 10.100.158.128:8080 10.16.0.10:8080,10.16.0.5:8080,10.16.63.30:8080
tcp 10.107.26.215:8080 10.16.0.19:8080,10.16.0.20:8080,10.16.0.21:8080
tcp 10.107.26.215:9093 10.16.0.19:9093,10.16.0.20:9093,10.16.0.21:9093
tcp 10.98.187.99:8080 10.16.0.22:8080,10.16.0.23:8080
tcp 10.98.187.99:9090 10.16.0.22:9090,10.16.0.23:9090
f43303e4-89aa-4d3e-a3dc-278a552fe27b cluster-udp-load udp 10.96.0.10:53 10.16.0.4:53,10.16.0.9:53
_uuid : 06776304-5a96-43ed-90c4-c4854c251699
addresses : []
external_ids : {vendor=kube-ovn}
name : node_liumengxin_ovn2_192.168.137.177_underlay_v6
_uuid : 62690625-87d5-491c-8675-9fd83b1f433c
addresses : []
external_ids : {vendor=kube-ovn}
name : node_liumengxin_ovn1_192.168.137.176_underlay_v6
_uuid : b03a9bae-94d5-4562-b34c-b5f6198e180b
addresses : ["10.16.0.0/16", "100.64.0.0/16", "172.22.0.0/16", "192.101.0.0/16"]
external_ids : {vendor=kube-ovn}
name : ovn.cluster.overlay.subnets.IPV4
_uuid : e1056f3a-24cc-4666-8a91-75ee6c3c2426
addresses : []
external_ids : {vendor=kube-ovn}
name : ovn.cluster.overlay.subnets.IPV6
_uuid : 3e5d5fff-e670-47b2-a2f5-a39f4698a8c5
addresses : []
external_ids : {vendor=kube-ovn}
name : node_liumengxin_ovn3_192.168.137.178_underlay_v6
_uuid : 2d85dbdc-d0db-4abe-b19e-cc806d32b492
action : drop
direction : from-lport
external_ids : {}
label : 0
log : false
match : "inport==@ovn.sg.kubeovn_deny_all && ip"
meter : []
name : []
options : {}
priority : 2003
severity : []
_uuid : de790cc8-f155-405f-bb32-5a51f30c545f
action : drop
direction : to-lport
external_ids : {}
label : 0
log : false
match : "outport==@ovn.sg.kubeovn_deny_all && ip"
meter : []
name : []
options : {}
priority : 2003
severity : []
Chassis "e15ed4d4-1780-4d50-b09e-ea8372ed48b8"
  hostname: liumengxin-ovn1-192.168.137.176
  Encap stt
    ip: "192.168.137.176"
    options: {csum="true"}
  Port_Binding node-liumengxin-ovn1-192.168.137.176
  Port_Binding perf-6vxkn.default
  Port_Binding kube-state-metrics-5d6885d89-4nf8h.monitoring
  Port_Binding alertmanager-main-0.monitoring
  Port_Binding kube-ovn-pinger-6ftdf.kube-system
  Port_Binding fake-kubelet-67c55dfd89-pv86k.kube-system

```



```

    Port_Binding prometheus-k8s-0.monitoring
Chassis "eef07da1-f8ad-4775-b14d-bd6a3b4eb0d5"
  hostname: liumengxin-ovn3-192.168.137.178
  Encap stt
    ip: "192.168.137.178"
    options: {csum="true"}
  Port_Binding kube-ovn-pinger-7twb4.kube-system
  Port_Binding prometheus-adapter-86df476d87-r188g.monitoring
  Port_Binding prometheus-k8s-1.monitoring
  Port_Binding node-liumengxin-ovn3-192.168.137.178
  Port_Binding perf-ff475.default
  Port_Binding alertmanager-main-1.monitoring
  Port_Binding blackbox-exporter-676d976865-tvsjd.monitoring
Chassis "efa253c9-494d-4719-83ae-b48ab0f11c03"
  hostname: liumengxin-ovn2-192.168.137.177
  Encap stt
    ip: "192.168.137.177"
    options: {csum="true"}
  Port_Binding grafana-6c4c6b8fb7-pzd2c.monitoring
  Port_Binding node-liumengxin-ovn2-192.168.137.177
  Port_Binding alertmanager-main-2.monitoring
  Port_Binding coredns-6789c94dd8-9jqs.kube-system
  Port_Binding coredns-6789c94dd8-25d4r.kube-system
  Port_Binding prometheus-operator-7bbc99fc8b-wgjm4.monitoring
  Port_Binding prometheus-adapter-86df476d87-gdxmc.monitoring
  Port_Binding perf-fjnws.default
  Port_Binding kube-ovn-pinger-vh2xg.kube-system
ds kube-proxy ready
kube-proxy ready
deployment ovn-central ready
deployment kube-ovn-controller ready
ds kube-ovn-cni ready
ds ovs-ovn ready
deployment coredns ready
ovn-nb leader check ok
ovn-sb leader check ok
ovn-northd leader check ok
### kube-ovn-controller recent log

### start to diagnose node liumengxin-ovn1-192.168.137.176
#### ovn-controller log:
2022-06-03T00:56:44.897Z|16722|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:06:44.912Z|16723|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:16:44.925Z|16724|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:26:44.936Z|16725|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:36:44.959Z|16726|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:46:44.974Z|16727|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T01:56:44.988Z|16728|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T02:06:45.001Z|16729|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T02:16:45.025Z|16730|inc_proc_eng|INFO|User triggered force recompute.
2022-06-03T02:26:45.040Z|16731|inc_proc_eng|INFO|User triggered force recompute.

#### ovs-vswhchd log:
2022-06-02T23:03:00.137Z|00079|dpif(handler1)|WARN|system@ovs-system: execute ct(commit,zone=14,label=0/0x1,nat(src)),8 failed (Invalid argument) on packet
icmp,vlan_tci=0x0000,d1_src=00:00:00:f8:07:c8,d1_dst=00:00:00:fa:1e:50,nw_src=10.16.0.5,nw_dst=10.16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
icmp_csum:f9d1
  with metadata skb_priority(0),tunnel(tun_id=0x160017000004,src=192.168.137.177,dst=192.168.137.176,ttl=64,tp_src=38881,tp_dst=7471,flags(csum|
key)),skb_mark(0),ct_state(0x21),ct_zone(0xe),ct_tuple4(src=10.16.0.5,dst=10.16.0.10,proto=1,tp_src=8,tp_dst=0),in_port(4) mtu 0
2022-06-02T23:23:31.840Z|00080|dpif(handler1)|WARN|system@ovs-system: execute ct(commit,zone=14,label=0/0x1,nat(src)),8 failed (Invalid argument) on packet
icmp,vlan_tci=0x0000,d1_src=00:00:00:f8:07:c8,d1_dst=00:00:00:fa:1e:50,nw_src=10.16.0.5,nw_dst=10.16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
icmp_csum:15b2
  with metadata skb_priority(0),tunnel(tun_id=0x160017000004,src=192.168.137.177,dst=192.168.137.176,ttl=64,tp_src=38881,tp_dst=7471,flags(csum|
key)),skb_mark(0),ct_state(0x21),ct_zone(0xe),ct_tuple4(src=10.16.0.5,dst=10.16.0.10,proto=1,tp_src=8,tp_dst=0),in_port(4) mtu 0
2022-06-03T00:09:15.659Z|00081|dpif(handler1)|WARN|system@ovs-system: execute ct(commit,zone=14,label=0/0x1,nat(src)),8 failed (Invalid argument) on packet
icmp,vlan_tci=0x0000,d1_src=00:00:00:dc:e3:63,d1_dst=00:00:00:fa:1e:50,nw_src=10.16.63.30,nw_dst=10.16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0 icmp_csum:e5a5
  with metadata skb_priority(0),tunnel(tun_id=0x150017000004,src=192.168.137.178,dst=192.168.137.176,ttl=64,tp_src=9239,tp_dst=7471,flags(csum|
key)),skb_mark(0),ct_state(0x21),ct_zone(0xe),ct_tuple4(src=10.16.63.30,dst=10.16.0.10,proto=1,tp_src=8,tp_dst=0),in_port(4) mtu 0
2022-06-03T00:02:33.832Z|00082|dpif(handler2)|WARN|system@ovs-system: execute ct(commit,zone=14,label=0/0x1,nat(src)),8 failed (Invalid argument) on packet
icmp,vlan_tci=0x0000,d1_src=00:00:00:f8:07:c8,d1_dst=00:00:00:fa:1e:50,nw_src=10.16.0.5,nw_dst=10.16.0.10,nw_tos=0,nw_ecn=0,nw_ttl=64,icmp_type=8,icmp_code=0
icmp_csum:a819
  with metadata skb_priority(0),tunnel(tun_id=0x160017000004,src=192.168.137.177,dst=192.168.137.176,ttl=64,tp_src=38881,tp_dst=7471,flags(csum|
key)),skb_mark(0),ct_state(0x21),ct_zone(0xe),ct_tuple4(src=10.16.0.5,dst=10.16.0.10,proto=1,tp_src=8,tp_dst=0),in_port(4) mtu 0

#### ovs-vsctl show results:
0d4c4675-c9cc-440a-8c1a-878e17f81b88
  Bridge br-int
    fail_mode: secure
    datapath_type: system
    Port a2c1a8a8b83a_h
      Interface a2c1a8a8b83a_h
      Port "4fa5c4cbb1a5_h"
      Interface "4fa5c4cbb1a5_h"
    Port ovn-eef07d-0
      Interface ovn-eef07d-0
      type: stt
      options: {csum="true", key=flow, remote_ip="192.168.137.178"}
    Port ovn0
      Interface ovn0

```

```

        type: internal
    Port "04d03360e9a0_h"
        Interface "04d03360e9a0_h"
    Port eeb4d9e51b5d_h
        Interface eeb4d9e51b5d_h
    Port mirror0
        Interface mirror0
        type: internal
    Port "8e5d887ccd80_h"
        Interface "8e5d887ccd80_h"
    Port ovn-efa253-0
        Interface ovn-efa253-0
        type: stt
        options: {csum="true", key=flow, remote_ip="192.168.137.177"}
    Port "17512d5be1f1_h"
        Interface "17512d5be1f1_h"
    Port br-int
        Interface br-int
        type: internal
    ovs_version: "2.17.2"

### pinger diagnose results:
I0603 10:35:04.349404 17619 pinger.go:19]
-----
Kube-OVN:
Version:      v1.17.0
Build:        2022-04-24_08:02:50
Commit:       git-73f9d15
Go Version:   go1.17.8
Arch:         amd64
-----
I0603 10:35:04.376797 17619 config.go:166] pinger config is &{KubeConfigFile: KubeClient:0xc000493380 Port:8080 DaemonSetNamespace:kube-system
DaemonSetName:kube-ovn-pinger Interval:5 Mode:job ExitCode:0 InternalDNS:kubernetes.default ExternalDNS: NodeName:liumengxin-ovn1-192.168.137.176 HostIP:
192.168.137.176 PodName:kube-ovn-pinger-6ftdf PodIP:10.16.0.10 PodProtocols:[IPv4] ExternalAddress: NetworkMode:kube-ovn PollTimeout:2 PollInterval:15
SystemRunDir:/var/run/openvswitch DatabaseVswitchName:Open_vSwitch DatabaseVswitchSocketRemote:unix:/var/run/openvswitch/db.sock DatabaseVswitchFileDataPath:/
etc/openvswitch/conf.db DatabaseVswitchFileLogPath:/var/log/openvswitch/ovsdb-server.log DatabaseVswitchFilePidPath:/var/run/openvswitch/ovsdb-server.pid
DatabaseVswitchFileSystemIDPath:/etc/openvswitch/system-id.conf ServiceVswitchdFileLogPath:/var/log/openvswitch/ovs-vswitchd.log ServiceVswitchdFilePidPath:/
var/run/openvswitch/ovs-vswitchd.pid ServiceOvnControllerFileLogPath:/var/log/ovn/ovn-controller.log ServiceOvnControllerFilePidPath:/var/run/ovn/ovn-
controller.pid}
I0603 10:35:04.449166 17619 exporter.go:75] liumengxin-ovn1-192.168.137.176: exporter connect successfully
I0603 10:35:04.554011 17619 ovn.go:21] ovs-vswitchd and ovsdb are up
I0603 10:35:04.651293 17619 ovn.go:33] ovn_controller is up
I0603 10:35:04.651342 17619 ovn.go:39] start to check port binding
I0603 10:35:04.749613 17619 ovn.go:135] chassis id is 1d7f3d6c-ee5-4b3c-adca-2969d9cdfd80
I0603 10:35:04.763487 17619 ovn.go:49] port in sb is [node-liumengxin-ovn1-192.168.137.176 perf-6vxkn.default kube-state-metrics-5d6885d89-4nf8h.monitoring
alertmanager-main-0.monitoring kube-ovn-pinger-6ftdf.kube-system fake-kubelet-67c55dfd89-pv86k.kube-system prometheus-k8s-0.monitoring]
I0603 10:35:04.763583 17619 ovn.go:61] ovs and ovn-sb binding check passed
I0603 10:35:05.049309 17619 ping.go:259] start to check apiserver connectivity
I0603 10:35:05.053666 17619 ping.go:268] connect to apiserver success in 4.27ms
I0603 10:35:05.053786 17619 ping.go:129] start to check pod connectivity
I0603 10:35:05.249590 17619 ping.go:159] ping pod: kube-ovn-pinger-6ftdf 10.16.0.10, count: 3, loss count 0, average rtt 16.30ms
I0603 10:35:05.354135 17619 ping.go:159] ping pod: kube-ovn-pinger-7twb4 10.16.63.30, count: 3, loss count 0, average rtt 1.81ms
I0603 10:35:05.458460 17619 ping.go:159] ping pod: kube-ovn-pinger-vh2xg 10.16.0.5, count: 3, loss count 0, average rtt 1.92ms
I0603 10:35:05.458523 17619 ping.go:83] start to check node connectivity

```

diagnose	subnet	subnet	daemonset	kube-ovn-pinger	daemonset	pod	daemonset
diagnose	IPPorts	kube-ovn-pinger	pod	IP Port			

reload

Kube-OVN

```

# kubectl ko reload
pod "ovn-central-8684dd94bd-vzgcr" deleted
Waiting for deployment "ovn-central" rollout to finish: 0 of 1 updated replicas are available...
deployment "ovn-central" successfully rolled out
pod "ovs-ovn-bsnvz" deleted
pod "ovs-ovn-m9b98" deleted
pod "kube-ovn-controller-8459db5ff4-64c62" deleted
Waiting for deployment "kube-ovn-controller" rollout to finish: 0 of 1 updated replicas are available...
deployment "kube-ovn-controller" successfully rolled out
pod "kube-ovn-cni-2klmh" deleted
pod "kube-ovn-cni-t2jz4" deleted
Waiting for daemon set "kube-ovn-cni" rollout to finish: 0 of 2 updated pods are available...
Waiting for daemon set "kube-ovn-cni" rollout to finish: 1 of 2 updated pods are available...
daemon set "kube-ovn-cni" successfully rolled out
pod "kube-ovn-pinger-ln72z" deleted
pod "kube-ovn-pinger-w8lrk" deleted
Waiting for daemon set "kube-ovn-pinger" rollout to finish: 0 of 2 updated pods are available...
Waiting for daemon set "kube-ovn-pinger" rollout to finish: 1 of 2 updated pods are available...
daemon set "kube-ovn-pinger" successfully rolled out
pod "kube-ovn-monitor-7fb67d5488-7q6zb" deleted
Waiting for deployment "kube-ovn-monitor" rollout to finish: 0 of 1 updated replicas are available...
deployment "kube-ovn-monitor" successfully rolled out

```

log

kube-ovn Kube-OVN OVN Open vSwitch log linux debug

```
# kubectl ko log all
Collecting kube-ovn logging files
Collecting ovn logging files
Collecting openvswitch logging files
Collecting linux dmesg files
Collecting linux iptables-legacy files
Collecting linux iptables-nft files
Collecting linux route files
Collecting linux link files
Collecting linux neigh files
Collecting linux memory files
Collecting linux top files
Collecting linux sysctl files
Collecting linux netstat files
Collecting linux addr files
Collecting linux ipset files
Collecting linux tcp files
Collected files have been saved in the directory /root/kubectl-ko-log
```

```
# tree kubectl-ko-log/
kubectl-ko-log/
|-- kube-ovn-control-plane
|   |-- kube-ovn
|   |   |-- kube-ovn-cni.log
|   |   |-- kube-ovn-monitor.log
|   |   '-- kube-ovn-pinger.log
|   |-- linux
|   |   |-- addr.log
|   |   |-- dmesg.log
|   |   |-- ipset.log
|   |   |-- iptables-legacy.log
|   |   |-- iptables-nft.log
|   |   |-- link.log
|   |   |-- memory.log
|   |   |-- neigh.log
|   |   |-- netstat.log
|   |   |-- route.log
|   |   |-- sysctl.log
|   |   |-- tcp.log
|   |   '-- top.log
|   |-- openvswitch
|   |   |-- ovs-vswitchd.log
|   |   '-- ovssdb-server.log
|   '-- ovn
|       |-- ovn-controller.log
|       |-- ovn-northd.log
|       |-- ovssdb-server-nb.log
|       '-- ovssdb-server-sb.log
```

perf [image]

Kube-OVN

- 1.
- 2. Hostnetwork
- 3.
- 4. OVN-NB, OVN-SB, OVN-Northd leader

image Pod `docker.io/kubeovn/test:v1.13.0`

```
# kubectl ko perf
===== Prepareing Performance Test Resources =====
pod/test-client created
pod/test-host-client created
pod/test-server created
pod/test-host-server created
service/test-server created
pod/test-client condition met
pod/test-host-client condition met
pod/test-host-server condition met
pod/test-server condition met
=====
===== Start Pod Network Unicast Performance Test =====
Size          TCP Latency    TCP Bandwidth  UDP Latency    UDP Lost Rate  UDP Bandwidth
64             82.8 us        97.7 Mbits/sec 67.6 us        (0%)           8.42 Mbits/sec
128            85.4 us        167 Mbits/sec  67.2 us        (0%)           17.2 Mbits/sec
```

```
512      85.8 us      440 Mbits/sec  68.7 us      (0%)      68.4 Mbits/sec
1k       85.1 us      567 Mbits/sec  68.7 us      (0%)      134 Mbits/sec
4k       138 us      826 Mbits/sec  78.1 us      (1.4%)    583 Mbits/sec
=====
===== Start Host Network Performance Test =====
Size      TCP Latency    TCP Bandwidth  UDP Latency    UDP Lost Rate  UDP Bandwidth
64        49.7 us      120 Mbits/sec  37.9 us      (0%)          18.6 Mbits/sec
128       49.7 us      200 Mbits/sec  38.1 us      (0%)          35.5 Mbits/sec
512       51.9 us      588 Mbits/sec  38.9 us      (0%)          142 Mbits/sec
1k        51.7 us      944 Mbits/sec  37.2 us      (0%)          279 Mbits/sec
4k        74.9 us      1.66 Gbits/sec 39.9 us      (0%)          1.20 Gbits/sec
=====
===== Start Service Network Performance Test =====
Size      TCP Latency    TCP Bandwidth  UDP Latency    UDP Lost Rate  UDP Bandwidth
64        111 us      96.3 Mbits/sec  88.4 us      (0%)          7.59 Mbits/sec
128       83.7 us      150 Mbits/sec  69.2 us      (0%)          16.9 Mbits/sec
512       87.4 us      374 Mbits/sec  75.8 us      (0%)          60.9 Mbits/sec
1k        88.2 us      521 Mbits/sec  73.1 us      (0%)          123 Mbits/sec
4k        148 us      813 Mbits/sec  77.6 us      (0.0044%)     451 Mbits/sec
=====
===== Start Pod Multicast Network Performance Test =====
Size      UDP Latency    UDP Lost Rate  UDP Bandwidth
64        0.014 ms      (0.17%)       5.80 Mbits/sec
128       0.012 ms      (0%)          11.4 Mbits/sec
512       0.016 ms      (0%)          46.1 Mbits/sec
1k        0.023 ms      (0.073%)      89.8 Mbits/sec
4k        0.035 ms      (1.3%)        126 Mbits/sec
=====
===== Start Host Multicast Network Performance =====
Size      UDP Latency    UDP Lost Rate  UDP Bandwidth
64        0.007 ms      (0%)          9.95 Mbits/sec
128       0.005 ms      (0%)          21.8 Mbits/sec
512       0.008 ms      (0%)          86.8 Mbits/sec
1k        0.013 ms      (0.045%)      168 Mbits/sec
4k        0.010 ms      (0.31%)       242 Mbits/sec
=====
===== Start Leader Recover Time Test =====
Delete ovn central nb pod
pod "ovn-central-5cb9c67d75-tlz9w" deleted
Waiting for ovn central nb pod running
===== OVN nb Recovery takes 3.305236803 s =====
Delete ovn central sb pod
pod "ovn-central-5cb9c67d75-szx4c" deleted
Waiting for ovn central sb pod running
===== OVN sb Recovery takes 3.462698535 s =====
Delete ovn central northd pod
pod "ovn-central-5cb9c67d75-zqmqv" deleted
Waiting for ovn central northd pod running
===== OVN northd Recovery takes 2.691291403 s =====
===== Remove Performance Test Resource =====
rm -f unicast-test-client.log
rm -f unicast-test-host-client.log
rm -f unicast-test-client.log
kubectl ko nbctl lb-del test-server
rm -f multicast-test-server.log
kubectl exec ovs-ovn-gxdrf -n kube-system -- ip maddr del 01:00:5e:00:00:64 dev eth0
kubectl exec ovs-ovn-h57bf -n kube-system -- ip maddr del 01:00:5e:00:00:64 dev eth0
rm -f multicast-test-host-server.log
pod "test-client" deleted
pod "test-host-client" deleted
pod "test-host-server" deleted
pod "test-server" deleted
service "test-server" deleted
=====
```


 PDF

 Slack

 Support

🕒2026 4 28

🕒2022 5 24



6.2

Kubernetes

ovs-ovn

ovn-controller

ovn-central

Kubernetes

ovn-central

ovn-central

6.2.1

```
# kubectl drain kube-ovn-worker --ignore-daemonsets --force
node/kube-ovn-worker cordoned
WARNING: ignoring DaemonSet-managed Pods: kube-system/kube-ovn-cni-zt74b, kube-system/kube-ovn-pinger-5rxfs, kube-system/kube-proxy-jpmnm, kube-system/ovs-
ovn-v2kll
evicting pod kube-system/coredns-64897985d-qsgpt
evicting pod local-path-storage/local-path-provisioner-5ddd94ff66-1lss6
evicting pod kube-system/kube-ovn-controller-8459db5ff4-94lxb
pod/kube-ovn-controller-8459db5ff4-94lxb evicted
pod/coredns-64897985d-qsgpt evicted
pod/local-path-provisioner-5ddd94ff66-1lss6 evicted
node/kube-ovn-worker drained
```

6.2.2 kubelet docker

ovs-ovn

ovn-central

```
systemctl stop kubelet
systemctl stop docker
```

Containerd

containerd CRI

Pod/

ovs-ovn

containerd

ovs-ovn

1. kubelet

```
systemctl stop kubelet
```

2. ovs-ovn Pod

```
crictl rm -f $(crictl ps | grep openvswitch | awk '{print $1}')
```

3. containerd

```
systemctl stop containerd
```

6.2.3 Node

```
rm -rf /var/run/openvswitch
rm -rf /var/run/ovn
rm -rf /etc/origin/openvswitch/
rm -rf /etc/origin/ovn/
rm -rf /etc/cni/net.d/00-kube-ovn.conflist
rm -rf /etc/cni/net.d/01-kube-ovn.conflist
rm -rf /var/log/openvswitch
rm -rf /var/log/ovn
```

6.2.4 kubectl

```
kubectl delete no kube-ovn-01
```

6.2.5

ovn-sb

kube-ovn-worker

```
# kubectl ko sbctl show
Chassis "b0564934-5a0d-4804-a4c0-476c93596a17"
  hostname: kube-ovn-worker
  Encap geneve
    ip: "172.18.0.2"
    options: {csum="true"}
  Port_Binding kube-ovn-pinger-5rxfs.kube-system
Chassis "6a29de7e-d731-4eaf-bacd-2f239ee52b28"
  hostname: kube-ovn-control-plane
  Encap geneve
    ip: "172.18.0.3"
    options: {csum="true"}
  Port_Binding coredns-64897985d-nbfln.kube-system
  Port_Binding node-kube-ovn-control-plane
  Port_Binding local-path-provisioner-5ddd94ff66-h4tn9.local-path-storage
  Port_Binding kube-ovn-pinger-hf2p6.kube-system
  Port_Binding coredns-64897985d-fhwlw.kube-system
```

6.2.6

chassis

uuidChassisid

```
# kubectl ko sbctl chassis-del b0564934-5a0d-4804-a4c0-476c93596a17
# kubectl ko sbctl show
Chassis "6a29de7e-d731-4eaf-bacd-2f239ee52b28"
  hostname: kube-ovn-control-plane
  Encap geneve
    ip: "172.18.0.3"
    options: {csum="true"}
  Port_Binding coredns-64897985d-nbfln.kube-system
  Port_Binding node-kube-ovn-control-plane
  Port_Binding local-path-provisioner-5ddd94ff66-h4tn9.local-path-storage
  Port_Binding kube-ovn-pinger-hf2p6.kube-system
  Port_Binding coredns-64897985d-fhwlw.kube-system
```

 PDF

 Slack

 Support

🕒2026 7 3

🕒2022 6 3

 GitHub



6.2.7

6.3 ovn-central

ovn-central ovn-nb ovn-sb etcd Raft ovn-central

6.3.1 ovn-central

kube-ovn-control-plane2

ovn-central

```
# kubectl -n kube-system get pod -o wide | grep central
ovn-central-6bf58cbc97-2cdhg          1/1      Running   0           21m    172.18.0.3    kube-ovn-control-plane    <none>    <none>
ovn-central-6bf58cbc97-crmfp          1/1      Running   0           21m    172.18.0.5    kube-ovn-control-plane2   <none>    <none>
ovn-central-6bf58cbc97-lxmpl          1/1      Running   0           21m    172.18.0.4    kube-ovn-control-plane3   <none>    <none>
```

ovn-nb

ID

```
# kubectl ko nb status
1b9a
Name: OVN_Northbound
Cluster ID: 32ca (32ca07fb-739b-4257-b510-12fa18e7cce8)
Server ID: 1b9a (1b9a5d76-e69b-410c-8085-39943d0cd38c)
Address: tcp:[172.18.0.3]:6643
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 2135194 ms ago, reason: timeout
Last Election won: 2135188 ms ago
Election timer: 5000
Log: [135, 135]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-d64b ->d64b <-4984 ->4984
Disconnections: 0
Servers:
  4984 (4984 at tcp:[172.18.0.4]:6643) next_index=135 match_index=134 last msg 1084 ms ago
  1b9a (1b9a at tcp:[172.18.0.3]:6643) (self) next_index=2 match_index=134
  d64b (d64b at tcp:[172.18.0.5]:6643) next_index=135 match_index=134 last msg 1084 ms ago
status: ok
```

kube-ovn-control-plane2

IP 172.18.0.5

ID d64b

ovn-nb

```
# kubectl ko nb kick d64b
started removal
```

```
# kubectl ko nb status
1b9a
Name: OVN_Northbound
Cluster ID: 32ca (32ca07fb-739b-4257-b510-12fa18e7cce8)
Server ID: 1b9a (1b9a5d76-e69b-410c-8085-39943d0cd38c)
Address: tcp:[172.18.0.3]:6643
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 2297649 ms ago, reason: timeout
Last Election won: 2297643 ms ago
Election timer: 5000
Log: [136, 136]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-4984 ->4984
Disconnections: 2
Servers:
  4984 (4984 at tcp:[172.18.0.4]:6643) next_index=136 match_index=135 last msg 1270 ms ago
  1b9a (1b9a at tcp:[172.18.0.3]:6643) (self) next_index=2 match_index=135
status: ok
```

ovn-sb

ovn-sb

ID

```
kubectl ko sb status
3722
Name: OVN_Southbound
Cluster ID: d4bd (d4bd37a4-0400-499f-b4df-b4fd389780f0)
Server ID: 3722 (3722d5ae-2ced-4820-a6b2-8b744d11fb3e)
Address: tcp:[172.18.0.3]:6644
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 2395317 ms ago, reason: timeout
Last Election won: 2395316 ms ago
Election timer: 5000
Log: [130, 130]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-e9f7 ->e9f7 <-6e84 ->6e84
Disconnections: 0
Servers:
  e9f7 (e9f7 at tcp:[172.18.0.5]:6644) next_index=130 match_index=129 last msg 1006 ms ago
  6e84 (6e84 at tcp:[172.18.0.4]:6644) next_index=130 match_index=129 last msg 1004 ms ago
  3722 (3722 at tcp:[172.18.0.3]:6644) (self) next_index=2 match_index=129
status: ok
```

kube-ovn-control-plane2 IP 172.18.0.5 ID e9f7 ovn-sb

```
# kubectl ko sb kick e9f7
started removal
```

```
# kubectl ko sb status
3722
Name: OVN_Southbound
Cluster ID: d4bd (d4bd37a4-0400-499f-b4df-b4fd389780f0)
Server ID: 3722 (3722d5ae-2ced-4820-a6b2-8b744d11fb3e)
Address: tcp:[172.18.0.3]:6644
Status: cluster member
Role: leader
Term: 1
Leader: self
Vote: self

Last Election started 2481636 ms ago, reason: timeout
Last Election won: 2481635 ms ago
Election timer: 5000
Log: [131, 131]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: <-6e84 ->6e84
Disconnections: 2
Servers:
  6e84 (6e84 at tcp:[172.18.0.4]:6644) next_index=131 match_index=130 last msg 642 ms ago
  3722 (3722 at tcp:[172.18.0.3]:6644) (self) next_index=2 match_index=130
status: ok
```

ovn-central

ovn-central

NODE_IPS

```
kubectl label node kube-ovn-control-plane2 kube-ovn/role-
kubectl scale deployment -n kube-system ovn-central --replicas=2
kubectl set env deployment/ovn-central -n kube-system NODE_IPS="172.18.0.3,172.18.0.4"
kubectl rollout status deployment/ovn-central -n kube-system
```

ovn-central

OVS-OVN

```
# kubectl set env daemonset/ovs-ovn -n kube-system OVN_DB_IPS="172.18.0.3,172.18.0.4"
daemonset.apps/ovs-ovn env updated
# kubectl delete pod -n kube-system -lapp=ovs
pod "ovs-ovn-4f6jc" deleted
```



```
pod "ovs-ovn-csn2w" deleted
pod "ovs-ovn-mpbmb" deleted
```

kube-ovn-controller

```
# kubectl set env deployment/kube-ovn-controller -n kube-system OVN_DB_IPS="172.18.0.3,172.18.0.4"
deployment.apps/kube-ovn-controller env updated

# kubectl rollout status deployment/kube-ovn-controller -n kube-system
Waiting for deployment "kube-ovn-controller" rollout to finish: 1 of 3 updated replicas are available...
Waiting for deployment "kube-ovn-controller" rollout to finish: 2 of 3 updated replicas are available...
deployment "kube-ovn-controller" successfully rolled out
```

kube-ovn-control-plane2

```
rm -rf /etc/origin/ovn
```

Kubernetes

6.3.2 ovn-central

Kubernetes

ovn-central

```
/etc/origin/ovn      ovnnb_db.db  ovnsb_db.db
```

```
rm -rf /etc/origin/ovn
```

ovn-central

ovn-central

```
# kubectl ko nb status
1b9a
Name: OVN_Northbound
Cluster ID: 32ca (32ca07fb-739b-4257-b510-12fa18e7cce8)
Server ID: 1b9a (1b9a5d76-e69b-410c-8085-39943d0cd38c)
Address: tcp:[172.18.0.3]:6643
Status: cluster member
Role: leader
Term: 44
Leader: self
Vote: self

Last Election started 1855739 ms ago, reason: timeout
Last Election won: 1855729 ms ago
Election timer: 5000
Log: [147, 147]
Entries not yet committed: 0
Entries not yet applied: 0
Connections: ->4984 <-4984
Disconnections: 0
Servers:
  4984 (4984 at tcp:[172.18.0.4]:6643) next_index=147 match_index=146 last msg 367 ms ago
  1b9a (1b9a at tcp:[172.18.0.3]:6643) (self) next_index=140 match_index=146
status: ok

# kubectl ko sb status
3722
Name: OVN_Southbound
Cluster ID: d4bd (d4bd37a4-0400-499f-b4df-b4fd389780f0)
Server ID: 3722 (3722d5ae-2ced-4820-a6b2-8b744d11fb3e)
Address: tcp:[172.18.0.3]:6644
Status: cluster member
Role: leader
Term: 33
Leader: self
Vote: self

Last Election started 1868589 ms ago, reason: timeout
Last Election won: 1868579 ms ago
Election timer: 5000
Log: [142, 142]
Entries not yet committed: 0
```

```
Entries not yet applied: 0
Connections: ->6e84 <-6e84
Disconnections: 0
Servers:
  6e84 (6e84 at tcp:[172.18.0.4]:6644) next_index=142 match_index=141 last msg 728 ms ago
  3722 (3722 at tcp:[172.18.0.3]:6644) (self) next_index=134 match_index=141
status: ok
```

ovn-central NODE_IPS

```
kubectl label node kube-ovn-control-plane2 kube-ovn/role=master
kubectl scale deployment -n kube-system ovn-central --replicas=3
kubectl set env deployment/ovn-central -n kube-system NODE_IPS="172.18.0.3,172.18.0.4,172.18.0.5"
kubectl rollout status deployment/ovn-central -n kube-system
```

ovn-central

ovs-ovn

```
# kubectl set env daemonset/ovs-ovn -n kube-system OVN_DB_IPS="172.18.0.3,172.18.0.4,172.18.0.5"
daemonset.apps/ovs-ovn env updated
# kubectl delete pod -n kube-system -lapp=ovs
pod "ovs-ovn-4f6jc" deleted
pod "ovs-ovn-csn2w" deleted
pod "ovs-ovn-mpbmb" deleted
```

kube-ovn-controller

```
# kubectl set env deployment/kube-ovn-controller -n kube-system OVN_DB_IPS="172.18.0.3,172.18.0.4,172.18.0.5"
deployment.apps/kube-ovn-controller env updated

# kubectl rollout status deployment/kube-ovn-controller -n kube-system
Waiting for deployment "kube-ovn-controller" rollout to finish: 1 of 3 updated replicas are available...
Waiting for deployment "kube-ovn-controller" rollout to finish: 2 of 3 updated replicas are available...
deployment "kube-ovn-controller" successfully rolled out
```



PDF




Slack



Support

🕒 2025 9 10

🕒 2022 5 24



6.3.3

6.4 OVN

6.4.1

kubectl backup

```
# kubectl ko nb backup
tar: Removing leading '/' from member names
backup ovn-nb db to /root/ovnnb_db.060223191654183154.backup

# kubectl ko sb backup
tar: Removing leading '/' from member names
backup ovn-sb db to /root/ovnsb_db.060223191654183154.backup
```

6.4.2

/var/log/ovn/ovn-northd.log

```
* ovn-northd is not running
ovsdb-server: ovsdb error: error reading record 2739 from OVN_Northbound log: record 2739 advances commit index to 6308 but last log index is 6307
* Starting ovsdb-nb
```

OVN_Northbound

OVN_Southbound

OVN_Northbound

ovn-nb

```
# kubectl ko nb status
9182
Name: OVN_Northbound
Cluster ID: e75f (e75fa340-49ed-45ab-990e-26cb865ebc85)
Server ID: 9182 (9182e8dd-b5b0-4dd8-8518-598cc1e374f3)
Address: tcp:[10.0.128.61]:6643
Status: cluster member
Role: leader
Term: 1454
Leader: self
Vote: self

Last Election started 1732603 ms ago, reason: timeout
Last Election won: 1732587 ms ago
Election timer: 1000
Log: [7332, 12512]
Entries not yet committed: 1
Entries not yet applied: 1
Connections: ->f080 <-f080 <-e631 ->e631
Disconnections: 1
Servers:
  f080 (f080 at tcp:[10.0.129.139]:6643) next_index=12512 match_index=12510 last msg 63 ms ago
  9182 (9182 at tcp:[10.0.128.61]:6643) (self) next_index=10394 match_index=12510
  e631 (e631 at tcp:[10.0.131.173]:6643) next_index=12512 match_index=0
```

```
kubectl ko nb kick e631
```

```
mv /etc/origin/ovn/ovnnb_db.db /tmp
```

ovn-central Pod

```
kubectl delete pod -n kube-system ovn-central-xxxx
```

6.4.3

leader

ovn-central

ovn-central ovn-central

```
kubectl scale deployment -n kube-system ovn-central --replicas=0
```

ovsdb-tool cluster-to-standalone

```
ovn-central NODE_IPS /etc/origin/ovn
```

docker

```
docker run -it -v /etc/origin/ovn:/etc/ovn kubeovn/kube-ovn:v1.17.0 bash
cd /etc/ovn/
ovsdb-tool cluster-to-standalone ovnnb_db_standalone.db ovnnb_db.db
ovsdb-tool cluster-to-standalone ovnsb_db_standalone.db ovnsb_db.db
```

containerd docker ctr

```
ctr -n k8s.io image pull docker.io/kubeovn/kube-ovn:v1.17.0
ctr -n k8s.io run --rm -t \
  --mount type=bind,src=/etc/origin/ovn,dst=/etc/ovn,options=rbind:rw \
  docker.io/kubeovn/kube-ovn:v1.17.0 ovn-recover bash
cd /etc/ovn/
ovsdb-tool cluster-to-standalone ovnnb_db_standalone.db ovnnb_db.db
ovsdb-tool cluster-to-standalone ovnsb_db_standalone.db ovnsb_db.db
exit
```

```
ovn-central Pod ovsdb-tool cluster-to-standalone kubectl cp
```

ovn-central

```
mv /etc/origin/ovn/ovnnb_db.db /tmp
mv /etc/origin/ovn/ovnsb_db.db /tmp
```

```
ovnnb_db.db ovnsb_db.db ovn-central NODE_IPS /etc/origin/ovn/
```

```
mv /etc/origin/ovn/ovnnb_db_standalone.db /etc/origin/ovn/ovnnb_db.db
mv /etc/origin/ovn/ovnsb_db_standalone.db /etc/origin/ovn/ovnsb_db.db
```

ovn-central

```
kubectl scale deployment -n kube-system ovn-central --replicas=3
kubectl rollout status deployment/ovn-central -n kube-system
```



PDF



Slack



Support

 2026 4 28

 2022 5 24

  GitHub

6.4.4

6.5 CIDR

CIDR				
CIDR	Pod	CIDR	Join	CIDR
			Join	CIDR

6.5.1

```
kubectl edit cidrBlock gateway excludeIps
kubectl edit subnet test-subnet
```

6.5.2 Namespace Pod

```
test Namespace

for pod in $(kubectl get pod --no-headers -n test --field-selector spec.restartPolicy=Always -o custom-columns=NAME:.metadata.name,HOST:spec.hostNetwork |
awk '{if ($2!="true") print $1}'); do
    kubectl delete pod "$pod" -n test --ignore-not-found
done

host Pod

for ns in $(kubectl get ns --no-headers -o custom-columns=NAME:.metadata.name); do
    for pod in $(kubectl get pod --no-headers -n "$ns" --field-selector spec.restartPolicy=Always -o custom-columns=NAME:.metadata.name,HOST:spec.hostNetwork |
    awk '{if ($2!="true") print $1}'); do
        kubectl delete pod "$pod" -n "$ns" --ignore-not-found
    done
done
```

6.5.3

CIDR kube-ovn-controller Deployment

args:
--default-cidr=10.17.0.0/16
--default-gateway=10.17.0.1
--default-exclude-ips=10.17.0.1


PDF

Slack

Support

🕒 2026 4 28

🕒 2022 5 24



6.5.4

6.6 Join CIDR

Join CIDR

Join CIDR Pod

6.6.1 Join

```
kubectl patch subnet join --type='json' -p '[{"op": "replace", "path": "/metadata/finalizers", "value": []}]'
kubectl delete subnet join
```

6.6.2

```
kubectl annotate node ovn.kubernetes.io/allocated=false --all --overwrite
```

6.6.3 Join

kube-ovn-controller Join

```
kubectl edit deployment -n kube-system kube-ovn-controller
```

```
args:
- --node-switch-cidr=100.51.0.0/16
```

kube-ovn-controller join

```
kubectl delete pod -n kube-system -lapp=kube-ovn-controller
```

Join

# kubectl get subnet												
NAME	PROVIDER	VPC	PROTOCOL	CIDR	PRIVATE	NAT	DEFAULT	GATEWAYTYPE	V4USED	V4AVAILABLE	V6USED	V6AVAILABLE
EXCLUDEIPS												
join	ovn	ovn-cluster	IPv4	100.51.0.0/16	false	false	false	distributed	2	65531	0	0
["100.51.0.1"]												
ovn-default	ovn	ovn-cluster	IPv4	10.17.0.0/16	false	true	true	distributed	5	65528	0	0
["10.17.0.1"]												

6.6.4 ovn0

ovn0 kube-ovn-cni

```
kubectl delete pod -n kube-system -l app=kube-ovn-cni
```


 PDF

 Slack

 Support

🕒 2025 9 10

🕒 2022 5 24



6.6.5

6.7

kube-ovn.yaml

```
vi kube-ovn.yaml
# ...
- name: kube-ovn-controller
  image: "docker.io/kubeovn/kube-ovn:v1.17.0"
  imagePullPolicy: IfNotPresent
  args:
    - /kube-ovn/start-controller.sh
    - --v=3
# ...
#
```

 PDF


 Slack

 Support

 2025 9 10

 2023 4 4

 GitHub



6.7.1

6.8

Kube-OVN

6.8.1

1.
 - Pod Pod
 - Pod
 - Pod Service
 - Pod
 - Pod
 - kube-ovn-pinger
2.
 - Pod
 - kube-ovn-cni CNI
 - ovs-ovn OVS
 - kube-ovn-controller
 - ovn-central OVN
 - dmesg
 - netstat -s
3. CPU, IO
- kubectl ko logs

6.8.2 Pod IP

Pod Running kubectl describe Pod duplicate IPv4 address <ip> found on logical switch port <port>

1. Pod IP Pod IP IP IP Pod
2. kube-ovn-controller IP
3. kube-ovn-controller IP
4. kubectl ko nbctl show OVN IP
5. OVN Kubernetes IP kubectl ko nbctl lsp-del <port>

6.8.3 Pod ping gateway failed

Pod Running kubectl describe Pod network <ip> with gateway <gw ip> is not ready for interface eth0 after 30 checks

1. kubectl ko sbctl show Pod
2. ovn-central ovs-ovn ovn-central ovs-ovn

3. Pod
4. Underlay Underlay

6.8.4 Pod

VPC Pod

1. kubectl ko trace OVN ACL
2. ACL ACL
3. ACL Subnet stats
4. Subnet Spec
5. kube-ovn-controller

6.8.5 Pod IP CIDR

Pod IP CIDR

1. /etc/cni/net.d/ Kube-OVN CNI
2.
3. kubelet Pod

6.8.6 Debug Pod

kubectl debug Pod ContainerCreating Pod Event network not ready no address allocated

debug Pod yaml yaml Annotation

```
ovn.kubernetes.io/ip_address
ovn.kubernetes.io/mac_address
ovn.kubernetes.io/allocated
ovn.kubernetes.io/routed
```

debug Pod yaml debug Pod

6.8.7 ARM

ARM Offload

netstat

```
# netstat -us
IcmpMsg:
  InType0: 22
  InType3: 24
  InType8: 117852
  OutType0: 117852
```

```
OutType3: 29
OutType8: 22
Udp:
  3040636 packets received
  0 packets to unknown port received.
  4 packet receive errors
  602 packets sent
  0 receive buffer errors
  0 send buffer errors
  InCsumErrors: 4
UdpLite:
IpExt:
  InBcastPkts: 10244
  InOctets: 4446320361
  OutOctets: 1496815600
  InBcastOctets: 3095950
  InNoECTPkts: 7683903
```

InCsumErrors

tx offload TCP

```
ethtool -K eth0 tx off
```

CentOS 7 4.19.90-25.16.v2101

6.8.8 Pod Service

Pod Service dmesg

```
netlink: Unknown conntrack attr (type=6, max=5)
openvswitch: netlink: Flow actions may not be safe on all matching packets.
```

OVS NAT

- 1. OVS
- 2. Overlay kube-ovn-controller --enable-lb=false OVN LB kube-proxy Service

6.8.9 ovn-central

v1.11.x 1 Pod OVN NB SB Kube-OVN ovsdb-server/compact

v1.13 ENABLE_COMPACT false dist/images/install.sh start-db.sh ovn-central true

```
- name: ENABLE_COMPACT
  value: "false"
```

 PDF

 Slack

 Support

 2026 4 28

 2022 5 24

 GitHub



6.8.10


7.

7.1

Kube-OVN	CNI	macvlan	vlan	host-device	IPAM	Kube-OVN	IP
Kube-OVN		Kube-OVN					

7.1.1


Multus CNI pod pod eth0 net0 net1 eth0 kubernetes kubernetes kubernetes api-server kubelet
net0 net1 CNI vlan/vxlan/ptp

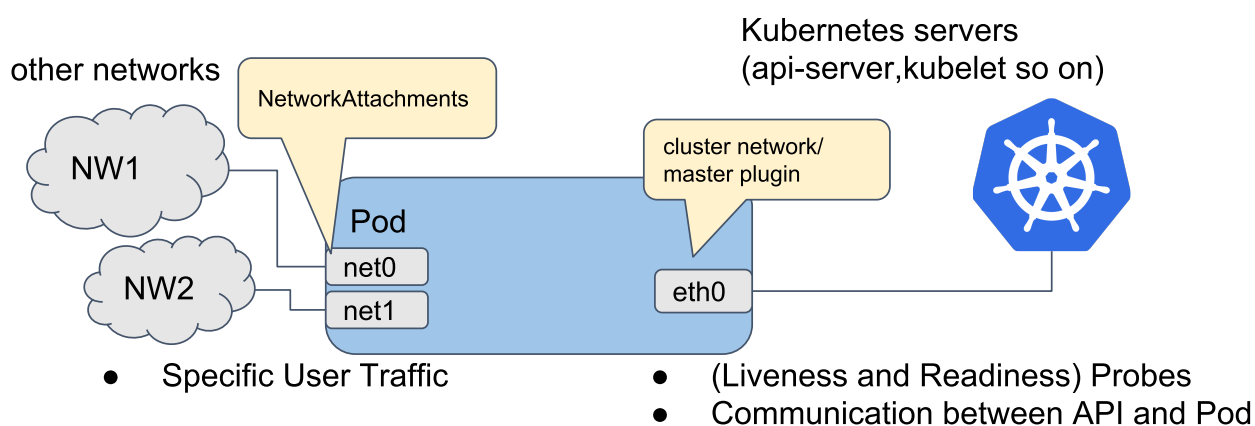

IPAM

Multus CNI Pod IP Kube-OVN Subnet IP CRD IP IP

Kube-OVN IPAM

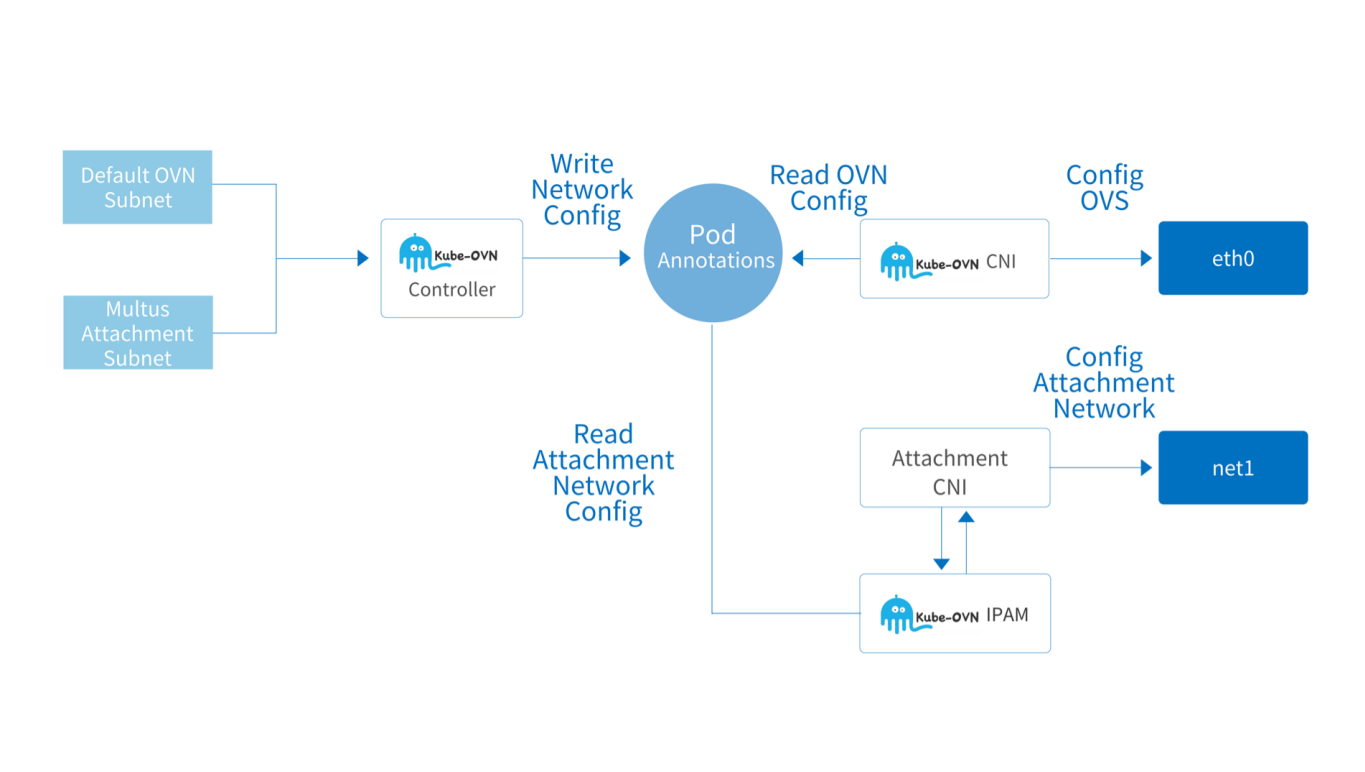

	Kube-OVN	IP	eth0	OVN	net1	CNI	net1	multus-cni	NetworkAttachmentDefinition
Pod	kube-ovn-controller	Pod	Pod	Pod	annotation	Subnet	IP	Pod	Pod annotation
	CNI	kube-ovn-cni	ipam	kube-ovn-cni	Pod annotation		CNI		CNI

7.1.2

NetworkAttachmentDefinitionspecmultusdefaultConfDirCNI

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: macvlan-conf-2
```

kube-ovn-controllerNetworkAttachmentDefinitionproviderspeckube-ovn-controllerproviderspecKube-OVN IPAM

7.1.3

Kube-OVN Multus

[Kube-OVN](#)[Multus how to use](#)[Kube-OVN](#)[Multus-CNI](#)

CNI IPAM

[Kube-OVN](#)[CNI](#)

NETWORKATTACHMENTDEFINITION

[macvlan](#)[ipam](#)[kube-ovn](#)

```
# macvlan
sudo modprobe macvlan
```

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: macvlan
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "macvlan",
    "master": "eth0",
    "mode": "bridge",
    "ipam": {
      "type": "kube-ovn",
      "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
      "provider": "macvlan.default"
    }
  }'
```

- spec.config.ipam.type: kube-ovn kube-ovn
- server_socket: Kube-OVN socket /run/openvswitch/kube-ovn-daemon.sock
- provider: NetworkAttachmentDefinition <name>.<namespace> Kube-OVN Subnet
- master:

Info

provider Underlay ProviderNetwork

KUBE-OVN SUBNET

Kube-OVN Subnet cidrBlock exclude_ips provider NetworkAttachmentDefinition <name>.<namespace> macvlan Subnet

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: macvlan
spec:
  protocol: IPv4
  provider: macvlan.default
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  excludeIps:
    - 172.17.0.0..172.17.0.10
```

gateway private nat provider ovn attachment network

Pod

Pod annotation k8s.v1.cni.cncf.io/networks NetworkAttachmentDefinition <namespace>/<name>

```
apiVersion: v1
kind: Pod
metadata:
  name: samplepod
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: default/macvlan
spec:
  containers:
    - name: samplepod
      command: ["/bin/ash", "-c", "trap : TERM INT; sleep infinity & wait"]
      image: docker.io/library/alpine:edge
```

IP Pod

IP Pod <networkAttachmentName>.<networkAttachmentNamespace>.kubernetes.io/ip_address annotation

```
apiVersion: v1
kind: Pod
metadata:
  name: static-ip
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: default/macvlan
    ovn.kubernetes.io/ip_address: 10.16.0.15
    ovn.kubernetes.io/mac_address: 00:00:00:53:6B:B6
```

```
macvlan.default.kubernetes.io/ip_address: 172.17.0.100
macvlan.default.kubernetes.io/mac_address: 00:00:00:53:6B:BB
spec:
  containers:
  - name: static-ip
    image: docker.io/library/nginx:alpine
```

IP

ippool `<networkAttachmentName>.<networkAttachmentNamespace>.kubernetes.io/ip_pool` annotation

```
apiVersion: apps/v1
kind: Deployment
metadata:
  namespace: default
  name: static-workload
  labels:
    app: static-workload
spec:
  replicas: 2
  selector:
    matchLabels:
      app: static-workload
  template:
    metadata:
      labels:
        app: static-workload
      annotations:
        k8s.v1.cni.cncf.io/networks: default/macvlan
        ovn.kubernetes.io/ip_pool: 10.16.0.15,10.16.0.16,10.16.0.17
        macvlan.default.kubernetes.io/ip_pool: 172.17.0.200,172.17.0.201,172.17.0.202
    spec:
      containers:
      - name: static-workload
        image: docker.io/library/nginx:alpine
```

macvlan Pod

macvlan Pod Pod annotation default-route

```
apiVersion: v1
kind: Pod
metadata:
  name: samplepod-route
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: '[{"name": "macvlan", "namespace": "default", "default-route": ["172.17.0.1"]}]'
spec:
  containers:
  - name: samplepod-route
    command: ["/bin/ash", "-c", "trap : TERM INT; sleep infinity & wait"]
    image: docker.io/library/alpine:edge
```

macvlan Pod

macvlan Pod annotation `v1.multus-cni.io/default-network` NetworkAttachmentDefinition `<namespace>/<name>`

```
apiVersion: v1
kind: Pod
metadata:
  name: samplepod-macvlan
  namespace: default
  annotations:
    v1.multus-cni.io/default-network: default/macvlan
spec:
  containers:
  - name: samplepod-macvlan
    command: ["/bin/ash", "-c", "trap : TERM INT; sleep infinity & wait"]
    image: docker.io/library/alpine:edge
```

KUBE-OVN SUBNET PROVIDER OVN

provider ovn subnet IP provider ovn Kube-OVN Subnet cidrBlock exclude_ips Subnet

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: macvlan
spec:
  protocol: IPv4
  provider: ovn
```



```
cidrBlock: 172.17.0.0/16
gateway: 172.17.0.1
excludeIps:
- 172.17.0.0..172.17.0.10
```

Pod

provider ovn subnet IP Pod annotation k8s.v1.cni.cncf.io/networks

<networkAttachmentName>.<networkAttachmentNamespace>.kubernetes.io/logical_switch

```
apiVersion: v1
kind: Pod
metadata:
  name: samplepod
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: default/macvlan
    macvlan.default.kubernetes.io/logical_switch: macvlan
spec:
  containers:
  - name: samplepod
    command: ["/bin/ash", "-c", "trap : TERM INT; sleep infinity & wait"]
    image: docker.io/library/alpine:edge
```

- k8s.v1.cni.cncf.io/networks: NetworkAttachmentDefinition <namespace>/<name>
- macvlan.default.kubernetes.io/logical_switch:

- <networkAttachmentName>.<networkAttachmentNamespace>.kubernetes.io/logical_switch provider
- ovn subnet ipam IP Pod IP macvlan Pod
- macvlan Pod

Kube-OVN

Kube-OVN

NETWORKATTACHMENTDEFINITION

provider ovn

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: attachnet
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "kube-ovn",
    "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
    "provider": "attachnet.default.ovn"
  }'
```

- spec.config.type: kube-ovn CNI Kube-OVN
- server_socket: Kube-OVN socket /run/openvswitch/kube-ovn-daemon.sock
- provider: NetworkAttachmentDefinition <name>.<namespace>.ovn Kube-OVN Subnet ovn

KUBE-OVN SUBNET

Kube-OVN provider NetworkAttachmentDefinition <name>.<namespace>.ovn ovn Kube-OVN Subnet

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: attachnet
spec:
  protocol: IPv4
  provider: attachnet.default.ovn
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  excludeIps:
  - 172.17.0.0..172.17.0.10
```

Pod

Pod annotation k8s.v1.cni.cncf.io/networks NetworkAttachmentDefinition <namespace>/<name>

```
apiVersion: v1
kind: Pod
metadata:
  name: samplepod
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: default/attachnet
spec:
  containers:
  - name: samplepod
    command: ["/bin/ash", "-c", "trap : TERM INT; sleep infinity & wait"]
    image: docker.io/library/alpine:edge
```

IP/MAC

NetworkAttachmentDefinition IP/MAC k8s.v1.cni.cncf.io/networks interface
annotation <nadName>.<nadNamespace>.kubernetes.io/ip_address.<interfaceName> <nadName>.<nadNamespace>.kubernetes.io/
mac_address.<interfaceName> - IP/MAC

Kube-OVN Pod <networkAttachmentName>.<networkAttachmentNamespace>.ovn.kubernetes.io/routes annotation

```
apiVersion: v1
kind: Pod
metadata:
  name: custom-routes-attach
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: default/attachnet
    attachnet.default.ovn.kubernetes.io/routes: |
      [{
        "dst": "192.168.0.101/24",
        "gw": "172.17.0.254"
      }, {
        "gw": "172.17.0.254"
      }]
spec:
  containers:
  - name: custom-routes-attach
    command: ["/bin/ash", "-c", "trap : TERM INT; sleep infinity & wait"]
    image: docker.io/library/alpine:edge
```

dst

Deployment DaemonSet StatefulSet Annotation .spec.template.metadata.annotations

```
apiVersion: apps/v1
kind: Deployment
metadata:
  name: custom-routes-attach
  labels:
    app: nginx
spec:
  replicas: 2
  selector:
    matchLabels:
      app: nginx
  template:
    metadata:
      labels:
        app: nginx
      annotations:
        k8s.v1.cni.cncf.io/networks: default/attachnet
        attachnet.default.ovn.kubernetes.io/routes: |
          [{
            "dst": "192.168.0.101/24",
            "gw": "172.17.0.254"
          }, {
            "gw": "172.17.0.254"
          }]
    spec:
      containers:
      - name: nginx
        image: docker.io/library/nginx:alpine
```

KUBE-OVN SUBNET PROVIDER OVN

provider ovn subnet IP provider ovn Kube-OVN Subnet cidrBlock exclude_ips Subnet

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: attachnet
spec:
  protocol: IPv4
  provider: ovn
  cidrBlock: 172.17.0.0/16
  gateway: 172.17.0.1
  excludeIps:
    - 172.17.0.0..172.17.0.10
```

Pod

provider ovn subnet IP Pod annotation k8s.v1.cni.cncf.io/networks

<networkAttachmentName>.<networkAttachmentNamespace>.ovn.kubernetes.io/logical_switch

```
apiVersion: v1
kind: Pod
metadata:
  name: samplepod
  namespace: default
  annotations:
    k8s.v1.cni.cncf.io/networks: default/attachnet
    attachnet.default.ovn.kubernetes.io/logical_switch: attachnet
spec:
  containers:
    - name: samplepod
      command: ["/bin/ash", "-c", "trap : TERM INT; sleep infinity & wait"]
      image: docker.io/library/alpine:edge
```

- k8s.v1.cni.cncf.io/networks: NetworkAttachmentDefinition <namespace>/<name>
- attachnet.default.ovn.kubernetes.io/logical_switch:

- <networkAttachmentName>.<networkAttachmentNamespace>.ovn.kubernetes.io/logical_switch provider
- Kube-OVN Pod IP Pod IP macvlan Pod Kube-OVN Pod
- Kube-OVN Pod <networkAttachmentName>.<networkAttachmentNamespace>.ovn.kubernetes.io/routes annotation


 PDF

 Slack

 Support

🕒 2026 2 11

🕒 2022 5 20




7.1.4

7.2

Kube-OVN

Kube-OVN

7.2.1

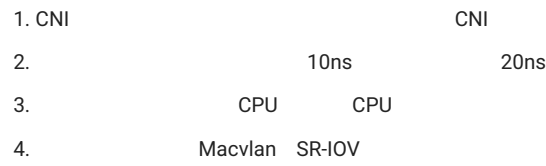

7.2.2

Overlay

- Kubernetes: 1.22.0
- OS: CentOS 7
- Kube-OVN: 1.8.0 *Overlay*
- CPU: Intel(R) Xeon(R) E-2278G
- Network: 2*10Gbps, xmit_hash_policy=layer3+4

```
qperf -t 60 <server ip> -ub -oo msg_size:1 -vu tcp_lat tcp_bw udp_lat udp_bw 1 tcp/udp
```

Type	tcp_lat (us)	udp_lat (us)	tcp_bw (Mb/s)	udp_bw(Mb/s)
Kube-OVN Default	25.7	22.9	27.1	1.59
Kube-OVN Optimized	13.9	12.9	27.6	5.57
HOST Network	13.1	12.4	28.2	6.02

Overlay Underlay

Kube-OVN Overlay Underlay

Environment:

- Kubernetes: 1.22.0
- OS: CentOS 7
- Kube-OVN: 1.8.0
- CPU: AMD EPYC 7402P 24-Core Processor
- Network: Intel Corporation Ethernet Controller XXV710 for 25GbE SFP28

```
qperf -t 60 <server ip> -ub -oo msg_size:1 -vu tcp_lat tcp_bw udp_lat udp_bw
```

Type	tcp_lat (us)	udp_lat (us)	tcp_bw (Mb/s)	udp_bw(Mb/s)
Kube-OVN Overlay	15.2	14.6	23.6	2.65
Kube-OVN Underlay	14.3	13.8	24.2	3.46
HOST Network	16.6	15.4	24.8	2.64

```
qperf -t 60 <server ip> -ub -oo msg_size:1K -vu tcp_lat tcp_bw udp_lat udp_bw
```

Type	tcp_lat (us)	udp_lat (us)	tcp_bw (Gb/s)	udp_bw(Gb/s)
Kube-OVN Overlay	16.5	15.8	10.2	2.77
Kube-OVN Underlay	15.9	14.5	9.6	3.22
HOST Network	18.1	16.6	9.32	2.66

```
qperf -t 60 <server ip> -ub -oo msg_size:4K -vu tcp_lat tcp_bw udp_lat udp_bw
```

Type	tcp_lat (us)	udp_lat (us)	tcp_bw (Gb/s)	udp_bw(Gb/s)
Kube-OVN Overlay	34.7	41.6	16.0	9.23
Kube-OVN Underlay	32.6	44	15.1	6.71
HOST Network	35.9	45.9	14.6	5.59



7.2.3

CPU

CPU

CPU

```
cpupower frequency-set -g performance
```

```
# ethtool -g eno1
Ring parameters for eno1:
Pre-set maximums:
RX:                4096
RX Mini:           0
RX Jumbo:          0
TX:                4096
Current hardware settings:
RX:                255
RX Mini:           0
RX Jumbo:          0
TX:                255
```

```
ethtool -G eno1 rx 4096
ethtool -G eno1 tx 4096
```

tuned

tuned profile

tuned-adm profile network-latency

tuned-adm profile network-throughput

irqbalance CPU CPU

OVN LB

OVN L2 LB conntrack recirculate CPU 20% CPU Overlay kube-proxy Service
Pod-to-Pod kube-ovn-controller

```
command:
- /kube-ovn/start-controller.sh
args:
...
- --enable-lb=false
...
```

Underlay kube-proxy iptables ipvs LB Service

conntrack

OVN LB Service Service NetworkPolicy Subnet A Pod Subnet B Service
kube-ovn-controller --skip-conntrack-dst-cidrs conntrack

--skip-conntrack-dst-cidrs="10.17.0.0/16,169.254.169.245/32"

FastPath

network ns netfilter 20% CPU netfilter FastPath netfilter CPU

netfilter iptables ipvs nftables

FastPath

insmod kube_ovn_fastpath.ko FastPath dmesg

```
# dmesg
...
[619631.323788] init_module,kube_ovn_fastpath_local_out
[619631.323798] init_module,kube_ovn_fastpath_post_routing
[619631.323800] init_module,kube_ovn_fastpath_pre_routing
[619631.323801] init_module,kube_ovn_fastpath_local_in
...
```

OVS

OVS flow 10% CPU x86 CPU popcnt sse4.2 flow CPU
5%

FastPath

CPU

```
cat /proc/cpuinfo | grep popcnt
cat /proc/cpuinfo | grep sse4_2
```

CENTOS

```
yum install -y gcc kernel-devel-$(uname -r) python3 autoconf automake libtool rpm-build openssl-devel
```

OVS RPM :

```
git clone -b branch-3.5 --depth=1 https://github.com/openvswitch/ovs.git
cd ovs
curl -s https://github.com/kubeovn/ovs/commit/2d2c83c26d4217446918f39d5cd5838e9ac27b32.patch | git apply
./boot.sh
./configure --with-linux=/lib/modules/$(uname -r)/build CFLAGS="-g -O2 -mpopcnt -msse4.2"
make rpm-fedora-kmod
cd rpm/rpmbuild/RPMS/x86_64/
```

RPM

```
rpm -i openvswitch-kmod-3.5.1-1.el7.x86_64.rpm
```

Kube-OVN OVS

UBUNTU

```
apt install -y autoconf automake libtool gcc build-essential libssl-dev
```

OVS

```
apt install -y autoconf automake libtool gcc build-essential libssl-dev

git clone -b branch-3.5 --depth=1 https://github.com/openvswitch/ovs.git
cd ovs
curl -s https://github.com/kubeovn/ovs/commit/2d2c83c26d4217446918f39d5cd5838e9ac27b32.patch | git apply
./boot.sh
./configure --prefix=/usr/ --localstatedir=/var --enable-ssl --with-linux=/lib/modules/$(uname -r)/build
make -j `nproc`
make install
make modules_install

cat > /etc/depmod.d/openvswitch.conf << EOF
override openvswitch * extra
override vport-* * extra
EOF

depmod -a
cp debian/openvswitch-switch.init /etc/init.d/openvswitch-switch
/etc/init.d/openvswitch-switch force-reload-kmod
```

Kube-OVN OVS

STT

 **Warning**

OpenVswitch 3.6 [STT](#) [Tunnel](#)

	Geneve	Vxlan	UDP	UDP	TCP	TCP	offload	TCP
CPU	TCP							
STT	TCP		TCP	TCP		TCP	TCP	
STT		OVS	OVS					

STT

```
kubect1 set env daemonset/ovs-ovn -n kube-system TUNNEL_TYPE=stt
kubect1 delete pod -n kube-system -lapp=ovs
```

 PDF

 Slack

 Support

 2025 10 28

 2022 5 24

 GitHub







7.2.4

7.3 FastPath

Profile **Netfilter**

20%

CPU

FastPath

Netfilter

CPU

FastPath

7.3.1

```
git clone --depth=1 https://github.com/kubeovn/kube-ovn.git
```

7.3.2

RPM CentOS RHEL

```
yum install -y kernel-devel-$(uname -r) gcc elfutils-libelf-devel
```

DEB Ubuntu Debian

```
apt install -y linux-headers-$(uname -r) build-essential
```

7.3.3

3.x

```
cd kube-ovn/fastpath/3.x
make all
```

4.x ~ 6.x

```
cd kube-ovn/fastpath/4.x-6.x
make all
```

7.3.4

```
kube_ovn_fastpath.ko
```

```
insmod kube_ovn_fastpath.ko
```

dmesg

```
# dmesg
[619631.323788] init_module,kube_ovn_fastpath_local_out
[619631.323798] init_module,kube_ovn_fastpath_post_routing
[619631.323800] init_module,kube_ovn_fastpath_pre_routing
[619631.323801] init_module,kube_ovn_fastpath_local_in
```

```
rmmod kube_ovn_fastpath.ko
```



PDF



Slack



Support

🕒2026 2 11

🕒2022 5 24



🐙GitHub




7.3.5

7.4 eBPF TCP

5G Pod TCP Intel [istio-tcpip-bypass](#) Pod eBPF TCP/IP socket

7.4.1


Pod TCP TCP/IP, netfilter OVS

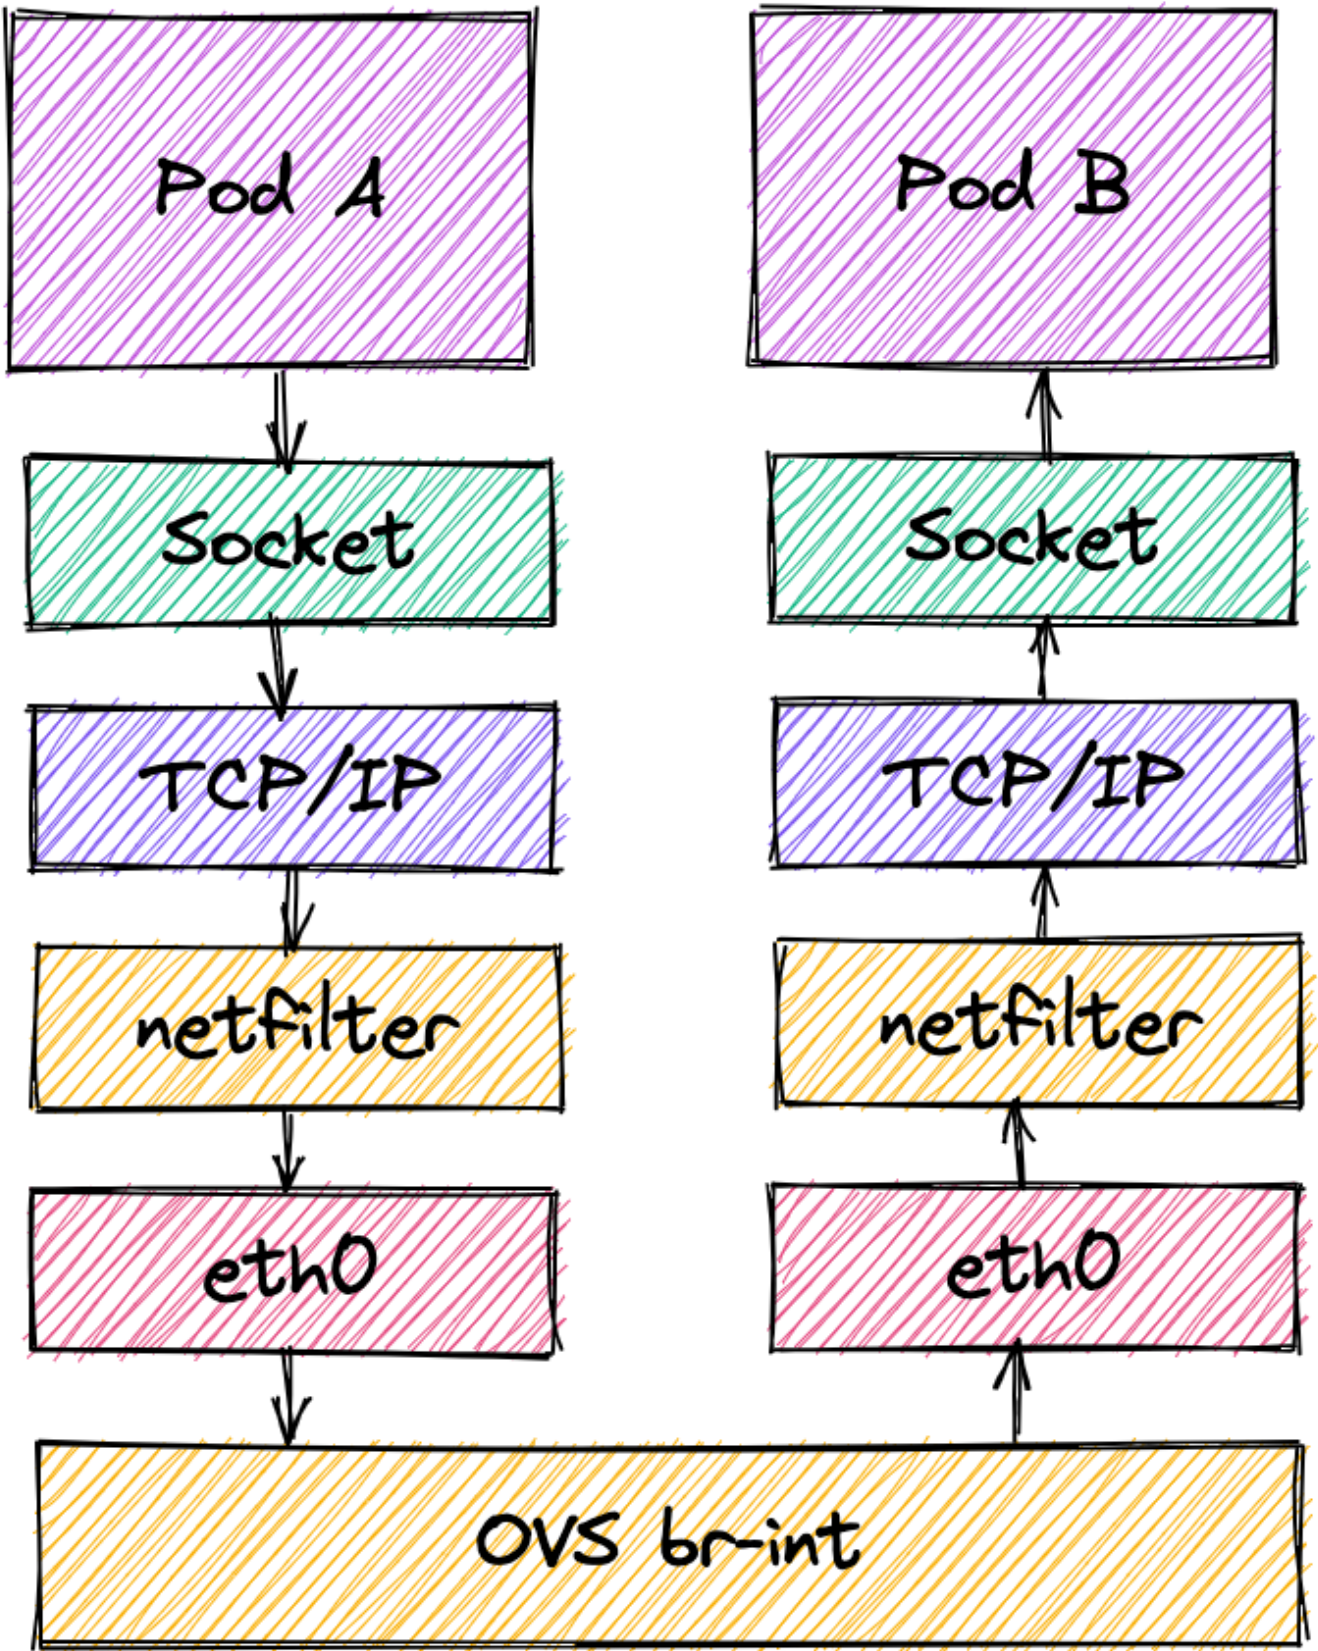

istio-tcpip-bypass

TCP

socket

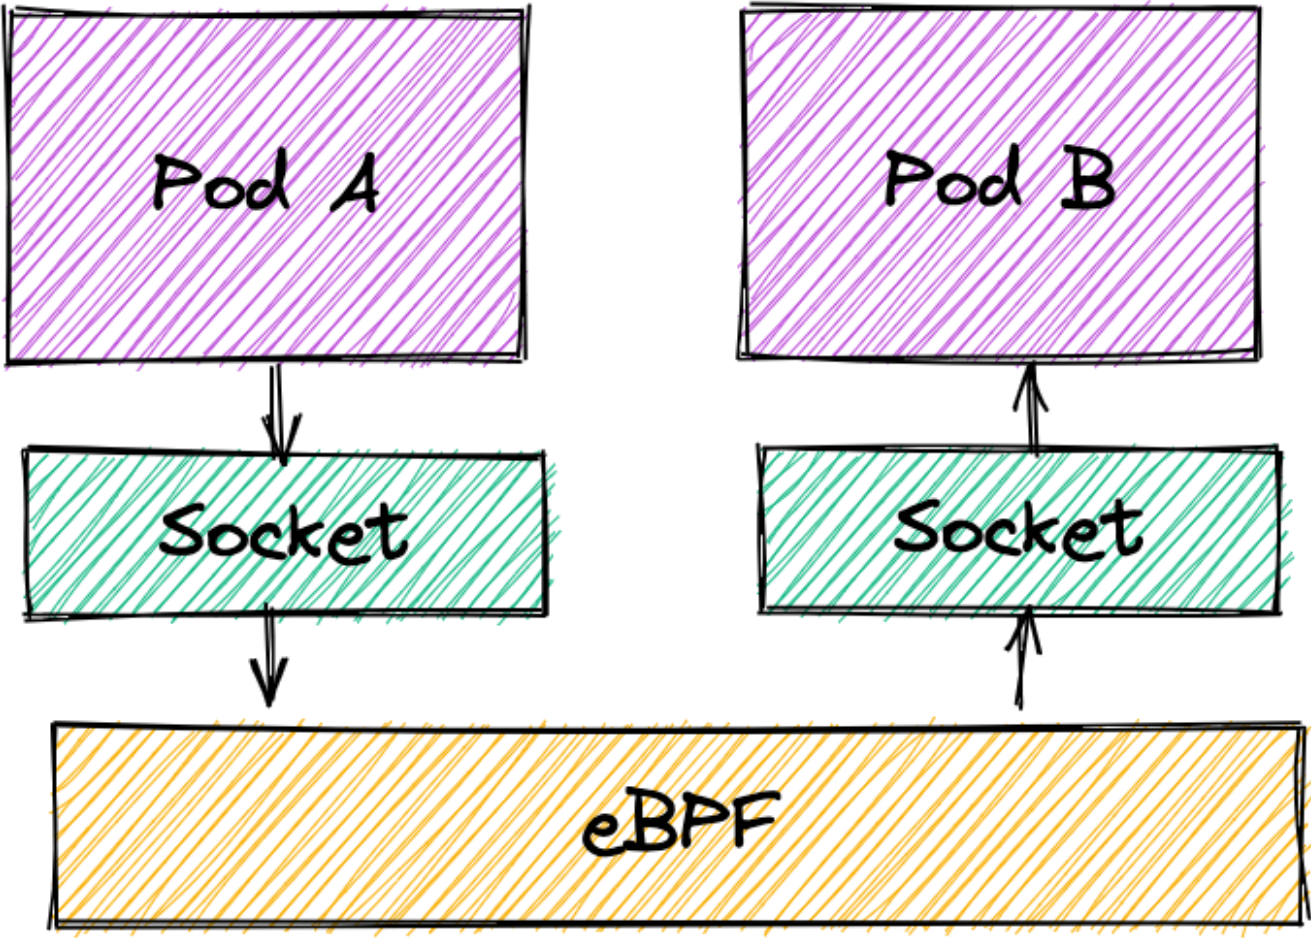

TCP Service Mesh Service Mesh

Tanzu Service Mesh Acceleration using eBPF

7.4.2

eBPF Ubuntu 20.04 Linux 5.4.0-74-generic

7.4.3

Pod nodeSelector

```
# kubectl create deployment perf --image=kubeovn/perf:dev --replicas=2
deployment.apps/perf created
# kubectl get pod -o wide
NAME                                READY   STATUS    RESTARTS   AGE   IP            NODE   NOMINATED NODE   READINESS GATES
perf-7697bc6ddf-b2cpv               1/1    Running   0          28s   100.64.0.3    sealos <none>         <none>
perf-7697bc6ddf-p2xpt               1/1    Running   0          28s   100.64.0.2    sealos <none>         <none>
```

Pod qperf server Pod qperf client

```
# kubectl exec -it perf-7697bc6ddf-b2cpv sh
/ # qperf

# kubectl exec -it perf-7697bc6ddf-p2xpt sh
/ # qperf -t 60 100.64.0.3 -ub -oo msg_size:1:16K:*4 -vu tcp_lat tcp_bw
```

istio-tcpip-bypass

```
kubectl apply -f https://raw.githubusercontent.com/intel/istio-tcpip-bypass/main/bypass-tcpip-daemonset.yaml
```

perf client

```
# kubectl exec -it perf-7697bc6ddf-p2xpt sh
/ # qperf -t 60 100.64.0.3 -ub -oo msg_size:1:16K:*4 -vu tcp_lat tcp_bw
```

7.4.4

TCP40% ~ 60%102440% ~ 80%

Packet Size (byte)	eBPF tcp_lat (us)	Default tcp_lat (us)	eBPF tcp_bw (Mb/s)	Default tcp_bw(Mb/s)
1	20.2	44.5	1.36	4.27
4	20.2	48.7	5.48	16.7
16	19.6	41.6	21.7	63.5
64	18.8	41.3	96.8	201
256	19.2	36	395	539
1024	18.3	42.4	1360	846
4096	16.5	62.6	4460	2430
16384	20.2	58.8	9600	6900

512eBPFTCPeBPF eBPF TCP

7.4.5

1. [istio-tcpip-bypass](#)

2. [Deep Dive TCP/IP Bypass with eBPF in Service Mesh](#)

3. [Tanzu Service Mesh Acceleration using eBPF](#)


PDF

Slack

Support


🕒2025 9 10

🕒2022 9 27



7.4.6

7.5 OVN-IC

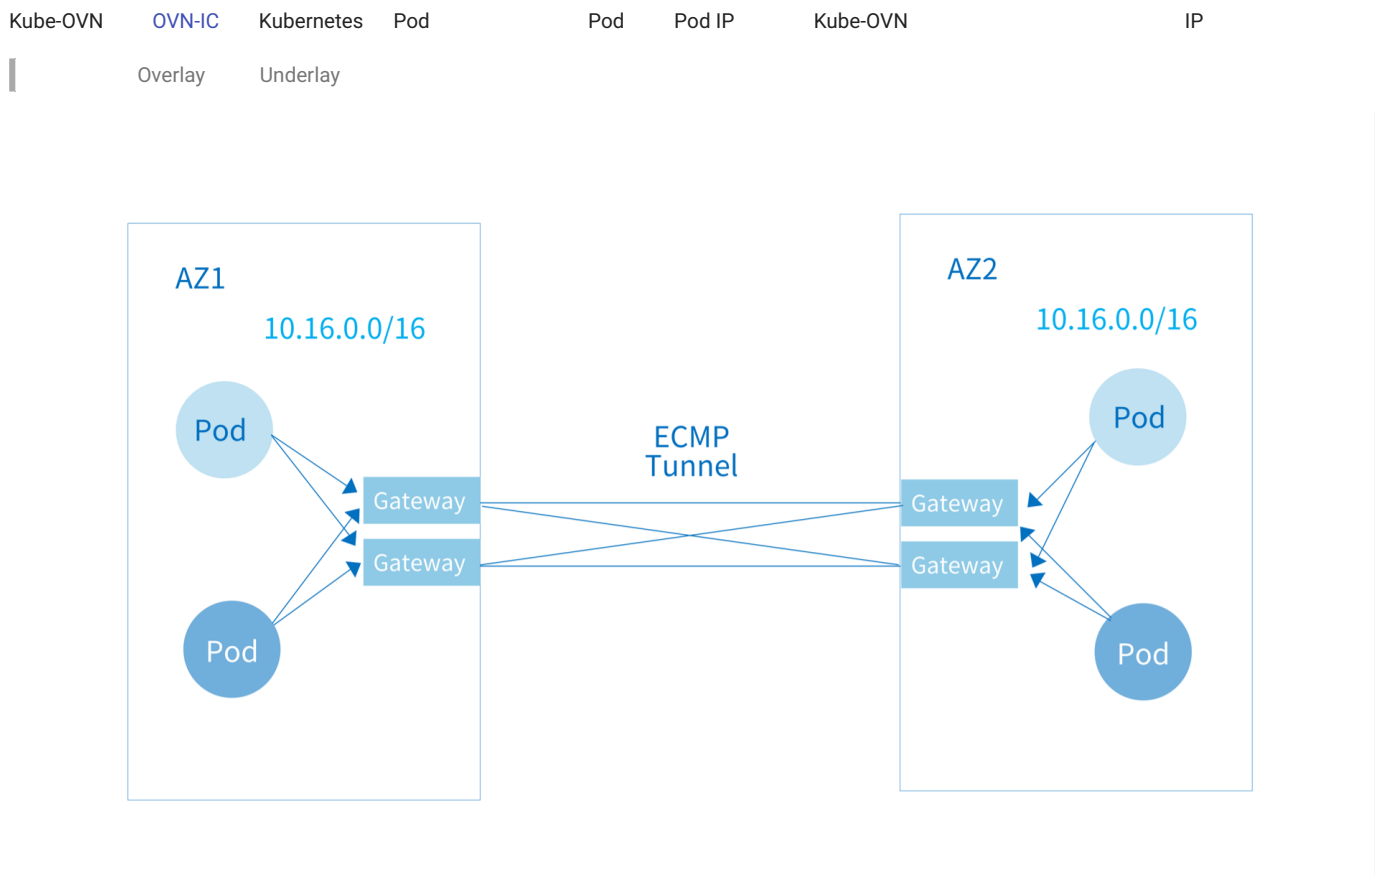

 Limitation

OVN-IC	Pod IP	Service DNS	NetworkPolicy	Istio
--------	--------	-------------	---------------	-------

7.5.1

```
1.1.11.16 install.sh
```

ENABLE_IC=true

deployment ovn-ic-controller

2. CIDR

3. kube-ovn-controller IP

4. IP

5. VPC VPC

7.5.2 OVN-IC

1

1 Kube-OVN v1.11.16

"	"	"	"	Deployment	master	master	1	master
---	---	---	---	------------	--------	--------	---	--------

```
install-ovn-ic.sh
```

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/dist/images/install-ic-server.sh
```

TS_NUM ECMP Path

```
sed 's/VERSION=.*//VERSION=v1.17.0/' dist/images/install-ic-server.sh | TS_NUM=3 bash
```

```
deployment.apps/ovn-ic-server created
Waiting for deployment spec update to be observed...
Waiting for deployment "ovn-ic-server" rollout to finish: 0 out of 3 new replicas have been updated...
Waiting for deployment "ovn-ic-server" rollout to finish: 0 of 3 updated replicas are available...
Waiting for deployment "ovn-ic-server" rollout to finish: 1 of 3 updated replicas are available...
Waiting for deployment "ovn-ic-server" rollout to finish: 2 of 3 updated replicas are available...
deployment "ovn-ic-server" successfully rolled out
OVN IC Server installed Successfully
```

```
kubect1 ko icsbctl show
```

```
kubect1 ko icsbctl show
availability-zone az0
gateway 059b5c54-c540-4d77-b009-02d65f181a02
  hostname: kube-ovn-worker
  type: geneve
  ip: 172.18.0.3
  port ts-az0
    transit switch: ts
    address: ["00:00:00:B4:8E:BE 169.254.100.97/24"]
gateway 74ee4b9a-ba48-4a07-861e-1a8e4b9f905f
  hostname: kube-ovn-worker2
  type: geneve
  ip: 172.18.0.2
  port ts1-az0
    transit switch: ts1
    address: ["00:00:00:19:2E:F7 169.254.101.90/24"]
gateway 7e2428b6-344c-4dd5-a0d5-972c1ccec581
  hostname: kube-ovn-control-plane
  type: geneve
  ip: 172.18.0.4
  port ts2-az0
    transit switch: ts2
    address: ["00:00:00:EA:32:BA 169.254.102.103/24"]
availability-zone az1
gateway 034da7cb-3826-4318-81ce-6a877a9bf285
  hostname: kube-ovn1-worker
  type: geneve
  ip: 172.18.0.6
  port ts-az1
    transit switch: ts
    address: ["00:00:00:25:3A:B9 169.254.100.51/24"]
gateway 2531a683-283e-4fb8-a619-bdbcb33539b8
  hostname: kube-ovn1-worker2
  type: geneve
  ip: 172.18.0.5
  port ts1-az1
    transit switch: ts1
    address: ["00:00:00:52:87:F4 169.254.101.118/24"]
gateway b0efb0be-e5a7-4323-ad4b-317637a757c4
  hostname: kube-ovn1-control-plane
  type: geneve
  ip: 172.18.0.8
  port ts2-az1
    transit switch: ts2
    address: ["00:00:00:F6:93:1A 169.254.102.17/24"]
```

2

kube-ovn-controller IP OVN-IC

docker OVN-IC

```
docker run --name=ovn-ic-db -d --env "ENABLE_OVN_LEADER_CHECK=false" --network=host --privileged -v /etc/ovn:/etc/ovn -v /var/run/ovn:/var/run/ovn -v /var/log/ovn:/var/log/ovn kubeovn/kube-ovn:v1.17.0 bash start-ic-db.sh
```

containerd docker


```
ctr -n k8s.io run -d --env "ENABLE_OVN_LEADER_CHECK=false" --net-host --privileged --mount="type=bind,src=/etc/ovn/,dst=/etc/ovn,options=rbind:rw" --mount="type=bind,src=/var/run/ovn,dst=/var/run/ovn,options=rbind:rw" --mount="type=bind,src=/var/log/ovn,dst=/var/log/ovn,options=rbind:rw" docker.io/kubeovn/kube-ovn:v1.17.0 ovn-ic-db bash start-ic-db.sh
```

7.5.3

VPC Subnet CIDR OVN-IC Subnet CIDR

kube-system Namespace ovn-ic-config ConfigMap

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-ic-config
  namespace: kube-system
data:
  enable-ic: "true"
  az-name: "az1"
  ic-db-host: "192.168.65.3"
  ic-nb-port: "6645"
  ic-sb-port: "6646"
  gw-nodes: "az1-gw"
  auto-route: "true"
```

- enable-ic:
- az-name:
- ic-db-host: OVN-IC
- ic-nb-port: OVN-IC 6645
- ic-sb-port: OVN-IC 6646
- gw-nodes:
- auto-route:

ovn-ic-config ConfigMap ConfigMap ConfigMap

ovn-ic ts

```
# ovn-ic-sbctl show
availability-zone az1
  gateway deee03e0-af16-4f45-91e9-b50c3960f809
    hostname: az1-gw
    type: geneve
    ip: 192.168.42.145
    port ts-az1
    transit switch: ts
    address: ["00:00:00:50:AC:8C 169.254.100.45/24"]
availability-zone az2
  gateway e94cc831-8143-40e3-a478-90352773327b
    hostname: az2-gw
    type: geneve
    ip: 192.168.42.149
    port ts-az2
    transit switch: ts
    address: ["00:00:00:07:4A:59 169.254.100.63/24"]
```

```
# kubectl ko nbctl lr-route-list ovn-cluster
IPv4 Routes
10.42.1.1 169.254.100.45 dst-ip (learned)
10.42.1.3 100.64.0.2 dst-ip
10.16.0.2 100.64.0.2 src-ip
10.16.0.3 100.64.0.2 src-ip
10.16.0.4 100.64.0.2 src-ip
10.16.0.6 100.64.0.2 src-ip
10.17.0.0/16 169.254.100.45 dst-ip (learned)
100.65.0.0/16 169.254.100.45 dst-ip (learned)
```

1 Pod ping 2 Pod IP

Subnet disableInterConnection

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
```

```

name: no-advertise
spec:
  cidrBlock: 10.199.0.0/16
  disableInterConnection: true

```

7.5.4

CIDR

kube-system Namespace ovn-ic-config ConfigMap auto-route false

```

apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-ic-config
  namespace: kube-system
data:
  enable-ic: "true"
  az-name: "az1"
  ic-db-host: "192.168.65.3"
  ic-nb-port: "6645"
  ic-sb-port: "6646"
  gw-nodes: "az1-gw"
  auto-route: "false"

```

```

[root@az1 ~]# kubectl ko nbctl show
switch a391d3a1-14a0-4841-9836-4bd930c447fb (ts)
  port ts-az1
    type: router
    router-port: az1-ts
  port ts-az2
    type: remote
    addresses: ["00:00:00:4B:E2:9F 169.254.100.31/24"]

```

```

[root@az2 ~]# kubectl ko nbctl show
switch da6138b8-de81-4908-abf9-b2224ec4edf3 (ts)
  port ts-az2
    type: router
    router-port: az2-ts
  port ts-az1
    type: remote
    addresses: ["00:00:00:FB:2A:F7 169.254.100.79/24"]

```

az1 az2 169.254.100.31 az2 az1 169.254.100.79

az1 CIDR 10.16.0.0/24 az2 CIDR 10.17.0.0/24

az1 az2

```
kubectl ko nbctl lr-route-add ovn-cluster 10.17.0.0/24 169.254.100.31
```

az2 az1

```
kubectl ko nbctl lr-route-add ovn-cluster 10.16.0.0/24 169.254.100.79
```

7.5.5 OVN-IC

1

1 Kube-OVN v1.11.16

1

2

OVN-IC Raft 3

OVN-IC leader

docker

```
docker run --name=ovn-ic-db -d --env "ENABLE_OVN_LEADER_CHECK=false" --network=host --privileged -v /etc/ovn:/etc/ovn -v /var/run/ovn:/var/run/ovn -v /var/log/ovn:/var/log/ovn -e LOCAL_IP="192.168.65.3" -e NODE_IPS="192.168.65.3,192.168.65.2,192.168.65.1" kubeovn/kube-ovn:v1.17.0 bash start-ic-db.sh
```

containerd

```
ctr -n k8s.io run -d --env "ENABLE_OVN_LEADER_CHECK=false" --net-host --privileged --mount="type=bind,src=/etc/ovn,dst=/etc/ovn,options=rbind:rw" --mount="type=bind,src=/var/run/ovn,dst=/var/run/ovn,options=rbind:rw" --mount="type=bind,src=/var/log/ovn,dst=/var/log/ovn,options=rbind:rw" --env="NODE_IPS="192.168.65.3,192.168.65.2,192.168.65.1" --env="LOCAL_IP="192.168.65.3" docker.io/kubeovn/kube-ovn:v1.17.0 ovn-ic-db bash start-ic-db.sh
```

- LOCAL_IP IP
- NODE_IPS OVN-IC IP
- OVN-IC follower

docker

```
docker run --name=ovn-ic-db -d --network=host --privileged -v /etc/ovn:/etc/ovn -v /var/run/ovn:/var/run/ovn -v /var/log/ovn:/var/log/ovn -e LOCAL_IP="192.168.65.2" -e NODE_IPS="192.168.65.3,192.168.65.2,192.168.65.1" -e LEADER_IP="192.168.65.3" kubeovn/kube-ovn:v1.17.0 bash start-ic-db.sh
```

containerd

```
ctr -n k8s.io run -d --net-host --privileged --mount="type=bind,src=/etc/ovn,dst=/etc/ovn,options=rbind:rw" --mount="type=bind,src=/var/run/ovn,dst=/var/run/ovn,options=rbind:rw" --mount="type=bind,src=/var/log/ovn,dst=/var/log/ovn,options=rbind:rw" --env="NODE_IPS="192.168.65.3,192.168.65.2,192.168.65.1" --env="LOCAL_IP="192.168.65.2" --env="LEADER_IP="192.168.65.3" docker.io/kubeovn/kube-ovn:v1.17.0 ovn-ic-db bash start-ic-db.sh
```

- LOCAL_IP IP
- NODE_IPS OVN-IC IP
- LEADER_IP: OVN-IC leader IP
- ovn-ic-config OVN-IC

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-ic-config
  namespace: kube-system
data:
  enable-ic: "true"
  az-name: "az1"
  ic-db-host: "192.168.65.3,192.168.65.2,192.168.65.1"
  ic-nb-port: "6645"
  ic-sb-port: "6646"
  gw-nodes: "az1-gw"
  auto-route: "true"
```

7.5.6 ECMP

1

ECMP ECMP path 3 ECMP path

```
kubectrl edit deployment ovn-ic-server -n kube-system
```

'TS_NUM' TS_NUM ECMP Path

7.5.7

ovn-ic-config Configmap

```
kubectrl -n kube-system delete cm ovn-ic-config
```

ts

```
kubectrl ko nbctl ls-del ts
```

7.5.8 az-name

kubectl editovn-ic-configconfigmapaz-nameovn-cni pod10

ovn-appctl -t ovn-controller inc-engine/recompute

7.5.9

ovn-ic-config Configmap

kubectl -n kube-system delete cm ovn-ic-config

ts

kubectl ko nbctl ls-del ts

OVN-IC

docker

docker stop ovn-ic-db
docker rm ovn-ic-db

containerd

ctr -n k8s.io task kill ovn-ic-db
ctr -n k8s.io containers rm ovn-ic-db

deployment ovn-ic-server

kubectl delete deployment ovn-ic-server -n kube-system

masterDB

rm -f /etc/origin/ovn/ovn_ic_nb_db.db
rm -f /etc/origin/ovn/ovn_ic_sb_db.db

 PDF

 Slack

 Support

 2025 6 19

 2022 5 24



GitHub


+1

7.5.10

7.6 Submariner

Submariner	Kubernetes	Pod	Service	Kube-OVN	
OVN-IC	Submariner	Kube-OVN	Kube-OVN	Service	Submariner

7.6.1

- Service CIDR CIDR

7.6.2 Submariner

Note

Submariner v0.22.0 nftables Kube-OVN Submariner

```
kubectl create namespace submariner-operator
kubectl create configmap submariner-global --namespace=submariner-operator --from-literal=use-nftables=false
```

```
subctl
```

```
curl -Ls https://get.submariner.io | bash
export PATH=$PATH:~/local/bin
echo export PATH=$PATH:~/local/bin >> ~/.profile
```

```
kubeconfig      submariner-broker
```

```
subctl deploy-broker
```

```
cluster0      CIDR   10.16.0.0/16 join    CIDR   100.64.0.0/16 cluster1      CIDR   11.16.0.0/16 join    CIDR   100.68.0.0/16
```

```
kubeconfig cluster0      broker      :
```

```
subctl join broker-info.subm --clusterid cluster0 --clustercidr 100.64.0.0/16,10.16.0.0/16 --natt=false --cable-driver vxlan --health-check=false
kubectl label nodes cluster0 submariner.io/gateway=true
```

```
kubeconfig cluster1      broker      :
```

```
subctl join broker-info.subm --clusterid cluster1 --clustercidr 100.68.0.0/16,11.16.0.0/16 --natt=false --cable-driver vxlan --health-check=false
kubectl label nodes cluster1 submariner.io/gateway=true
```

```
join      gateway, routeagent pod      ,      submariner-operator      clusterrole      :
```

```
- apiGroups:
- "apps"
resources:
- daemonsets
verbs:
- create
- get
- list
- watch
- update
```

```
subnet    ovn-default      centralized      gatewayNode
```

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: ovn-default
spec:
  gatewayType: centralized
  gatewayNode: "node1,node2" #    submariner      gateway
```

```
submariner      gateway      gatewayNode
```

Pod IP

subctl

```
subctl show all
subctl diagnose all
```

Submariner Submariner

 PDF

 Slack

 Support

 2026 4 28

 2022 5 24



 GitHub





7.6.3

7.7 Overlay

Underlay		Pod	IP
VPC	Overlay	Pod IP	IP

7.7.1

- `ip_forward`
- `iptables` `forward` `Drop`
- `ct` `INVALID`

7.7.2

<code>natOutgoing</code>	<code>false</code>	<code>nat</code>	Pod IP
--------------------------	--------------------	------------------	--------

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: routed
spec:
  protocol: IPv4
  cidrBlock: 10.166.0.0/16
  default: false
  excludeIps:
    - 10.166.0.1
  gateway: 10.166.0.1
  gatewayType: distributed
  natOutgoing: false
```

Pod

Kubernetes

```
ip route add 10.166.0.0/16 via 192.168.2.10 dev eth0
```

10.166.0.0/16	192.168.2.10	Kubernetes
---------------	--------------	------------

IP	Keepalived	VIP	VIP
Subnet	gatewayType	centralized	gatewayNode
			IP

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: routed
spec:
  protocol: IPv4
  cidrBlock: 10.166.0.0/16
  default: false
  excludeIps:
    - 10.166.0.1
  gateway: 10.166.0.1
  gatewayType: centralized
  gatewayNode: "node1"
  natOutgoing: false
```

<code>nat</code>	VPC NAT
------------------	---------

 PDF

 Slack

 Support

 2023 12 25

 2022 7 6

 GitHub 

7.7.3

7.8 Overlay

Overlay	tunnel

7.8.1

Kube-OVN	Kubernetes Node IP
<pre>IFACE=eth1</pre>	
<pre>ens[a-z0-9]*,eth[a-z0-9]*</pre>	
<pre>kube-ovn-cni DaemonSet</pre>	
<pre>args: - --iface=eth1</pre>	
<pre>annotation ovn.kubernetes.io/tunnel_interface</pre>	<pre>annotation iface annotation</pre>
<pre>kubect1 annotate node no1 ovn.kubernetes.io/tunnel_interface=ethx</pre>	

7.8.2

Kube-OVN	IP	tunnel
- IP - Overlay		
1. Node	IP	
2. Subnet	nodeNetwork	
3. kube-ovn-daemon	IP	OVS
4. Pod	nodeNetwork	Pod OVS IP
<pre>ovn.kubernetes.io/node_networks</pre>		
<pre>JSON key value IP</pre>		
<pre>kubect1 annotate node <node-name> ovn.kubernetes.io/node_networks='{ "storage": "192.168.100.10", "app": "172.16.0.10" }'</pre>		
- storage IP 192.168.100.10 IP - app IP 172.16.0.10 IP		
IP		

spec.nodeNetwork

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: storage-subnet
spec:
  protocol: IPv4
  cidrBlock: 10.100.0.0/16
  gateway: 10.100.0.1
  nodeNetwork: storage
```

storage-subnet	Pod	storage	tunnel
nodeNetwork	IP	IFACE	IP

OVS IP

OVS IP

```
ovs-vsctl get open . external-ids:ovn-encap-ip
```

IP

```
"192.168.1.10,192.168.100.10,172.16.0.10"
```

IP

```
ovs-vsctl get open . external-ids:ovn-encap-ip-default
```

POD IP

Pod Pod OVS IP

```
ovs-vsctl --columns=external_ids find interface external-ids:iface-id="<pod-name>.<namespace>"
```

nodeNetwork encap-ip

```
external_ids : {encap-ip="192.168.100.10", iface-id="test-pod.default", ...}
```

1.

- eth0 IP 192.168.1.10 192.168.1.11
- eth1 IP 10.10.10.10 10.10.10.11

```
kubect1 annotate node node1 ovn.kubernetes.io/node_networks='{"storage": "10.10.10.10"}'
kubect1 annotate node node2 ovn.kubernetes.io/node_networks='{"storage": "10.10.10.11"}'
```

2.

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: storage-net
spec:
  protocol: IPv4
  cidrBlock: 10.200.0.0/16
  gateway: 10.200.0.1
  nodeNetwork: storage
```

```
namespaces:
- storage-namespace
```

3. POD

```
apiVersion: v1
kind: Pod
metadata:
  name: storage-pod
  namespace: storage-namespace
spec:
  containers:
  - name: app
    image: docker.io/library/nginx:alpine
```

Pod eth1

- 1.
- 2. IP IP
- 3. Overlay Underlay Underlay Underlay
- 4. nodeNetwork IP
- 5. Pod nodeNetwork Pod
- 6. ovn.kubernetes.io/node_networks Pod

 PDF

 Slack

 Support

🕒 2025 11 28

🕒 2025 11 28

 GitHub







7.9 BGP

Kube-OVN	Pods	Subnets	Services	EIPs	IP	BGP	IP	kube-ovn-speaker
Pod	Subnet	annotation						
EIP	BGP		VPC NAT Gateway			EIPs		

7.9.1 kube-ovn-speaker

kube-ovn-speaker [GoBGP](#)

kube-ovn-speaker

```
kubectl label nodes speaker-node-1 ovn.kubernetes.io/bgp=true
kubectl label nodes speaker-node-2 ovn.kubernetes.io/bgp=true
```

kube-ovn-speaker ECMP

yaml:

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/yamls/speaker.yaml
```

yaml

```
- --neighbor-address=10.32.32.254
- --neighbor-ipv6-address=2409:AB00:AB00:2000::AFB:8AFE
- --neighbor-as=65030
- --cluster-as=65000
# IP
# - --allowed-source-addresses=10.32.32.2,10.32.32.3,10.32.32.4,10.32.32.5
```

```
- --neighbor-address=10.32.32.252,10.32.32.253
- --neighbor-ipv6-address=2409:AB00:AB00:2000::AFB:8AFC,2409:AB00:AB00:2000::AFB:8AFD
- --neighbor-as=65030
- --cluster-as=65000
# IP
# - --allowed-source-addresses=10.32.32.2,10.32.32.3,10.32.32.4,10.32.32.5
```

- neighbor-address: BGP Peer
- neighbor-as: BGP Peer AS
- cluster-as: AS
- allowed-source-addresses: Speaker IP Speaker ip route get BGP Peer IP
Speaker ECMP IP IP

yaml:

```
kubectl apply -f speaker.yaml
```

7.9.2 Pod/Subnet

BGP Subnet natOutgoing false Pod IP
annotation

```
kubectl annotate pod sample ovn.kubernetes.io/bgp=true
kubectl annotate subnet ovn-default ovn.kubernetes.io/bgp=true
```

annotation

```
kubectl annotate pod sample ovn.kubernetes.io/bgp-
kubectl annotate subnet ovn-default ovn.kubernetes.io/bgp-
```

BGP

7.9.3 ClusterIP Service

Service ClusterIP kube-ovn-speaker --announce-cluster-ip true BGP

annotation

```
kubectl annotate service sample ovn.kubernetes.io/bgp=true
```

annotation

```
kubectl annotate service sample ovn.kubernetes.io/bgp-
```

7.9.4 EIPs

EIPs	VPC NAT Gateway	VpcNatGateway	BGP	BGP Sidecar					
VPC NAT Gateway	BGP	BGP Speaker Sidecar	NetworkAttachmentDefinition	NAD	VPC	Subnet	Sidecar		
Kubernetes API	EIPs	VPC	CoreDNS	NAD					
NetworkAttachmentDefinition	Subnet	provider	{nadName}.{nadNamespace}.ovn						

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
  name: api-ovn-nad
  namespace: default
spec:
  config: '{
    "cniVersion": "0.3.0",
    "type": "kube-ovn",
    "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
    "provider": "api-ovn-nad.default.ovn"
  }'
---
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: vpc-apiserver-subnet
spec:
  protocol: IPv4
  cidrBlock: 100.100.100.0/24
  provider: api-ovn-nad.default.ovn
```

ovn-vpc-nat-config ConfigMap apiNadProvider BGP Speaker :

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: ovn-vpc-nat-config
  namespace: kube-system
data:
  apiNadProvider: api-ovn-nad.default.ovn # What NetworkAttachmentDefinition provider to use so that the sidecar
                                           # can access the K8S API, as it can't by default due to VPC segmentation
  bgpSpeakerImage: docker.io/kubeovn/kube-ovn:v1.13.0 # Sets the BGP speaker image used
  image: docker.io/kubeovn/vpc-nat-gateway:v1.13.0
```

ovn-default provider

```
provider: api-ovn-nad.default.ovn
```

VPC NAT Gateway BGP

```
kind: VpcNatGateway
apiVersion: kubeovn.io/v1
metadata:
  name: vpc-natgw
spec:
  vpc: vpc1
  subnet: net1
  lanIp: 10.0.1.10
```

```
bgpSpeaker:
  enabled: true
  asn: 65500
  remoteAsn: 65000
  neighbors:
    - 100.127.4.161
    - fd:01::1
  enableGracefulRestart: true # Optional
  routerId: 1.1.1.1           # Optional
  holdTime: 1m                # Optional
  password: "password123"     # Optional
  extraArgs:                  # Optional, passed directly to the BGP speaker
    - -v5                     # Enables verbose debugging of the BGP speaker sidecar
  selector:
    - "kubernetes.io/os: linux"
  externalSubnets:
    - ovn-vpc-external-network # Network on which we'll speak BGP and receive/send traffic to the outside world
                                # BGP neighbors need to be on that network
```

BGP EIP

```
kubectl annotate eip sample ovn.kubernetes.io/bgp=true
```




7.9.5

kube-ovn-speaker		:																	
• Cluster:	speaker	Pod IPs/Subnet CIDRs		IP	CIDR	Pod	speaker		Pod										
	Pod	Subnet																	
• Local:	Pod IPs	Pod	Cluster		Pod														
:	Local	kube-ovn-speaker		Pod	speaker														
	Cluster	Pod/Subnet	annotation ovn.kubernetes.io/bgp																
• ovn.kubernetes.io/bgp=cluster		ovn.kubernetes.io/bgp=true		Cluster															
• ovn.kubernetes.io/bgp=local		Local																	
	Service	kube-proxy	ClusterIP	Service	Cluster														

7.9.6 BGP

kube-ovn-speaker		BGP										
• announce-cluster-ip:	Service	false										
• auth-password:	BGP peer											
• holdtime:	BGP	90										
• graceful-restart:	BGP Graceful Restart											
• graceful-restart-time:	BGP Graceful restart time		RFC4724 3									
• graceful-restart-deferral-time:	BGP Graceful restart deferral time		RFC4724 4.1									
• passivemode:	Speaker	passive	peer									
• ebgp-multihop:	ebgp ttl	1										
• allowed-source-addresses:	IP	Speaker	ip route get	BGP Peer		IP	ECMP					
	IP											
• enable-bfd:	kube-ovn-speaker	BFD	false	"	kube-ovn-speaker	BFD"						
• bfd-min-tx:	kube-ovn-speaker	BFD	1000	1								
• bfd-min-rx:	kube-ovn-speaker	BFD	1000	1								
• bfd-detection-multiplier:	kube-ovn-speaker	BFD	3	= bfd-min-rx * bfd-detection-multiplier								

7.9.7 BFD

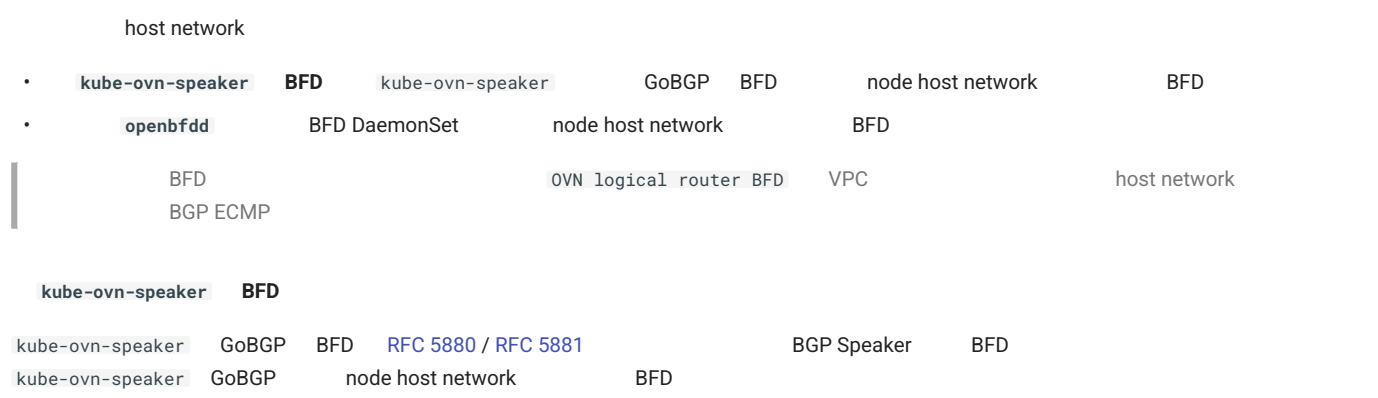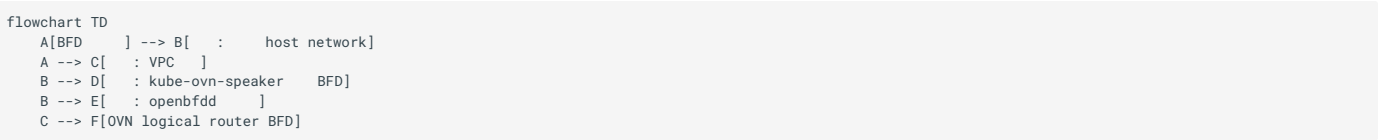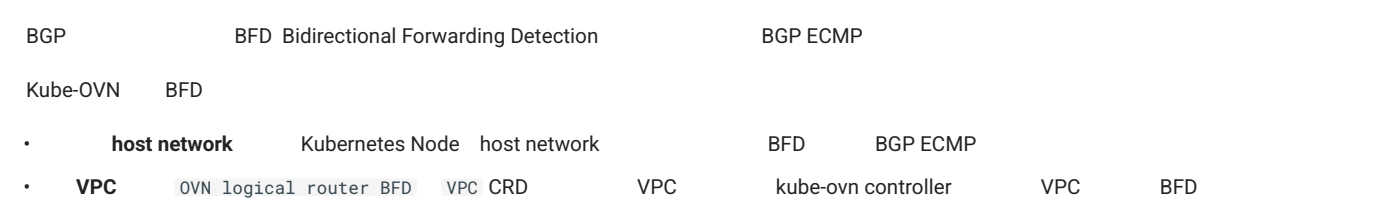

```
args:
- --enable-bfd=true
#
- --bfd-min-tx=1000
- --bfd-min-rx=1000
- --bfd-detection-multiplier=3
```

1000ms × 3 = 3

300ms

```
args:
- --enable-bfd=true
- --bfd-min-tx=100
- --bfd-min-rx=100
- --bfd-detection-multiplier=3
```

- BFD BFD BFD
- UDP 3784 BFD
- BFD CPU BGP



```
gobgp -j neighbor <peer-address> | jq '{bfd_config: .bfd, bfd_state: .state.bfd_state}'
```

```
{
  "bfd_config": {
    "enabled": true,
```

```

"port": 3784,
"desired_minimum_tx_interval": 1000000,
"required_minimum_receive": 1000000,
"detection_multiplier": 3
},
"bfd_state": {
  "session_state": 1,
  "bfd_async": {
    "transmitted_packets": 100,
    "received_packets": 99
  }
}
}
}

```

session_state 1 = UP 2 = DOWN 3 = ADMIN_DOWN 4 = INIT

BFD GoBGP BGP hard reset BFD is down BGP

openbfd

BFD kube-ovn-speaker openbfd BFD DaemonSet node host network BGP

BFD BFD_MULTI * max(BFD_MIN_TX, BFD_MIN_RX) = 3 * 1000ms = 3

DaemonSet hostNetwork: true Pod

• **init-peer:** ip route get IP Volume

• **bfdd:** openbfd init IP BFD start-bfdd.sh bfdd-prestart.sh startupProbe

• **reconcile:** 5 BFD peer

yaml

wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/yamls/bfdd-daemonset.yaml

GATEWAY_ADDRESS ALLOWED_SOURCE_ADDRESSES Speaker --allowed-source-addresses

```

env:
- name: GATEWAY_ADDRESS
  value: "10.32.32.1" #
- name: ALLOWED_SOURCE_ADDRESSES
  value: "10.32.32.2,10.32.32.3,10.32.32.4,10.32.32.5" # IP
- name: BFD_MIN_TX
  value: "1000" #
- name: BFD_MIN_RX
  value: "1000" #
- name: BFD_MULTI
  value: "3" #

```

DaemonSet

kubectl apply -f bfdd-daemonset.yaml

BFD

```

# BFD daemon
bfdd-control status

# BFD remote= , local= IP
bfdd-control status remote <gateway-ip> local <local-ip>

# BFD
bfdd-control allow <gateway-ip>

#
bfdd-control session new set mintx <ms> ms #
bfdd-control session new set minrx <ms> ms #
bfdd-control session new set multi <n> #

#
bfdd-control log type command no

# init IP
cat /bfdd-peer/local-ip

# reconcile sidecar
kubectl logs -n kube-system ds/openbfd -c reconcile

```



```
# init
kubectl logs -n kube-system ds/openbfd -c init-peer
```

OVN BFD

OVN BFD kube-ovn controller

```
# OVN BFD
kubectl ko nbctl list bfd

# BFD
kubectl ko nbctl find bfd logical_port=<lrp-name>

# OVN BFD
kubectl ko nbctl destroy bfd <uuid>
```

7.9.8 BGP routes debug

```
# show peer neighbor
gobgp neighbor

# show announced routes to one peer
gobgp neighbor 10.32.32.254 adj-out
```

[PDF](#)[Slack](#)[Support](#)

🕒 2026 7 3

🕒 2022 6 14



GitHub



7.9.9

7.10 MetalLB Kube-OVN Underlay

MetalLB Kubernetes Kubernetes Service


MetalLB Kube-OVN Underlay

7.10.1

Kube-OVN 1.14.0 MetalLB Underlay

- MetalLB IP
- Pod MetalLB VIP Underlay
- IP SNAT

7.10.2

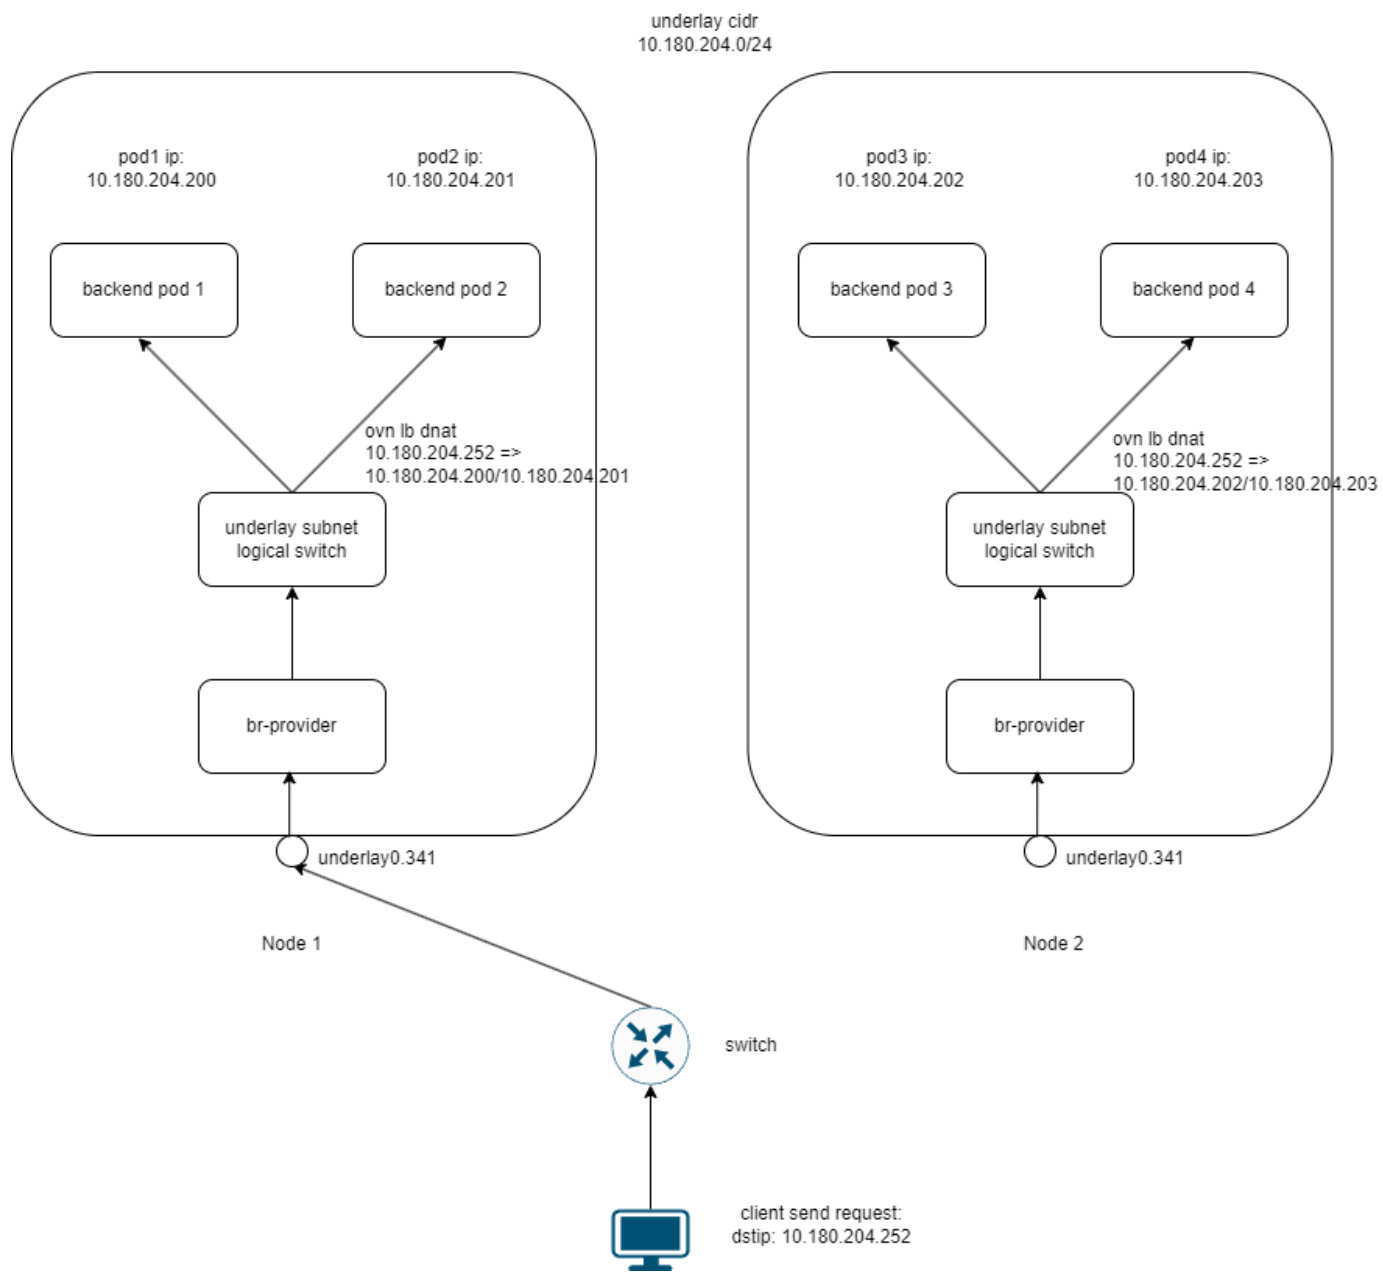

1 MetalLB VIP Kube-OVN Underlay

MetalLB Kube-OVN Underlay

1. VIP 10.180.204.252 IP MetalLB L2 Node1 metallb VIP
2. VIP underlay0.341
3. br-provider Underlay
4. br-provider OpenFlow OVN
5. underlay subnet OVN ovn lb dnat
6. OVN Pod

10.180.204.0/24 VIP Pod IP

7.10.3

- Kube-OVN `--enable-ovn-lb-prefer-local=true`
- Underlay `enableExternalLBAddress=true`
- Underlay `excludeIps` MetalLB IP

7.10.4

1. Kube-OVN

Kube-OVN Kube-OVN `--enable-ovn-lb-prefer-local=true` `--ls-ct-skip-dst-lport-ips=false`

```
# kube-ovn-controller Deployment
kubectl edit deployment -n kube-system kube-ovn-controller
```

```
--enable-ovn-lb-prefer-local=true
--ls-ct-skip-dst-lport-ips=false
```

2. Underlay

Underlay LoadBalancer excludeIps MetalLB IP

```
apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
  name: underlay-subnet
spec:
  protocol: IPv4
  provider: ovn
  cidrBlock: 10.180.204.0/24 #
  gateway: 10.180.204.1
  excludeIps:
    - 10.180.204.250
    - 10.180.204.251
    - 10.180.204.252 # MetalLB VIP 10.180.204.252
  natOutgoing: false
  enableExternalLBAddress: true # subnet cidr ip metallb vip
```

3. MetalLB

MetalLB MetalLB

```
kubectl apply -f https://raw.githubusercontent.com/metallb/metallb/v0.13.7/config/manifests/metallb-native.yaml
```

MetalLB L2

```
apiVersion: metallb.io/v1beta1
kind: IPAddressPool
metadata:
```

```
name: underlay-pool
namespace: metallb-system
spec:
  addresses:
    - 10.180.204.250-10.180.204.254 #      VIP 10.180.204.252
---
apiVersion: metallb.io/v1beta1
kind: L2Advertisement
metadata:
  name: l2-advert
  namespace: metallb-system
spec:
  ipAddressPools:
    - underlay-pool
```

4. LoadBalancer Service

LoadBalancer Service Underlay Pod

```
apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: nginx
  name: deploy-169402624
spec:
  replicas: 3
  selector:
    matchLabels:
      app: nginx
  template:
    metadata:
      annotations:
        ovn.kubernetes.io/logical_switch: underlay-subnet
      labels:
        app: nginx
    spec:
      containers:
        - args:
            - netexec
            - --http-port
            - "80"
          image: kubeovn/agnhost:2.47
          imagePullPolicy: IfNotPresent
          name: nginx
---
apiVersion: v1
kind: Service
metadata:
  name: nginx-lb
spec:
  externalTrafficPolicy: Local
  ipFamilies:
    - IPv4
  ipFamilyPolicy: PreferDualStack
  ports:
    - port: 80
      protocol: TCP
      targetPort: 80
  selector:
    app: nginx
  type: LoadBalancer
```

7.10.5

1. Service MetalLB IP

```
kubectl get svc nginx-lb
```

EXTERNAL-IP IP 10.180.204.252

1. Service IP

```
curl http://10.180.204.252
```

1. Pod

Service endpoints Pod

```
# Service endpoints
kubectl get endpoints nginx-lb
```

```
# Pod
kubectl get pods -l app=nginx -o wide
```

1. IP

nginx Pod	IP	IP	SNAT	IP
-----------	----	----	------	----

```
kubectl exec -it $(kubectl get pods -l app=nginx -o name | head -n1) -- cat /var/log/nginx/access.log
```

7.10.6

IP

MetalLB	Underlay	CIDR	Underlay	excludeIps	IP
---------	----------	------	----------	------------	----

MetalLB	Kube-OVN Underlay	underlay0.341	VLAN	VLAN	ARP	MetalLB VIP
---------	-------------------	---------------	------	------	-----	-------------

- Kube-OVN	--enable-ovn-lb-prefer-local=true	- Service	externalTrafficPolicy: Local
------------	-----------------------------------	-----------	------------------------------


PDF

Slack

Support

🕒2025 9 10

🕒2025 4 2




7.10.7

7.11 Cilium

Cilium eBPF Kube-OVN CNI Chaining Kube-OVN eBPF

Cilium Kube-OVN

-
- Hubble

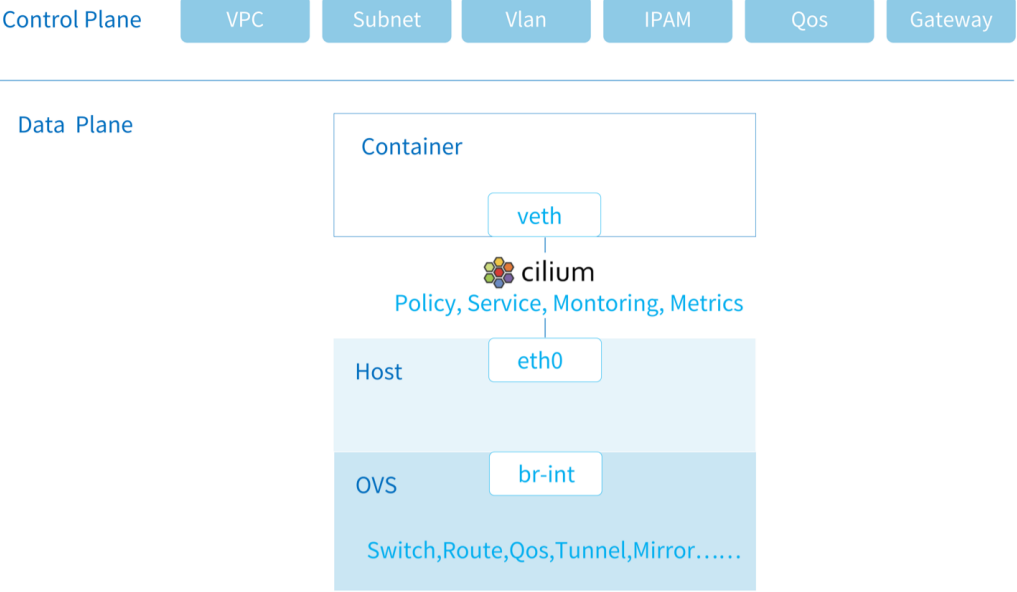

7.11.1

1. Linux 4.19 eBPF
2. Helm Cilium Helm [Installing Helm](#)

7.11.2 Kube-OVN

Cilium Kube-OVN networkpolicy CNI

install.sh

```
ENABLE_NP=false
CNI_CONFIG_PRIORITY=10
```

kube-ovn-controller networkpolicy

```
args:
- --enable-np=false
```

kube-ovn-cni CNI

```
args:
- --cni-conf-name=10-kube-ovn.conflist
```

Kube-OVN

Cilium

```
mv /etc/cni/net.d/01-kube-ovn.conflist /etc/cni/net.d/10-kube-ovn.conflist
```

7.11.3 Cilium

chaining.yaml Cilium generic-veth

```
apiVersion: v1
kind: ConfigMap
metadata:
  name: cni-configuration
  namespace: kube-system
data:
  cni-config: |-
    {
      "name": "generic-veth",
      "cniVersion": "0.3.1",
      "plugins": [
        {
          "type": "kube-ovn",
          "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
          "ipam": {
            "type": "kube-ovn",
            "server_socket": "/run/openvswitch/kube-ovn-daemon.sock"
          }
        },
        {
          "type": "portmap",
          "snat": true,
          "capabilities": {"portMappings": true}
        },
        {
          "type": "cilium-cni"
        }
      ]
    }
```

```
kubectl apply -f chaining.yaml
```

Helm Cilium

```
helm repo add cilium https://helm.cilium.io/
helm install cilium cilium/cilium --version 1.11.6 \
  --namespace kube-system \
  --set cni.chainingMode=generic-veth \
  --set cni.customConf=true \
  --set cni.configMap=cni-configuration \
  --set tunnel=disabled \
  --set enableIPv4Masquerade=false \
  --set devices="eth+ ovn0 genev_sys_6081 vxlan_sys_4789" \
  --set enableIdentityMark=false
```

Cilium

```
# cilium status
/---\
|--\  /---\  Cilium:      OK
\---\  /---\  Operator:   OK
/---\  /---\  Hubble:    disabled
\---\  /---\  ClusterMesh: disabled
\---\

DaemonSet      cilium           Desired: 2, Ready: 2/2, Available: 2/2
Deployment      cilium-operator  Desired: 2, Ready: 2/2, Available: 2/2
Containers:    cilium           Running: 2
               cilium-operator  Running: 2
Cluster Pods:  8/11 managed by Cilium
Image versions  cilium           quay.io/cilium/cilium:v1.11.6: 2
               cilium-operator  quay.io/cilium/operator-generic:v1.11.6: 2
```

7.11.4 Cilium Kube-OVN NAT

Cilium	NAT	Pod		NAT	VPC	Pod	SNAT/DNAT	IP	Pod	IP
Cilium	SIP	Source IP	--	Pod IP		Hubble	DROPPED			

IP NAT

/Pod Cilium ≥ 1.20

Cilium 1.20 [cilium/cilium#43505](#) annotation Pod SIP

1. annotation

```
kubectl annotate namespace <nat-gateway-namespace> \
  config.cilium.io/delegate-source-ip-verification=true
```

2. NAT Pod SIP annotation

```
apiVersion: v1
kind: Pod
metadata:
  annotations:
    config.cilium.io/disable-source-ip-verification: "true"
```

NAT Pod

Cilium < 1.20

Cilium Helm Chart enableSourceIPVerification false SIP

```
enableSourceIPVerification: false
```

 PDF

 Slack

 Support

🕒 2026 4 28

🕒 2022 5 24

 GitHub







7.11.5

7.12 Cilium NetworkPolicy

Kube-OVN	Cilium	Cilium
Cilium	Cilium	Cilium L3 L4

7.12.1

Pod

namespace test yaml test namespace label app=test Pod Pod

```
apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: test
  name: test
  namespace: test
spec:
  replicas: 1
  selector:
    matchLabels:
      app: test
  strategy:
    rollingUpdate:
      maxSurge: 25%
      maxUnavailable: 25%
    type: RollingUpdate
  template:
    metadata:
      labels:
        app: test
    spec:
      containers:
        - image: docker.io/library/nginx:alpine
          imagePullPolicy: IfNotPresent
          name: nginx
```

yaml default namespace label app=dynamic Pod Pod

```
apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: dynamic
  name: dynamic
  namespace: default
spec:
  replicas: 2
  selector:
    matchLabels:
      app: dynamic
  strategy:
    rollingUpdate:
      maxSurge: 25%
      maxUnavailable: 25%
    type: RollingUpdate
  template:
    metadata:
      creationTimestamp: null
      labels:
        app: dynamic
    spec:
      containers:
        - image: docker.io/library/nginx:alpine
          imagePullPolicy: IfNotPresent
          name: nginx
```

Pod Label :

```
# kubectl get pod -o wide --show-labels
NAME                                READY   STATUS    RESTARTS   AGE   IP            NODE                                NOMINATED NODE   READINESS GATES   LABELS
dynamic-7d8d7874f5-9v5c4           1/1     Running   0           28h   10.16.0.35    kube-ovn-worker                    <none>            <none>             app=dynamic, pod-
dynamic-7d8d7874f5-8z2n            1/1     Running   0           28h   10.16.0.36    kube-ovn-control-plane             <none>            <none>             app=dynamic, pod-
dynamic-7d8d7874f5-6dsg6           1/1     Running   0           7h20m 10.16.0.2     kube-ovn-control-plane             <none>            <none>             app=dynamic, pod-
dynamic-7d8d7874f5-6dsg6           1/1     Running   0           7h20m 10.16.0.2     kube-ovn-control-plane             <none>            <none>             app=dynamic, pod-
```

dynamic-7d8d7874f5-tjgtp template-hash=7d8d7874f5	1/1	Running	0	7h46m	10.16.0.42	kube-ovn-worker	<none>	<none>	app=dynamic, pod-
label=test1-77b6764857-swq4k template-hash=77b6764857	1/1	Running	0	3h43m	10.16.0.12	kube-ovn-worker	<none>	<none>	app=test1, pod-
# Pod test-54c98bc466-mft5s template-hash=54c98bc466	1/1	Running	0	8h	10.16.0.41	kube-ovn-worker	<none>	<none>	app=test, pod-

L3

yaml CiliumNetworkPolicy :

```
apiVersion: "cilium.io/v2"
kind: CiliumNetworkPolicy
metadata:
  name: "l3-rule"
  namespace: test
spec:
  endpointSelector:
    matchLabels:
      app: test
  ingress:
    - fromEndpoints:
      - matchLabels:
          app: dynamic
```

default namespace Pod Pod test namespace Pod

default namespace :

```
# kubectl exec -it dynamic-7d8d7874f5-9v5c4 -- bash
bash-5.0# ping -c 3 10.16.0.41
PING 10.16.0.41 (10.16.0.41): 56 data bytes

--- 10.16.0.41 ping statistics ---
3 packets transmitted, 0 packets received, 100% packet loss
```

test namespace Pod :

```
# kubectl exec -it -n test dynamic-7d8d7874f5-6dsg6 -- bash
bash-5.0# ping -c 3 10.16.0.41
PING 10.16.0.41 (10.16.0.41): 56 data bytes
64 bytes from 10.16.0.41: seq=0 ttl=64 time=2.558 ms
64 bytes from 10.16.0.41: seq=1 ttl=64 time=0.223 ms
64 bytes from 10.16.0.41: seq=2 ttl=64 time=0.304 ms

--- 10.16.0.41 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.223/1.028/2.558 ms
```

Cilium CiliumNetworkPolicy Namespace Cilium

Namespace Pod Namespace Pod

Namespace Namespace

CiliumNetworkPolicy namespace :

```
ingress:
- fromEndpoints:
- matchLabels:
    app: dynamic
    k8s:io.kubernetes.pod.namespace: default # Namespace Pod
```

CiliumNetworkPolicy :

```
# kubectl get cnp -n test -o yaml l3-rule
apiVersion: cilium.io/v2
kind: CiliumNetworkPolicy
metadata:
  name: l3-rule
  namespace: test
spec:
  endpointSelector:
    matchLabels:
      app: test
  ingress:
    - fromEndpoints:
      - matchLabels:
```

```
app: dynamic
- matchLabels:
  app: dynamic
  k8s:io.kubernetes.pod.namespace: default
```

default namespace Pod Pod :

```
# kubectl exec -it dynamic-7d8d7874f5-9v5c4 -n test -- bash
bash-5.0# ping -c 3 10.16.0.41
PING 10.16.0.41 (10.16.0.41): 56 data bytes
64 bytes from 10.16.0.41: seq=0 ttl=64 time=2.383 ms
64 bytes from 10.16.0.41: seq=1 ttl=64 time=0.115 ms
64 bytes from 10.16.0.41: seq=2 ttl=64 time=0.142 ms

--- 10.16.0.41 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max = 0.115/0.880/2.383 ms
```

Kubernetes	networkpolicy	Cilium	Namespace	Namespace	Namespace	Namespace	Pod
Kube-OVN	Kube-OVN	k8s	Namespace	Pod	Pod	Namespace	Pod

Pod

L4

yaml L4 :

```
apiVersion: "cilium.io/v2"
kind: CiliumNetworkPolicy
metadata:
  name: "l4-rule"
  namespace: test
spec:
  endpointSelector:
    matchLabels:
      app: test
  ingress:
    - fromEndpoints:
      - matchLabels:
          app: dynamic
    toPorts:
      - ports:
          - port: "80"
            protocol: TCP
```

Namespace Pod

```
# kubectl exec -it -n test dynamic-7d8d7874f5-6dsg6 -- bash
bash-5.0# ping -c 3 10.16.0.41
PING 10.16.0.41 (10.16.0.41): 56 data bytes

--- 10.16.0.41 ping statistics ---
3 packets transmitted, 0 packets received, 100% packet loss
bash-5.0#
bash-5.0# curl 10.16.0.41:80
<html>
<head>
  <title>Hello World!</title>
  <link href='//fonts.googleapis.com/css?family=Open+Sans:400,700' rel='stylesheet' type='text/css'>
  <style>
    body {
      background-color: white;
      text-align: center;
      padding: 50px;
      font-family: "Open Sans", "Helvetica Neue", Helvetica, Arial, sans-serif;
    }
    #logo {
      margin-bottom: 40px;
    }
  </style>
</head>
<body>
  <h1>Hello World!</h1>
  <h3>Links found</h3>
  <h3>I am on test-54c98bc466-mft5s</h3>
  <h3>Cookie =</h3>
  <b>KUBERNETES</b> listening in 443 available at tcp://10.96.0.1:443<br />
  <h3>my name is hanhouchao!</h3>
  <h3> RequestURI=' /'</h3>
</body>
</html>
```

Namespace

Pod

```
# kubectl exec -it -n test label-test1-77b6764857-swq4k -- bash
bash-5.0# ping -c 3 10.16.0.41
PING 10.16.0.41 (10.16.0.41): 56 data bytes

--- 10.16.0.41 ping statistics ---
3 packets transmitted, 0 packets received, 100% packet loss
bash-5.0#
bash-5.0# curl -v 10.16.0.41:80 --connect-timeout 10
* Trying 10.16.0.41:80...
* After 10000ms connect time, move on!
* connect to 10.16.0.41 port 80 failed: Operation timed out
* Connection timeout after 10001 ms
* Closing connection 0
curl: (28) Connection timeout after 10001 ms
```

Namespace

L3

L4

ping

TCP

ICMP

[L4](#)

L7

chaining

L7

Cilium

[Generic Veth Chaining](#)

[issue 12454](#)

 [PDF](#)

 [Slack](#)

 [Support](#)

 2026 7 4

 2022 8 2



 GitHub



+1

7.12.2

7.13 Cilium

Kube-OVN	Cilium	Cilium
Cilium	Hubble	Hubble

7.13.1 Hubble

Cilium	Hubble	Hubble
helm	Hubble	

```
helm upgrade cilium cilium/cilium --version 1.11.6 \
  --namespace kube-system \
  --reuse-values \
  --set hubble.relay.enabled=true \
  --set hubble.ui.enabled=true
```

Hubble	cilium status	Hubble
--------	---------------	--------

```
# cilium status
/---\
/---\ Cilium:      OK
\---\ Operator:   OK
/---\ Hubble:     OK
\---\ ClusterMesh: disabled

Deployment      hubble-relay      Desired: 1, Ready: 1/1, Available: 1/1
Deployment      cilium-operator    Desired: 2, Ready: 2/2, Available: 2/2
DaemonSet       cilium             Desired: 2, Ready: 2/2, Available: 2/2
Deployment       hubble-ui          Desired: 1, Ready: 1/1, Available: 1/1
Containers:     cilium             Running: 2
                 hubble-ui          Running: 1
                 hubble-relay       Running: 1
                 cilium-operator    Running: 2
Cluster Pods:   16/17 managed by Cilium
Image versions  hubble-relay       quay.io/cilium/hubble-relay:v1.11.6@sha256:fd9034a2d04d5b973f1e8ed44f230ea195b89c37955ff32e34e5aa68f3ed675a: 1
                  cilium-operator    quay.io/cilium/operator-generic:v1.11.6@sha256:9f6063c7bcaede801a39315ec7c166309f6a6783e98665f6693939cf1701bc17: 2
                  cilium             quay.io/cilium/cilium:v1.11.6@sha256:f7f93c26739b6641a3fa3d76b1e1605b15989f25d06625260099e01c8243f54c: 2
                  hubble-ui          quay.io/cilium/hubble-ui:v0.9.0@sha256:0ef04e9a29212925da6bdfd0ba5b581765e41a01f1cc30563cef9b30b457fea0: 1
                  hubble-ui          quay.io/cilium/hubble-ui-backend:v0.9.0@sha256:000df6b76719f607a9edefb9af94dfd1811a6f1b6a8a9c537cba90bf12df474b: 1
apple@bogon cilium %
```

Hubble	Hubble CLI :
--------	--------------

```
curl -L --fail --remote-name-all https://github.com/cilium/hubble/releases/download/v0.10.0/hubble-linux-amd64.tar.gz
sudo tar xzvfC hubble-linux-amd64.tar.gz /usr/local/bin
```

7.13.2

Cilium

cilium connectivity test	Cilium	cilium-test	Namespace	cilium-test
--------------------------	--------	-------------	-----------	-------------

cilium-test namespace

```
# kubectl get all -n cilium-test
NAME                                READY   STATUS    RESTARTS   AGE
pod/client-7df6cfbf7b-z5t2j         1/1     Running   0           21s
pod/client2-547996d7d8-nvgxg        1/1     Running   0           21s
pod/echo-other-node-d79544ccf-h14gg 2/2     Running   0           21s
pod/echo-same-node-5d466d5444-m17tc 2/2     Running   0           21s

NAME                                TYPE      CLUSTER-IP      EXTERNAL-IP      PORT(S)          AGE
service/echo-other-node             NodePort   10.109.58.126    <none>            8080:32269/TCP   21s
service/echo-same-node              NodePort   10.108.70.32     <none>            8080:32490/TCP   21s

NAME                                READY   UP-TO-DATE   AVAILABLE   AGE
deployment.apps/client              1/1     1             1           21s
deployment.apps/client2             1/1     1             1           21s
deployment.apps/echo-other-node     1/1     1             1           21s
deployment.apps/echo-same-node      1/1     1             1           21s

NAME                                DESIRED   CURRENT   READY   AGE
```

```

replicaset.apps/client-7df6cfbf7b      1      1      1      21s
replicaset.apps/client2-547996d7d8     1      1      1      21s
replicaset.apps/echo-other-node-d79544ccf 1      1      1      21s
replicaset.apps/echo-same-node-5d466d5444 1      1      1      21s

```

7.13.3

Cilium kube-system namespace Cilium pod hubble observe

```

# kubectl get pod -n kube-system -o wide
NAME                                     READY   STATUS    RESTARTS   AGE   IP           NODE               NOMINATED NODE   READINESS GATES
cilium-d6h56                           1/1     Running   0           2d20h  172.18.0.2   kube-ovn-worker    <none>           <none>
cilium-operator-5887f78bbb-c7sb2       1/1     Running   0           2d20h  172.18.0.2   kube-ovn-worker    <none>           <none>
cilium-operator-5887f78bbb-wj8gt       1/1     Running   0           2d20h  172.18.0.3   kube-ovn-control-plane <none>           <none>
cilium-tq5xb                           1/1     Running   0           2d20h  172.18.0.3   kube-ovn-control-plane <none>           <none>
kube-ovn-pinger-7lgk8                  1/1     Running   0           21h    10.16.0.19   kube-ovn-control-plane <none>           <none>
kube-ovn-pinger-msvcn                  1/1     Running   0           21h    10.16.0.18   kube-ovn-worker     <none>           <none>

# kubectl exec -it -n kube-system cilium-d6h56 -- bash
root@kube-ovn-worker:/home/cilium# hubble observe --from-namespace kube-system
Jul 29 03:24:25.551: kube-system/kube-ovn-pinger-msvcn:35576 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: ACK, PSH)
Jul 29 03:24:25.561: kube-system/kube-ovn-pinger-msvcn:35576 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: RST)
Jul 29 03:24:25.561: kube-system/kube-ovn-pinger-msvcn:35576 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: ACK, RST)
Jul 29 03:24:25.572: kube-system/kube-ovn-pinger-msvcn:35578 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: SYN)
Jul 29 03:24:25.572: kube-system/kube-ovn-pinger-msvcn:35578 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: ACK)
Jul 29 03:24:25.651: kube-system/kube-ovn-pinger-msvcn:35578 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: ACK, PSH)
Jul 29 03:24:25.661: kube-system/kube-ovn-pinger-msvcn:35578 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: RST)
Jul 29 03:24:25.661: kube-system/kube-ovn-pinger-msvcn:35578 -> 172.18.0.3:6642 to-stack FORWARDED (TCP Flags: ACK, RST)
Jul 29 03:24:25.761: kube-system/kube-ovn-pinger-msvcn:52004 -> 172.18.0.3:6443 to-stack FORWARDED (TCP Flags: ACK, PSH)
Jul 29 03:24:25.779: kube-system/kube-ovn-pinger-msvcn -> kube-system/kube-ovn-pinger-7lgk8 to-stack FORWARDED (ICMPv4 EchoRequest)
Jul 29 03:24:25.779: kube-system/kube-ovn-pinger-msvcn <- kube-system/kube-ovn-pinger-7lgk8 to-endpoint FORWARDED (ICMPv4 EchoReply)
Jul 29 03:24:25.866: kube-system/hubble-ui-7596f7ff6f-7j6f2:55836 <- kube-system/hubble-relay-959988db5-zc5vv:4245 to-stack FORWARDED (TCP Flags: ACK)
Jul 29 03:24:25.866: kube-system/hubble-ui-7596f7ff6f-7j6f2:55836 <- kube-system/hubble-relay-959988db5-zc5vv:80 to-endpoint FORWARDED (TCP Flags: ACK)
Jul 29 03:24:25.866: kube-system/hubble-ui-7596f7ff6f-7j6f2:55836 -> kube-system/hubble-relay-959988db5-zc5vv:4245 to-stack FORWARDED (TCP Flags: ACK)
Jul 29 03:24:25.866: kube-system/hubble-ui-7596f7ff6f-7j6f2:55836 -> kube-system/hubble-relay-959988db5-zc5vv:4245 to-endpoint FORWARDED (TCP Flags: ACK)
Jul 29 03:24:25.975: kube-system/kube-ovn-pinger-7lgk8 -> kube-system/kube-ovn-pinger-msvcn to-endpoint FORWARDED (ICMPv4 EchoRequest)
Jul 29 03:24:25.975: kube-system/kube-ovn-pinger-7lgk8 <- kube-system/kube-ovn-pinger-msvcn to-stack FORWARDED (ICMPv4 EchoReply)
Jul 29 03:24:25.979: kube-system/kube-ovn-pinger-msvcn -> 172.18.0.3 to-stack FORWARDED (ICMPv4 EchoRequest)
Jul 29 03:24:26.037: kube-system/coredns-6d4b75cb6d-lbgjg:36430 -> 172.18.0.3:6443 to-stack FORWARDED (TCP Flags: ACK)
Jul 29 03:24:26.282: kube-system/kube-ovn-pinger-msvcn -> 172.18.0.2 to-stack FORWARDED (ICMPv4 EchoRequest)

```

Hubble Relay Hubble

Hubble API Hubble Service kubectl port-forward deployment/hubble-relay -n kube-system 4245:4245

kubectl port-forward

hubble status

```

# hubble status
Healthcheck (via localhost:4245): Ok
Current/Max Flows: 8,190/8,190 (100.00%)
Flows/s: 22.86
Connected Nodes: 2/2

```

hubble observe

cilium-test

```

apple@bogon ovn-test % hubble observe
Jul 28 08:00:07.033: cilium-test/client-7df6cfbf7b-qn7q6:56906 (ID:15432) -> kube-system/coredns-6d4b75cb6d-b444j:53 (ID:11307) to-endpoint FORWARDED (UDP)
Jul 28 08:00:07.033: cilium-test/client-7df6cfbf7b-qn7q6:56906 (ID:15432) <- kube-system/coredns-6d4b75cb6d-b444j:53 (ID:11307) to-stack FORWARDED (UDP)
Jul 28 08:00:07.095: 100.64.0.3:43037 (world) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: SYN)
Jul 28 08:00:07.095: 100.64.0.3:43037 (world) <- cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: SYN, ACK)
Jul 28 08:00:07.096: 100.64.0.3:43037 (world) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: ACK)
Jul 28 08:00:07.096: 100.64.0.3:43037 (world) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.096: 100.64.0.3:43037 (world) <- cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.097: 100.64.0.3:43037 (world) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: ACK)
Jul 28 08:00:07.249: 100.64.0.2:33419 (host) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: SYN)
Jul 28 08:00:07.249: 100.64.0.2:33419 (host) <- cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: SYN, ACK)
Jul 28 08:00:07.250: 100.64.0.2:33419 (host) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: ACK)
Jul 28 08:00:07.251: 100.64.0.2:33419 (host) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.251: 100.64.0.2:33419 (host) <- cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.251: 100.64.0.2:33419 (host) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: ACK)
Jul 28 08:00:07.323: cilium-test/client2-547996d7d8-jgblc:34927 (ID:14804) <- 172.18.0.3:31514 (kube-apiserver) to-endpoint FORWARDED (TCP Flags: SYN, ACK)
Jul 28 08:00:07.323: cilium-test/client2-547996d7d8-jgblc:34927 (ID:14804) -> 172.18.0.3:31514 (kube-apiserver) to-stack FORWARDED (TCP Flags: ACK)
Jul 28 08:00:07.324: 100.64.0.2:34927 (world) -> cilium-test/echo-same-node-5d466d5444-4vllm:8080 (ID:15976) to-endpoint FORWARDED (TCP Flags: ACK)
Jul 28 08:00:07.324: cilium-test/client2-547996d7d8-jgblc:34927 (ID:14804) -> 172.18.0.3:31514 (kube-apiserver) to-stack FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.324: 100.64.0.2:34927 (world) -> cilium-test/echo-same-node-5d466d5444-4vllm:8080 (ID:15976) to-endpoint FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.324: 100.64.0.2:34927 (world) <- cilium-test/echo-same-node-5d466d5444-4vllm:8080 (ID:15976) to-stack FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.324: cilium-test/client2-547996d7d8-jgblc:34927 (ID:14804) <- 172.18.0.3:31514 (kube-apiserver) to-endpoint FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.324: cilium-test/client2-547996d7d8-jgblc:34927 (ID:14804) -> 172.18.0.3:31514 (kube-apiserver) to-stack FORWARDED (TCP Flags: ACK)
Jul 28 08:00:07.324: 100.64.0.2:34927 (world) -> cilium-test/echo-same-node-5d466d5444-4vllm:8080 (ID:15976) to-endpoint FORWARDED (TCP Flags: ACK)
Jul 28 08:00:07.340: kube-system/hubble-relay-959988db5-zc5vv:46938 (ID:53347) -> 172.18.0.2:4244 (host) to-stack FORWARDED (TCP Flags: ACK, PSH)
Jul 28 08:00:07.340: kube-system/hubble-relay-959988db5-zc5vv:46938 (ID:53347) -> 172.18.0.3:4244 (kube-apiserver) to-stack FORWARDED (TCP Flags: ACK, PSH)
Jul 28 08:00:07.340: kube-system/hubble-relay-959988db5-zc5vv:46938 (ID:53347) <- 172.18.0.2:4244 (host) to-endpoint FORWARDED (TCP Flags: ACK, PSH)
Jul 28 08:00:07.341: kube-system/hubble-relay-959988db5-zc5vv:46938 (ID:53347) <- 172.18.0.3:4244 (kube-apiserver) to-endpoint FORWARDED (TCP Flags: ACK, PSH)
Jul 28 08:00:07.409: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: SYN)
Jul 28 08:00:07.409: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: SYN)
Jul 28 08:00:07.409: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) <- cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: SYN, ACK)
Jul 28 08:00:07.410: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) <- cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: SYN, ACK)
Jul 28 08:00:07.410: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: ACK, PSH)
Jul 28 08:00:07.410: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: ACK)
Jul 28 08:00:07.410: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: ACK, PSH)
Jul 28 08:00:07.411: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) <- cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: ACK, PSH)
Jul 28 08:00:07.411: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) <- cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: ACK, PSH)
Jul 28 08:00:07.412: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.412: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) -> cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.412: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) <- cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-stack FORWARDED (TCP Flags: ACK, FIN)
Jul 28 08:00:07.412: cilium-test/client-7df6cfbf7b-qn7q6:57326 (ID:15432) <- cilium-test/echo-other-node-d79544ccf-r688b:8080 (ID:50956) to-endpoint FORWARDED (TCP Flags: ACK, FIN)
apple@bogon ovn-test %

```

hubble observe

hubble help observe

Hubble CLI

7.13.4 UI

cilium status

Hubble UI

Hubble


UI

cilium hubble ui

hubble-ui service

Hubble UI

http://localhost:12000 UI

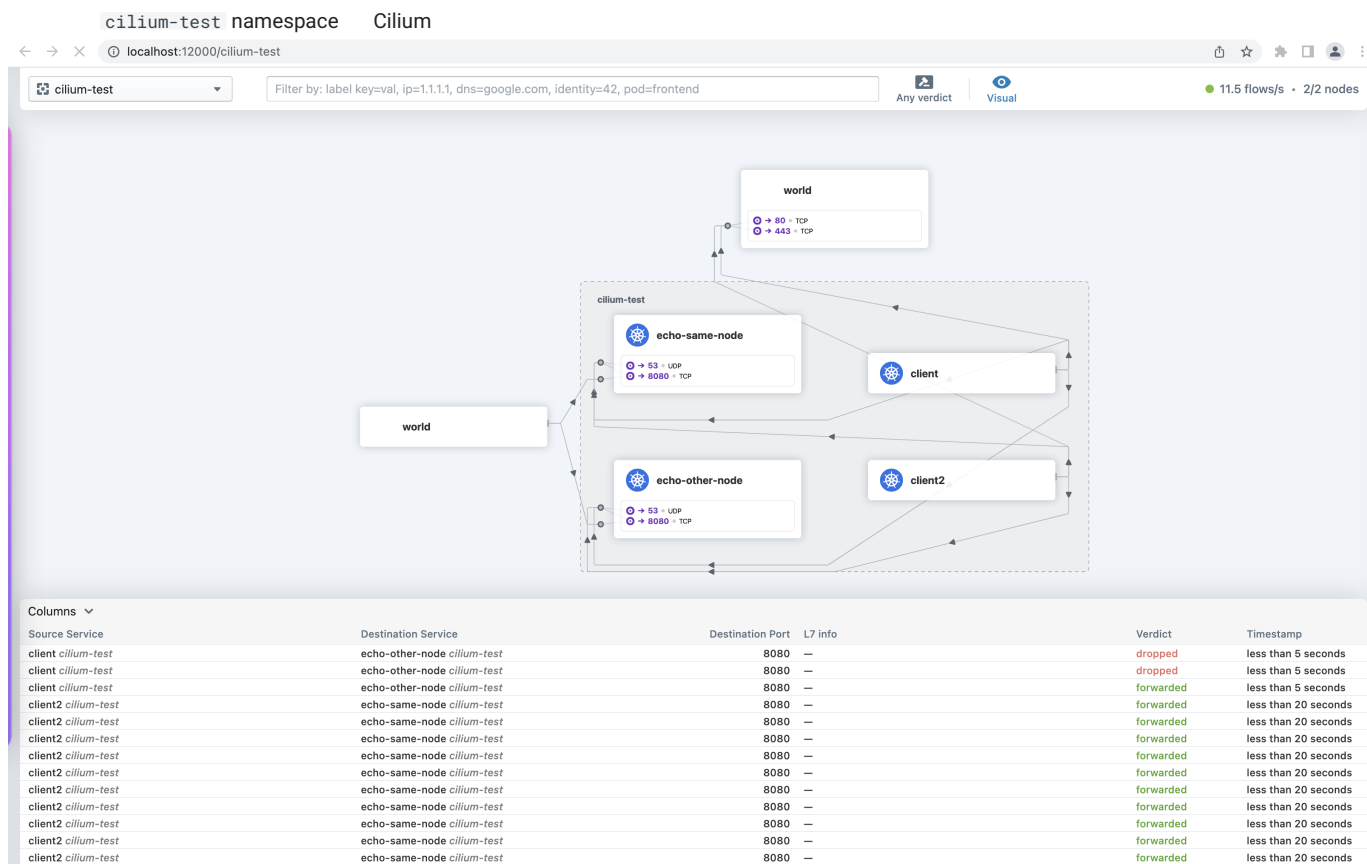

7.13.5 Hubble

Hubble Pod Hubble

hubble.metrics.enabled :

```
helm upgrade cilium cilium/cilium --version 1.11.6 \
  --namespace kube-system \
  --reuse-values \
  --set hubble.relay.enabled=true \
  --set hubble.ui.enabled=true \
  --set hubble.metrics.enabled="{dns,drop,tcp,flow,icmp,http}"
```

kube-system namespace hubble-metrics Endpoints Hubble :

```
# curl 172.18.0.2:9091/metrics
# HELP hubble_drop_total Number of drops
# TYPE hubble_drop_total counter
hubble_drop_total{protocol="ICMPv6",reason="Unsupported L3 protocol"} 2
# HELP hubble_flows_processed_total Total number of flows processed
# TYPE hubble_flows_processed_total counter
hubble_flows_processed_total{protocol="ICMPv4",subtype="to-endpoint",type="Trace",verdict="FORWARDED"} 335
hubble_flows_processed_total{protocol="ICMPv4",subtype="to-stack",type="Trace",verdict="FORWARDED"} 335
hubble_flows_processed_total{protocol="ICMPv6",subtype="",type="Drop",verdict="DROPPED"} 2
hubble_flows_processed_total{protocol="TCP",subtype="to-endpoint",type="Trace",verdict="FORWARDED"} 8282
hubble_flows_processed_total{protocol="TCP",subtype="to-stack",type="Trace",verdict="FORWARDED"} 6767
hubble_flows_processed_total{protocol="UDP",subtype="to-endpoint",type="Trace",verdict="FORWARDED"} 1642
hubble_flows_processed_total{protocol="UDP",subtype="to-stack",type="Trace",verdict="FORWARDED"} 1642
# HELP hubble_icmp_total Number of ICMP messages
# TYPE hubble_icmp_total counter
hubble_icmp_total{family="IPv4",type="EchoReply"} 335
hubble_icmp_total{family="IPv4",type="EchoRequest"} 335
hubble_icmp_total{family="IPv4",type="RouterSolicitation"} 2
# HELP hubble_tcp_flags_total TCP flag occurrences
# TYPE hubble_tcp_flags_total counter
hubble_tcp_flags_total{family="IPv4",flag="FIN"} 2043
hubble_tcp_flags_total{family="IPv4",flag="RST"} 301
hubble_tcp_flags_total{family="IPv4",flag="SYN"} 1169
hubble_tcp_flags_total{family="IPv4",flag="SYN-ACK"} 1169
```


 PDF

 Slack

 Support

 2023 3 26

 2022 8 2

 GitHub



7.13.6

7.14

Kube-OVN

7.14.1

```
kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
  name: external
spec:
  cidrBlock: 172.31.0.0/16
  gatewayType: centralized
  natOutgoing: false
  externalEgressGateway: 192.168.0.1
  policyRoutingTableID: 1000
  policyRoutingPriority: 1500
```

- natOutgoing: false
- externalEgressGateway
- policyRoutingTableID TableID
- policyRoutingPriority

 PDF

 Slack

 Support

 2022 6 8

 2022 5 24

 GitHub 

7.14.2

7.15 VIP IP

[illegible]

- Allowed-Address-Pairs VIP
- Switch LB rule VIP
- Pod VIP IP

7.15.1 1. Allowed-Address-Pairs VIP

	IP	Pod			
• Kubernetes	Kubernetes	Kubernetes	Underlay	Subnet	
• LB	Subnet	IP	Pod		
VIP	Allowed-Address-Pairs	IP	IP		
• Keepalived	IP				

1.1 VIP

```
IP    IP                                yaml
```

```
apiVersion: kubeovn.io/v1
kind: Vip
metadata:
  name: vip-dynamic-01
spec:
  subnet: ovn-default
  type: ""
```

- ```

• subnet: Subnet IP
• type: ipam ip switch_lb_vip vip switch lb vip ip

```

VIP

```
kubectl get vip
```

| NAME           | V4IP       | PV4IP | MAC               | PMAC | V6IP | PV6IP | SUBNET      | READY |
|----------------|------------|-------|-------------------|------|------|-------|-------------|-------|
| vip-dynamic-01 | 10.16.0.12 |       | 00:00:00:F0:DB:25 |      |      |       | ovn-default | true  |

VIP 10.16.0.12 IP

## 1.2 VIP

```
VIP IP yaml
```

```
apiVersion: kubeovn.io/v1
kind: Vip
metadata:
 name: static-vip01
spec:
 subnet: ovn-default
 v4ip: "10.16.0.121"
```

- `subnet:` Subnet IP
- `v4ip:` IP `subnet` CIDR

VIP

```
kubectl get vip
NAME V4IP PV4IP MAC PMAC V6IP PV6IP SUBNET READY
static-vip01 10.16.0.121 10.16.0.121 00:00:00:F0:DB:26 00:00:00:F0:DB:26 00:00:00:F0:DB:26 00:00:00:F0:DB:26 ovn-default true
```

VIP IP

1.3 Pod VIP AAP

Pod annotation VIP AAP Pod labels VIP selector

Pod annotation VIP ovn.kubernetes.io/aaps: vip-aap,vip-aap2,vip-aap3

AAP Pod AAP Pod VIP subnet Port

1.3.1 VIP AAP

```
apiVersion: kubeovn.io/v1
kind: Vip
metadata:
 name: vip-aap
spec:
 subnet: ovn-default
 namespace: default
 selector:
 - "app: aap1"
```

VIP

- namespace: AAP VIP VIP AAP
  - selector: AAP VIP Pod namespace Pod key: value AND
- VIP Port

```
kubectl ko nbctl show ovn-default
switch e32e1d3b-c539-45f4-ab19-be4e33a061f6 (ovn-default)
 port aap-vip
 type: virtual
```

```
apiVersion: v1
kind: Pod
metadata:
 name: busybox
 annotations:
 ovn.kubernetes.io/aaps: vip-aap
 labels:
 app: aap1
spec:
 containers:
 - name: busybox
 image: busybox
 command: ["sleep", "3600"]
 securityContext:
 capabilities:
 add:
 - NET_ADMIN
```

AAP

```
kubectl ko nbctl list logical_switch_port aap-vip
_uuid : cd930750-0533-4f06-a6c0-217ddac73272
addresses : []
dhcpv4_options : []
dhcpv6_options : []
dynamic_addresses : []
enabled : []
external_ids : {ls=ovn-default, vendor=kube-ovn}
ha_chassis_group : []
mirror_rules : []
name : aap-vip
options : {virtual-ip="10.16.0.100", virtual-parents="busybox.default"}
parent_name : []
port_security : []
tag : []
tag_request : []
type : virtual
up : false
```

virtual-ip VIP IP virtual-parents AAP Pod Port

Pod

```
kubectl exec -it busybox -- ip addr add 10.16.0.100/16 dev eth0
kubectl exec -it busybox01 -- ip addr show eth0
35: eth0@if36: <BROADCAST,MULTICAST,UP,LOWER_UP,M-DOWN> mtu 1400 qdisc noqueue
 link/ether 00:00:00:e2:ab:0c brd ff:ff:ff:ff:ff:ff
 inet 10.16.0.7/16 brd 10.16.255.255 scope global eth0
 valid_lft forever preferred_lft forever
 inet 10.16.0.100/16 scope global secondary eth0
 valid_lft forever preferred_lft forever
 inet6 fe80::200:ff:fee2:ab0c/64 scope link
 valid_lft forever preferred_lft forever
```

|     |    |     |    |        |     |    |
|-----|----|-----|----|--------|-----|----|
| Pod | IP | VIP | IP | subnet | Pod | IP |
|-----|----|-----|----|--------|-----|----|

7.15.2.2. Switch LB rule vip

```
apiVersion: kubeovn.io/v1
kind: Vip
metadata:
 name: slr-01
spec:
 subnet: ovn-default
 type: switch_lb_vip
```

- subnet: Subnet IP
- type: ipam ip switch\_lb\_vip vip switch lb vip ip

7.15.3.3. Pod VIP IP

v1.12

IP

```
apiVersion: kubeovn.io/v1
kind: Vip
metadata:
 name: pod-use-vip
spec:
 subnet: ovn-default
 type: ""
```

|            |     |     |
|------------|-----|-----|
| annotation | VIP | Pod |
|------------|-----|-----|

```
apiVersion: v1
kind: Pod
metadata:
 name: static-ip
 annotations:
 ovn.kubernetes.io/vip: pod-use-vip # vip
 namespace: default
spec:
 containers:
 - name: static-ip
 image: docker.io/library/nginx:alpine
```

3.1 StatefulSet Kubevirt VM VIP

|             |     |                     |                             |
|-------------|-----|---------------------|-----------------------------|
| StatefulSet | VM  | Pod                 | VIP                         |
| VM          | VIP | kube-ovn-controller | keep-vm-ip true Kubevirt VM |

 PDF

 Slack

 Support

🕒2026 4 28

🕒2022 5 24




+2

7.15.4

---

## 7.16 Mellanox Offload

Kube-OVN Processing (ASAP<sup>2</sup>)      OVS OVS      CPU eSwitch      CPU OVS      Mellanox CPU      Accelerated Switching And Packet

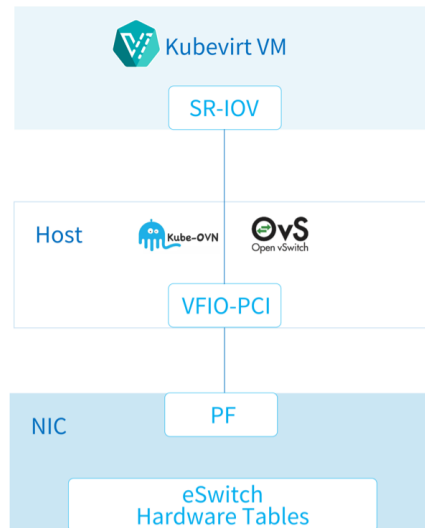

### Note

2022

### 7.16.1

- Mellanox CX5/CX6/CX7/BlueField      ASAP<sup>2</sup>
- CentOS 8 Stream      Linux 5.7
- dp\_hash      hash      OVN LB
- bond

### 7.16.2 SR-IOV Device Plugin

Mellanox      offload      SR-IOV Device Plugin      [sriov-network-operator](#)

#### SR-IOV Device Plugin

SR-IOV

ID      84:00.0      84.00.1

```
lspci -nn | grep ConnectX-5
84:00.0 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5] [15b3:1017]
84:00.1 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5] [15b3:1017]
```

## ID

```
ls -l /sys/class/net/ | grep 84:00.0
lrwxrwxrwx 1 root root 0 Feb 4 16:16 enp132s0f0np0 -> ../../devices/pci0000:80/0000:80:08.0/0000:84:00.0/net/enp132s0f0np0
ls -l /sys/class/net/ | grep 84:00.1
lrwxrwxrwx 1 root root 0 Feb 4 16:16 enp132s0f1np1 -> ../../devices/pci0000:80/0000:80:08.0/0000:84:00.1/net/enp132s0f1np1
```

## bond

```
enp132s0f0np0 enp132s0f1np1 bond1
```

```
ip link show enp132s0f0np0 | grep bond
160: enp132s0f0np0: <BROADCAST,MULTICAST,SLAVE,UP,LOWER_UP> mtu 1500 qdisc mq master bond1 state UP mode DEFAULT group default qlen 1000
ip link show enp132s0f1np1 | grep bond
169: enp132s0f1np1: <BROADCAST,MULTICAST,SLAVE,UP,LOWER_UP> mtu 1500 qdisc mq master bond1 state UP mode DEFAULT group default qlen 1000
```

## bond VF

```
ifenslave -d bond1 enp132s0f0np0
ifenslave -d bond1 enp132s0f1np1
echo 0 > /sys/class/net/enp132s0f0np0/device/sriov_numvfs
echo 0 > /sys/class/net/enp132s0f1np1/device/sriov_numvfs
ip link set enp132s0f0np0 down
ip link set enp132s0f1np1 down
```

## OVS

## SMFS DMFS

- SMFS (software-managed flow steering)
- DMFS (device-managed flow steering)

## sysfs devlink API

```
sysfs
echo <smfs|dmfs> > /sys/class/net/enp132s0f0np0/compat/devlink/steering_mode
echo <smfs|dmfs> > /sys/class/net/enp132s0f1np1/compat/devlink/steering_mode
devlink
devlink dev param set pci/84:00.0 name flow_steering_mode value smfs cmode runtime
devlink dev param set pci/84:00.1 name flow_steering_mode value smfs cmode runtime
```

## VF

```
cat /sys/class/net/enp132s0f0np0/device/sriov_totalvfs
127
cat /sys/class/net/enp132s0f1np1/device/sriov_totalvfs
127
```

## VF

```
echo '4' > /sys/class/net/enp132s0f0np0/device/sriov_numvfs
echo '4' > /sys/class/net/enp132s0f1np1/device/sriov_numvfs
ip link show enp132s0f0np0
160: enp132s0f0np0: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc mq state DOWN mode DEFAULT group default qlen 1000
 link/ether 08:c0:eb:74:c3:4a brd ff:ff:ff:ff:ff:ff
 vf 0 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
 vf 1 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
 vf 2 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
 vf 3 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
ip link show enp132s0f1np1
169: enp132s0f1np1: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc mq state DOWN mode DEFAULT group default qlen 1000
 link/ether 08:c0:eb:74:c3:4b brd ff:ff:ff:ff:ff:ff
 vf 0 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
 vf 1 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
 vf 2 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
 vf 3 link/ether 00:00:00:00:00:00 brd ff:ff:ff:ff:ff:ff, spoof checking off, link-state disable, trust off, query_rss off
ip link set enp132s0f0np0 up
ip link set enp132s0f1np1 up
```

## VF

## ID

```
lspci -nn | grep ConnectX-5 | grep Virtual
84:00.2 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
84:00.3 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
84:00.4 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
```



|         |                     |                                              |                               |             |
|---------|---------------------|----------------------------------------------|-------------------------------|-------------|
| 84:00.5 | Ethernet controller | [0200]: Mellanox Technologies MT27800 Family | [ConnectX-5 Virtual Function] | [15b3:1018] |
| 84:00.6 | Ethernet controller | [0200]: Mellanox Technologies MT27800 Family | [ConnectX-5 Virtual Function] | [15b3:1018] |
| 84:00.7 | Ethernet controller | [0200]: Mellanox Technologies MT27800 Family | [ConnectX-5 Virtual Function] | [15b3:1018] |
| 84:01.0 | Ethernet controller | [0200]: Mellanox Technologies MT27800 Family | [ConnectX-5 Virtual Function] | [15b3:1018] |
| 84:01.1 | Ethernet controller | [0200]: Mellanox Technologies MT27800 Family | [ConnectX-5 Virtual Function] | [15b3:1018] |

## VF

```
echo 0000:84:06.2 > /sys/bus/pci/drivers/mlx5_core/unbind
echo 0000:84:06.3 > /sys/bus/pci/drivers/mlx5_core/unbind
echo 0000:84:06.4 > /sys/bus/pci/drivers/mlx5_core/unbind
echo 0000:84:06.5 > /sys/bus/pci/drivers/mlx5_core/unbind
echo 0000:84:06.6 > /sys/bus/pci/drivers/mlx5_core/unbind
echo 0000:84:06.7 > /sys/bus/pci/drivers/mlx5_core/unbind
echo 0000:84:01.0 > /sys/bus/pci/drivers/mlx5_core/unbind
echo 0000:84:01.1 > /sys/bus/pci/drivers/mlx5_core/unbind
```

## eSwitch

```
devlink dev eswitch set pci/0000:84:00.0 mode switchdev
devlink dev eswitch set pci/0000:84:00.1 mode switchdev
ethtool -K enp132s0f0np0 hw-tc-offload on
ethtool -K enp132s0f1np1 hw-tc-offload on
```

## SR-IOV VF

|               |    |     |          |      |
|---------------|----|-----|----------|------|
| SR-IOV VF LAG | PF | OVS | e-switch | bond |
|---------------|----|-----|----------|------|

- Active-backup
- XOR
- LACP

|               |     |      |         |    |    |      |    |
|---------------|-----|------|---------|----|----|------|----|
| SR-IOV VF LAG | LAG | bond | bond PF | VF | VF | bond | PF |
| VF            | PF  | XOR  | LACP    | PF | VF | PF   |    |

LACP

```
modprobe bonding mode=802.3ad
ip link set enp132s0f0np0 master bond1
ip link set enp132s0f1np1 master bond1
ip link set enp132s0f0np0 up
ip link set enp132s0f1np1 up
ip link set bond1 up
```

bond

## VF

```
echo 0000:84:00.2 > /sys/bus/pci/drivers/mlx5_core/bind
echo 0000:84:00.3 > /sys/bus/pci/drivers/mlx5_core/bind
echo 0000:84:00.4 > /sys/bus/pci/drivers/mlx5_core/bind
echo 0000:84:00.5 > /sys/bus/pci/drivers/mlx5_core/bind
echo 0000:84:00.6 > /sys/bus/pci/drivers/mlx5_core/bind
echo 0000:84:00.7 > /sys/bus/pci/drivers/mlx5_core/bind
echo 0000:84:01.0 > /sys/bus/pci/drivers/mlx5_core/bind
echo 0000:84:01.1 > /sys/bus/pci/drivers/mlx5_core/bind
```

NetworkManager

NetworkManager

```
systemctl stop NetworkManager
systemctl disable NetworkManager
```

## DEVICE PLUGIN

|    |     |    |                      |
|----|-----|----|----------------------|
| VF | Pod | VF | SR-IOV Device Plugin |
|----|-----|----|----------------------|

SR-IOV      Configmap

```
apiVersion: v1
kind: ConfigMap
metadata:
 name: srioovdp-config
 namespace: kube-system
data:
 config.json: |
```

```
{
 "resourceList": [{
 "resourcePrefix": "mellanox.com",
 "resourceName": "cx5_sriov_switchdev",
 "selectors": {
 "vendors": ["15b3"],
 "devices": ["1018"],
 "drivers": ["mlx5_core"]
 }
 }]
}
```

SR-IOV Device Plugin      ConfigMap      ConfigMap    name   sriovdp-config

- selectors: VF
- vendors:
- devices:
- drivers:

selectors      pciAddresses    acpiIndexes      VF      [SR-IOV ConfigMap](#)

SR-IOV

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/sriov-network-device-plugin/v3.6.2/deployments/sriovdp-daemonset.yaml
```

SR-IOV      Kubernetes Node

```
kubectl describe node kube-ovn-01 | grep mellanox

mellanox.com/cx5_sriov_switchdev: 8
mellanox.com/cx5_sriov_switchdev: 8
mellanox.com/cx5_sriov_switchdev 0 0
```

sriov-network-operator    SR-IOV    Device Plugin

[node-feature-discovery](#)

```
kubectl apply -k https://github.com/kubernetes-sigs/node-feature-discovery/deployment/overlays/default?ref=v0.11.3
```

offload      annotation:

```
kubectl label nodes [offloadNicNode] feature.node.kubernetes.io/network-sriov.capable=true
```

Operator

```
git clone --depth=1 https://github.com/kubeovn/sriov-network-operator.git
kubectl apply -k sriov-network-operator/deploy
```

Operator

```
kubectl get -n kube-system all | grep sriov
NAME READY STATUS RESTARTS AGE
pod/sriov-network-config-daemon-bf9nt 1/1 Running 0 8s
pod/sriov-network-operator-54d7545f65-296gb 1/1 Running 0 10s

NAME DESIRED CURRENT READY UP-TO-DATE AVAILABLE NODE
SELECTOR
daemonset.apps/sriov-network-config-daemon 1 1 1 1 1 beta.kubernetes.io/os=linux,feature.node.kubernetes.io/network-sriov.capable=true 8s

NAME READY UP-TO-DATE AVAILABLE AGE
deployment.apps/sriov-network-operator 1/1 1 1 10s

NAME DESIRED CURRENT READY AGE
replicaset.apps/sriov-network-operator-54d7545f65 1 1 1 10s
```

SriovNetworkNodeState      node1      Mellanox

```
kubectl get sriovnetworknodestates.sriovnetwork.openshift.io -n kube-system node1 -o yaml
apiVersion: sriovnetwork.openshift.io/v1
kind: SriovNetworkNodeState
spec: ...
```

```

status:
 interfaces:
 - deviceID: "1017"
 driver: mlx5_core
 mtu: 1500
 pciAddress: "0000:5f:00.0"
 totalVfs: 8
 vendor: "15b3"
 linkSpeed: 25000Mb/s
 linkType: ETH
 mac: 08:c0:eb:f4:85:bb
 name: ens41f0np0
 - deviceID: "1017"
 driver: mlx5_core
 mtu: 1500
 pciAddress: "0000:5f:00.1"
 totalVfs: 8
 vendor: "15b3"
 linkSpeed: 25000Mb/s
 linkType: ETH
 mac: 08:c0:eb:f4:85:bb
 name: ens41f1np1

```

SriovNetworkNodePolicy

nicSelector

```

apiVersion: srionetwork.openshift.io/v1
kind: SrionetworkNodePolicy
metadata:
 name: policy
 namespace: kube-system
spec:
 nodeSelector:
 feature.node.kubernetes.io/network-srionetwork.capable: "true"
 eSwitchMode: switchdev
 numVfs: 3
 nicSelector:
 pfNames:
 - ens41f0np0
 - ens41f1np1
 resourceName: cx_srionetwork_switchdev

```

SrionetworkNodeState

status

```
kubectl get srionetworknodestates.srionetwork.openshift.io -n kube-system node1 -o yaml
```

```

...
spec:
 interfaces:
 - eSwitchMode: switchdev
 name: ens41f0np0
 numVfs: 3
 pciAddress: 0000:5f:00.0
 vfGroups:
 - policyName: policy
 vfRange: 0-2
 resourceName: cx_srionetwork_switchdev
 - eSwitchMode: switchdev
 name: ens41f1np1
 numVfs: 3
 pciAddress: 0000:5f:00.1
 vfGroups:
 - policyName: policy
 vfRange: 0-2
 resourceName: cx_srionetwork_switchdev
status:
 interfaces:
 - Vfs:
 - deviceID: 1018
 driver: mlx5_core
 pciAddress: 0000:5f:00.2
 vendor: "15b3"
 - deviceID: 1018
 driver: mlx5_core
 pciAddress: 0000:5f:00.3
 vendor: "15b3"
 - deviceID: 1018
 driver: mlx5_core
 pciAddress: 0000:5f:00.4
 vendor: "15b3"
 deviceID: "1017"
 driver: mlx5_core
 linkSpeed: 25000Mb/s
 linkType: ETH
 mac: 08:c0:eb:f4:85:ab
 mtu: 1500
 name: ens41f0np0
 numVfs: 3
 pciAddress: 0000:5f:00.0
 totalVfs: 3
 vendor: "15b3"
 - Vfs:

```

```
- deviceID: 1018
 driver: mlx5_core
 pciAddress: 0000:5f:00.5
 vendor: "15b3"
- deviceID: 1018
 driver: mlx5_core
 pciAddress: 0000:5f:00.6
 vendor: "15b3"
- deviceID: 1018
 driver: mlx5_core
 pciAddress: 0000:5f:00.7
 vendor: "15b3"
deviceID: "1017"
driver: mlx5_core
linkSeed: 25000Mb/s
linkType: ETH
mac: 08:c0:eb:f4:85:bb
mtu: 1500
name: ens41f1np1
numVfs: 3
pciAddress: 0000:5f:00.1
totalvfs: 3
vendor: "15b3"
```

VF

```
lspci -nn | grep ConnectX
5f:00.0 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5] [15b3:1017]
5f:00.1 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5] [15b3:1017]
5f:00.2 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
5f:00.3 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
5f:00.4 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
5f:00.5 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
5f:00.6 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
5f:00.7 Ethernet controller [0200]: Mellanox Technologies MT27800 Family [ConnectX-5 Virtual Function] [15b3:1018]
```

PF

```
cat /sys/class/net/ens41f0np0/compat/devlink/mode
switchdev
```

7.16.3 Multus-CNI

| SR-IOV Device Plugin                                                                                                                        | ID | Multus-CNI | Kube-OVN | Multus-CNI |
|---------------------------------------------------------------------------------------------------------------------------------------------|----|------------|----------|------------|
| <a href="#">Multus-CNI</a>                                                                                                                  |    |            |          |            |
| <pre>kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/multus-cni/v4.0.2/deployments/multus-daemonset-thick.yml</pre> |    |            |          |            |

|                             |        |      |       |        |       |
|-----------------------------|--------|------|-------|--------|-------|
|                             | multus | Thin | Thick | SR-IOV | Thick |
| NetworkAttachmentDefinition |        |      |       |        |       |

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
 name: sriov
 namespace: default
 annotations:
 k8s.v1.cni.cncf.io/resourceName: mellanox.com/cx5_sriov_switchdev
spec:
 config: '{
 "cniVersion": "0.3.1",
 "name": "kube-ovn",
 "plugins": [
 {
 "type": "kube-ovn",
 "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
 "provider": "sriov.default.ovn"
 },
 {
 "type": "portmap",
 "capabilities": {
 "portMappings": true
 }
 }
]
 }'
```

- provider: NetworkAttachmentDefinition {name}.{namespace}.ovn

7.16.4 Overlay

Kube-OVN

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/dist/images/install.sh
```

| IFACE                                                                                                                          |        | IP            |      |       |       |      |       |               |               |
|--------------------------------------------------------------------------------------------------------------------------------|--------|---------------|------|-------|-------|------|-------|---------------|---------------|
| <pre>ENABLE_MIRROR=\${ENABLE_MIRROR:-false} HW_OFFLOAD=\${HW_OFFLOAD:-true} ENABLE_LB=\${ENABLE_LB:-false} IFACE="bond1"</pre> |        |               |      |       |       |      |       |               |               |
| #                                                                                                                              | SR-IOV | Device Plugin | bond | IFACE | bond1 | bond | IFACE | enp132s0f0np0 | enp132s0f1np1 |

Kube-OVN

```
bash install.sh
```

VF Pod

yaml

VF

Pod:

```
apiVersion: v1
kind: Pod
metadata:
 name: nginx-overlay
 annotations:
 v1.multus-cni.io/default-network: default/sriov
 sriov.default.ovn.kubernetes.io/logical_switch: ovn-default
spec:
 containers:
 - name: nginx-overlay
 image: docker.io/library/nginx:alpine
 resources:
 requests:
 mellanox.com/cx5_sriov_switchdev: '1'
 limits:
 mellanox.com/cx5_sriov_switchdev: '1'
```

- v1.multus-cni.io/default-network: NetworkAttachmentDefinition {namespace}/{name}
- sriov.default.ovn.kubernetes.io/logical\_switch: Pod Pod

7.16.5 Underlay

Kube-OVN

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/dist/images/install.sh
```

| IFACE                                                                                                                     |          | IP    |     |
|---------------------------------------------------------------------------------------------------------------------------|----------|-------|-----|
| <pre>ENABLE_MIRROR=\${ENABLE_MIRROR:-false} HW_OFFLOAD=\${HW_OFFLOAD:-true} ENABLE_LB=\${ENABLE_LB:-false} IFACE=""</pre> |          |       |     |
| #                                                                                                                         | Underlay | IFACE | PF  |
|                                                                                                                           |          | IFACE | K8s |
|                                                                                                                           |          |       | PF  |

Kube-OVN

```
bash install.sh
```

VF Pod

yaml

VF

Pod:

```

apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
 name: underlay-offload
spec:
 defaultInterface: bond1

apiVersion: kubeovn.io/v1
kind: Vlan
metadata:
 name: vlan0
spec:
 id: 0
 provider: underlay-offload

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
 name: vlan0
spec:
 protocol: IPv4
 provider: ovn
 cidrBlock: 10.10.204.0/24
 gateway: 10.10.204.254
 vlan: vlan0
 excludeIps:
 - 10.10.204.1..10.10.204.100

apiVersion: v1
kind: Pod
metadata:
 name: nginx-underlay
 annotations:
 k8s.v1.cni.cncf.io/networks: '[{
 "name": "sriov",
 "namespace": "default",
 "default-route": ["10.10.204.254"]
 }]'
 sriov.default.ovn.kubernetes.io/logical_switch: vlan0
spec:
 containers:
 - name: nginx-underlay
 image: docker.io/library/nginx:alpine
 resources:
 requests:
 mellanox.com/cx5_sriov_switchdev: '1'
 limits:
 mellanox.com/cx5_sriov_switchdev: '1'

```

• v1.multus-cni.io/default-network: NetworkAttachmentDefinition {namespace}/{name}

multus VF Pod VF Pod VF Pod multus

yaml VF Pod:

```

apiVersion: v1
kind: Pod
metadata:
 name: nginx-underlay-noVF
 annotations:
 ovn.kubernetes.io/logical_switch: vlan0
spec:
 containers:
 - name: nginx-underlay-noVF
 image: docker.io/library/nginx:alpine

```

VF Pod ovs-kernel e-switch

## 7.16.6

Pod ovs-ovn

```

ovs-appctl dpctl/dump-flows -m type=offloaded
ufid:91cc45de-e7e9-4935-8f82-1890430b0f66, skb_priority(0/0),skb_mark(0/0),ct_state(0/0x23),ct_zone(0/0),ct_mark(0/0),ct_label(0/0x1),recirc_id(0),dp_hash(0/0),in_port(5b45c61b307e_h),packet_type(ns=0/0,id=0/0),eth(src=00:00:00:c5:6d:4e,dst=00:00:00:e7:16:ce),eth_type(0x0800),ipv4(src=0.0.0.0/0.0.0.0,dst=0.0.0.0/0.0.0.0,proto=0/0,tos=0/0,ttl=0/0,frag=no), packets:941539, bytes:62142230, used:0.260s, offloaded:yes, dp:tc, actions:54235e5753b8_h
ufid:e00768d7-e652-4d79-8182-3291d852b791, skb_priority(0/0),skb_mark(0/0),ct_state(0/0x23),ct_zone(0/0),ct_mark(0/0),ct_label(0/0x1),recirc_id(0),dp_hash(0/0),in_port(54235e5753b8_h),packet_type(ns=0/0,id=0/0),eth(src=00:00:00:e7:16:ce,dst=00:00:00:c5:6d:4e),eth_type(0x0800),ipv4(src=0.0.0.0/0.0.0.0,dst=0.0.0.0/0.0.0.0,proto=0/0,tos=0/0,ttl=0/0,frag=no), packets:82386659, bytes:115944854173, used:0.260s, offloaded:yes, dp:tc, actions:5b45c61b307e_h

```

offloaded:yes, dp:tc

 PDF

 Slack

 Support

 2025 9 10

 2022 5 24


  
  
  
  


GitHub

7.16.7

---

7.17 Offload

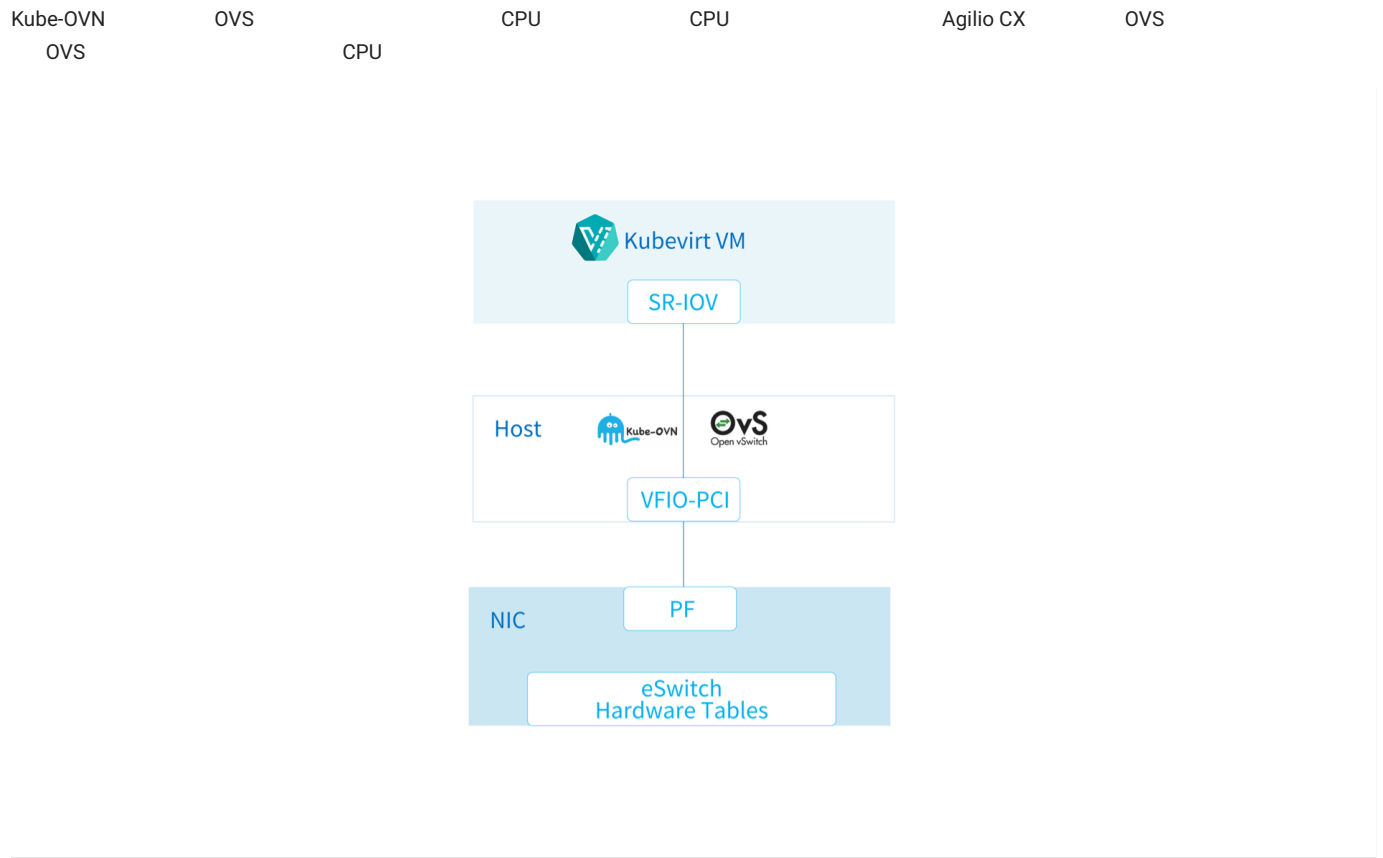

**Note**

2022

7.17.1

- Agilio CX
- CentOS 8 Stream    Linux 5.7
- dp\_hash    hash        OVN LB

7.17.2 SR-IOV

Agilio Open vSwitch TC User Guide

```
#!/bin/bash
DEVICE=${1}
DEFAULT_ASSY=scan
ASSY=${2:-${DEFAULT_ASSY}}
APP=${3:-flower}

if ["x${DEVICE}" = "x" -o ! -e /sys/class/net/${DEVICE}]; then
 echo Syntax: ${0} device [ASSY] [APP]
 echo
 echo This script associates the TC Offload firmware
 echo with a Netronome SmartNIC.
 echo
 echo device: is the network device associated with the SmartNIC
```



```
echo ASSY: defaults to ${DEFAULT_ASSY}
echo APP: defaults to flower. flower-next is supported if updated
echo firmware has been installed.
exit 1
fi

It is recommended that the assembly be determined by inspection
The following code determines the value via the debug interface
if ["${ASSY}x" = "scanx"]; then
 ethtool -W ${DEVICE} 0
 DEBUG=$(ethtool -w ${DEVICE} data /dev/stdout | strings)
 SERIAL=$(echo "${DEBUG}" | grep "^SN:")
 ASSY=$(echo ${SERIAL} | grep -oE AMDA[0-9]{4})
fi

PCIADDR=$(basename $(readlink -e /sys/class/net/${DEVICE}/device))
FWDIR="/lib/firmware/netronome"

AMDA0081 and AMDA0097 uses the same firmware
if ["${ASSY}" = "AMDA0081"]; then
 if [! -e ${FWDIR}/${APP}/nic_AMDA0081.nffw]; then
 ln -sf nic_AMDA0097.nffw ${FWDIR}/${APP}/nic_AMDA0081.nffw
 fi
fi

FW="${FWDIR}/pci-${PCIADDR}.nffw"
ln -sf "${APP}/nic-${ASSY}.nffw" "${FW}"

insert distro-specific initramfs section here...
```

```
./agilio-tc-fw-select.sh ens47np0 scan
rmmod nfp
modprobe nfp
```

VF          VF

```
cat /sys/class/net/ens3/device/sriov_totalvfs
65

echo 4 > /sys/class/net/ens47/device/sriov_numvfs
```

7.17.3 SR-IOV Device Plugin

VF          Pod          VF          SR-IOV Device Plugin

SR-IOV      Configmap

```
apiVersion: v1
kind: ConfigMap
metadata:
 name: sriovdp-config
 namespace: kube-system
data:
 config.json: |
 {
 "resourceList": [{
 "resourcePrefix": "corigine.com",
 "resourceName": "agilio_sriov",
 "selectors": {
 "vendors": ["19ee"],
 "devices": ["6003"],
 "drivers": ["nfp_netvf"]
 }
 }]
 }

```

SR-IOV Network Device Plugin          intel/sriov-network-device-plugin          k8snetworkplumbingwg

kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/sriov-network-device-plugin/master/deployments/sriovdp-daemonset.yaml

SR-IOV          Kubernetes Node

```
kubectl describe no containerserver | grep corigine

corigine.com/agilio_sriov: 4
corigine.com/agilio_sriov: 4
corigine.com/agilio_sriov 0 0
```

7.17.4 Multus-CNI

|                                                                                                                                       |    |            |          |            |
|---------------------------------------------------------------------------------------------------------------------------------------|----|------------|----------|------------|
| SR-IOV Device Plugin                                                                                                                  | ID | Multus-CNI | Kube-OVN | Multus-CNI |
| Multus-CNI                                                                                                                            |    |            |          |            |
| <pre>kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/multus-cni/master/deployments/multus-daemonset.yml</pre> |    |            |          |            |

NetworkAttachmentDefinition

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
 name: default
 namespace: default
 annotations:
 k8s.v1.cni.cncf.io/resourceName: corigine.com/agilio_sriov
spec:
 config: '{
 "cniVersion": "0.3.1",
 "name": "kube-ovn",
 "plugins": [
 {
 "type": "kube-ovn",
 "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
 "provider": "default.default.ovn"
 },
 {
 "type": "portmap",
 "capabilities": {
 "portMappings": true
 }
 }
]
 }'
```

• provider: NetworkAttachmentDefinition {name}.{namespace}.ovn

7.17.5 Kube-OVN

|                                                                                                        |  |
|--------------------------------------------------------------------------------------------------------|--|
| <pre>wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/dist/images/install.sh</pre> |  |
|--------------------------------------------------------------------------------------------------------|--|

IFACE IP

```
ENABLE_MIRROR=${ENABLE_MIRROR:-false}
HW_OFFLOAD=${HW_OFFLOAD:-true}
ENABLE_LB=${ENABLE_LB:-false}
IFACE="ensp01"
```

Kube-OVN

```
bash install.sh
```

7.17.6 VF Pod

|      |    |      |
|------|----|------|
| yaml | VF | Pod: |
|------|----|------|

```
apiVersion: v1
kind: Pod
metadata:
 name: nginx
 namespace: default
 annotations:
 v1.multus-cni.io/default-network: default/default
spec:
 containers:
 - name: nginx
 image: docker.io/library/nginx:alpine
 resources:
 requests:
 corigine.com/agilio_sriov: '1'
```

```
limits:
 corigine.com/agilio_sriov: '1'
```

• v1.multus-cni.io/default-network: NetworkAttachmentDefinition {namespace}/{name}

Pod ovs-ovn

```
ovs-appctl dpctl/dump-flows -m type=offloaded
ufid:91cc45de-e7e9-4935-8f82-1890430b0f66, skb_priority(0/0),skb_mark(0/0),ct_state(0/0x23),ct_zone(0/0),ct_mark(0/0),ct_label(0/0x1),recirc_id(0),dp_hash(0/0),in_port(5b45c61b307e_h),packet_type(ns=0/0,id=0/0),eth(src=00:00:00:c5:6d:4e,dst=00:00:00:e7:16:ce),eth_type(0x0800),ipv4(src=0.0.0.0/0.0.0.0,dst=0.0.0.0/0.0.0.0,proto=0/0,tos=0/0,ttl=0/0,frag=no), packets:941539, bytes:62142230, used:0.260s, offloaded:yes, dp:tc, actions:54235e5753b8_h
ufid:e00768d7-e652-4d79-8182-3291d852b791, skb_priority(0/0),skb_mark(0/0),ct_state(0/0x23),ct_zone(0/0),ct_mark(0/0),ct_label(0/0x1),recirc_id(0),dp_hash(0/0),in_port(54235e5753b8_h),packet_type(ns=0/0,id=0/0),eth(src=00:00:00:e7:16:ce,dst=00:00:00:c5:6d:4e),eth_type(0x0800),ipv4(src=0.0.0.0/0.0.0.0,dst=0.0.0.0/0.0.0.0,proto=0/0,tos=0/0,ttl=0/0,frag=no), packets:82386659, bytes:115944854173, used:0.260s, offloaded:yes, dp:tc, actions:5b45c61b307e_h
```

offloaded:yes, dp:tc


 PDF

 Slack

 Support

 2026 4 28

 2022 5 24



7.17.7

## 7.18 Offload

|          |     |     |     |     |  |           |     |
|----------|-----|-----|-----|-----|--|-----------|-----|
| Kube-OVN | OVS |     | CPU | CPU |  | metaScale | OVS |
| OVS      |     | CPU |     |     |  |           |     |

### Note

1. 2024
2. 1.11 Kube-OVN

### 7.18.1

- metaScale
- MCR
- BIOS SR-IOV VT-d

### 7.18.2

#### hw-offload Kube-OVN

1.

```
wget https://raw.githubusercontent.com/yunsilicon/kube-ovn/release-1.11/dist/images/install.sh
```

1.

```
/opt/ovs-config/ovs-dpdk-config
```

```
specify log level for ovs dpdk, the value is info or dbg, default is info
VLOG=info
specify nic offload, the value is true or false, default is true
HW_OFFLOAD=true
specify cpu mask for ovs dpdk, not specified by default
CPU_MASK=0x02
specify socket memory, not specified by default
SOCKET_MEM="2048,2048"
specify encap IP
ENCAP_IP=6.6.6.200/24
specify pci device
DPDK_DEV=0000:b3:00.0
specify mtu, default is 1500
PF_MTU=1500
specify bond name if bond enabled, not specified by default
BR_PHY_BOND_NAME=bond0
```

1. Kube-OVN

```
bash install.sh
```

#### SR-IOV

1. metaScale ID b3:00.0:

```
[root@k8s-master ~]# lspci -d 1f67:
b3:00.0 Ethernet controller: Device 1f67:1111 (rev 02)
b3:00.1 Ethernet controller: Device 1f67:1111 (rev 02)
```

1. ID p3p1

```
ls -l /sys/class/net/ | grep b3:00:0
lrwxrwxrwx 1 root root 0 May 7 16:30 p3p1 -> ../../devices/pci0000:b2:000:b2:00.0/0000:b3:00.0/net/p3p1
```

## 1. VF

```
cat /sys/class/net/p3p1/device/sriov_totalvfs
512
```

## 1. VF

```
echo '10' > /sys/class/net/p3p1/device/sriov_numvfs
```

## 1. VF

```
lspci -d 1f67:
b3:00.0 Ethernet controller: Device 1f67:1111 (rev 02)
b3:00.1 Ethernet controller: Device 1f67:1111 (rev 02)
b3:00.2 Ethernet controller: Device 1f67:1112
b3:00.3 Ethernet controller: Device 1f67:1112
b3:00.4 Ethernet controller: Device 1f67:1112
b3:00.5 Ethernet controller: Device 1f67:1112
b3:00.6 Ethernet controller: Device 1f67:1112
b3:00.7 Ethernet controller: Device 1f67:1112
b3:01.0 Ethernet controller: Device 1f67:1112
b3:01.1 Ethernet controller: Device 1f67:1112
b3:01.2 Ethernet controller: Device 1f67:1112
b3:01.3 Ethernet controller: Device 1f67:1112
```

## 1. switchdev

```
devlink dev eswitch set pci/0000:b3:00.0 mode switchdev
```

## SR-IOV Device Plugin

### 1. SR-IOV ConfigMap

```
apiVersion: v1
kind: ConfigMap
metadata:
 name: sriovdp-config
 namespace: kube-system
data:
 config.json: |
 {
 "resourceList": [{
 "resourceName": "xsc_sriov",
 "resourcePrefix": "yunsilicon.com",
 "selectors": {
 "vendors": ["1f67"],
 "devices": ["1012", "1112"]
 }
 }]
 }
```

### 1. SR-IOV Device Plugin DevicePlugin

### 2. SR-IOV

```
kubectl describe node <node name> | grep yunsilicon.com/xsc_sriov
yunsilicon.com/xsc_sriov: 10
yunsilicon.com/xsc_sriov: 10
yunsilicon.com/xsc_sriov 0 0
```

## Multus-CNI

### 1. Multus-CNI Multus-CNI

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/multus-cni/master/deployments/multus-daemonset.yml
```

### 1. NetworkAttachmentDefinition

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
```

```

metadata:
 name: sriov-net1
 namespace: default
 annotations:
 k8s.v1.cni.cncf.io/resourceName: yunsilicon.com/xsc_sriov
spec:
 config: '{
 "cniVersion": "0.3.1",
 "name": "kube-ovn",
 "plugins": [
 {
 "type": "kube-ovn",
 "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
 "provider": "sriov-net1.default.ovn"
 },
 {
 "type": "portmap",
 "capabilities": {
 "portMappings": true
 }
 }
]
 }'

```

## SR-IOV Pod

```

apiVersion: v1
kind: Pod
metadata:
 name: nginx
 annotations:
 v1.multus-cni.io/default-network: default/sriov-net1
spec:
 containers:
 - name: nginx
 image: docker.io/library/nginx:alpine
 resources:
 requests:
 yunsilicon.com/xsc_sriov: '1'
 limits:
 yunsilicon.com/xsc_sriov: '1'

```

## Offload

Pod `ovs-ovn`

```

ovs-appctl dpctl/dump-flows type=offloaded
flow-dump from pmd on cpu core: 9
ct_state(-new+est-rel+rpl+trk),ct_mark(0/0x3),recirc_id(0x2d277),in_port(15),packet_type(ns=0,id=0),eth(src=00:00:00:9d:fb:1a,dst=00:00:00:ce:cf:b9),eth_type(0x0800),ipv4(dst=10.16.0.14,frag=no), packets:6, bytes:588, used:7.276s, actions:ct(zone=4,nat),recirc(0x2d278)
ct_state(-new+est-rel+rpl+trk),ct_mark(0/0x3),recirc_id(0x2d275),in_port(8),packet_type(ns=0,id=0),eth(src=00:00:00:ce:cf:b9,dst=00:00:00:9d:fb:1a),eth_type(0x0800),ipv4(dst=10.16.0.18,frag=no), packets:5, bytes:490, used:7.434s, actions:ct(zone=6,nat),recirc(0x2d276)
ct_state(-new+est-rel+rpl+trk),ct_mark(0/0x1),recirc_id(0x2d276),in_port(8),packet_type(ns=0,id=0),eth(src=00:00:00:ce:cf:b9,dst=00:00:00:9d:fb:1a/01:00:00:00:00:00),eth_type(0x0800),ipv4(frag=no), packets:5, bytes:490, used:7.434s, actions:15
recirc_id(0),in_port(15),packet_type(ns=0,id=0),eth(src=00:00:00:9d:fb:1a/01:00:00:00:00:00,dst=00:00:00:ce:cf:b9),eth_type(0x0800),ipv4(dst=10.16.0.14/255.192.0.0,frag=no), packets:6, bytes:588, used:7.277s, actions:ct(zone=6,nat),recirc(0x2d277)
recirc_id(0),in_port(8),packet_type(ns=0,id=0),eth(src=00:00:00:ce:cf:b9/01:00:00:00:00:00,dst=00:00:00:9d:fb:1a),eth_type(0x0800),ipv4(dst=10.16.0.18/255.192.0.0,frag=no), packets:6, bytes:588, used:7.434s, actions:ct(zone=4,nat),recirc(0x2d275)
ct_state(-new+est-rel+rpl+trk),ct_mark(0/0x1),recirc_id(0x2d278),in_port(15),packet_type(ns=0,id=0),eth(dst=00:00:00:ce:cf:b9/01:00:00:00:00:00),eth_type(0x0800),ipv4(frag=no), packets:6, bytes:588, used:7.277s, actions:8

```



[PDF](#)

[Slack](#)

[Support](#)

🕒 2026 4 28

🕒 2024 5 29



7.18.3

7.19 Offload

 **Note**

2024

7.19.1

- 2200E
- HADOS
- BIOS SR-IOV

7.19.2

SR-IOV

1. 2200E vendor ID 1f47 ID 00:0a.0 00:0b.0 2200E

```
lspci | grep 1f47
00:0a.0 Ethernet controller: Device 1f47:1001 (rev 10)
00:0b.0 Ethernet controller: Device 1f47:1001 (rev 10)
```

1. VF

```
cat /sys/bus/pci/devices/0000\:00\:0a.0/sriov_totalvfs
256
```

1. VF VF

```
echo 7 > /sys/bus/pci/devices/0000\:00\:0a.0/sriov_numvfs
```

1. VF

```
lspci | grep 1f47
00:0a.0 Ethernet controller: Device 1f47:1001 (rev 10)
00:0a.1 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.2 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.3 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.4 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.5 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.6 Ethernet controller: Device 1f47:110f (rev 10)
00:0a.7 Ethernet controller: Device 1f47:110f (rev 10)
00:0b.0 Ethernet controller: Device 1f47:1001 (rev 10)
```

SR-IOV Device Plugin

1. SR-IOV Configmap SR-IOV Device Plugin VF Pod

```
apiVersion: v1
kind: ConfigMap
metadata:
 name: sriovdp-config
 namespace: kube-system
data:
 config.json: |
 {
 "resourceList": [{
 "resourceName": "sriov_dpu",
 "resourcePrefix": "yusur.tech",
 "selectors": {
 "vendors": ["1f47"],
 "devices": ["110f"]
 }
 }]
 }
```

```
]
}
```

1. SR-IOV Device Plugin

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/sriov-network-device-plugin/v3.6.2/deployments/sriovdp-daemonset.yaml
```

1. SR-IOV kubernetes Node

```
kubectl describe node node1 | grep yusur
yusur.tech/sriov_dpu: 7
yusur.tech/sriov_dpu: 7
yusur.tech/sriov_dpu: 0 0
```

7.19.3 Multus-CNI

Multus-CNI Kube-OVN SRIOV Device ID

```
kubectl apply -f https://raw.githubusercontent.com/k8snetworkplumbingwg/multus-cni/v4.0.2/deployments/multus-daemonset-thick.yml
```

NetworkAttachmentDefinition

```
apiVersion:
 "k8s.cni.cncf.io/v1"
kind:
 NetworkAttachmentDefinition
metadata:
 name: test
 namespace: kube-system
 annotations:
 k8s.v1.cni.cncf.io/resourceName: yusur.tech/sriov_dpu
spec:
 config: '{
 "cniVersion": "0.3.1",
 "name": "kube-ovn",
 "plugins": [
 {
 "type": "kube-ovn",
 "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
 "provider": "test.kube-system.ovn"
 },
 {
 "type": "portmap",
 "capabilities": {
 "portMappings": true
 }
 }
]
 }'
```

• provider: NetworkAttachmentDefinition {name}.{namespace}.ovn

7.19.4 Kube-OVN

1.

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.12/dist/images/install.sh
```

1. IFACE IP

```
ENABLE_MIRROR=${ENABLE_MIRROR:-false}
HW_OFFLOAD=${HW_OFFLOAD:-true}
ENABLE_LB=${ENABLE_LB:-false}
IFACE="p0"
```

1. kube-ovn

```
bash install.sh
```

| VF   | pod    |
|------|--------|
| yaml | VF Pod |



```
apiVersion: v1
kind: Pod
metadata:
 name: nginx
 namespace: default
 annotations:
 v1.multus-cni.io/default-network: kube-system/test
spec:
 containers:
 - name: nginx
 image: docker.io/library/nginx:alpine
 resources:
 requests:
 yusur.tech/sriov_dpu: '1'
 limits:
 yusur.tech/sriov_dpu: '1'
```

• v1.multus-cni.io/default-network: NetworkAttachmentDefinition {namespace}/{name}

Offload

Pod ovs-ovn

```
ovs-appctl dpctl/dump-flows -m type=offloaded
ufid:67c2e10f-92d4-4574-be70-d072815ff166, skb_priority(0/0),skb_mark(0/0),ct_state(0/0x23),ct_zone(0/0),ct_mark(0/0),ct_label(0/0),recirc_id(0),dp_hash(0/0),in_port(d85b161b6840_h),packet_type(ns=0/0,id=0/0),eth(src=0a:c9:1c:70:01:09,dst=8a:18:a4:22:b7:7d),eth_type(0x0800),ipv4(src=10.0.1.10,dst=10.0.1.6,proto=6,tos=0/0x3,ttl=0/0,frag=no),tcp(src=60774,dst=9001), packets:75021, bytes:109521630, offload_packets:75019, offload_bytes:109521498, used: 3.990s, offloaded:yes, dp:tc, actions:set(tunnel(tun_id=0x5,dst=192.168.201.12,ttl=64,tp_dst=6081,geneve({class=0x102,type=0x80,len=4,0xa0006})), flags(csum|key))), genev_sys_6081
ufid:7940666e-a0bd-42a5-8116-1e84e81bb338, skb_priority(0/0),tunnel(tun_id=0x5,src=192.168.201.12,dst=192.168.201.11,ttl=0/0,tp_dst=6081,geneve({class=0x102,type=0x80,len=4,0x6000a})), flags(+key)),skb_mark(0/0),ct_state(0/0),ct_zone(0/0),ct_mark(0/0),ct_label(0/0),recirc_id(0),dp_hash(0/0),in_port(genev_sys_6081),packet_type(ns=0/0,id=0/0),eth(src=8a:18:a4:22:b7:7d,dst=0a:c9:1c:70:01:09),eth_type(0x0800),ipv4(src=10.0.1.6,dst=10.0.1.10,proto=6,tos=0/0,ttl=0/0,frag=no),tcp(src=9001,dst=60774), packets:6946, bytes:459664, offload_packets:6944, offload_bytes:459532, used: 4.170s, dp:tc, offloaded:yes, actions:d85b161b6840_h
```

 PDF

 Slack

 Support

🕒 2026 4 28

🕒 2024 8 13

 GitHub



## 7.20 DPDK

|  |          |          |                               |          |                   |
|--|----------|----------|-------------------------------|----------|-------------------|
|  | Kube-OVN | OVS-DPDK | KubeVirt                      | DPDK     |                   |
|  | KubeVirt | OVS-DPDK | patchVhostuser implementation | KubeVirt | KVM Device Plugin |
|  |          |          |                               |          | OVS-DPDK          |

### 7.20.1

- DPDK
- Hugepages

### 7.20.2 DPDK

```
driverctl DPDK

driverctl set-override 0000:00:0b.0 uio_pci_generic
```

### 7.20.3

OVS-DPDK

Kube-OVN

```
kubectl label nodes <node> ovn.kubernetes.io/ovs_dp_type="userspace"
```

OVS-DPDK

/opt/ovs-config

ovs-dpdk-config

```
ENCAP_IP=192.168.122.193/24
DPDK_DEV=0000:00:0b.0
```

- ENCAP\_IP :
- DPDK\_DEV:    PCI ID

### 7.20.4 Kube-OVN

```
wget https://raw.githubusercontent.com/kubeovn/kube-ovn/release-1.16/dist/images/install.sh

DPDK

bash install.sh --with-hybrid-dpdk
```

### 7.20.5

vhostuser

OVS-DPDK

KVM Device Plugin

KVM Device Plugin

```
kubectl apply -f https://raw.githubusercontent.com/kubevirt/kubernetes-device-plugins/master/manifests/kvm-ds.yml
```

NetworkAttachmentDefinition

```
apiVersion: k8s.cni.cncf.io/v1
kind: NetworkAttachmentDefinition
metadata:
 name: ovn-dpdk
 namespace: default
spec:
 config: >-
 {
 "cniVersion": "0.3.0",
 "type": "kube-ovn",
```

```

 "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
 "provider": "ovn-dpdk.default.ovn",
 "vhost_user_socket_volume_name": "vhostuser-sockets",
 "vhost_user_socket_name": "sock"
}

```

## Dockerfile VM

```

FROM quay.io/kubevirt/virt-launcher:v0.46.1

wget http://cloud.centos.org/centos/7/images/CentOS-7-x86_64-GenericCloud.qcow2
COPY CentOS-7-x86_64-GenericCloud.qcow2 /var/lib/libvirt/images/CentOS-7-x86_64-GenericCloud.qcow2

```

```

apiVersion: v1
kind: ConfigMap
metadata:
 name: vm-config
data:
 start.sh: |
 chmod u+w /etc/libvirt/qemu.conf
 echo "hugetlbfs_mount = \"/dev/hugepages\" >> /etc/libvirt/qemu.conf
 virtlogd &
 libvirtd &

 mkdir /var/lock

 sleep 5

 virsh define /root/vm/vm.xml
 virsh start vm

 tail -f /dev/null
 vm.xml: |
 <domain type='kvm'>
 <name>vm</name>
 <uuid>4a9b3f53-fa2a-47f3-a757-dd87720d9d1d</uuid>
 <memory unit='KiB'>2097152</memory>
 <currentMemory unit='KiB'>2097152</currentMemory>
 <memoryBacking>
 <hugepages>
 <page size='2' unit='M' nodeset='0' />
 </hugepages>
 </memoryBacking>
 <vcpu placement='static'>2</vcpu>
 <cputune>
 <shares>4096</shares>
 <vcpupin vcpu='0' cpuset='4' />
 <vcpupin vcpu='1' cpuset='5' />
 <emulatorpin cpuset='1,3' />
 </cputune>
 <os>
 <type arch='x86_64' machine='pc'>hvm</type>
 <boot dev='hd' />
 </os>
 <features>
 <acpi />
 <apic />
 </features>
 <cpu mode='host-model'>
 <model fallback='allow' />
 <topology sockets='1' cores='2' threads='1' />
 <numa>
 <cell id='0' cpus='0-1' memory='2097152' unit='KiB' memAccess='shared' />
 </numa>
 </cpu>
 <on_reboot>restart</on_reboot>
 <devices>
 <emulator>usr/libexec/qemu-kvm</emulator>
 <disk type='file' device='disk'>
 <driver name='qemu' type='qcow2' cache='none' />
 <source file='/var/lib/libvirt/images/CentOS-7-x86_64-GenericCloud.qcow2' />
 <target dev='vda' bus='virtio' />
 </disk>

 <interface type='vhostuser'>
 <mac address='00:00:00:0A:30:89' />
 <source type='unix' path='/var/run/vm/sock' mode='server' />
 <model type='virtio' />
 <driver queues='2'>
 <host mrg_rxbuf='off' />
 </driver>
 </interface>
 <serial type='pty'>
 <target type='isa-serial' port='0'>
 <model name='isa-serial' />
 </target>
 </serial>
 <console type='pty'>
 <target type='serial' port='0' />
 </console>
 </devices>
 </domain>

```

```

 </console>
 <channel type='unix'>
 <source mode='bind' path='/var/lib/libvirt/qemu/channel/target/domain-1-vm/org.qemu.guest_agent.0' />
 <target type='virtio' name='org.qemu.guest_agent.0' state='connected' />
 <alias name='channel0' />
 <address type='virtio-serial' controller='0' bus='0' port='1' />
 </channel>

 </devices>
 </domain>

apiVersion: apps/v1
kind: Deployment
metadata:
 name: vm-deployment
 labels:
 app: vm
spec:
 replicas: 1
 selector:
 matchLabels:
 app: vm
 template:
 metadata:
 labels:
 app: vm
 annotations:
 k8s.v1.cnf.cncf.io/networks: default/ovn-dpdk
 ovn-dpdk.default.ovn.kubernetes.io/ip_address: 10.16.0.96
 ovn-dpdk.default.ovn.kubernetes.io/mac_address: 00:00:00:0A:30:89
 spec:
 nodeSelector:
 ovn.kubernetes.io/ovs_dp_type: userspace
 securityContext:
 runAsUser: 0
 volumes:
 - name: vhostuser-sockets
 emptyDir: {}
 - name: xml
 configMap:
 name: vm-config
 - name: hugepage
 emptyDir:
 medium: HugePages-2Mi
 - name: libvirt-runtime
 emptyDir: {}
 containers:
 - name: vm
 image: vm-vhostuser:latest
 command: ["bash", "/root/vm/start.sh"]
 securityContext:
 capabilities:
 add:
 - NET_BIND_SERVICE
 - SYS_NICE
 - NET_RAW
 - NET_ADMIN
 privileged: false
 runAsUser: 0
 resources:
 limits:
 cpu: '2'
 devices.kubevirt.io/kvm: '1'
 memory: '8784969729'
 hugepages-2Mi: 2Gi
 requests:
 cpu: 666m
 devices.kubevirt.io/kvm: '1'
 ephemeral-storage: 50M
 memory: '4490002433'
 volumeMounts:
 - name: vhostuser-sockets
 mountPath: /var/run/vm
 - name: xml
 mountPath: /root/vm/
 - mountPath: /dev/hugepages
 name: hugepage
 - name: libvirt-runtime
 mountPath: /var/run/libvirt

```

## Pod

```

virsh set-user-password vm root 12345
Password set successfully for root in vm

virsh console vm
Connected to domain 'vm'
Escape character is ^] (Ctrl +])

CentOS Linux 7 (Core)
Kernel 3.10.0-1127.el7.x86_64 on an x86_64

```

```
localhost login: root
Password:
Last login: Fri Feb 25 09:52:54 on ttyS0
```

```
ip link set eth0 mtu 1400
ip addr add 10.16.0.96/16 dev eth0
ip ro add default via 10.16.0.1
ping 114.114.114.114
```



🕒 2022 7 16

🕒 2022 5 24



7.20.6

---

## 7.21 OpenStack

|     |           |            |  |                   |     |          |
|-----|-----------|------------|--|-------------------|-----|----------|
|     | OpenStack | Kubernetes |  | OpenStack Neutron | OVN | Kube-OVN |
| OVN | OpenStack | Kubernetes |  |                   |     |          |

### 7.21.1

|        |            |           |            |
|--------|------------|-----------|------------|
| OVN-IC | Kubernetes | OpenStack | Kubernetes |
|--------|------------|-----------|------------|

- OpenStack    Kubernetes    CIDR
- 
- IP
- Kubernetes    OpenStack    VPC

#### OVN-IC

OVN-IC

```
docker run --name=ovn-ic-db -d --network=host -v /etc/ovn:/etc/ovn -v /var/run/ovn:/var/run/ovn -v /var/log/ovn:/var/log/ovn kubeovn/kube-ovn:v1.17.0 bash start-ic-db.sh
```

#### Kubernetes

|             |           |               |           |
|-------------|-----------|---------------|-----------|
| kube-system | Namespace | ovn-ic-config | ConfigMap |
|-------------|-----------|---------------|-----------|

```
apiVersion: v1
kind: ConfigMap
metadata:
 name: ovn-ic-config
 namespace: kube-system
data:
 enable-ic: "true"
 az-name: "az1"
 ic-db-host: "192.168.65.3"
 ic-nb-port: "6645"
 ic-sb-port: "6646"
 gw-nodes: "az1-gw"
 auto-route: "true"
```

- enable-ic:
- az-name:
- ic-db-host: OVN-IC
- ic-nb-port: OVN-IC      6645
- ic-sb-port: OVN-IC      6646
- gw-nodes:
- auto-route:

#### OpenStack

Kubernetes

```
openstack router create router0
openstack router list
+-----+-----+-----+-----+-----+
| ID | Name | Status | State | Project |
+-----+-----+-----+-----+-----+
| d5b38655-249a-4192-8046-71aa4d2b4af1 | router0 | ACTIVE | UP | 98a29ab7388347e7b5ff8bdd181ba4f9 |
+-----+-----+-----+-----+-----+
```

## OpenStack OVN

```
ovn-nbctl set NB_Global . name=op-az
```

OVN-IC

OVN-IC

```
/usr/share/ovn/scripts/ovn-ctl --ovn-ic-nb-db=tcp:192.168.65.3:6645 \
--ovn-ic-sb-db=tcp:192.168.65.3:6646 \
--ovn-northd-nb-db=unix:/run/ovn/ovnnb_db.sock \
--ovn-northd-sb-db=unix:/run/ovn/ovnsb_db.sock \
start_ic
```

- `ovn-ic-nb-db` `ovn-ic-sb-db` : OVN-IC
- `ovn-northd-nb-db` `ovn-northd-sb-db` : OVN

```
ovs-vsctl set open_vswitch . external_ids:ovn-is-interconn=true
```

## OpenStack OVN

```
ts router0
```

```
ovn-nbctl lrp-add router0 lrp-router0-ts 00:02:ef:11:39:4f 169.254.100.73/24
ovn-nbctl lsp-add ts lsp-ts-router0 -- lsp-set-addresses lsp-ts-router0 router \
-- lsp-set-type lsp-ts-router0 router \
-- lsp-set-options lsp-ts-router0 router-port=lrp-router0-ts
ovn-nbctl lrp-set-gateway-chassis lrp-router0-ts {gateway chassis} 1000
ovn-nbctl set NB_Global . options:ic-route-adv=true options:ic-route-learn=true
```

## Kubernetes

```
ovn-nbctl lr-route-list router0
IPv4 Routes
 10.0.0.22 169.254.100.34 dst-ip (learned)
 10.16.0.0/16 169.254.100.34 dst-ip (learned)
```

router0

Kubernetes Pod

## 7.21.2 OVN

OpenStack Kubernetes OVN VPC Subnet

Kube-OVN OVN OpenStack Neutron OVN OpenStack networking-ovn Neutron

## Neutron

```
Neutron /etc/neutron/plugins/ml2/ml2_conf.ini
```

```
[ovn]
...
ovn_nb_connection = tcp:[192.168.137.176]:6641,tcp:[192.168.137.177]:6641,tcp:[192.168.137.178]:6641
ovn_sb_connection = tcp:[192.168.137.176]:6642,tcp:[192.168.137.177]:6642,tcp:[192.168.137.178]:6642
ovn_l3_scheduler = OVN_L3_SCHEDULER
```

- `ovn_nb_connection` `ovn_sb_connection` : Kube-OVN `ovn-central`

## OVS

```
ovs-vsctl set open . external-ids:ovn-remote=tcp:[192.168.137.176]:6642,tcp:[192.168.137.177]:6642,tcp:[192.168.137.178]:6642
ovs-vsctl set open . external-ids:ovn-encap-type=geneve
ovs-vsctl set open . external-ids:ovn-encap-ip=192.168.137.200
```

- `external-ids:ovn-remote` : Kube-OVN `ovn-central`
- `ovn-encap-ip` : IP

## Kubernetes OpenStack

Kubernetes OpenStack OpenStack Pod



## Note

```
kube-ovn-controller args --enable-external-vpc=true
```

## OpenStack

```
openstack router list
+-----+-----+-----+-----+-----+
| ID | Name | Status | State | Project |
+-----+-----+-----+-----+-----+
| 22040ed5-0598-4f77-bffd-e7fd4db47e93 | router0 | ACTIVE | UP | 62381a21d569404aa236a5dd8712449c |
+-----+-----+-----+-----+-----+

openstack network list
+-----+-----+-----+
| ID | Name | Subnets |
+-----+-----+-----+
| cd59e36a-37db-4c27-b709-d35379a7920f | provider | 01d73d9f-fdaa-426c-9b60-aa34abbfacae |
+-----+-----+-----+

openstack subnet list
+-----+-----+-----+-----+
| ID | Name | Network | Subnet |
+-----+-----+-----+-----+
| 01d73d9f-fdaa-426c-9b60-aa34abbfacae | provider-v4 | cd59e36a-37db-4c27-b709-d35379a7920f | 192.168.1.0/24 |
+-----+-----+-----+-----+

openstack server list
+-----+-----+-----+-----+-----+-----+
| ID | Name | Status | Networks | Image | Flavor |
+-----+-----+-----+-----+-----+-----+
| 8433d622-a8d6-41a7-8b31-49abfd64f639 | provider-instance | ACTIVE | provider=192.168.1.61 | ubuntu | m1 |
+-----+-----+-----+-----+-----+-----+
```

## Kubernetes VPC

```
kubectl get vpc
NAME STANDBY SUBNETS
neutron-22040ed5-0598-4f77-bffd-e7fd4db47e93 true ["neutron-cd59e36a-37db-4c27-b709-d35379a7920f"]
ovn-cluster true ["join", "ovn-default"]
```

neutron-22040ed5-0598-4f77-bffd-e7fd4db47e93 OpenStack VPC

Kube-OVN VPC Subnet Pod

VPC, Subnet Namespace net2 Pod:

```
apiVersion: v1
kind: Namespace
metadata:
 name: net2

apiVersion: kubeovn.io/v1
kind: Vpc
metadata:
 creationTimestamp: "2021-06-20T13:34:11Z"
 generation: 2
 labels:
 ovn.kubernetes.io/vpc_external: "true"
 name: neutron-22040ed5-0598-4f77-bffd-e7fd4db47e93
 resourceVersion: "583728"
 uid: 18d4c654-f511-4def-a3a0-a6434d237c1e
spec:
 namespaces:
 - net2

kind: Subnet
apiVersion: kubeovn.io/v1
metadata:
 name: net2
spec:
 vpc: neutron-22040ed5-0598-4f77-bffd-e7fd4db47e93
 namespaces:
 - net2
 cidrBlock: 12.0.1.0/24
 natOutgoing: false

apiVersion: v1
kind: Pod
metadata:
 name: ubuntu
```



```
namespace: net2
spec:
 containers:
 - image: docker.io/kubeovn/kube-ovn:v1.8.0
 command:
 - "sleep"
 - "604800"
 imagePullPolicy: IfNotPresent
 name: ubuntu
 restartPolicy: Always
```



PDF




Slack



Support

 2025 8 4

 2022 5 24



7.21.3

---

## 7.22 IPsec

Kube-OVN v1.13.0 OVN/OVS IPsec Geneve/Vxlan/STT

### 7.22.1

- UDP 500 IKE UDP 4500 NAT-T
- xfrm / af\_key strongSwan/libreswan

### 7.22.2

kube-ovn-cni CertificateSigningRequest kube-ovn-controller approve kube-ovn-cni IPsec ipsec

### 7.22.3 IPsec

kube-ovn-controller Deployment kube-ovn-cni DaemonSet --enable-ovn-ipsec=false --enable-ovn-ipsec=true

```
ENABLE_OVN_IPSEC=true
```

### 7.22.4 cert-manager

cert-manager IPsec --cert-manager-ipsec-cert=true kube-ovn-cni cert-manager IPsec  
Kube-OVN CA

```
args:
- --enable-ovn-ipsec=true
- --cert-manager-ipsec-cert=true
```

### 7.22.5

- kube-ovn-cni ovs-appctl ipsec/show IPsec SA SPI
- kubect1 get csr kube-ovn-cni CSR IPsec CSR approve controller signer.go
- IPsec false IPsec SA kube-ovn-cni Pod


 PDF

 Slack

 Support

🕒 2026 4 28

🕒 2023 4 18



### 7.22.6

7.23 OVN

|  | Pod      | GRE/ERSPAN |
|--|----------|------------|
|  | Kube-OVN | v1.12      |

7.23.1 Multus-CNI

|            |        |
|------------|--------|
| Multus-CNI | Multus |
|------------|--------|

7.23.2

```
apiVersion: "k8s.cni.cncf.io/v1"
kind: NetworkAttachmentDefinition
metadata:
 name: attachnet
 namespace: default
spec:
 config: |
 {
 "cniVersion": "0.3.1",
 "type": "kube-ovn",
 "server_socket": "/run/openvswitch/kube-ovn-daemon.sock",
 "provider": "attachnet.default.ovn"
 }

```

provider

<NAME>.<NAMESPACE>.ovn

7.23.3 Underlay

|  | MTU | LSP/Pod | Underlay |
|--|-----|---------|----------|
|--|-----|---------|----------|

Underlay

```
apiVersion: kubeovn.io/v1
kind: ProviderNetwork
metadata:
 name: net1
spec:
 defaultInterface: eth1

apiVersion: kubeovn.io/v1
kind: Vlan
metadata:
 name: vlan1
spec:
 id: 0
 provider: net1

apiVersion: kubeovn.io/v1
kind: Subnet
metadata:
 name: subnet1
spec:
 protocol: IPv4
 cidrBlock: 172.19.0.0/16
 excludeIps:
 - 172.19.0.2..172.19.0.20
 gateway: 172.19.0.1
 vlan: vlan1
 provider: attachnet.default.ovn

```

provider

provider

7.23.4 Pod

| Pod |
|-----|
|-----|

```
apiVersion: v1
kind: Pod

```

```

metadata:
 name: pod1
 annotations:
 k8s.v1.cni.cncf.io/networks: default/attachnet
spec:
 containers:
 - name: bash
 image: docker.io/kubeovn/kube-ovn:v1.17.0
 args:
 - bash
 - -c
 - sleep infinity
 securityContext:
 privileged: true

```

#### Pod IP

```

$ kubectl get ips | grep pod1
pod1.default 10.16.0.12 00:00:00:FF:34:24 kube-ovn-worker ovn-default
pod1.default.attachnet.default.ovn 172.19.0.21 00:00:00:A0:30:68 kube-ovn-worker subnet1

```

IP 172.19.0.21

## 7.23.5 OVN

### OVN

```

kubectl ko nbctl mirror-add mirror1 gre 99 from-lport 172.19.0.21
kubectl ko nbctl lsp-attach-mirror coredns-787d4945fb-gpnkb.kube-system mirror1

```

coredns-787d4945fb-gpnkb.kube-system OVN LSP <POD\_NAME>.<POD\_NAMESPACE>

### OVN

```

ovn-nbctl mirror-add <NAME> <TYPE> <INDEX> <FILTER> <IP>

NAME - add a mirror with given name
TYPE - specify TYPE 'gre' or 'erspan'
INDEX - specify the tunnel INDEX value
 (indicates key if GRE, erspan_idx if ERSPAN)
FILTER - specify FILTER for mirroring selection
 ('to-lport' / 'from-lport')
IP - specify Sink / Destination i.e. Remote IP

ovn-nbctl mirror-del [NAME] remove mirrors
ovn-nbctl mirror-list print mirrors

ovn-nbctl lsp-attach-mirror PORT MIRROR attach source PORT to MIRROR
ovn-nbctl lsp-detach-mirror PORT MIRROR detach source PORT from MIRROR

```

## 7.23.6 Pod

### Pod

```

root@pod1:/kube-ovn# ip link add mirror1 type gretap local 172.19.0.21 key 99 dev net1
root@pod1:/kube-ovn# ip link set mirror1 up

```

### Pod

```

root@pod1:/kube-ovn# tcpdump -i mirror1 -nnve
tcpdump: listening on mirror1, link-type EN10MB (Ethernet), snapshot length 262144 bytes
05:13:30.328008 00:00:00:a3:f5:e2 > 00:00:00:97:0f:6e, ethertype ARP (0x0806), length 42: Ethernet (len 6), IPv4 (len 4), Request who-has 10.16.0.7 tell 10.16.0.4, length 28
05:13:30.559167 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 212: (tos 0x0, ttl 64, id 57364, offset 0, flags [DF], proto UDP (17), length 198)
10.16.0.4.53 > 10.16.0.6.50472: 34511 NXDomain*- 0/1/1 (170)
05:13:30.559343 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 212: (tos 0x0, ttl 64, id 57365, offset 0, flags [DF], proto UDP (17), length 198)
10.16.0.4.53 > 10.16.0.6.45177: 1659 NXDomain*- 0/1/1 (170)
05:13:30.560625 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 200: (tos 0x0, ttl 64, id 57367, offset 0, flags [DF], proto UDP (17), length 186)
10.16.0.4.53 > 10.16.0.6.43848: 2636*- 0/1/1 (158)
05:13:30.562774 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 191: (tos 0x0, ttl 64, id 57368, offset 0, flags [DF], proto UDP (17), length 177)
10.16.0.4.53 > 10.16.0.6.37755: 48737 NXDomain*- 0/1/1 (149)
05:13:30.563523 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 187: (tos 0x0, ttl 64, id 57369, offset 0, flags [DF], proto UDP (17), length 173)
10.16.0.4.53 > 10.16.0.6.53887: 45519 NXDomain*- 0/1/1 (145)
05:13:30.564940 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 201: (tos 0x0, ttl 64, id 57370, offset 0, flags [DF], proto UDP (17),

```

```
length 187)
10.16.0.4.53 > 10.16.0.6.40846: 25745 NXDomain*- 0/1/1 (159)
05:13:30.565140 00:00:00:a3:f5:e2 > 00:00:00:89:d5:cc, ethertype IPv4 (0x0800), length 201: (tos 0x0, ttl 64, id 57371, offset 0, flags [DF], proto UDP (17),
length 187)
10.16.0.4.53 > 10.16.0.6.45214: 61875 NXDomain*- 0/1/1 (159)
05:13:30.566023 00:00:00:a3:f5:e2 > 00:00:00:55:e4:4e, ethertype IPv4 (0x0800), length 80: (tos 0x0, ttl 64, id 45937, offset 0, flags [DF], proto UDP (17),
length 66)
10.16.0.4.44116 > 172.18.0.1.53: 16025+ [1au] AAAA? kube-ovn.io. (38)
```

7.23.7

1.      ERSPAN              OVN              Linux              4.14      ERSPAN              IPv6              Linux              4.16
2.                              OVN

 PDF

 Slack

 Support

 2025 7 2

 2023 4 20

 GitHub







7.23.8

7.24 DNS Kube-OVN

NodeLocal DNSCache DaemonSet DNS DNS Kube-OVN

7.24.1 DNS

Kubernetes DNS

Kubernetes Nodelocaldnscache

```
#!/bin/bash

localdns=169.254.20.10
domain=cluster.local
kubedns=10.96.0.10

wget https://raw.githubusercontent.com/kubernetes/kubernetes/master/cluster/addons/dns/nodelocaldns/nodelocaldns.yaml
sed -i "s/___PILLAR__LOCAL__DNS___/$localdns/g; s/___PILLAR__DNS__DOMAIN___/$domain/g; s/___PILLAR__DNS__SERVER___/g; s/___PILLAR__CLUSTER__DNS___/$kubedns/g"
nodelocaldns.yaml

kubectl apply -f nodelocaldns.yaml
```

kubelet /var/lib/kubelet/config.yaml clusterDNS DNS IP 169.254.20.10 kubelet

Kube-OVN DNS

Kubernetes Nodelocal DNSCache Kube-OVN

UNDERLAY SUBNET U2O

Underlay Subnet DNS U2O kubectl edit subnet {your subnet} spec.u2oInterconnection = true , Overlay Subnet

KUBE-OVN-CONTROLLER DNS IP

```
kubectl edit deployment kube-ovn-controller -n kube-system
```

spec.template.spec.containers.args --node-local-dns-ip=169.254.20.10

POD

Pod /etc/resolv.conf nameserver DNS IP Pod nameserver DNS ClusterIP u2o Pod Pod

7.24.2 DNS

Pod Pod DNS 169.254.20.10

```
kubectl exec -it pod1 -- nslookup github.com
Server: 169.254.20.10
Address: 169.254.20.10:53

Name: github.com
Address: 20.205.243.166
```

DNS ovn0 DNS DNS

```
tcpdump -i any port 53

06:20:00.441889 659246098c56_h P ifindex 17 00:00:00:73:f1:06 ethertype IPv4 (0x0800), length 75: 10.16.0.2.40230 > 169.254.20.10.53: 1291+ A? baidu.com. (27)
06:20:00.441889 ovn0 In ifindex 7 00:00:00:50:32:cd ethertype IPv4 (0x0800), length 75: 10.16.0.2.40230 > 169.254.20.10.53: 1291+ A? baidu.com. (27)
06:20:00.441950 659246098c56_h P ifindex 17 00:00:00:73:f1:06 ethertype IPv4 (0x0800), length 75: 10.16.0.2.40230 > 169.254.20.10.53: 1611+ AAAA? baidu.com. (27)
06:20:00.441950 ovn0 In ifindex 7 00:00:00:50:32:cd ethertype IPv4 (0x0800), length 75: 10.16.0.2.40230 > 169.254.20.10.53: 1611+ AAAA? baidu.com. (27)
06:20:00.442203 ovn0 Out ifindex 7 00:00:00:52:99:d8 ethertype IPv4 (0x0800), length 145: 169.254.20.10.53 > 10.16.0.2.40230: 1611* 0/1/0 (97)
```

```
06:20:00.442219 659246098c56_h Out ifindex 17 00:00:00:ea:b3:5e ethertype IPv4 (0x0800), length 145: 169.254.20.10.53 > 10.16.0.2.40230: 1611* 0/1/0 (97)
06:20:00.442273 ovn0 Out ifindex 7 00:00:00:52:99:d8 ethertype IPv4 (0x0800), length 125: 169.254.20.10.53 > 10.16.0.2.40230: 1291* 2/0/0 A 39.156.66.10, A
110.242.68.66 (77)
06:20:00.442278 659246098c56_h Out ifindex 17 00:00:00:ea:b3:5e ethertype IPv4 (0x0800), length 125: 169.254.20.10.53 > 10.16.0.2.40230: 1291* 2/0/0 A 39.
156.66.10, A 110.242.68.66 (77)
```

7.24.3



NetworkPolicy      NetworkPolicy      DNS IP    169.254.20.10      CIDR      NetworkPolicy      DNS      Pod

NetworkPolicy

Pod      DNS      NetworkPolicy

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
 name: allow-local-dns-and-node-cidr
 namespace: default #
spec:
 podSelector: {} # Pod
 policyTypes:
 - Ingress
 - Egress
 egress:
 # DNS
 - to:
 - ipBlock:
 cidr: 169.254.20.10/32
 # CIDR CIDR
 - to:
 - ipBlock:
 cidr: 10.0.0.0/8 # CIDR
 ingress:
 # DNS
 - from:
 - ipBlock:
 cidr: 169.254.20.10/32
 # CIDR CIDR
 - from:
 - ipBlock:
 cidr: 10.0.0.0/8 # CIDR
```

- 169.254.20.10/32      DNS      IP
- 10.0.0.0/8      CIDR

PDF

Slack

Support

🕒2025 7 3

🕒2023 5 5

7.24.4

## 7.25 VPC NAT

### 7.25.1

|     |         |             |        |      |      |    |     |      |
|-----|---------|-------------|--------|------|------|----|-----|------|
| VPC | Overlay | natOutgoing | Subnet | Pod  | SNAT | IP | Pod | SNAT |
| NAT |         | CIDR        | IP     | SNAT |      |    |     |      |

### 7.25.2

subnet.SpecnatOutgoingnatOutgoingPolicyRules

```
spec:
 natOutgoing: true
 natOutgoingPolicyRules:
 - action: forward
 match:
 srcIPs: 10.0.11.0/30,10.0.11.254
 - action: nat
 match:
 srcIPs: 10.0.11.128/26
 dstIPs: 114.114.114.114,8.8.8.8
```

NAT

1. IP 10.0.11.0/30 10.0.11.254 SNAT

2. IP 10.0.11.128/26 IP 114.114.114.114 8.8.8.8 SNAT

actionmatchaction, actionforwardnatforwardSNAT, natSNATnatOutgoingPolicyRules

SNAT

matchsrcIPsdstIPsIPIP match.srcIPsmatch.dstIPsCIDRIP

matchnatOutgoingPolicyRulesaction


PDF

Slack

Support

🕒2023 10 25

🕒2023 6 5



### 7.25.3





OVN-CENTRAL

ovn-central Deployment OVN ovn-nb, ovn-sb, ovn-northd

- ovn-nb API kube-ovn-controller ovn-nb
- ovn-sb ovn-nb
- ovn-northd ovn-nb ovn-sb

ovn-central Raft

OVS-OVN

ovs-ovn DaemonSet Pod openvswitch, ovssdb, ovn-controller ovn-central Agent

Agent

Kube-OVN OVN Kubernetes

KUBE-OVN-CONTROLLER

Deployment Kubernetes OVN Kube-OVN kube-ovn-controller OVN

Pod Service Endpoint Node NetworkPolicy VPC Subnet Vlan ProviderNetwork

Pod kube-ovn-controller Pod IPAM ovn-central ACL kube-ovn-controller

CIDR Pod annotation annotation kube-ovn-cni

KUBE-OVN-CNI

DaemonSet CNI OVS

DaemonSet kube-ovn kubelet kube-ovn-cni CNI kube-ovn-cni /opt/cni/bin

kube-ovn-cni

- 1. ovn-controller vswitchd
- 2. CNI add/del
  - a. veth OVS
  - b. OVS
  - c. iptables/ipset/route
- 3. QoS.
- 4. ovn0
- 5. Vlan/Underlay/EIP
- 6.

Kube-OVN

KUBE-OVN-SPEAKER

DaemonSet Pod IP

BGP

KUBE-OVN-PINGER

DaemonSet OVS Kube-OVN

KUBE-OVN-MONITOR

Deployment OVN Kube-OVN

KUBECTL-KO

kubectl

kubectl

 PDF

 Slack

 Support

 2025 9 10

 2022 5 24

  
GitHub 



8.1.2

---

## 8.2 What's Next

---

This document lists the features merged into the master branch for the next minor release.

### 8.2.1 Post-v1.16.0

---

- QoS: support configurable ingress/egress burst limits via per-NIC annotations ( `ovn.kubernetes.io/ingress_burst` ). [#6628](#)
- VPC Egress Gateway: accept integer Mbps values and `M`, `Mi`, `G`, or `Gi` bit-rate quantities for per-replica bandwidth limits. [#7115](#)
- VPC NAT Gateway: allow placing the NAT gateway StatefulSet and its iptables-EIP custom resources in a user-specified namespace. [#6595](#)
- iptables-EIP: surface the bound external subnet in the `kubectl get iptables-eip` printer. [#6672](#)
- Helm Chart (kube-ovn-v2): ship PrometheusRule and Grafana dashboards out of the box. [#6630](#)

### 8.2.2 Post-v1.15.0

---

- NetworkPolicy now supports provider-scoped policies for multi-network pods using the `ovn.kubernetes.io/policy-for` annotation. [#6223](#)
- Support static IP/MAC for multiple interfaces on the same logical switch. [#6060](#)
- MetalLB underlay integration now supports IPv6 and dual-stack. [#6159](#)
- KubeVirt live-migration multi-chassis options now apply to all VM NICs, not just the primary one. [#6241](#)
- Add human-readable descriptions to all Kube-OVN CRD fields for better `kubectl explain` output. [#6133](#) [#6147](#)
- Support BGP and EVPN (L3VPN) for VPC Egress Gateway, running FRR in the egress gateway Pod. [#6224](#)
- Support per-pod NIC granular DHCP control via annotations, overriding subnet-level DHCP settings. [#6475](#)
- Extend SecurityGroup API with tiers, larger priority range (1-16384), localAddress and port matches. [#6330](#)
- Use BigInt for SubnetStatus IP count fields to support large address ranges. [#6403](#)
- Improve hairpin logic to support FIP, SNAT from any CIDR within the VPC and LoadBalancers. [#6445](#)
- VPC NAT Gateway
  - Support user-defined annotations on NAT gateway Pod template. [#6256](#)
  - Allow SNAT EIP to FIP EIP traffic. [#6329](#)
  - Allow any EIP to share external subnet gateway in one native VLAN. [#6426](#)
- VPC Egress Gateway
  - Support custom resources and bandwidth limits. [#6407](#)
- Interconnection
  - Add vendor ID to transit switches to avoid conflicts with other OVN controllers. [#6186](#)
- Reliability
  - OpenFlow synchronization: detect and recover from stale or missing OVS flows automatically. [#6117](#)
  - OVN DB: back up Raft header before rejoining cluster to improve recovery. [#6106](#)
- Performance
  - Strip `managedFields` from informer cache to reduce memory usage. [#6119](#)
  - Add field selectors to informer factory to reduce API server load. [#6091](#)
- Security
  - Replace wildcard RBAC verbs with explicit verb lists. [#6233](#)
  - Specify ephemeral storage limits for containers. [#6259](#)
- Helm Chart
  - Make DaemonSet update strategy configurable via `values.yaml`. [#6136](#)
  - Introduce `extraEnv` variable for all components. [#6142](#)

- Add `affinity` and `nodeSelector` support for ovs-ovn and ovs-ovn-dpdk DaemonSets. [#6308](#)
- Add `external-gateway-config-ns` option for controller. [#6211](#)
- Introduce ServiceMonitor and labels to services. [#6340](#)

### 8.2.3 Post-v1.14.0

- ACL log supports ratelimiting. [#5938](#)
- Subnet with centralized gateway now supports nodeSelectors. [#5956](#)
- Overlay encapsulation NIC selection. [#5946](#)
- Performance: skip conntrack for specific dst CIDRs. [#5821](#)
- NetworkPolicy supports `lax` mode which only deny traffic type of TCP, UDP and SCTP. That means ARP, ICMP and DHCP traffic are always allowed. [#5745](#)
- Remove internal-port type interface code. [#5794](#)
- IPPool
- Multiple IPPools now can bind to the same Namespace. [#5731](#)
- Pods in a bound namespace will only get IPs from the bound pool(s), not other ranges in the subnet. [#5731](#)
- IPPool will create an AddressSet that can be work with VPC Policy Route and ACL. [#5920](#)
- `AdminNetworkPolicy` now supports specify egress peers using FQDNs. [#5703](#)
- Using ARP for IPv4 network ready check: now you don't need ACL allow rules for gateway to make Pod running. [#5716](#)
- Non-primary CNI mode: you can run Kube-OVN as the secondary only network, without annoying unused annotations and logical switch port allocations. [#5618](#)
- VPC NAT Gateway:
  - No default EIP mode: the secondary interface can initialize without a default EIP to avoid the waste. [#5605](#)
  - Custom routes: you can control the route rules within the vpc-nat-gateway Pods to control traffic paths. [#5608](#)
  - Gratuitous ARP: VPC NAT Gateway automatically sends gratuitous ARP packets during initialization to accelerate network convergence. [#5607](#)
  - Healthchecks for static endpoints in `SwitchLBRules`: SLR with both selector or endpoints key can support healthchecks. [#5435](#)
- Underlay
  - Node Selectors for `ProviderNetwork`: instead of adding/removing nodes to the `ProviderNetwork` one by one, you can use node selectors to simplify the workflow. [#5518](#)
  - Different `NetworkProvider`s can now share the same VLAN. [#5471](#)
  - Auto create VLAN sub-interfaces. [#5966](#)
  - Auto move VLAN sub-interfaces to OVS bridges. [#5949](#)
  - Adding `pod_name` and `pod_namespace` labels to interface metrics. [#5463](#)
- IPsec
  - Support `cert-manager` to issue certificates. [#5365](#)
  - Request new certificate if current certificate is not trusted. [#5710](#)
- kubectI-ko
  - Collect IPsec and xFRM information. [#5472](#)
  - Replace `Endpoint` with `EndpointSlice`. [#5425](#)
- NetworkAttachment caching: reduce APIServer load in large-scale deployments with Multus. [#5386](#)
- Upgrade `ovs` to 3.5 and `ovn` to 25.03. [#5537](#)



PDF



Slack



Support

🕒2026 8 4

🕒2025 9 15

 GitHub



8.2.4

---

8.3

Kube-OVN

8.3.1

Kube-OVN

1. default
- Pod IP
- CIDR
- 10.16.0.0/16
- 10.16.0.1
2. join
- Node Pod
- ,
- CIDR
- 100.64.0.0/16
- 100.64.0.1

```
POD_CIDR="10.16.0.0/16"
POD_GATEWAY="10.16.0.1"
JOIN_CIDR="100.64.0.0/16"
EXCLUDE_IPS=""
```

EXCLUDE\_IP      POD\_CIDR      192.168.10.20..192.168.10.30

Overlay      Service CIDR

Join

8.3.2 Service

kube-proxy      iptables      Kube-OVN      Kube-OVN      Service      CIDR

```
SVC_CIDR="10.96.0.0/12"
```

kube-ovn-controller Deployment

```
args:
- --service-cluster-ip-range=10.96.0.0/12
```

8.3.3 Overlay

Kube-OVN      Kubernetes Node IP

```
IFACE=eth1
```

ens[a-z0-9]\*,eth[a-z0-9]\*

kube-ovn-cni DaemonSet

```
args:
- --iface=eth1
```

annotation ovn.kubernetes.io/tunnel\_interface      annotation      iface      annotation

```
kubect1 annotate node no1 ovn.kubernetes.io/tunnel_interface=ethx
```

Overlay

8.3.4 MTU

|                                   |          |              |           |         |     |     |           |          |     |
|-----------------------------------|----------|--------------|-----------|---------|-----|-----|-----------|----------|-----|
| Overlay                           | Kube-OVN | MTU          | MTU       | Overlay | Pod | MTU | MTU - 100 | Underlay | Pod |
| MTU                               |          |              |           |         |     |     |           |          |     |
| Overlay                           | MTU      | kube-ovn-cni | DaemonSet |         |     |     |           |          |     |
| <pre>args:<br/>- --mtu=1333</pre> |          |              |           |         |     |     |           |          |     |

8.3.5

|                                 |           |         |  |  |  |  |  |  |  |
|---------------------------------|-----------|---------|--|--|--|--|--|--|--|
| Kube-OVN                        | mirror0   | tcpdump |  |  |  |  |  |  |  |
| ENABLE_MIRROR=true              |           |         |  |  |  |  |  |  |  |
| kube-ovn-cni                    | DaemonSet | :       |  |  |  |  |  |  |  |
| args:<br>- --enable-mirror=true |           |         |  |  |  |  |  |  |  |

8.3.6 LB

|                                          |                         |                       |                   |       |           |         |    |
|------------------------------------------|-------------------------|-----------------------|-------------------|-------|-----------|---------|----|
| Underlay                                 | kube-proxy<br>ClusterIP | Service<br>kube-proxy | OVN<br>kube-proxy | L2 LB | ClusterIP | Service | LB |
| <pre>ENABLE_LB=false</pre>               |                         |                       |                   |       |           |         |    |
| kube-ovn-controller                      |                         | Deployment            |                   |       |           |         |    |
| <pre>args:<br/>- --enable-lb=false</pre> |                         |                       |                   |       |           |         |    |

LB

|                  |            |               |          |          |    |               |                     |          |  |
|------------------|------------|---------------|----------|----------|----|---------------|---------------------|----------|--|
| Kube-OVN v1.12.0 | subnet crd | spec          | enableLb | Kube-OVN | LB | LB            | kube-ovn-controller |          |  |
| Deployment       | enable-lb  | load-balancer |          | enableLb |    | load-balancer | v1.12.0             | enableLb |  |

8.3.7 NetworkPolicy

|                                |     |     |               |               |              |      |               |          |
|--------------------------------|-----|-----|---------------|---------------|--------------|------|---------------|----------|
| Kube-OVN                       | OVN | ACL | NetworkPolicy | NetworkPolicy | Cilium Chain | eBPF | NetworkPolicy | Kube-OVN |
| NetworkPolicy                  |     |     |               |               |              |      |               |          |
| ENABLE_NP=false                |     |     |               |               |              |      |               |          |
| kube-ovn-controller Deployment |     |     |               |               |              |      |               |          |
| args:<br>- --enable-np=false   |     |     |               |               |              |      |               |          |

NetworkPolicy

8.3.8 EIP SNAT

|     |      |                     |  |  |  |  |  |  |  |
|-----|------|---------------------|--|--|--|--|--|--|--|
| EIP | SNAT | kube-ovn-controller |  |  |  |  |  |  |  |
|-----|------|---------------------|--|--|--|--|--|--|--|



```
ENABLE_EIP_SNAT=false
```

kube-ovn-controller Deployment

```
args:
- --enable-eip-snat=false
```

EIP SNAT EIP SNAT

8.3.9 Load Balancer Service

VPC Load Balancer Service LoadBalancer Service

```
ENABLE_LB_SVC=true
```

kube-ovn-controller Deployment

```
args:
- --enable-lb-svc=true
```

8.3.10 ECMP

ECMP ECMP kube-ovn-controller Deployment :

```
args:
- --enable-ecmp=true
```

Kube-OVN v1.12.0 subnet crd spec enableEcmp ECMP ECMP kube-ovn-controller  
Deployment enable-ecmp v1.12.0

8.3.11 Kubevirt VM

Kubevirt VM kube-ovn-controller StatefulSet Pod IP VM

1.10.6 kube-ovn-controller Deployment

```
args:
- --keep-vm-ip=false
```

8.3.12 CNI

Kube-OVN /opt/cni/bin CNI /etc/cni/net.d CNI 01-kube-ovn.conflist CNI

```
CNI_CONF_DIR="/etc/cni/net.d"
CNI_BIN_DIR="/opt/cni/bin"
CNI_CONFIG_PRIORITY="01"
```

kube-ovn-cni DaemonSet Volume

```
volumes:
- name: cni-conf
 hostPath:
 path: "/etc/cni/net.d"
- name: cni-bin
 hostPath:
 path: "/opt/cni/bin"
...
args:
- --cni-conf-name=01-kube-ovn.conflist
```

8.3.13

Kube-OVN

Overlay

Geneve

Vxlan

STT

TUNNEL\_TYPE="vxlan"

ovs-ovn DaemonSet

env:  
- name: TUNNEL\_TYPE  
  value: "vxlan"

STT

ovs

8.3.14 SSL

OVN DB

API

SSL

:

ENABLE\_SSL=true

SSL

8.3.15 connttrack CIDR

connttrack

NAT/

kube-ovn-controller

CIDR

SKIP\_CONNTRACK\_DST\_CIDRS="10.10.0.0/16,fd00:10::/64"

args:  
- --skip-connttrack-dst-cidrs=10.10.0.0/16,fd00:10::/64

8.3.16 OVN IPsec

Kube-OVN

OVN

IPSec

Geneve/Vxlan/STT

ENABLE\_OVN\_IPSEC=true

daemon

args:  
- --enable-ovn-ipsec=true

OVN IPsec

8.3.17 AdminNetworkPolicy / DNS

AdminNetworkPolicy

ANP/CNP

DNS

DNSNameResolver

CRD

ENABLE\_ANP=true  
ENABLE\_DNS\_NAME\_RESOLVER=true

args:  
- --enable-anp=true  
- --enable-dns-name-resolver=true

### 8.3.18 VPC NAT Gateway

VPC NAT Gateway controller

```
ENABLE_NAT_GW=true
```

ovn-vpc-nat-gw-config ConfigMap enable-vpc-nat-gw

### 8.3.19 ovn-northd

ovn-northd

```
OVN_NORTHD_N_THREADS=4
```

1 CPU

### 8.3.20 NetworkPolicy

Kube-OVN standard / lax NetworkPolicy

```
NP_ENFORCEMENT=standard
```

```
args:
- --np-enforcement=standard
```

NetworkPolicy ovn.kubernetes.io/network\_policy\_enforcement annotation [NetworkPolicy](#)

### 8.3.21 VXLAN TX checksum offload

VXLAN checksum offload

```
SET_VXLAN_TX_OFF=true
```

```
args:
- --set-vxlan-tx-off=true
```

### 8.3.22 KubeVirt

KubeVirt

```
ENABLE_LIVE_MIGRATION_OPTIMIZE=true
```

### 8.3.23 OVN LB endpoint

OVN LoadBalancer endpoint externalTrafficPolicy=Local

```
ENABLE_OVN_LB_PREFER_LOCAL=true
```

```
args:
- --enable-ovn-lb-prefer-local=true
```

### 8.3.24 ConfigMap

ConfigMap external-gw-config kube-system

```
EXTERNAL_GATEWAY_CONFIG_NS=kube-system
```

8.3.25 Non-Primary CNI

| Kube-OVN                                       | attachment network            | Pod      | IP                      | CNI      | controller                      | daemon |
|------------------------------------------------|-------------------------------|----------|-------------------------|----------|---------------------------------|--------|
| <pre>args: - --non-primary-cni-mode=true</pre> |                               |          |                         |          |                                 |        |
| Helm                                           | cni_conf.NON_PRIMARY_CNI=true | chart v1 | /cni.nonPrimaryCNI=true | chart v2 | <a href="#">Non-Primary CNI</a> |        |

8.3.26 ip

|                                                                                                  |           |         |    |
|--------------------------------------------------------------------------------------------------|-----------|---------|----|
| kube-ovn-controller/kube-ovn-cni/kube-ovn-monitor                                                | ip        | 0.0.0.0 | ip |
| ENABLE_BIND_LOCAL_IP=true                                                                        |           |         |    |
| kube-ovn-monitor                                                                                 | pod ip    |         |    |
| # netstat -tunlp  grep kube-ovn<br>tcp 0 0 172.18.0.5:10661 0.0.0.0:* LISTEN 2612/./kube-ovn-mon |           |         |    |
| deployment                                                                                       | daemonSet |         |    |
| env:<br>- name: ENABLE_BIND_LOCAL_IP<br>value: "false"                                           |           |         |    |


 PDF

 Slack

 Support

🕒 2026 4 28

🕒 2022 5 24



8.3.27

8.4

|          |       |       |       |         |     |       |     |     |
|----------|-------|-------|-------|---------|-----|-------|-----|-----|
| Kube-OVN | Minor | Patch | Minor | OVN/OVS | API | Patch | Bug | API |
|----------|-------|-------|-------|---------|-----|-------|-----|-----|

8.4.1

|                      |                      |              |              |     |
|----------------------|----------------------|--------------|--------------|-----|
| Kube-OVN<br>backport | master, release-1.12 | release-1.11 | release-1.12 | Bug |
| release-1.11         | backport             | Bug          |              |     |

8.4.2

|       |       |     |     |
|-------|-------|-----|-----|
| Minor | Patch | Bug | Bug |
|-------|-------|-----|-----|

8.4.3 Patch

|       |                     |                 |          |              |         |
|-------|---------------------|-----------------|----------|--------------|---------|
| Patch | hack/release.sh     |                 |          |              |         |
| 1.    | Build               |                 |          |              |         |
| 2.    | tag                 | Docker Hub      |          |              |         |
| 3.    | tag                 | Github          |          |              |         |
| 4.    |                     |                 |          |              |         |
| 5.    |                     |                 |          |              |         |
| 6.    | Release Note PR     |                 |          |              |         |
| 7.    | Release Note ( )    |                 |          |              |         |
| 8.    | Merge github action | Release Note PR |          |              |         |
| 9.    | Github Release      |                 |          |              |         |
| 10.   | Github Release      | Release         | v1.12.12 | Release Note | Release |

8.4.4 Minor

|       |                                                              |                            |         |              |         |
|-------|--------------------------------------------------------------|----------------------------|---------|--------------|---------|
| Minor |                                                              |                            |         |              |         |
| 1.    | Github                                                       | release-1.13 ( )           |         |              |         |
| 2.    | VERSION, dist/images/install.sh, charts/kube-ovn/values.yaml | charts/kube-ovn/Chart.yaml | Minor   | v1.14.0 ( )  |         |
| 3.    | tag                                                          | Docker Hub ( )             |         |              |         |
| 4.    | tag                                                          | Github ( )                 |         |              |         |
| 5.    | v1.13                                                        | mkdocs.yml                 | version | branch       | ( )     |
| 6.    | Release Note PR                                              |                            |         |              |         |
| 7.    | Release Note ( )                                             |                            |         |              |         |
| 8.    | Merge github action                                          | Release Note PR            |         |              |         |
| 9.    | Github Release                                               |                            |         |              |         |
| 10.   | Github Release                                               | Release                    | v1.13.0 | Release Note | Release |
| 11.   | VERSION                                                      | Patch                      | v1.13.1 |              |         |

 PDF

 Slack

 Support

🕒2024 5 16

🕒2024 5 8



🐙GitHub



8.4.5

---


## 8.5 Underlay

---

Underlay


### 8.5.1

---

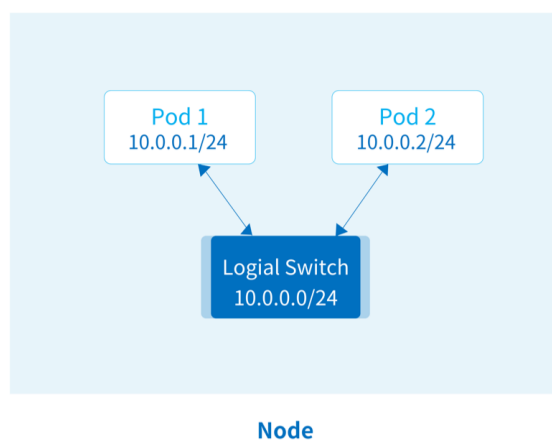


### 8.5.2

---

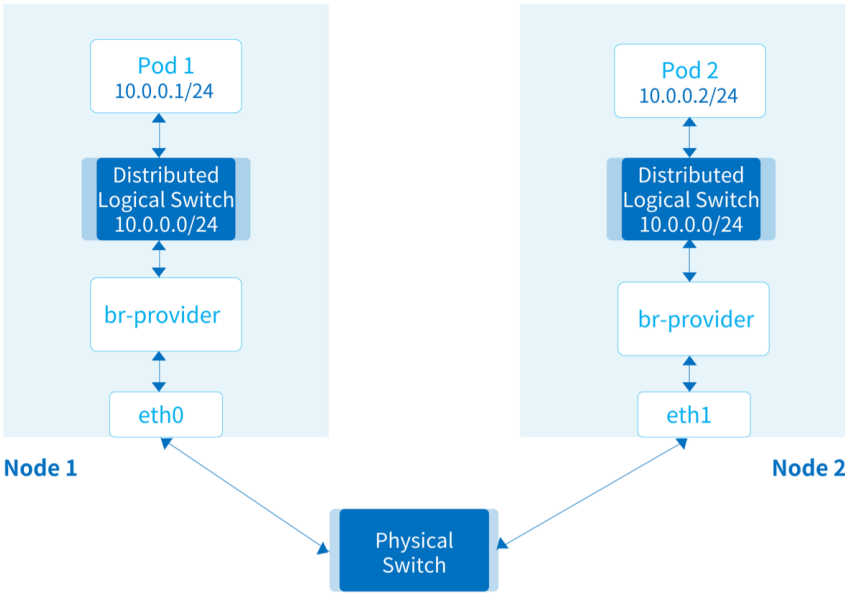


8.5.3

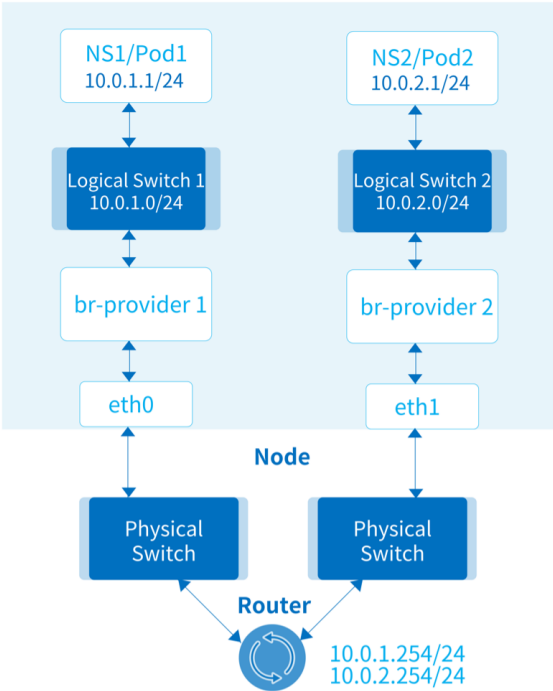


br-provider-1 br-provider-2 OVS Provider Network



8.5.4

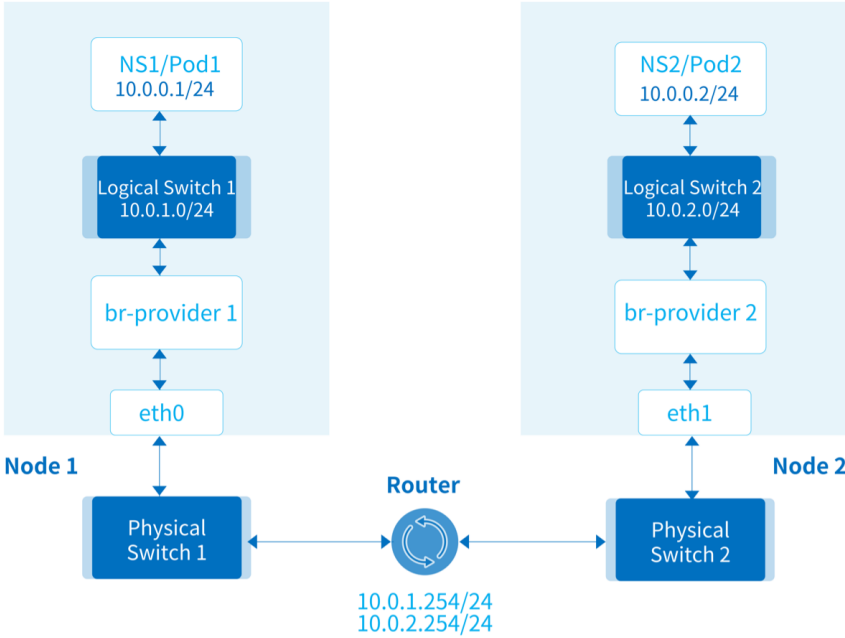


8.5.5

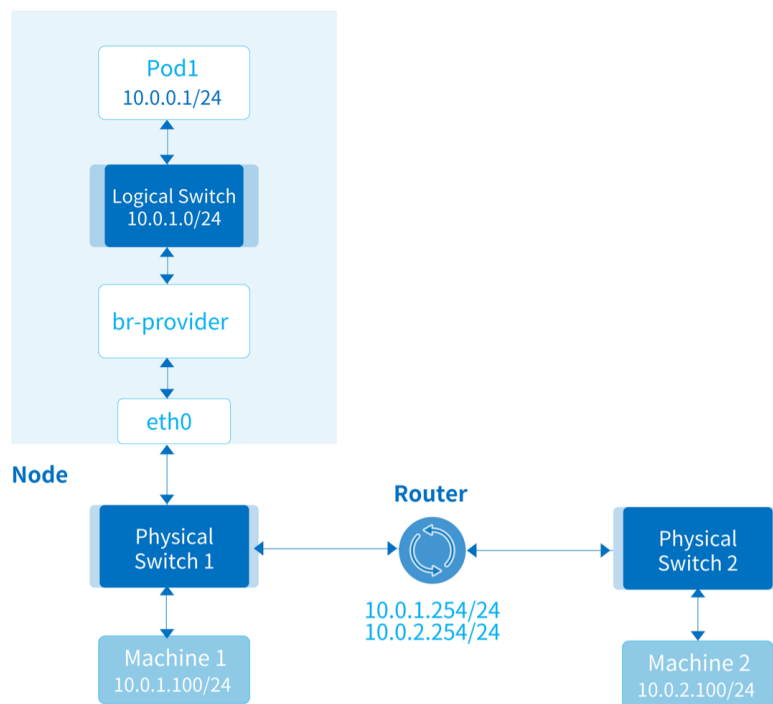


Pod

## 8.5.6 Vlan Tag

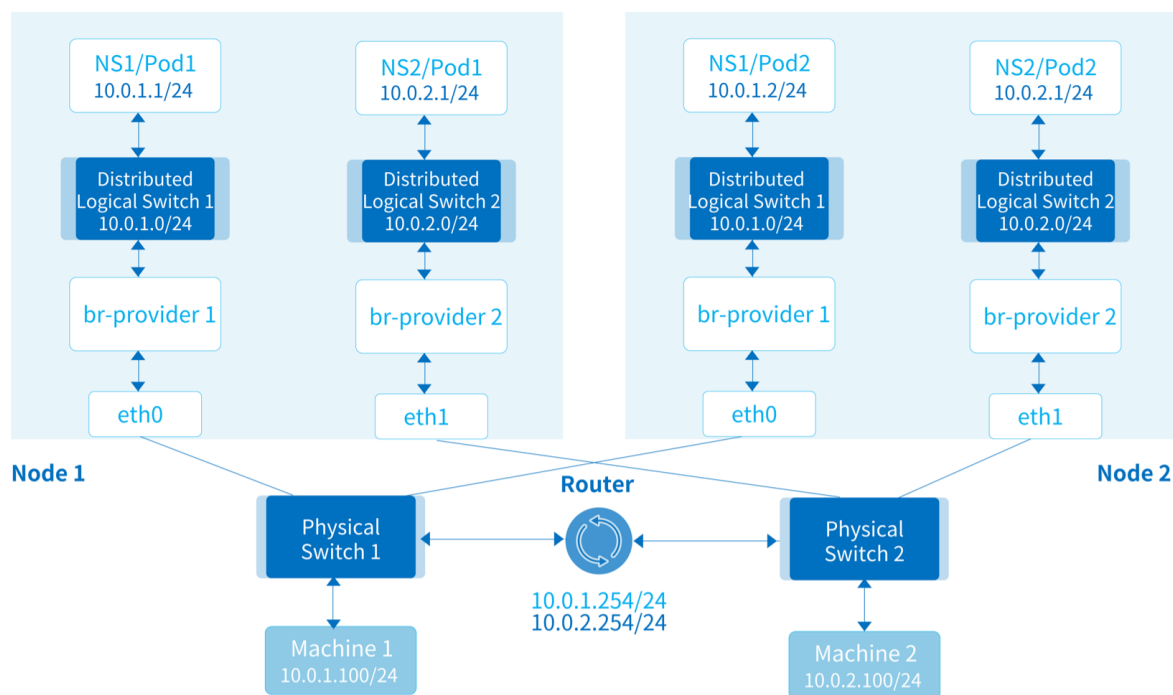


8.5.7 VLAN

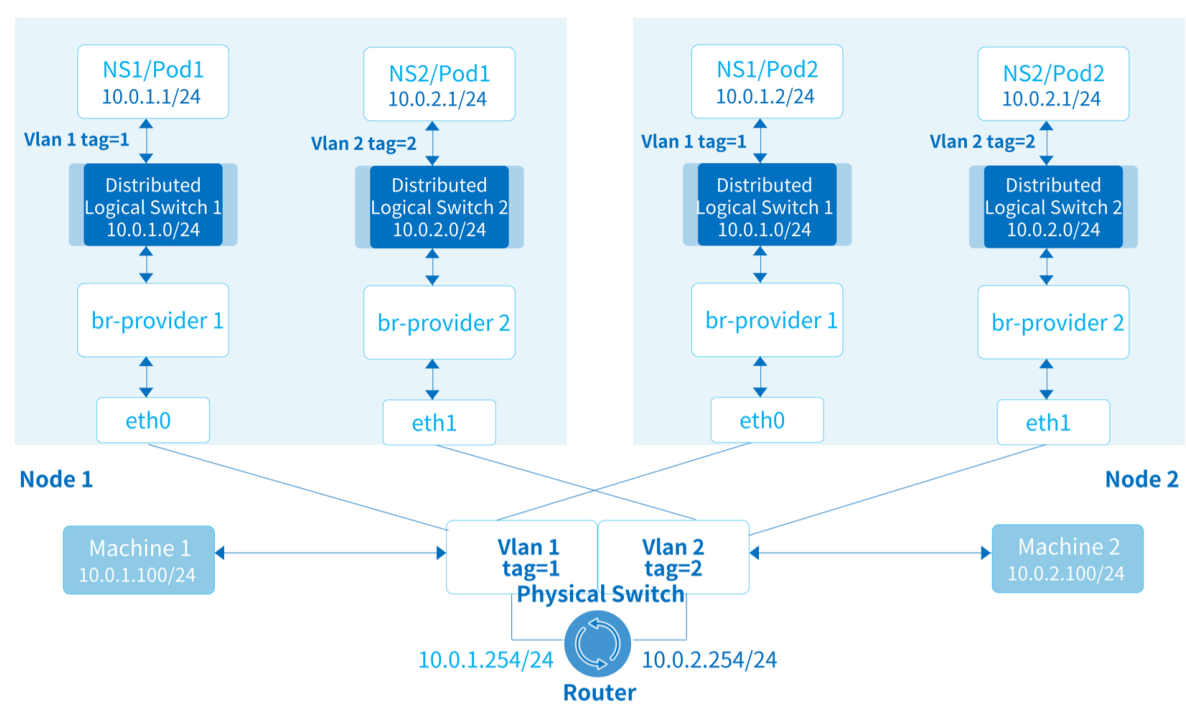


8.5.8 Pod Service IP

| Kube-OVN | Kubernetes Service<br>DNAT | IP | Service | Pod<br>Endpoint | Service IP<br>IP | Pod<br>MAC | Service IP<br>MAC | MAC | MAC |
|----------|----------------------------|----|---------|-----------------|------------------|------------|-------------------|-----|-----|
|----------|----------------------------|----|---------|-----------------|------------------|------------|-------------------|-----|-----|

Service                  Pod

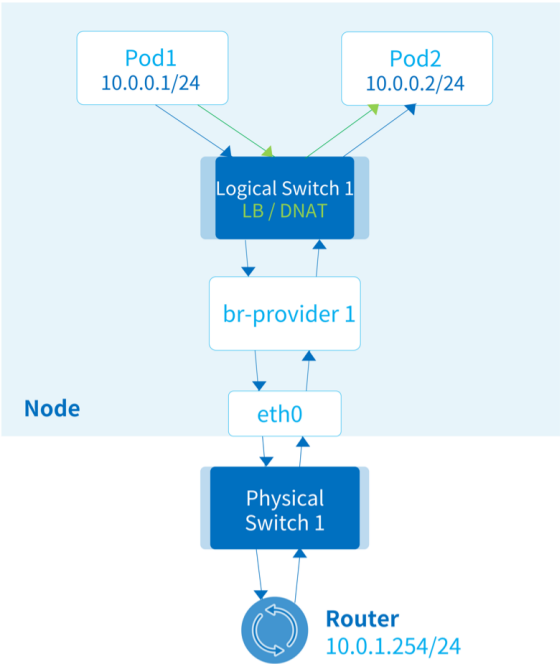

Service                  Pod

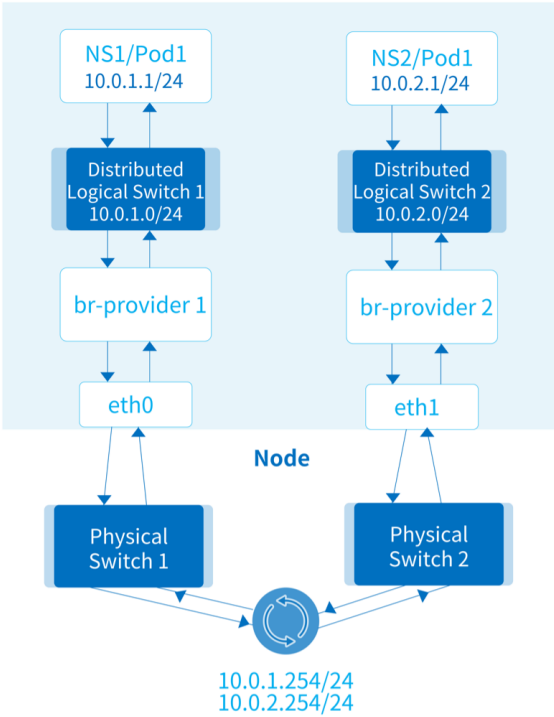

PDF

Slack

Support

 2022 9 23

 2022 5 20

 GitHub 

8.5.9

---

## 8.6 Iptables

Kube-OVN   ipset   iptables   VPC   Overlay   NAT

ipset

| IPv4/IPv6                                               |          |                        |                  |        |
|---------------------------------------------------------|----------|------------------------|------------------|--------|
| ovn40services/ovn60services                             | hash:net | Service                |                  |        |
| ovn40subnets/ovn60subnets                               | hash:net | Overlay                | NodeLocal DNS IP |        |
| ovn40subnets-nat/ovn60subnets-nat                       | hash:net | NatOutgoing            | Overlay          |        |
| ovn40subnets-distributed-gw/ovn60subnets-distributed-gw | hash:net | Overlay                |                  |        |
| ovn40other-node/ovn60other-node                         | hash:net | IP                     |                  |        |
| ovn40local-pod-ip-nat/ovn60local-pod-ip-nat             | hash:ip  |                        |                  |        |
| ovn40subnets-nat-policy                                 | hash:net | natOutgoingPolicyRules |                  |        |
| ovn40natpr-418e79269dc5-dst                             | hash:net | natOutgoingPolicyRules | rule             | dstIPs |
| ovn40natpr-418e79269dc5-src                             | hash:net | natOutgoingPolicyRules | rule             | srcIPs |

iptables    IPv4

|        |                    |                                                                                                                                 |                           |                                                                                              |
|--------|--------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------|----------------------------------------------------------------------------------------------|
| filter | INPUT              | -m set --match-set<br>ovn40services src -j<br>ACCEPT                                                                            | k8s Service Pod           | --                                                                                           |
| filter | INPUT              | -m set --match-set<br>ovn40services dst -j<br>ACCEPT                                                                            |                           | --                                                                                           |
| filter | INPUT              | -m set --match-set<br>ovn40subnets src -j<br>ACCEPT                                                                             |                           | --                                                                                           |
| filter | INPUT              | -m set --match-set<br>ovn40subnets dst -j<br>ACCEPT                                                                             |                           | --                                                                                           |
| filter | FORWARD            | -m set --match-set<br>ovn40services src -j<br>ACCEPT                                                                            |                           | --                                                                                           |
| filter | FORWARD            | -m set --match-set<br>ovn40services dst -j<br>ACCEPT                                                                            |                           | --                                                                                           |
| filter | FORWARD            | -m set --match-set<br>ovn40subnets src -j<br>ACCEPT                                                                             |                           | --                                                                                           |
| filter | FORWARD            | -m set --match-set<br>ovn40subnets dst -j<br>ACCEPT                                                                             |                           | --                                                                                           |
| filter | FORWARD            | -s 10.16.0.0/16 -m<br>comment --comment "ovn-<br>subnet-gateway,ovn-<br>default"                                                | subnet                    | 10.16.0.0/16 subnet cidr comment<br>ovn-subnet-gateway iptables<br>subnet ovn-default subnet |
| filter | FORWARD            | -d 10.16.0.0/16 -m<br>comment --comment "ovn-<br>subnet-gateway,ovn-<br>default"                                                | subnet                    |                                                                                              |
| filter | OUTPUT             | -p udp -m udp --dport 6081<br>-j MARK --set-xmark 0x0                                                                           | SNAT                      | <a href="#">UDP: bad checksum on VXLAN interface</a>                                         |
| nat    | PREROUTING         | -m comment --comment<br>"kube-ovn prerouting rules"<br>-j OVN-PREROUTING                                                        | OVN-PREROUTING            | --                                                                                           |
| nat    | POSTROUTING        | -m comment --comment<br>"kube-ovn postrouting<br>rules" -j OVN-<br>POSTROUTING                                                  | OVN-POSTROUTING           | --                                                                                           |
| nat    | OVN-<br>PREROUTING | -i ovn0 -m set --match-set<br>ovn40subnets src -m set --<br>match-set ovn40services<br>dst -j MARK --set-xmark<br>0x4000/0x4000 | Pod Service<br>masquerade | LB                                                                                           |
| nat    | OVN-<br>PREROUTING | -p tcp -m addrtype --dst-<br>type LOCAL -m set --match-                                                                         |                           | kube-proxy ipvs                                                                              |



|     |                 |                                                                                                                           |                                                            |                                      |                    |               |
|-----|-----------------|---------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|--------------------------------------|--------------------|---------------|
|     |                 | set KUBE-NODE-PORT-LOCAL-TCP dst -j MARK --set-xmark 0x80000/0x80000                                                      | ExternalTrafficPolicy<br>Local Service TCP                 |                                      |                    |               |
| nat | OVN-PREROUTING  | -p udp -m addrtype --dst-type LOCAL -m set --match-set KUBE-NODE-PORT-LOCAL-UDP dst -j MARK --set-xmark 0x80000/0x80000   | ExternalTrafficPolicy<br>Local Service UDP                 |                                      |                    |               |
| nat | OVN-POSTROUTING | -m set --match-set ovn40services src -m set --match-set ovn40subnets dst -m mark --mark 0x4000/0x4000 -j SNAT --to-source | Service IP<br>Overlay Pod IP                               | kube-proxy                           | ipvs               |               |
| nat | OVN-POSTROUTING | -m mark --mark 0x4000/0x4000 -j MASQUERADE                                                                                | SNAT                                                       | --                                   |                    |               |
| nat | OVN-POSTROUTING | -m set --match-set ovn40subnets src -m set --match-set ovn40subnets dst -j MASQUERADE                                     | Pod Service<br>SNAT                                        | --                                   |                    |               |
| nat | OVN-POSTROUTING | -m mark --mark 0x80000/0x80000 -m set --match-set ovn40subnets-distributed-gw dst -j RETURN                               | ExternalTrafficPolicy<br>Local Service<br>Endpoint<br>SNAT | --                                   |                    |               |
| nat | OVN-POSTROUTING | -m mark --mark 0x80000/0x80000 -j MASQUERADE                                                                              | ExternalTrafficPolicy<br>Local Service<br>Endpoint<br>SNAT | --                                   |                    |               |
| nat | OVN-POSTROUTING | -p tcp -m tcp --tcp-flags SYN NONE -m conntrack --ctstate NEW -j RETURN                                                   | Pod IP                                                     | SNAT                                 | --                 |               |
| nat | OVN-POSTROUTING | -s 10.16.0.0/16 -m set ! --match-set ovn40subnets dst -j SNAT --to-source 192.168.0.101                                   | Pod<br>NatOutgoing<br>SNAT                                 | IP                                   | 10.16.0.0/16<br>IP | 192.168.0.101 |
| nat | OVN-POSTROUTING | -m set --match-set ovn40subnets-nat src -m set ! --match-set ovn40subnets dst -j MASQUERADE                               | Pod<br>NatOutgoing                                         | SNAT                                 | --                 |               |
| nat | OVN-POSTROUTING | -m set --match-set ovn40subnets-nat-policy src -m set ! --match-set ovn40subnets dst -j OVN-NAT-POLICY                    | Pod<br>natOutgoingPolicyRules<br>SNAT                      | natOutgoingPolicyRules<br>NAT-POLICY |                    | OVN           |
| nat |                 |                                                                                                                           |                                                            |                                      |                    |               |

|        |                                      |                                                                                                                                                            |                   |                                                                                                                                                                                     |               |
|--------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
|        | OVN-<br>POSTROUTING                  | -m mark --mark<br>0x90001/0x90001 -j<br>MASQUERADE --random-<br>fully                                                                                      |                   | OVN-NAT-POLICY<br>0x90001/0x90001                                                                                                                                                   | tag<br>SNAT   |
| nat    | OVN-<br>POSTROUTING                  | -m mark --mark<br>0x90002/0x90002 -j<br>RETURN                                                                                                             |                   | OVN-NAT-POLICY<br>0x90002/0x90002                                                                                                                                                   | , tag<br>SNAT |
| nat    | OVN-NAT-POLICY                       | -s 10.0.11.0/24 -m<br>comment --comment<br>natPolicySubnet-net1 -j<br>OVN-NAT-PSUBNET-<br>aa98851157c5                                                     |                   | 10.0.11.0/24 net1 CIDR OVN-NAT-<br>PSUBNET-aa98851157c5<br>natOutgoingPolicyRules                                                                                                   |               |
| nat    | OVN-NAT-<br>PSUBNET-<br>xxxxxxxxxxxx | -m set --match-set<br>ovn40natpr-418e79269dc5-<br>src src -m set --match-set<br>ovn40natpr-418e79269dc5-<br>dst dst -j MARK --set-xmark<br>0x90002/0x90002 |                   | 418e79269dc5 natOutgoingPolicyRules<br>ID<br>status.natOutgoingPolicyRules[index].Rule<br>srcIPs ovn40natpr-418e79269dc5-<br>src dstIPs ovn40natpr-418e79269dc5-<br>dst tag 0x90002 |               |
| mangle | OVN-OUTPUT                           | -d 10.241.39.2/32 -p tcp -m<br>tcp --dport 80 -j MARK --set-<br>xmark 0x90003/0x90003                                                                      | kubelet<br>tproxy |                                                                                                                                                                                     |               |
| mangle | OVN-<br>PREROUTING                   | -d 10.241.39.2/32 -p tcp -m<br>tcp --dport 80 -j TPROXY --<br>on-port 8102 --on-ip<br>172.18.0.3 --tproxy-mark<br>0x90004/0x90004                          | kubelet<br>tproxy |                                                                                                                                                                                     |               |

 PDF

 Slack

 Support

🕒 2025 11 20

🕒 2022 9 6

 GitHub



## 8.7

### 8.7.1

|          |        |   |        |       |    |            |        |               |
|----------|--------|---|--------|-------|----|------------|--------|---------------|
| Kube-OVN | Github | / | Github | Issue | PR | Maintainer | Review | Github Action |
|----------|--------|---|--------|-------|----|------------|--------|---------------|

### 8.7.2

Kube-OVN

Go

Go Modules

G0111MODULE="on"

golangci-lint

local-installation

Kube-OVN

Docker buildx

Docker

buildx:

docker buildx create --use

### 8.7.3

Kube-OVN

git clone https://github.com/kubeovn/kube-ovn.git

cd kube-ovn

make release

ARM

make release-arm

### 8.7.4 base

OVS/OVN

base

base

Dockerfile

dist/images/Dockerfile.base

# build x86 base image

make base-amd64

# build arm base image

make base-arm64

### 8.7.5 E2E

Kube-OVN

:

• KIND

Kubernetes

go install sigs.k8s.io/kind@latest

• jinjanator

:

pip install jinjanator

• Ginkgo

go install github.com/onsi/ginkgo/v2/ginkgo;

go get github.com/onsi/gomega/...

E2E

make kind-init

make kind-install

make e2e

Underlay E2E

```
make kind-init
make kind-install-underlay
make e2e-underlay-single-nic
```

ovn vpc nat gw eip, fip, snat, dnat

```
make kind-init
make kind-install
make ovn-vpc-nat-gw-conformance-e2e
```

iptables vpc nat gw eip, fip, snat, dnat

```
make kind-init
make kind-install-vpc-nat-gw
make iptables-vpc-nat-gw-conformance-e2e
```

loadbalancer service

```
make kind-init
make kind-install-lb-svc
make kube-ovn-lb-svc-conformance-e2e
```

```
make kind-clean
```

 PDF

 Slack

 Support

 2025 6 29

 2022 5 20



 GitHub 





## 8.8 OVS/OVN

| OVN/OVS                                   | SDN                   | Kubernetes   | Kube-OVN              | Kube-OVN | OVN/OVS |
|-------------------------------------------|-----------------------|--------------|-----------------------|----------|---------|
| OVN/OVS                                   | Kube-OVN              |              |                       |          |         |
| • <a href="#">4228eab1d7</a>              | vswitchd ofport_usage |              |                       |          |         |
| • <a href="#">54056ea65d</a>              | timer                 |              |                       |          |         |
| • <a href="#">6b4dcb311f</a>              | fdb                   |              |                       |          |         |
| • <a href="#">f627b7721e</a>              | hairpin               | fdb          |                       |          |         |
| • <a href="#">3f3e3a436f</a>              | ovsdb-tool            | join-cluster | Server ID             |          |         |
| • <a href="#">a6cb8215a8</a>              | QoS                   |              |                       |          |         |
| • <a href="#">d4d76ddb2e</a>              | ovsdb-tool            | fix-cluster  |                       |          |         |
| • <a href="#">ffd2328d4a</a>              | netdev                | CPU          |                       |          |         |
| • <a href="#">d088c5d8c2</a>              | ovs-router            | kube-ipvs0   |                       |          |         |
| • <a href="#">1b31f07dc6</a>              |                       |              |                       |          |         |
| • <a href="#">54b7678229</a>              | ovs-sandbox           | docker run   |                       |          |         |
| • <a href="#">9ee66bd91b</a>              |                       |              |                       |          |         |
| • <a href="#">e889d46924</a>              | Underlay              | resubmit     |                       |          |         |
| • <a href="#">f9e97031b5</a>              | ovn-controller        | Kube-OVN     | localnet              | GARP     |         |
| • <a href="#">78cade0187</a>              | conntrack             |              |                       |          |         |
| • <a href="#">85aa6263ad</a>              | northd                | DNS IP       | conntrack             |          |         |
| • <a href="#">34dc3e3fcf</a>              | lflow                 | lport        | conntrack             |          |         |
| • <a href="#">a297b840c2</a>              |                       | DNAT         | lsp                   |          |         |
| • <a href="#">03e35ed9c5</a>              | ovn-controller        |              |                       |          |         |
| • <a href="#">e7d3ba53cd</a>              | ACL                   | DNS IP       | conntrack             |          |         |
| • <a href="#">9286e1fd57</a>              |                       |              |                       |          |         |
| • <a href="#">e5916eb53a</a>              |                       | lr-lb DNAT   |                       |          |         |
| • <a href="#">e4e6ea9c5f</a>              | BFD LRP               |              |                       |          |         |
| • <a href="#">e76880e792</a>              | northd                | nb           | version_compatibility |          |         |
| • <a href="#">477695a010</a>              | northd                | localnet     | lrp                   | arp/nd   |         |
| • <a href="#">2209d9a335</a>              | ovn-controller        | LSP          |                       |          |         |
| • <a href="#">52b727b331</a>              |                       | ovn-northd   |                       |          |         |
| • <a href="#">53b9837f7f</a>              | LB                    | ACL          |                       |          |         |
| • <a href="#">737d9f932e</a>              | GW                    |              |                       |          |         |
| • <a href="#">sbrec-delete-null-check</a> | ovn-controller        | sbrec        |                       |          |         |
| • <a href="#">20626ea909</a>              | LB                    | ACL          |                       |          |         |
| • <a href="#">a2d9ff3ccd</a>              | Deb                   |              |                       |          |         |



PDF



Slack



Support

🕒2026 4 28

🕒2022 5 24

 GitHub



8.8.1

---

8.9

|                                  |         |        |       |     |     |
|----------------------------------|---------|--------|-------|-----|-----|
| Kube-OVN                         | OVN/OVS | Geneve | Vxlan | STT | OVN |
| OVN Architecture Design Decision |         |        |       |     |     |

8.9.1 Geneve

|          |              |          |         |          |       |
|----------|--------------|----------|---------|----------|-------|
| Geneve   | Kube-OVN     | OVN      | Offload | Geneve   | 24bit |
| datapath |              | datapath | 32768   |          |       |
| Mellanox | OVS          | Geneve   | 5.4     | backport |       |
| UDP      | TCP over UDP | TCP      | CPU     |          |       |

8.9.2 Vxlan

|          |              |         |     |          |      |          |
|----------|--------------|---------|-----|----------|------|----------|
| Vxlan    | OVN          | Offload | OVN | datapath | 4096 | datapath |
| datapath | 4096         | inport  | ACL |          |      |          |
| Mellanox | OVS          | Vxlan   |     |          |      |          |
| UDP      | TCP over UDP | TCP     | CPU |          |      |          |

8.9.3 STT

Warning

OpenVswitch3.6STTTunnel

|     |     |     |     |     |     |          |
|-----|-----|-----|-----|-----|-----|----------|
| STT | OVN | TCP | TCP | TCP | OVN | datapath |
|     | OVS |     |     |     |     |          |
|     | OVS |     |     |     |     |          |

8.9.4

- [VXLAN vs GENEVE: Understand The Difference](#)
- [OVN FAQ](#)
- [What is Geneve](#)


PDF

Slack

Support

🕒2025 9 10

🕒2022 6 17



8.9.5

---



## 8.10 Kube-OVN

### Kube-OVN

#### 8.10.1 ovn-monitor

##### OVN

|       |                                                   |                                |                     |                |     |
|-------|---------------------------------------------------|--------------------------------|---------------------|----------------|-----|
|       |                                                   |                                |                     |                |     |
| Gauge | kube_ovn_ovn_status                               | OVN                            | (2) follower        | (1) leader,    | (0) |
| Gauge | kube_ovn_failed_req_count                         | OVN                            |                     |                |     |
| Gauge | kube_ovn_log_file_size_bytes                      | OVN                            |                     |                |     |
| Gauge | kube_ovn_db_file_size_bytes                       | OVN                            |                     |                |     |
| Gauge | kube_ovn_chassis_info                             | OVN chassis                    | (1)                 | (0)            |     |
| Gauge | kube_ovn_db_status                                | OVN                            | , (1)               | (0)            |     |
| Gauge | kube_ovn_logical_switch_info                      | OVN logical switch             | (1)                 | logical switch |     |
| Gauge | kube_ovn_logical_switch_external_id               | OVN logical switch external_id | (1)                 | external-id    |     |
| Gauge | kube_ovn_logical_switch_port_binding              | OVN logical switch             | logical switch port | (1)            |     |
| Gauge | kube_ovn_logical_switch_tunnel_key                | OVN logical switch             | tunnel key          |                |     |
| Gauge | kube_ovn_logical_switch_ports_num                 | OVN logical switch             | logical port        |                |     |
| Gauge | kube_ovn_logical_switch_port_info                 | OVN logical switch port        | (1)                 |                |     |
| Gauge | kube_ovn_logical_switch_port_tunnel_key           | OVN logical switch port        | tunnel key          |                |     |
| Gauge | kube_ovn_cluster_enabled                          | (1) OVN                        | (0) OVN             |                |     |
| Gauge | kube_ovn_cluster_role                             |                                | (1)                 |                |     |
| Gauge | kube_ovn_cluster_status                           |                                | (1)                 |                |     |
| Gauge | kube_ovn_cluster_term                             | RAFT term                      |                     |                |     |
| Gauge | kube_ovn_cluster_leader_self                      |                                | leader (1)          | (0)            |     |
| Gauge | kube_ovn_cluster_vote_self                        |                                | leader (1)          | (0)            |     |
| Gauge | kube_ovn_cluster_election_timer                   | election timer                 |                     |                |     |
| Gauge | kube_ovn_cluster_log_not_committed                | commit                         | RAFT                |                |     |
| Gauge | kube_ovn_cluster_log_not_applied                  | apply                          | RAFT                |                |     |
| Gauge | kube_ovn_cluster_log_index_start                  | RAFT                           |                     |                |     |
| Gauge | kube_ovn_cluster_log_index_next                   | RAFT                           |                     |                |     |
| Gauge | kube_ovn_cluster_inbound_connections_total        |                                |                     |                |     |
| Gauge | kube_ovn_cluster_outbound_connections_total       |                                |                     |                |     |
| Gauge | kube_ovn_cluster_inbound_connections_error_total  |                                |                     |                |     |
| Gauge | kube_ovn_cluster_outbound_connections_error_total |                                |                     |                |     |

## 8.10.2 ovs-monitor

---

ovsdb vswitchd

|       |                         |               |                       |     |
|-------|-------------------------|---------------|-----------------------|-----|
|       |                         |               |                       |     |
| Gauge | ovs_status              | OVS           | (1)                   | (0) |
| Gauge | ovs_info                | OVS           | (1)                   |     |
| Gauge | failed_req_count        | OVS           |                       |     |
| Gauge | log_file_size_bytes     | OVS           |                       |     |
| Gauge | db_file_size_bytes      | OVS           |                       |     |
| Gauge | datapath                | Datapath      | (1)                   |     |
| Gauge | dp_total                | OVS           | datapath              |     |
| Gauge | dp_if                   | Datapath      | (1)                   |     |
| Gauge | dp_if_total             | datapath      | port                  |     |
| Gauge | dp_flows_total          | Datapath      | flow                  |     |
| Gauge | dp_flows_lookup_hit     | Datapath      | flow                  |     |
| Gauge | dp_flows_lookup_missed  | Datapath      | flow                  |     |
| Gauge | dp_flows_lookup_lost    | Datapath      | userspace             |     |
| Gauge | dp_masks_hit            | Datapath      | mask                  |     |
| Gauge | dp_masks_total          | Datapath      | mask                  |     |
| Gauge | dp_masks_hit_ratio      | Datapath      | mask                  |     |
| Gauge | interface               | OVS           | (1)                   |     |
| Gauge | interface_admin_state   |               | (0) down, (1) up, (2) |     |
| Gauge | interface_link_state    |               | (0) down, (1) up, (2) |     |
| Gauge | interface_mac_in_use    | OVS Interface | MAC                   |     |
| Gauge | interface_mtu           | OVS Interface | MTU                   |     |
| Gauge | interface_of_port       | OVS Interface | OpenFlow Port ID      |     |
| Gauge | interface_if_index      | OVS Interface | Index                 |     |
| Gauge | interface_tx_packets    | OVS Interface |                       |     |
| Gauge | interface_tx_bytes      | OVS Interface |                       |     |
| Gauge | interface_rx_packets    | OVS Interface |                       |     |
| Gauge | interface_rx_bytes      | OVS Interface |                       |     |
| Gauge | interface_rx_crc_err    | OVS Interface |                       |     |
| Gauge | interface_rx_dropped    | OVS Interface |                       |     |
| Gauge | interface_rx_errors     | OVS Interface |                       |     |
| Gauge | interface_rx_frame_err  | OVS Interface |                       |     |
| Gauge | interface_rx_missed_err | OVS Interface | miss                  |     |
| Gauge | interface_rx_over_err   | OVS Interface | overrun               |     |
| Gauge | interface_tx_dropped    | OVS Interface |                       |     |

|       |                      |               |
|-------|----------------------|---------------|
|       |                      |               |
| Gauge | interface_tx_errors  | OVS Interface |
| Gauge | interface_collisions | OVS interface |

### 8.10.3 kube-ovn-pinger

|           |                                  |                    |               |
|-----------|----------------------------------|--------------------|---------------|
|           |                                  |                    |               |
| Gauge     | pinger_ovs_up                    | OVS                |               |
| Gauge     | pinger_ovs_down                  | OVS                |               |
| Gauge     | pinger_ovn_controller_up         | ovn-controller     |               |
| Gauge     | pinger_ovn_controller_down       | ovn-controller     |               |
| Gauge     | pinger_inconsistent_port_binding | OVN-SB portbinding | OVS interface |
| Gauge     | pinger_apiserver_healthy         | kube-ovn-pinger    | apiserver     |
| Gauge     | pinger_apiserver_unhealthy       | kube-ovn-pinger    | apiserver     |
| Histogram | pinger_apiserver_latency_ms      | kube-ovn-pinger    | apiserver     |
| Gauge     | pinger_internal_dns_healthy      | kube-ovn-pinger    |               |
| Gauge     | pinger_internal_dns_unhealthy    | kube-ovn-pinger    |               |
| Histogram | pinger_internal_dns_latency_ms   | kube-ovn-pinger    |               |
| Gauge     | pinger_external_dns_healthy      | kube-ovn-pinger    |               |
| Gauge     | pinger_external_dns_unhealthy    | kube-ovn-pinger    |               |
| Histogram | pinger_external_dns_latency_ms   | kube-ovn-pinger    |               |
| Histogram | pinger_pod_ping_latency_ms       | kube-ovn-pinger    | ping Pod      |
| Gauge     | pinger_pod_ping_lost_total       | kube-ovn-pinger    | ping Pod      |
| Gauge     | pinger_pod_ping_count_total      | kube-ovn-pinger    | ping Pod      |
| Histogram | pinger_node_ping_latency_ms      | kube-ovn-pinger    | ping Node     |
| Gauge     | pinger_node_ping_lost_total      | kube-ovn-pinger    | ping Node     |
| Gauge     | pinger_node_ping_count_total     | kube-ovn-pinger    | ping Node     |
| Histogram | pinger_external_ping_latency_ms  | kube-ovn-pinger    | ping          |
| Gauge     | pinger_external_ping_lost_total  | kube-ovn-pinger    | ping          |

## 8.10.4 kube-ovn-controller

### kube-ovn-controller

|           |                                         |                  |
|-----------|-----------------------------------------|------------------|
|           |                                         |                  |
| Histogram | rest_client_request_latency_seconds     | apiserver        |
| Counter   | rest_client_requests_total              | apiserver        |
| Counter   | lists_total                             | API list         |
| Summary   | list_duration_seconds                   | API list         |
| Summary   | items_per_list                          | API list         |
| Counter   | watches_total                           | API watch        |
| Counter   | short_watches_total                     | API watch        |
| Summary   | watch_duration_seconds                  | API watch        |
| Summary   | items_per_watch                         | API watch        |
| Gauge     | last_resource_version                   | resource version |
| Histogram | ovs_client_request_latency_milliseconds | OVN              |
| Gauge     | subnet_available_ip_count               | IP               |
| Gauge     | subnet_used_ip_count                    | IP               |

## 8.10.5 kube-ovn-cni

### kube-ovn-cni

|           |                                         |                  |
|-----------|-----------------------------------------|------------------|
|           |                                         |                  |
| Histogram | cni_op_latency_seconds                  | CNI              |
| Counter   | cni_wait_address_seconds_total          | CNI              |
| Counter   | cni_wait_connectivity_seconds_total     | CNI              |
| Counter   | cni_wait_route_seconds_total            | CNI              |
| Histogram | rest_client_request_latency_seconds     | apiserver        |
| Counter   | rest_client_requests_total              | apiserver        |
| Counter   | lists_total                             | API list         |
| Summary   | list_duration_seconds                   | API list         |
| Summary   | items_per_list                          | API list         |
| Counter   | watches_total                           | API watch        |
| Counter   | short_watches_total                     | API watch        |
| Summary   | watch_duration_seconds                  | API watch        |
| Summary   | items_per_watch                         | API watch        |
| Gauge     | last_resource_version                   | resource version |
| Histogram | ovs_client_request_latency_milliseconds | OVN              |

 PDF

 Slack

 Support

 2026 4 28

 2022 6 21

 GitHub


8.10.6

---

## 8.11 Kube-OVN

Kube-OVN      Kube-OVN      CRD      CRD

### 8.11.1 Condition

|                    |        |                    |
|--------------------|--------|--------------------|
|                    |        |                    |
| type               | String |                    |
| status             | String | True False Unknown |
| reason             | String |                    |
| message            | String |                    |
| observedGeneration | Int64  |                    |
| lastUpdateTime     | Time   |                    |
| lastTransitionTime | Time   |                    |

CRD      Status      Condition

### 8.11.2

#### Subnet

SUBNET

|            |              |            |               |
|------------|--------------|------------|---------------|
|            |              |            |               |
| apiVersion | String       | Kubernetes | kubeovn.io/v1 |
| kind       | String       | Kubernetes | Subnet        |
| metadata   | ObjectMeta   | Kubernetes |               |
| spec       | SubnetSpec   | Subnet     |               |
| status     | SubnetStatus | Subnet     |               |

SubnetSpec



|                        |                         |                        |                                        |  |  |
|------------------------|-------------------------|------------------------|----------------------------------------|--|--|
|                        |                         |                        |                                        |  |  |
| default                | Bool                    |                        |                                        |  |  |
| vpc                    | String                  | VPC                    | ovn-cluster                            |  |  |
| protocol               | String                  | IP                     | IPv4 IPv6 Dual                         |  |  |
| namespaces             | []String                | namespace              |                                        |  |  |
| cidrBlock              | String                  | 10.16.0.0/16           |                                        |  |  |
| gateway                | String                  | CIDRBlock              |                                        |  |  |
| excludelpls            | []String                |                        |                                        |  |  |
| provider               | String                  | OVN Subnet             | NetworkAttachmentDefinition . Kube-OVN |  |  |
| gatewayType            | String                  | Overlay                | distributed centralized                |  |  |
| gatewayNode            | String                  | centralized            |                                        |  |  |
| natOutgoing            | Bool                    | NAT                    | externalEgressGateway                  |  |  |
| externalEgressGateway  | String                  |                        | natOutgoing                            |  |  |
| policyRoutingPriority  | Uint32                  |                        |                                        |  |  |
| policyRoutingTableID   | Uint32                  | TableID                |                                        |  |  |
| mtu                    | Uint32                  | MTU                    |                                        |  |  |
| private                | Bool                    |                        |                                        |  |  |
| allowSubnets           | []String                |                        |                                        |  |  |
| vlan                   | String                  | Vlan                   |                                        |  |  |
| vips                   | []String                | virtual lsp virtual-ip |                                        |  |  |
| logicalGateway         | Bool                    |                        |                                        |  |  |
| disableGatewayCheck    | Bool                    | Pod                    |                                        |  |  |
| disableInterConnection | Bool                    |                        |                                        |  |  |
| enableDHCP             | Bool                    | lsp dhcp               |                                        |  |  |
| dhcpV4Options          | String                  | lsp dhcpv4_options     | DHCP_Options                           |  |  |
| dhcpV6Options          | String                  | lsp dhcpv6_options     | DHCP_Options                           |  |  |
| enableIPv6RA           | Bool                    | lrp                    | ipv6_ra_configs                        |  |  |
| ipv6RAConfigs          | String                  | lrp                    | ipv6_ra_configs                        |  |  |
| acls                   | []Acl                   | logical-switch         | acls                                   |  |  |
| allowEWTraffic         | Bool                    |                        |                                        |  |  |
| natOutgoingPolicyRules | []NatOutgoingPolicyRule | NAT                    |                                        |  |  |
| u2oInterconnectionIP   | String                  | Underlay/Overlay       | IP                                     |  |  |
| u2oInterconnection     | Bool                    | Overlay/Underlay       |                                        |  |  |
| enableLb               | *Bool                   | logical-switch         | load-balancer                          |  |  |
| enableEcmp             | Bool                    | ECMP                   |                                        |  |  |

|                         |                 |
|-------------------------|-----------------|
|                         |                 |
| enableMulticastSnoop    | Bool            |
| enableExternalLBAddress | Bool            |
| routeTable              | String          |
| namespaceSelectors      | []LabelSelector |

Acl

|           |        |     |               |                                   |
|-----------|--------|-----|---------------|-----------------------------------|
|           |        |     |               |                                   |
| direction | String | Acl | from-lport    | to-lport                          |
| priority  | Int    | Acl | 0             | 32767                             |
| match     | String | Acl |               |                                   |
| action    | String | Acl | allow-related | allow-stateless allow drop reject |

NatOutgoingPolicyRule

|        |                        |
|--------|------------------------|
|        |                        |
| match  | NatOutGoingPolicyMatch |
| action | String                 |

NatOutGoingPolicyMatch

|        |        |    |
|--------|--------|----|
|        |        |    |
| srcIPs | String | IP |
| dstIPs | String | IP |

SubnetStatus

| conditions             | []SubnetCondition             |  |                    |              | Condition |
|------------------------|-------------------------------|--|--------------------|--------------|-----------|
| v4availableIPs         | BigInt                        |  | IPv4 IP            | IPv6         | float64   |
| v4availableIPrange     | String                        |  | IPv4               |              |           |
| v4usingIPs             | BigInt                        |  | IPv4 IP            |              |           |
| v4usingIPrange         | String                        |  | IPv4               |              |           |
| v6availableIPs         | BigInt                        |  | IPv6 IP            |              |           |
| v6availableIPrange     | String                        |  | IPv6               |              |           |
| v6usingIPs             | BigInt                        |  | IPv6 IP            |              |           |
| v6usingIPrange         | String                        |  | IPv6               |              |           |
| activateGateway        | String                        |  |                    |              |           |
| dhcpV4OptionsUUID      | String                        |  | lsp dhcpv4_options | DHCP_Options |           |
| dhcpV6OptionsUUID      | String                        |  | lsp dhcpv6_options | DHCP_Options |           |
| u2oInterconnectionIP   | String                        |  | Overlay/Underlay   | IP           |           |
| u2oInterconnectionMAC  | String                        |  | Overlay/Underlay   | MAC          |           |
| u2oInterconnectionVPC  | String                        |  | Overlay/Underlay   | VPC          |           |
| natOutgoingPolicyRules | []NatOutgoingPolicyRuleStatus |  | NAT                |              |           |
| mcastQuerierIP         | String                        |  | IP                 |              |           |
| mcastQuerierMAC        | String                        |  | MAC                |              |           |

IP

IP

| apiVersion | String     | Kubernetes | kubeovn.io/v1 |
|------------|------------|------------|---------------|
| kind       | String     | Kubernetes | IP            |
| metadata   | ObjectMeta | Kubernetes |               |
| spec       | IPSpec     | IP         |               |

## IPSpec

|               |          |                                                          |
|---------------|----------|----------------------------------------------------------|
|               |          |                                                          |
| podName       | String   | Pod                                                      |
| namespace     | String   | Pod Namespace                                            |
| subnet        | String   | IP Subnet                                                |
| attachSubnets | []String | IP                                                       |
| nodeName      | String   | Pod                                                      |
| ipAddress     | String   | IP <code>v4IP</code> <code>v6IP</code>                   |
| v4IpAddress   | String   | IPv4 IP                                                  |
| v6IpAddress   | String   | IPv6 IP                                                  |
| attachIps     | []String | IP IP                                                    |
| macAddress    | String   | Pod MAC                                                  |
| attachMacs    | []String | IP MAC                                                   |
| containerID   | String   | Pod Container ID                                         |
| podType       | String   | Pod <code>StatefulSet</code> <code>VirtualMachine</code> |

## Vpc

## VPC

|            |            |            |                  |
|------------|------------|------------|------------------|
|            |            |            |                  |
| apiVersion | String     | Kubernetes | kubeovn.io/v1    |
| kind       | String     | Kubernetes | <code>Vpc</code> |
| metadata   | ObjectMeta | Kubernetes |                  |
| spec       | VpcSpec    | Vpc        |                  |
| status     | VpcStatus  | Vpc        |                  |

## VpcSpec

|                      |               |         |
|----------------------|---------------|---------|
|                      |               |         |
| defaultSubnet        | String        |         |
| namespaces           | []String      | Vpc     |
| staticRoutes         | []StaticRoute |         |
| policyRoutes         | []PolicyRoute |         |
| vpcPeerings          | []VpcPeering  | VPC     |
| enableExternal       | Bool          |         |
| extraExternalSubnets | []String      |         |
| enableBfd            | Bool          | BFD ( ) |
| bfdPort              | BFDPort       | BFD     |

StaticRoute

|            |        |        |  |
|------------|--------|--------|--|
|            |        |        |  |
| policy     | String |        |  |
| cidr       | String |        |  |
| nextHopIP  | String | IP     |  |
| ecmpMode   | String | ECMP   |  |
| bfdId      | String | BFD ID |  |
| routeTable | String |        |  |

PolicyRoute

|           |        |       |                |
|-----------|--------|-------|----------------|
|           |        |       |                |
| priority  | Int    |       |                |
| match     | String |       |                |
| action    | String | allow | drop reroute   |
| nextHopIP | String | IP    | action reroute |

VpcPeering

|                |        |     |
|----------------|--------|-----|
|                |        |     |
| remoteVpc      | String | VPC |
| localConnectIP | String | IP  |

BFDPort

|              |               |         |    |
|--------------|---------------|---------|----|
|              |               |         |    |
| enabled      | Bool          | BFD     |    |
| ip           | String        | BFD     | IP |
| nodeSelector | LabelSelector | BFD LRP |    |

VpcStatus

| conditions              | []VpcCondition | Vpc  | Condition |
|-------------------------|----------------|------|-----------|
| standby                 | Bool           | VPC  |           |
| default                 | Bool           | VPC  |           |
| defaultLogicalSwitch    | String         |      |           |
| router                  | String         |      |           |
| tcpLoadBalancer         | String         | TCP  |           |
| udpLoadBalancer         | String         | UDP  |           |
| sctpLoadBalancer        | String         | SCTP |           |
| tcpSessionLoadBalancer  | String         | TCP  |           |
| udpSessionLoadBalancer  | String         | UDP  |           |
| sctpSessionLoadBalancer | String         | SCTP |           |
| subnets                 | []String       | VPC  |           |
| vpcPeerings             | []String       | VPC  |           |
| enableExternal          | Bool           |      |           |
| extraExternalSubnets    | []String       |      |           |
| enableBfd               | Bool           | BFD  |           |

8.11.3 Underlay

Vlan

| apiVersion | String     | Kubernetes | kubeovn.io/v1 |
|------------|------------|------------|---------------|
| kind       | String     | Kubernetes | Vlan          |
| metadata   | ObjectMeta | Kubernetes |               |
| spec       | VlanSpec   | Vlan       |               |
| status     | VlanStatus | Vlan       |               |

VLANSPEC

| id       | Int    | Vlan tag | 0~4096          |
|----------|--------|----------|-----------------|
| provider | String | Vlan     | ProviderNetwork |

VLANSTATUS

|            |                 |      |           |
|------------|-----------------|------|-----------|
|            |                 |      |           |
| subnets    | []String        | Vlan |           |
| conflict   | Bool            |      |           |
| conditions | []VlanCondition | Vlan | Condition |

ProviderNetwork

|            |                       |                 |                 |
|------------|-----------------------|-----------------|-----------------|
|            |                       |                 |                 |
| apiVersion | String                | Kubernetes      | kubeovn.io/v1   |
| kind       | String                | Kubernetes      | ProviderNetwork |
| metadata   | ObjectMeta            | Kubernetes      |                 |
| spec       | ProviderNetworkSpec   | ProviderNetwork |                 |
| status     | ProviderNetworkStatus | ProviderNetwork |                 |

PROVIDERNETWORKSPEC

|                  |                   |     |             |                  |                           |
|------------------|-------------------|-----|-------------|------------------|---------------------------|
|                  |                   |     |             |                  |                           |
| defaultInterface | String            |     |             |                  |                           |
| customInterfaces | []CustomInterface |     |             |                  |                           |
| nodeSelector     | LabelSelector     | OVS | matchLabels | matchExpressions | nodeSelector excludeNodes |
| excludeNodes     | []String          |     |             |                  |                           |
| exchangeLinkName | Bool              | OVS |             |                  |                           |

CustomInterface

|           |          |          |
|-----------|----------|----------|
|           |          |          |
| interface | String   | Underlay |
| nodes     | []String |          |

PROVIDERNETWORKSTATUS

|               |                            |                 |           |
|---------------|----------------------------|-----------------|-----------|
|               |                            |                 |           |
| ready         | Bool                       |                 |           |
| readyNodes    | []String                   |                 |           |
| notReadyNodes | []String                   |                 |           |
| vlan          | []String                   | Vlan            |           |
| conditions    | []ProviderNetworkCondition | ProviderNetwork | Condition |

## 8.11.4

**SecurityGroup**

|            |                     |               |               |
|------------|---------------------|---------------|---------------|
|            |                     |               |               |
| apiVersion | String              | Kubernetes    | kubeovn.io/v1 |
| kind       | String              | Kubernetes    | SecurityGroup |
| metadata   | ObjectMeta          | Kubernetes    |               |
| spec       | SecurityGroupSpec   | SecurityGroup |               |
| status     | SecurityGroupStatus | SecurityGroup |               |

**SECURITYGROUPSPEC**

|                       |                     |
|-----------------------|---------------------|
|                       |                     |
| ingressRules          | []SecurityGroupRule |
| egressRules           | []SecurityGroupRule |
| allowSameGroupTraffic | Bool                |

**SecurityGroupRule**

|                     |              |    |         |               |
|---------------------|--------------|----|---------|---------------|
|                     |              |    |         |               |
| ipVersion           | String       | IP | ipv4    | ipv6          |
| protocol            | SgProtocol   |    | all     | icmp tcp udp  |
| priority            | Int          |    | 1-200   |               |
| remoteType          | SgRemoteType |    | address | securityGroup |
| remoteAddress       | String       |    |         |               |
| remoteSecurityGroup | String       |    |         |               |
| portRangeMin        | Int          |    | 1       |               |
| portRangeMax        | Int          |    | 65535   |               |
| policy              | SgPolicy     |    | allow   | drop          |

**SECURITYGROUPSTATUS**

|                        |        |     |
|------------------------|--------|-----|
|                        |        |     |
| portGroup              | String |     |
| allowSameGroupTraffic  | Bool   |     |
| ingressMd5             | String | MD5 |
| egressMd5              | String | MD5 |
| ingressLastSyncSuccess | Bool   |     |
| egressLastSyncSuccess  | Bool   |     |



8.11.5

IP

Vip

|            |            |            |               |
|------------|------------|------------|---------------|
|            |            |            |               |
| apiVersion | String     | Kubernetes | kubeovn.io/v1 |
| kind       | String     | Kubernetes | Vip           |
| metadata   | ObjectMeta | Kubernetes |               |
| spec       | VipSpec    | Vip        |               |
| status     | VipStatus  | Vip        |               |

VIPSPEC

|               |          |      |
|---------------|----------|------|
|               |          |      |
| namespace     | String   | VIP  |
| subnet        | String   | VIP  |
| type          | String   | VIP  |
| v4ip          | String   | IPv4 |
| v6ip          | String   | IPv6 |
| macAddress    | String   | MAC  |
| selector      | []String |      |
| attachSubnets | []String |      |

VIPSTATUS

|            |                |      |           |
|------------|----------------|------|-----------|
|            |                |      |           |
| conditions | []VipCondition | VIP  | Condition |
| type       | String         | VIP  |           |
| v4ip       | String         | IPv4 |           |
| v6ip       | String         | IPv6 |           |
| mac        | String         | MAC  |           |

SwitchLBRule

|            |                    |              |               |
|------------|--------------------|--------------|---------------|
|            |                    |              |               |
| apiVersion | String             | Kubernetes   | kubeovn.io/v1 |
| kind       | String             | Kubernetes   | SwitchLBRule  |
| metadata   | ObjectMeta         | Kubernetes   |               |
| spec       | SwitchLBRuleSpec   | SwitchLBRule |               |
| status     | SwitchLBRuleStatus | SwitchLBRule |               |

SWITCHLBRULESPEC

|                 |                    |    |
|-----------------|--------------------|----|
|                 |                    |    |
| vip             | String             | IP |
| namespace       | String             |    |
| selector        | []String           |    |
| endpoints       | []String           |    |
| sessionAffinity | String             |    |
| ports           | []SwitchLBRulePort |    |

SwitchLBRulePort

|            |        |
|------------|--------|
|            |        |
| name       | String |
| port       | Int32  |
| targetPort | Int32  |
| protocol   | String |

SWITCHLBRULESTATUS

|            |                         |              |           |
|------------|-------------------------|--------------|-----------|
|            |                         |              |           |
| conditions | []SwitchLBRuleCondition | SwitchLBRule | Condition |
| ports      | String                  | SwitchLBRule |           |
| service    | String                  | SwitchLBRule | service   |

8.11.6 QoS IP

QoSPolicy

|            |               |            |               |
|------------|---------------|------------|---------------|
|            |               |            |               |
| apiVersion | String        | Kubernetes | kubeovn.io/v1 |
| kind       | String        | Kubernetes | QoSPolicy     |
| metadata   | ObjectMeta    | Kubernetes |               |
| spec       | QoSPolicySpec | QoSPolicy  |               |

QOSPOLICYSPEC

|                     |                              |
|---------------------|------------------------------|
|                     |                              |
| bandwidthLimitRules | QoSPolicyBandwidthLimitRules |
| shared              | Bool                         |
| bindingType         | QoSPolicyBindingType         |

IPPool

|            |              |            |               |
|------------|--------------|------------|---------------|
|            |              |            |               |
| apiVersion | String       | Kubernetes | kubeovn.io/v1 |
| kind       | String       | Kubernetes | IPPool        |
| metadata   | ObjectMeta   | Kubernetes |               |
| spec       | IPPoolSpec   | IPPool     |               |
| status     | IPPoolStatus | IPPool     |               |

IPPOOLSPEC

|            |          |    |
|------------|----------|----|
|            |          |    |
| subnet     | String   |    |
| namespaces | []String |    |
| ips        | []String | IP |

IPPOOLSTATUS

|                    |                   |      |           |
|--------------------|-------------------|------|-----------|
|                    |                   |      |           |
| v4AvailableIPs     | BigInt            | IPv4 | IP        |
| v4AvailableIPRange | String            | IPv4 | IP        |
| v4UsingIPs         | BigInt            | IPv4 | IP        |
| v4UsingIPRange     | String            | IPv4 | IP        |
| v6AvailableIPs     | BigInt            | IPv6 | IP        |
| v6AvailableIPRange | String            | IPv6 | IP        |
| v6UsingIPs         | BigInt            | IPv6 | IP        |
| v6UsingIPRange     | String            | IPv6 | IP        |
| conditions         | []IPPoolCondition | IP   | Condition |

8.11.7 NAT IP

IptablesEIP

|            |                   |             |               |
|------------|-------------------|-------------|---------------|
|            |                   |             |               |
| apiVersion | String            | Kubernetes  | kubeovn.io/v1 |
| kind       | String            | Kubernetes  | IptablesEIP   |
| metadata   | ObjectMeta        | Kubernetes  |               |
| spec       | IptablesEIPSpec   | IptablesEIP |               |
| status     | IptablesEIPStatus | IptablesEIP |               |

IPTABLESEIPSPEC

|                |        |      |
|----------------|--------|------|
|                |        |      |
| v4ip           | String | IPv4 |
| v6ip           | String | IPv6 |
| macAddress     | String | MAC  |
| natGwDp        | String | NAT  |
| qosPolicy      | String | QoS  |
| externalSubnet | String |      |

IPTABLESEIPSTATUS

|            |                        |                 |               |      |
|------------|------------------------|-----------------|---------------|------|
|            |                        |                 |               |      |
| ready      | Bool                   | IptablesEIP     |               |      |
| ip         | String                 | IptablesEIP     | IP            | IPv4 |
| redo       | String                 | IptablesEIP CRD |               |      |
| nat        | String                 | IptablesEIP     | fip snat dnat |      |
| qosPolicy  | String                 | QoS             |               |      |
| conditions | []IptablesEIPCondition | IptablesEIP     | Condition     |      |

OvnEip

|            |              |            |               |
|------------|--------------|------------|---------------|
|            |              |            |               |
| apiVersion | String       | Kubernetes | kubeovn.io/v1 |
| kind       | String       | Kubernetes | OvnEip        |
| metadata   | ObjectMeta   | Kubernetes |               |
| spec       | OvnEipSpec   | OvnEip     |               |
| status     | OvnEipStatus | OvnEip     |               |

OVNEIPSPEC

|                |        |             |
|----------------|--------|-------------|
|                |        |             |
| externalSubnet | String |             |
| v4Ip           | String | IPv4        |
| v6Ip           | String | IPv6        |
| macAddress     | String | MAC         |
| type           | String | lrp lsp nat |

IptablesFIPRule

|            |                     |                 |                 |
|------------|---------------------|-----------------|-----------------|
|            |                     |                 |                 |
| apiVersion | String              | Kubernetes      | kubeovn.io/v1   |
| kind       | String              | Kubernetes      | IptablesFIPRule |
| metadata   | ObjectMeta          | Kubernetes      |                 |
| spec       | IptablesFIPRuleSpec | IptablesFIPRule |                 |

IPTABLESFIPRULESPEC

|            |        |    |
|------------|--------|----|
|            |        |    |
| eip        | String | IP |
| internalIP | String | IP |

OvnFip

|            |              |            |               |
|------------|--------------|------------|---------------|
|            |              |            |               |
| apiVersion | String       | Kubernetes | kubeovn.io/v1 |
| kind       | String       | Kubernetes | OvnFip        |
| metadata   | ObjectMeta   | Kubernetes |               |
| spec       | OvnFipSpec   | OvnFip     |               |
| status     | OvnFipStatus | OvnFip     |               |

OVNFIPSPEC

|        |        |                         |
|--------|--------|-------------------------|
|        |        |                         |
| ovnEip | String | OVN EIP                 |
| ipType | String | IP vip ip               |
| ipName | String | IP                      |
| vpc    | String | VPC                     |
| v4Ip   | String | IPv4                    |
| v6Ip   | String | IPv6                    |
| type   | String | distributed centralized |

IptablesDnatRule

|            |                      |                  |                  |
|------------|----------------------|------------------|------------------|
|            |                      |                  |                  |
| apiVersion | String               | Kubernetes       | kubeovn.io/v1    |
| kind       | String               | Kubernetes       | IptablesDnatRule |
| metadata   | ObjectMeta           | Kubernetes       |                  |
| spec       | IptablesDnatRuleSpec | IptablesDnatRule |                  |

IPTABLESDNATRULESPEC

|              |        |    |
|--------------|--------|----|
|              |        |    |
| eip          | String | IP |
| externalPort | String |    |
| protocol     | String |    |
| internalIP   | String | IP |
| internalPort | String |    |

OvnDnatRule

|            |                   |             |               |
|------------|-------------------|-------------|---------------|
|            |                   |             |               |
| apiVersion | String            | Kubernetes  | kubeovn.io/v1 |
| kind       | String            | Kubernetes  | OvnDnatRule   |
| metadata   | ObjectMeta        | Kubernetes  |               |
| spec       | OvnDnatRuleSpec   | OvnDnatRule |               |
| status     | OvnDnatRuleStatus | OvnDnatRule |               |

OVNDNATRULESPEC

|              |        |           |
|--------------|--------|-----------|
|              |        |           |
| ovnEip       | String | OVN EIP   |
| ipType       | String | IP vip ip |
| ipName       | String | IP        |
| internalPort | String |           |
| externalPort | String |           |
| protocol     | String |           |
| vpc          | String | VPC       |
| v4Ip         | String | IPv4      |
| v6Ip         | String | IPv6      |

OVNDNATRULESTATUS

|              |                        |          |           |
|--------------|------------------------|----------|-----------|
|              |                        |          |           |
| vpc          | String                 | VPC      |           |
| v4Eip        | String                 | IPv4 EIP |           |
| v6Eip        | String                 | IPv6 EIP |           |
| externalPort | String                 |          |           |
| v4Ip         | String                 | IPv4     |           |
| v6Ip         | String                 | IPv6     |           |
| internalPort | String                 |          |           |
| protocol     | String                 |          |           |
| ipName       | String                 | IP       |           |
| ready        | Bool                   | DNAT     |           |
| conditions   | []OvnDnatRuleCondition | OVN DNAT | Condition |

IptablesSnatRule

|            |                      |                  |                  |
|------------|----------------------|------------------|------------------|
|            |                      |                  |                  |
| apiVersion | String               | Kubernetes       | kubeovn.io/v1    |
| kind       | String               | Kubernetes       | IptablesSnatRule |
| metadata   | ObjectMeta           | Kubernetes       |                  |
| spec       | IptablesSnatRuleSpec | IptablesSnatRule |                  |

IPTABLESSNATRULESPEC

|              |        |      |
|--------------|--------|------|
|              |        |      |
| eip          | String | IP   |
| internalCIDR | String | CIDR |

OvnSnatRule

|            |                   |             |               |
|------------|-------------------|-------------|---------------|
|            |                   |             |               |
| apiVersion | String            | Kubernetes  | kubeovn.io/v1 |
| kind       | String            | Kubernetes  | OvnSnatRule   |
| metadata   | ObjectMeta        | Kubernetes  |               |
| spec       | OvnSnatRuleSpec   | OvnSnatRule |               |
| status     | OvnSnatRuleStatus | OvnSnatRule |               |

OVNSNATRULESPEC

|           |        |           |
|-----------|--------|-----------|
|           |        |           |
| ovnEip    | String | OVN EIP   |
| vpcSubnet | String | VPC       |
| ipName    | String | IP        |
| vpc       | String | VPC       |
| v4IpCidr  | String | IPv4 CIDR |
| v6IpCidr  | String | IPv6 CIDR |

8.11.8 VPC

VpcNatGateway

|            |                     |               |               |
|------------|---------------------|---------------|---------------|
|            |                     |               |               |
| apiVersion | String              | Kubernetes    | kubeovn.io/v1 |
| kind       | String              | Kubernetes    | VpcNatGateway |
| metadata   | ObjectMeta          | Kubernetes    |               |
| spec       | VpcNatGatewaySpec   | VpcNatGateway |               |
| status     | VpcNatGatewayStatus | VpcNatGateway |               |

VPCNATGATEWAYSPEC

|                 |               |                     |     |     |
|-----------------|---------------|---------------------|-----|-----|
|                 |               |                     |     |     |
| vpc             | String        | VPC                 | Pod | VPC |
| subnet          | String        | VPC                 | Pod |     |
| externalSubnets | []String      |                     |     |     |
| lanIp           | String        | VPC                 | Pod | IP  |
| selector        | []String      | Kubernetes Selector |     |     |
| tolerations     | []Toleration  | Kubernetes          |     |     |
| affinity        | Affinity      | Kubernetes          |     |     |
| qosPolicy       | String        | QoS                 |     |     |
| bgpSpeaker      | VpcBgpSpeaker | BGP speaker         |     |     |
| routes          | []Route       |                     |     |     |



VpcBgpSpeaker

|                       |          |             |
|-----------------------|----------|-------------|
|                       |          |             |
| enabled               | Bool     | BGP speaker |
| asn                   | Uint32   |             |
| remoteAsn             | Uint32   |             |
| neighbors             | []String | BGP         |
| holdTime              | Duration | BGP         |
| routerId              | String   | BGP ID      |
| password              | String   | BGP         |
| enableGracefulRestart | Bool     |             |
| extraArgs             | []String |             |

Route

|           |        |      |
|-----------|--------|------|
|           |        |      |
| cidr      | String | CIDR |
| nextHopIP | String | IP   |

VPCNATGATEWAYSTATUS

|                 |              |                     |
|-----------------|--------------|---------------------|
|                 |              |                     |
| qosPolicy       | String       | QoS                 |
| externalSubnets | []String     |                     |
| selector        | []String     | Kubernetes Selector |
| tolerations     | []Toleration | Kubernetes          |
| affinity        | Affinity     | Kubernetes          |

VpcEgressGateway

|            |                        |                  |                  |
|------------|------------------------|------------------|------------------|
|            |                        |                  |                  |
| apiVersion | String                 | Kubernetes       | kubeovn.io/v1    |
| kind       | String                 | Kubernetes       | VpcEgressGateway |
| metadata   | ObjectMeta             | Kubernetes       |                  |
| spec       | VpcEgressGatewaySpec   | VpcEgressGateway |                  |
| status     | VpcEgressGatewayStatus | VpcEgressGateway |                  |

VPCEGRESSGATEWAYSPEC

|                |                                |                     |                |                   |  |
|----------------|--------------------------------|---------------------|----------------|-------------------|--|
| vpc            | String                         | VPC                 | VPC            |                   |  |
| bgpConf        | String                         | BgpConf             |                |                   |  |
| evpnConf       | String                         | EvpnConf            | EVPN           |                   |  |
| replicas       | Int32                          | 1                   |                |                   |  |
| prefix         | String                         | <prefix><veg-name>  |                |                   |  |
| image          | String                         | kube-ovn-controller |                |                   |  |
| internalSubnet | String                         | VPC                 |                |                   |  |
| externalSubnet | String                         |                     |                |                   |  |
| internalIPs    | []String                       | IP                  | v4, v6         |                   |  |
| externalIPs    | []String                       | IP                  | v4, v6         |                   |  |
| internalIPPool | String                         | IPPool              | internalSubnet | internalIPs       |  |
| externalIPPool | String                         | IPPool              | externalSubnet | externalIPs       |  |
| selectors      | []VpcEgressGatewaySelector     | /Pod                |                |                   |  |
| trafficPolicy  | String                         | Cluster             | Local          | VPC               |  |
| bfd            | VpcEgressGatewayBFDDConfig     | BFD                 |                |                   |  |
| policies       | []VpcEgressGatewayPolicy       |                     |                |                   |  |
| nodeSelector   | []VpcEgressGatewayNodeSelector |                     |                |                   |  |
| tolerations    | []Toleration                   | Kubernetes          |                |                   |  |
| resources      | ResourceRequirements           |                     |                |                   |  |
| bandwidth      | BandwidthLimit                 | /                   | Mbps           | bit-rate quantity |  |
| observability  | VpcEgressGatewayObservability  | conntrack           | JSON           | ServiceMonitor    |  |

VpcEgressGatewaySelector

|                   |               |     |
|-------------------|---------------|-----|
|                   |               |     |
| namespaceSelector | LabelSelector |     |
| podSelector       | LabelSelector | Pod |

VpcEgressGatewayBFDDConfig

|            |         |     |     |                        |       |
|------------|---------|-----|-----|------------------------|-------|
|            |         |     |     |                        |       |
| enabled    | Boolean | BFD | VPC | .spec.bfd.enabled=true | false |
| minRX      | Int32   | BFD | ms  | 1000                   |       |
| minTX      | Int32   | BFD | ms  | 1000                   |       |
| multiplier | Int32   | BFD | 3   |                        |       |

VpcEgressGatewayPolicy

|          |          |                 |       |
|----------|----------|-----------------|-------|
|          |          |                 |       |
| snat     | Boolean  | SNAT/MASQUERADE | false |
| ipBlocks | []String | CIDR            |       |
| subnets  | []String |                 |       |

VpcEgressGatewayNodeSelector

|                  |                           |
|------------------|---------------------------|
|                  |                           |
| matchLabels      | map[String]String         |
| matchExpressions | []NodeSelectorRequirement |
| matchFields      | []NodeSelectorRequirement |

BandwidthLimit

|         |       |        |     |               |                 |
|---------|-------|--------|-----|---------------|-----------------|
|         |       |        |     |               |                 |
| ingress | Int64 | String | VPC | Mbps quantity | M Mi G Gi bit/s |
| egress  | Int64 | String | VPC | Mbps quantity | M Mi G Gi bit/s |

VpcEgressGatewayObservability

Kubernetes 1.29

schema

VPC Egress Gateway

|                  |                                         |                  |         |     |     |      |       |      |  |
|------------------|-----------------------------------------|------------------|---------|-----|-----|------|-------|------|--|
|                  |                                         |                  |         |     |     |      |       |      |  |
| resources        | ResourceRequirements                    | observer sidecar | request | 20m | CPU | 64Mi | limit | 200m |  |
|                  |                                         | CPU              | 256Mi   |     |     |      |       |      |  |
| interfaceMetrics | VpcEgressGatewayObservabilityFeature    |                  |         |     |     |      |       |      |  |
| connttrack       | VpcEgressGatewayConnttrackObservability | connttrack       |         |     |     |      |       |      |  |
| serviceMonitor   | VpcEgressGatewayServiceMonitor          | ServiceMonitor   |         |     |     |      |       |      |  |

VpcEgressGatewayObservabilityFeature

|         |         |       |
|---------|---------|-------|
|         |         |       |
| enabled | Boolean | false |

VpcEgressGatewayConnttrackObservability

|         |                                      |                |
|---------|--------------------------------------|----------------|
|         |                                      |                |
| metrics | VpcEgressGatewayObservabilityFeature | NAT connttrack |
| log     | VpcEgressGatewayConnttrackLog        | JSON Lines NAT |

VpcEgressGatewayConntrackLog

|           |                                       |         |             |       |
|-----------|---------------------------------------|---------|-------------|-------|
|           |                                       |         |             |       |
| enabled   | Boolean                               | JSON    | observer    | false |
| events    | []String                              |         | start / end |       |
| rateLimit | VpcEgressGatewayConntrackLogRateLimit | Pod     |             |       |
| filters   | VpcEgressGatewayConntrackLogFilters   | include | exclude     |       |

VpcEgressGatewayConntrackLogRateLimit

|                  |       |   |         |      |  |
|------------------|-------|---|---------|------|--|
|                  |       |   |         |      |  |
| recordsPerSecond | Int32 | 1 | 100000  | 100  |  |
| burst            | Int32 | 1 | 1000000 | 1000 |  |

VpcEgressGatewayConntrackLogFilters

|         |                                      |    |         |         |  |
|---------|--------------------------------------|----|---------|---------|--|
|         |                                      |    |         |         |  |
| include | []VpcEgressGatewayConntrackLogFilter | 64 | include | NAT     |  |
| exclude | []VpcEgressGatewayConntrackLogFilter | 64 | exclude | exclude |  |

VpcEgressGatewayConntrackLogFilter

AND OR

|                 |                                      |                                  |  |  |  |
|-----------------|--------------------------------------|----------------------------------|--|--|--|
|                 |                                      |                                  |  |  |  |
| addressFamilies | []String                             | ipv4 / ipv6                      |  |  |  |
| protocols       | []String                             | tcp udp sctp icmp icmpv6 / other |  |  |  |
| natTypes        | []String                             | snat dnat / snat_dnat            |  |  |  |
| original        | VpcEgressGatewayConntrackTupleFilter | tuple                            |  |  |  |
| translated      | VpcEgressGatewayConntrackTupleFilter | tuple                            |  |  |  |

VpcEgressGatewayConntrackTupleFilter

|                  |                             |      |    |
|------------------|-----------------------------|------|----|
|                  |                             |      |    |
| sourceCIDRs      | []String                    | CIDR | 64 |
| destinationCIDRs | []String                    | CIDR | 64 |
| sourcePorts      | []VpcEgressGatewayPortRange |      | 64 |
| destinationPorts | []VpcEgressGatewayPortRange |      | 64 |

VpcEgressGatewayPortRange

|       |       |       |       |  |  |
|-------|-------|-------|-------|--|--|
|       |       |       |       |  |  |
| start | Int32 | 0     | 65535 |  |  |
| end   | Int32 | start | 65535 |  |  |

VpcEgressGatewayServiceMonitor

|             |                   |                            |          |
|-------------|-------------------|----------------------------|----------|
|             |                   |                            |          |
| labels      | map[String]String | ServiceMonitor             | selector |
| annotations | map[String]String | ServiceMonitor annotations |          |

VPCEGRESSGATEWAYSTATUS

|               |                   |                              |
|---------------|-------------------|------------------------------|
|               |                   |                              |
| replicas      | Int32             | scale                        |
| labelSelector | String            | scale                        |
| ready         | Boolean           |                              |
| phase         | String            | Pending Processing Completed |
| internalIPs   | []String          | IP                           |
| externalIPs   | []String          | IP                           |
| conditions    | []Condition       |                              |
| workload      | VpcEgressWorkload |                              |

VpcEgressWorkload

|            |          |            |
|------------|----------|------------|
|            |          |            |
| apiVersion | String   | API        |
| kind       | String   | Deployment |
| name       | String   |            |
| nodes      | []String |            |

BgpConf

cluster-scoped      VpcEgressGateway.spec.bgpConf

|            |             |            |               |
|------------|-------------|------------|---------------|
|            |             |            |               |
| apiVersion | String      | Kubernetes | kubeovn.io/v1 |
| kind       | String      | Kubernetes | BgpConf       |
| metadata   | ObjectMeta  | Kubernetes |               |
| spec       | BgpConfSpec | BgpConf    |               |

BGPCONFSPEC

|                 |          |                      |
|-----------------|----------|----------------------|
|                 |          |                      |
| localASN        | UInt32   | BGP AS Number        |
| peerASN         | UInt32   | BGP AS Number        |
| routerId        | String   | BGP Router ID        |
| neighbours      | []String | BGP IP               |
| password        | String   | TCP MD5              |
| holdTime        | Duration | BGP Hold time        |
| keepaliveTime   | Duration | BGP Keepalive        |
| connectTime     | Duration | BGP Connect          |
| ebgpMultiHop    | Boolean  | eBGP MultiHop        |
| gracefulRestart | Boolean  | BGP Graceful Restart |

EvpnConf

|                |                                |            |               |              |
|----------------|--------------------------------|------------|---------------|--------------|
| cluster-scoped | VpcEgressGateway.spec.evpnConf | EVPN       | VNI           | Route Target |
|                |                                |            |               |              |
| apiVersion     | String                         | Kubernetes | kubeovn.io/v1 |              |
| kind           | String                         | Kubernetes | EvpnConf      |              |
| metadata       | ObjectMeta                     | Kubernetes |               |              |
| spec           | EvpnConfSpec                   | EvpnConf   |               |              |

EVPNCONFSPEC

|              |          |              |
|--------------|----------|--------------|
|              |          |              |
| vni          | UInt32   | EVPN VNI     |
| routeTargets | []String | Route Target |

DNSNameResolver

|                |                          |                 |                 |
|----------------|--------------------------|-----------------|-----------------|
| cluster-scoped | enable-dns-name-resolver | ANP/CNP         | DNS             |
|                |                          |                 |                 |
| apiVersion     | String                   | Kubernetes      | kubeovn.io/v1   |
| kind           | String                   | Kubernetes      | DNSNameResolver |
| metadata       | ObjectMeta               | Kubernetes      |                 |
| spec           | DNSNameResolverSpec      | DNSNameResolver |                 |
| status         | DNSNameResolverStatus    | DNSNameResolver |                 |

DNSNAMERESOLVERSPEC

|      |        |     |    |
|------|--------|-----|----|
|      |        |     |    |
| name | String | DNS | *. |

DNSNAMERESOLVERSTATUS

|               |                               |     |    |
|---------------|-------------------------------|-----|----|
|               |                               |     |    |
| resolvedNames | []DNSNameResolverResolvedName | DNS | IP |

DNSNameResolverResolvedName

|                    |                                  |          |     |
|--------------------|----------------------------------|----------|-----|
|                    |                                  |          |     |
| dnsName            | String                           | DNS      |     |
| resolvedAddresses  | []DNSNameResolverResolvedAddress | IP       | TTL |
| conditions         | []Condition                      | Degraded |     |
| resolutionFailures | Int32                            | 5        | TTL |

DNSNameResolverResolvedAddress

|                |        |     |                             |
|----------------|--------|-----|-----------------------------|
|                |        |     |                             |
| ip             | String | IP  |                             |
| ttlSeconds     | Int32  | TTL | lastLookupTime + ttlSeconds |
| lastLookupTime | Time   |     |                             |

VpcDns

|            |              |            |               |
|------------|--------------|------------|---------------|
|            |              |            |               |
| apiVersion | String       | Kubernetes | kubeovn.io/v1 |
| kind       | String       | Kubernetes | VpcDns        |
| metadata   | ObjectMeta   | Kubernetes |               |
| spec       | VpcDNSSpec   | VpcDns     |               |
| status     | VpcDNSStatus | VpcDns     |               |

VPCDNSSPEC

|          |        |     |
|----------|--------|-----|
|          |        |     |
| replicas | Int32  |     |
| vpc      | String | VPC |
| subnet   | String |     |

 PDF

 Slack

 Support

🕒 2026 8 21

🕒 2023 2 16



🐙 GitHub



8.11.9

---



## 8.12 Annotation

---

| Kube-OVN    | Pod | Node Annotation | Annotation |
|-------------|-----|-----------------|------------|
| <div></div> |     |                 | Annotation |

## 8.12.1 Pod Annotation

---

| Key                                                                       | Value                | Description |                                           |                                                         |            |     |
|---------------------------------------------------------------------------|----------------------|-------------|-------------------------------------------|---------------------------------------------------------|------------|-----|
| ovn.kubernetes.io/allocated                                               | true or false        | Pod         |                                           |                                                         |            |     |
| ovn.kubernetes.io/routed                                                  | true or false        | Pod         | OVN                                       |                                                         |            |     |
| ovn.kubernetes.io/routes                                                  | String               | Pod         |                                           |                                                         |            |     |
| ovn.kubernetes.io/mac_address                                             | String               | Pod         | Mac                                       | Pod                                                     | Annotation | Mac |
| ovn.kubernetes.io/ip_address                                              | String               | Pod         | IP                                        | Pod                                                     | Annotation | IP  |
| ovn.kubernetes.io/ip_family                                               | ipv4 or ipv6         | Pod         |                                           | IP                                                      |            |     |
| \<nadName>.\<nadNamespace>.kubernetes.io/<br>ip_address.\<interfaceName>  | String               | interface   |                                           | IP interfaceName Multus<br>ovn.kubernetes.io/ip_address |            |     |
| \<nadName>.\<nadNamespace>.kubernetes.io/<br>mac_address.\<interfaceName> | String               | interface   |                                           | MAC interfaceName Multus                                |            |     |
| ovn.kubernetes.io/cidr                                                    | String               | Pod         | CIDR                                      |                                                         |            |     |
| ovn.kubernetes.io/gateway                                                 | String               | Pod         | Gateway                                   |                                                         |            |     |
| ovn.kubernetes.io/ip_pool                                                 | IP                   | Pod         | Workload                                  |                                                         | IP         |     |
| ovn.kubernetes.io/bgp                                                     | true, cluster, local | BGP         |                                           | Pod                                                     |            |     |
| ovn.kubernetes.io/snat                                                    | String               | Pod         | SNAT                                      |                                                         |            |     |
| ovn.kubernetes.io/eip                                                     | String               | Pod         | EIP                                       |                                                         |            |     |
| ovn.kubernetes.io/vip                                                     | String               | Pod         | VIP                                       | Annotation                                              | VIP        |     |
| ovn.kubernetes.io/aaps                                                    | String               | Pod         | AAPs (Additional Allowed Addresses Pairs) |                                                         |            |     |
| ovn.kubernetes.io/virtualmachine                                          | String               | Pod         | VirtualMachineInstance                    |                                                         |            |     |
| ovn.kubernetes.io/activation_strategy                                     | String               | Pod         |                                           |                                                         |            |     |
| ovn.kubernetes.io/logical_router                                          | String               | Pod         | VPC                                       |                                                         |            |     |
| ovn.kubernetes.io/layer2_forward                                          | true or false        | Pod         | OVN LSP                                   | unknown                                                 |            |     |
| ovn.kubernetes.io/port_security                                           | true or false        | Pod         | Port Security                             |                                                         |            |     |
| ovn.kubernetes.io/logical_switch                                          | String               | Pod         |                                           |                                                         |            |     |
| ovn.kubernetes.io/vlan_id                                                 | Int                  | Pod         | Vlan ID                                   |                                                         |            |     |
| ovn.kubernetes.io/ingress_rate                                            | Int                  | Pod         | Mbits/s                                   |                                                         |            |     |
| ovn.kubernetes.io/egress_rate                                             | Int                  | Pod         | Mbits/s                                   |                                                         |            |     |
| ovn.kubernetes.io/security_groups                                         | String               | Pod         | Security Group                            |                                                         |            |     |
| ovn.kubernetes.io/default_route                                           | true or false        |             |                                           |                                                         |            |     |
| ovn.kubernetes.io/provider_network                                        | String               | Pod         | ProviderNetwork                           |                                                         |            |     |
| ovn.kubernetes.io/mirror                                                  | true or false        | Pod         |                                           |                                                         |            |     |
| ovn.kubernetes.io/north_gateway                                           | String               | Pod         |                                           |                                                         |            |     |
| ovn.kubernetes.io/latency                                                 | Int                  | Pod         | ms                                        |                                                         |            |     |
| ovn.kubernetes.io/limit                                                   | Int                  | Pod         | qdisc                                     |                                                         |            |     |
| ovn.kubernetes.io/loss                                                    | Float                | Pod         |                                           |                                                         |            |     |

| Key                                              | Value         | Description         |
|--------------------------------------------------|---------------|---------------------|
| ovn.kubernetes.io/jitter                         | Int           | Pod ms              |
| ovn.kubernetes.io/generate-hash                  | true or false | Pod                 |
| ovn.kubernetes.io/attachmentprovider             | String        | Pod                 |
| ovn.kubernetes.io/ingress_burst                  | Int           | Pod burst           |
| ovn.kubernetes.io/vpc_nat_gw                     | String        | VPC NAT Gateway Pod |
| ovn.kubernetes.io/vpc_nat_gw_init                | true or false | VPC NAT Gateway Pod |
| ovn.kubernetes.io/vpc_nat_gw_container_restarted | true or false | VPC NAT Gateway     |
| ovn.kubernetes.io/vpc_nat_gw_activated           | true or false | VPC NAT Gateway     |
| \<provider>.kubernetes.io/ip_pool                | IP            | provider IP         |
| \<provider>.kubernetes.io/ip_family              | ipv4 or ipv6  | provider IP         |
| \<provider>.kubernetes.io/dhcp-v4-options        | String        | provider DHCPv4     |
| \<provider>.kubernetes.io/port_security          | true or false | provider            |

## 8.12.2 Node Annotation

| Key                                | Value         | Description                                         |
|------------------------------------|---------------|-----------------------------------------------------|
| ovn.kubernetes.io/allocated        | true or false | ovn0 join                                           |
| ovn.kubernetes.io/mac_address      | String        | Node ovn0 Mac                                       |
| ovn.kubernetes.io/ip_address       | String        | Node ovn0 IP                                        |
| ovn.kubernetes.io/cidr             | String        | Node ovn0 join CIDR                                 |
| ovn.kubernetes.io/gateway          | String        | Node ovn0 join Gateway                              |
| ovn.kubernetes.io/chassis          | String        | Node OVN-SouthBoundDB Chassis ID                    |
| ovn.kubernetes.io/port_name        | String        | Node ovn0 OVN-NorthboundDB LSP                      |
| ovn.kubernetes.io/logical_switch   | String        | Node ovn0                                           |
| ovn.kubernetes.io/tunnel_interface | String        |                                                     |
| ovn.kubernetes.io/node_networks    | String        | Pod attachment networks NetworkAttachmentDefinition |

## 8.12.3 Namespace Annotation

| Key                           | Value      | Description          |
|-------------------------------|------------|----------------------|
| ovn.kubernetes.io/cidr        | CIDR       | Namespace CIDR       |
| ovn.kubernetes.io/exclude_ips | excludeIPs | Namespace excludeIPs |

## 8.12.4 Subnet Annotation

| Key                   | Value                | Description |
|-----------------------|----------------------|-------------|
| ovn.kubernetes.io/bgp | true, cluster, local | BGP         |
| ovn.kubernetes.io/vpc | String               | VPC VPC     |

8.12.5 Service Annotation

| Key                                               | Value                | Description                              |
|---------------------------------------------------|----------------------|------------------------------------------|
| ovn.kubernetes.io/bgp                             | true, cluster, local | BGP Service ClusterIP Service Pod/Subnet |
| ovn.kubernetes.io/switch_lb_vip                   | String               | Service Kube-OVN VIP                     |
| ovn.kubernetes.io/vpc                             | String               | Service VPC                              |
| ovn.kubernetes.io/service_external_ip_from_subnet | true or false        | Service IP                               |
| ovn.kubernetes.io/service_health_check            | true or false        | Service                                  |
| ovn.kubernetes.io/lb_svc_img                      | String               |                                          |

8.12.6 Networkpolicy Annotation

| Key                                          | Value             | Description                                            |
|----------------------------------------------|-------------------|--------------------------------------------------------|
| ovn.kubernetes.io/enable_log                 | true or false     | NetworkPolicy                                          |
| ovn.kubernetes.io/log_acl_actions            | "allow,drop,pass" | Action ACL                                             |
| ovn.kubernetes.io/acl_log_meter_rate         | Int               | NetworkPolicy /                                        |
| ovn.kubernetes.io/network_policy_enforcement | standard or lax   | NetworkPolicy                                          |
| ovn.kubernetes.io/network_policy_for         | String            | NetworkPolicy provider<br><nadName>.<nadNamespace>.ovn |

 PDF

 Slack

 Support

🕒2026 7 3

🕒2024 6 12



+1

8.12.7

8.13

---

8.13.1

---

| Bad | Good |
|-----|------|
|     |      |

| Bad                  | Good                 |
|----------------------|----------------------|
| Kube-OVN1.10Kube-OVN | Kube-OVN1.10Kube-OVN |



| Bad            | Good           |
|----------------|----------------|
| wget 127.0.0.1 | wget 127.0.0.1 |

8.13.2

---

yamlyaml

| Bad                                                                           | Good                                                                          |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| apiVersion: kubeovn.io/v1<br>kind: Subnet<br>metadata:<br>name: attach-subnet | apiVersion: kubeovn.io/v1<br>kind: Subnet<br>metadata:<br>name: attach-subnet |

bash

| Bad            | Good           |
|----------------|----------------|
| wget 127.0.0.1 | wget 127.0.0.1 |

#

| Bad                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Good                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>oilbeater@macdeMac-3 ~ ping 114.114.114.114 -c 3 PING 114.114.114.114 (114.114.114.114): 56 data bytes 64 bytes from 114.114.114.114: icmp_seq=0 ttl=83 time=10.429 ms 64 bytes from 114.114.114.114: icmp_seq=1 ttl=79 time=11.360 ms 64 bytes from 114.114.114.114: icmp_seq=2 ttl=76 time=10.794 ms  --- 114.114.114.114 ping statistics --- 3 packets transmitted, 3 packets received, 0.0% packet loss round-trip min/avg/max/stddev = 10.429/10.861/11.360/0.383 ms</pre> | <pre># ping 114.114.114.114 -c 3 PING 114.114.114.114 (114.114.114.114): 56 data bytes 64 bytes from 114.114.114.114: icmp_seq=0 ttl=83 time=10.429 ms 64 bytes from 114.114.114.114: icmp_seq=1 ttl=79 time=11.360 ms 64 bytes from 114.114.114.114: icmp_seq=2 ttl=76 time=10.794 ms  --- 114.114.114.114 ping statistics --- 3 packets transmitted, 3 packets received, 0.0% packet loss round-trip min/avg/max/stddev = 10.429/10.861/11.360/0.383 ms</pre> |

#

| Bad                                                                                    | Good                                                                               |
|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <pre># mv /etc/origin/ovn/ovnnb_db.db /tmp # mv /etc/origin/ovn/ovnsb_db.db /tmp</pre> | <pre>mv /etc/origin/ovn/ovnnb_db.db /tmp mv /etc/origin/ovn/ovnsb_db.db /tmp</pre> |

8.13.3

md

| Bad                                              | Good                         |
|--------------------------------------------------|------------------------------|
| <pre>[ ](http://kubeovn.github.io/prepare)</pre> | <pre>[ ](./prepare.md)</pre> |

| Bad                                            | Good                                                               |
|------------------------------------------------|--------------------------------------------------------------------|
| <pre>[Kubernetes ](http://kubernetes.io)</pre> | <pre>[Kubernetes ](http://kubernetes.io){: target="_blank" }</pre> |

8.13.4

| Bad                                   | Good                                  |
|---------------------------------------|---------------------------------------|
| <pre>'''bash wget 127.0.0.1 '''</pre> | <pre>'''bash wget 127.0.0.1 '''</pre> |

| Bad                                   | Good                                  |
|---------------------------------------|---------------------------------------|
| <pre>'''bash wget 127.0.0.1 '''</pre> | <pre>'''bash wget 127.0.0.1 '''</pre> |

 PDF

 Slack

 Support

 2025 9 10

 2022 7 19

 GitHub



8.13.5

---



## 9.

---

Kube-OVN

### 9.1

---

- Slack [CNCF Slack](#) [#kube-ovn](#)
- LinkedIn [Kube-OVN](#)
- Issue / [GitHub Issues](#) [GitHub Discussions](#)

### 9.2

---

.



### 9.3

---


.

- [USERS.md](#)



🕒 2026 4 28

🕒 2022 6 20



### 9.4

---