“The News Beat ”

MAJOR PROJECT (BCA-605P)

SUBMITTED TO

CHAUDHARY CHARAN SINGH UNIVERSITY, MEERUT

FOR THE PARTIAL FULFILLMENT OF THE DEGREE OF BACHELOR

IN COMPUTER APPLICATION

A.Y. 2023-24



Under the Guidance of

Ms. Vashnavi Sharma
Assistant Professor
School of IT
IMS Noida

Submitted by

Krishna Rajput (R210919106129)
Sahil Dogra (R210919106226)
Raja Baghel (R210919106201)
Safaan Shamim khan (R210919106225)

INSTITUTE OF MANAGEMENT STUDIES, NOIDA

PERFORMA FOR APPROVAL OF THE BCA MAJOR PROJECT

(605 P) PROPOSAL

Roll no.	R210919106129
Name of the Student	Krishna Rajput
E-mail	pvtkrsna@gmail.com
Mob. No.	87001 04997
Title of the Project	THE NEWS BEAT
Name of the Project Guide	Ms Vashnavi Sharma

For Office Use

Signature of the Guide

Approved	**Not Approved**	Date:

Suggestion (If any):-

1-

2-

3-

4-

5-

6-

7-

CERTIFICATE OF ORIGINALITY

I hereby declare that Major Project (BCA-605P) titled "**The News Beat** " has been submitted to School of IT, IMS Noida, which is affiliated with **CHAUDHARY CHARAN SINGH UNIVERSITY, MEERUT (U.P.),** for the partial fulfillment of the degree of Bachelor of Computer Application, in A.Y. 2023-2024. This has not previously formed the basis for the award of any other degree, diploma or other title from any other University.

Place: IMS Noida **Date:**

Name of Student: Krishna Rajput
University Roll Number: R210919106129

Sign

ACKNOWLEDGEMENT

I would like to express my profound gratitude to Prof. Monika Dixit Bajpai , HoD School of IT and IMS Noida for their contributions to the completion of my project titled The News Beat .

I would like to express my special thanks to my project guide Ms Vashnavi Sharma for her time and efforts that she provided throughout the year. Her useful advice and suggestions were really helpful to me during the project's completion. I am eternally grateful to my project guide.
I would like to acknowledge that this project was completed entirely by me and not by someone else.

Signature

INDEX

1.	**ProjectProfile** 1.1 Project Definition 1.2 Project Description 1.3 Existing System / Work Environment 1.4 Problem Statements 1.5 Need for New System 1.6 Proposed System & Features 1.7 Scope 1.8 Outcomes 1.9 Tools & Technology used 1.10 Project Plan	1-11
2.	**Requirement Analysis** 2.1 Feasibility Study 2.2 Users of the System 2.3 Modules 2.4 Process Model 2.5 Hardware & Software Requirements 2.6 Use Cases 2.7 Use Case Diagram	12-18
3.	**Design** 3.1 Use Case Scenarios 3.2 Diagrams 3.2.1 DFD 3.2.2 Entity Relationship Diagram 3.3 Data Dictionary	19-25
4.	**Implementation** 4.1 Form Layouts 4.2 Coding Convention 4.3 Code	26-76
5.	**Testing** 5.1 Test Strategy 5.2 Test Cases	77-83
6.	**Future Enhancement**	84-85
7.	**Bibliography**	86

CHAPTER-1 Project-Profile

1.1-Project Definition

The news website project aims to provide users with a platform to read news articles, categorized into various topics of interest. Users will have the freedom to select categories that align with their preferences and explore the latest news within those categories. Additionally, the website will enable users to engage with the content by allowing them to comment on each news post, fostering a sense of community and encouraging discussions.

The project will offer a seamless user experience, ensuring easy navigation and a visually appealing interface. Users will be able to browse through different news categories, view individual articles, and leave their thoughts in the comments section. The website will prioritize accessibility and responsiveness, allowing users to access it from various devices, including desktops, laptops, tablets, and mobile phones.

To maintain the website's content, an admin panel will be implemented. This admin panel will be accessible only to authorized personnel and will provide functionalities to upload, edit, and delete news articles. It will be a secure and protected environment, ensuring that external users cannot access or modify the admin panel.

1.2- Project Description

- User Registration: Users can create accounts to personalize their experience.
- News Categories: Categorize news articles into different topics or sections.
- News Filtering: Users can filter news articles based on their preferred categories.
- Article Display: Display news articles with titles, summaries, and full content.
- User Interactions: Enable users to like, dislike, and reply to comments.
- Search Functionality: Allow users to search for specific articles or topics.
- Trending Articles: Highlight popular or trending articles.
- Related Articles: Display related articles to encourage further reading.
- Social Media Integration: Allow users to share articles on social media platforms.
- Admin Panel: Provide a secure dashboard for authorized personnel to manage news articles.
- Article Beat: Enable admins to upload, edit, and delete news articles.
- User Beat: Allow admins to manage user accounts and access levels.
- Analytics and Insights: Provide statistics on article views, user engagement, etc.

1.3-Existing Website / Work Environment

EXISTING WEBSITE:

There are lots of blogging websites are available. But other people cannot share there own blogs or article on that website. People cannot share there article in different categories so in this website there will different categories available for article writing there will comments and likes option are also available.

PROPOSED WEBSITE:

To overcome the drawbacks of the existing websites, the proposed website has been evolved. This project aims to give people that social media website where people can share there thoughts freely . The website provides with the best user interface.

1.4-Problem Statements

This system developed will give the user a perfact interface for writing there articles and blogs. The user can easily create there account on this website by there email and name. the user can make there password for security of there account. the user can create there profile for easily interaction to the people. There will be a timeline where every people see all other people article and stories.

1.5-Need for New System

Currently students in schools or colleges are unable to express their ideas, their talent or anything that can expressed for some benefits for everyone. The reason is, schools or colleges don't have any proper medium to accomplish it. But proposed online blogging system can help in accomplish these things and even much more. We will cover the objectives of this online blogging system in next section. This website is not only for student anyone can create there account on this website and share there ideas to everyone. They can write there article and blogs on this website and comment on others blogs.

1.6-Proposed System & Features

This project was developed to fulfil the requirement of common blogging platform for educational purposes. However, there are lots of scope to improve the performance of the Online Blogging System in the area of user interface, database performance, and query processing time etc.

So, there are many things for future enhancement of this project. The future enhancements that are possible in the project are as follows:

- Possibility of account creation of parents/guardians with limited rights.
- Web based interface for generate reports, like who has published more contents, who has commented most, the logged in time etc.
- Linking and integration of other online educational web sites.
- Integration with school/college database through Web Services.
- Development of mobile application which can run on multiple OS and devices.

1.7-Scope

The Online Blogging System will allow the users to publish the writings, videos, images or audios if he/she should have credentials to login. The main users of this project are students, teachers and administrators.

From an end-user perspective, the Online Blogging System project consists of following functional elements:

- **Dashboard:** It is the default page of the site and we can access this option from left hand side anytime. All links are available on this page. We can also find the Quick Draft and Activity section here.
- **Posts:** Here we can see all the published contents by clicking on "All Posts" option and we can also publish new content by "Add New" option.
- **Media:** We can see the uploaded media items (videos, images, audios) by clicking on "Library" option and we can also add new media item from local system with the help of "Add New" button.
- **Comments:** In this section, we can check that who, when and what has been commented.
- **Profile:** In this section, we can personalize our profile like Password Change, Profile Picture Change, Display Name, Nickname etc.
- **Tools:** This option is having additional plugins to install, which may enhance the current functionality.
- **Collapse:** We can collapse the menu with this option.
- **Home Button:** It is located at the top left portion and we can use this button to check the timeline where we can view the contents published by everyone.

1.8-Outcomes

The system aims to promote critical and analytical thinking, increase access and exposure to quality content, and provide a combination of solitary and social interactions with peers. It will also help students to develop their communication and writing skills.

1.9-Tools & Technology used

The Online Blogging System project will utilize the following tools and technologies:

Front-end Development:

HTML (Hypertext Markup Language): For structuring the web pages.

CSS (Cascading Style Sheets): For styling and designing the user interface.

JavaScript: For client-side interactivity and dynamic behavior.

React: Frontend framework for designing user interface.

Back-end Development:

Node (Hypertext Preprocessor): A server-side scripting language for processing user requests and generating dynamic web content.

MongoDB (NoSql Database): A NoSql database for string the data.

Web Development Frameworks:

Express: A Node framework that provides a robust and scalable foundation for building web applications. It offers features such as routing, database Beat, and authentication.

Version Control:

Git: A distributed version control system for tracking changes in the project's source code and facilitating collaboration among developers.

Integrated Development Environment (IDE):

Visual Studio Code: A popular and lightweight code editor with excellent support for web development.

Additional Libraries and Technologies:

styled-components: A CSS framework for responsive and mobile-first web design. AJAX (Asynchronous JavaScript and XML): A technique for performing asynchronous server requests and updating web content without reloading the entire page.

These tools and technologies will collectively contribute to the development and deployment of the Online Blogging System, ensuring a robust, user-friendly, and feature-rich platform for users to create and share their news article.

1.10 Project Plan

20/12/2023 – Submission of Project Profile
30/02/2024 – Completion of Requirement Analysis
19/03/2024 – Completion of Design Phase
22/04/2024 – Completion of Project Development
17/05/2024 – Completion of Testing Using Test Cases
13/06/2024 – Deployment and Submission

CHAPTER-*2* Requirement Analysis

2.1 Feasibility Study:

The feasibility study assesses the viability and potential success of the news website project. It evaluates various aspects, including technical, economic, operational, and schedule feasibility. Here is a summary of the feasibility study for this project:

Technical Feasibility: The project's technical feasibility is high, considering the utilization of the MERN stack (MongoDB, Express.js, React, Node.js). These technologies are widely adopted, well-documented, and offer robust capabilities for building modern web applications. The availability of libraries and community support enhances the project's technical feasibility.

Economic Feasibility: The news website project's economic feasibility appears favorable. As the website is intended to be free for users, revenue generation may be through alternative means such as advertisements, sponsored content, or partnerships. Conducting market research and identifying potential revenue streams will help ensure long-term sustainability and profitability.

Operational Feasibility: The operational feasibility of the project is achievable. The website's core features, including user registration, news categorization, commenting system, and admin panel functionalities, are common in news websites. By leveraging established design patterns and industry best practices, the project can be executed smoothly.

2.2 Users of the System:

The news website project will have two primary user roles: regular users and administrators.

- Regular Users: Regular users are the main audience of the news website. They can access the website's content and utilize various features. The users of the system include:
- Readers: Individuals who visit the website to read news articles. They can browse different categories, select articles of interest, and view full article content. Users can also participate in discussions by commenting on articles and interacting with other users' comments.

2.3 Modules:

Based on the requirements of the news website project, here are some potential modules or components that could be implemented:

- User Beat:
- User Registration: Allows users to create accounts with email and password or social media login.
- User Authentication: Handles user login, session Beat, and authentication mechanisms.
- User Profile: Provides functionality for users to manage their profile information and preferences.
- News Beat:
- News Article Creation: Enables admins to create and publish news articles with titles, content, images, and categories.
- News Article Editing: Allows admins to edit existing news articles, update content, or modify categories.
- News Article Deletion: Provides the capability for admins to delete news articles from the system.
- Category Beat:
- Category Creation: Enables admins to create and manage news categories, allowing for dynamic categorization of articles.
- Category Assignment: Allows admins to assign categories to news articles during creation or editing.
- Commenting System:
- Comment Creation: Allows users to post comments on news articles.
- Comment Moderation: Provides admins with the ability to moderate comments, review flagged comments, and take appropriate actions.
- Comment Reply: Enables users to reply to comments and engage in discussions.
- User Interactions:
- Like/Dislike System: Allows users to express their preference for news articles or comments.

2.4 Process Model:

For the development of the news website, the Agile development methodology can be employed as the process model. Agile methodologies emphasize iterative and incremental development, collaboration, and flexibility in responding to changing requirements. Here is an outline of the Agile process model for the news website project:

2.5 Hardware & Software Requirements:

Hardware Requirements:

1. Server: A reliable server with sufficient processing power, memory, and storage to host the website and handle user traffic. Consider factors like scalability and potential future growth in determining server specifications.
2. Storage: Adequate storage capacity to store news articles, user data, and other websiterelated assets. Consider using a reliable and scalable storage solution to accommodate future growth.
3. Backup System: Implement a backup system to ensure data integrity and disaster recovery. Regularly backup the website's database and other critical data to mitigate the risk of data loss.

Software Requirements:

1. Operating System: Select a suitable operating system for the server, such as Linux (e.g., Ubuntu, CentOS) or Windows Server, based on compatibility with the chosen technology stack and the server environment.
2. Web Server: Install a web server software, such as Apache or Nginx, to handle HTTP requests and serve web pages.
3. Database Beat System: Utilize a reliable database Beat system (DBMS) like MongoDB for storing news

2.6 Use Cases:

Use Cases for the News Website:.

1. Browse News Categories:-

- Description: A user wants to explore news articles in specific categories.
- Actors: User, System
- Flow: The user selects a category from the available options. The system retrieves and displays news articles belonging to the selected category.

2. Read News Article:

- Description: A user wants to read a specific news article in detail.
- Actors: User, System
- Flow: The user clicks on a news article from the list or search results. The system displays the full article with its title, content, author, and additional details.

3. Comment on News Article:

- Description: A user wants to leave a comment on a news article.
- Actors: User, System
- Flow: The user navigates to the comments section of the news article and enters their comment. The system verifies the comment and displays it along with the user's name and timestamp.

4. Reply to a Comment:

- Description: A user wants to reply to an existing comment on a news article.
- Actors: User, System
- Flow: The user selects the "Reply" option below a comment, enters their response, and submits it. The system displays the reply along with the user's name and timestamp.

5. Admin Uploads News Article:

- Description: An admin wants to upload a new news article to the website.
- Actors: Admin, System
- Flow: The admin logs in to the admin panel, navigates to The News Beat section, and selects the option to create a new article. The admin provides the necessary details (title, content, image, category) and saves the article. The system adds the article to the database and makes it available for users.

2.7 Use Case Diagram:

The use case diagram for the system will illustrate the various use cases and how they relate to each other.

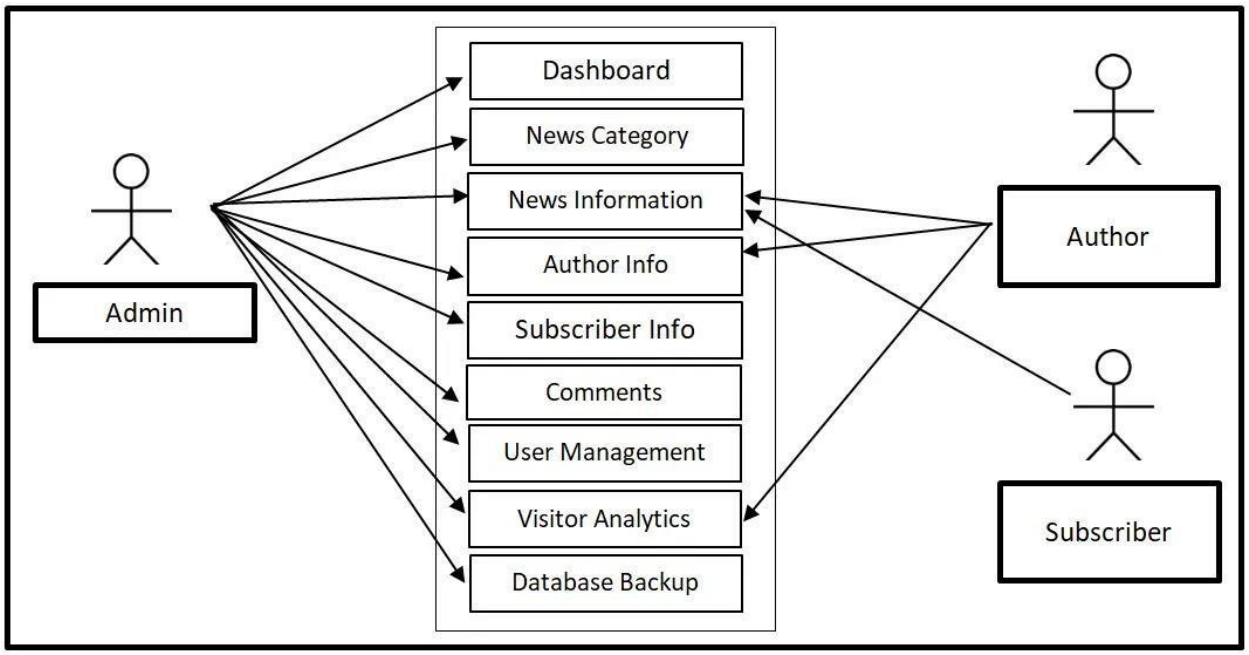


Fig.1 Use Case Diagram

Chapter-3 Design

3.1 Use Case Scenarios:

The news article project can be applied in various use case scenarios to provide valuable information and engage readers. Here are a few examples:

1. Breaking News Updates: News article projects can be used to deliver real-time updates on breaking news stories. This allows readers to stay informed about the latest developments on topics of interest, such as major events, political happenings, or natural disasters.

2. Feature Stories: News articles can be written as in-depth feature stories that explore specific topics in detail. These projects can cover a wide range of subjects, such as human interest stories, investigative journalism, scientific discoveries, or cultural trends. Feature stories aim to captivate readers and provide them with a comprehensive understanding of the subject matter.

3. Opinion Pieces: News article projects can include opinion pieces that express the viewpoints of journalists or experts on various issues. These articles can provoke thoughtful discussions and encourage readers to engage in debates or share their own opinions.

4. Educational Content: News articles can serve as educational resources by presenting wellresearched and informative content on specific subjects. These projects can cover topics like history, science, technology, health, or personal finance, providing readers with valuable insights and knowledge.

5. Travel and Lifestyle Guides: News article projects can be utilized to create travel and lifestyle guides that offer recommendations and insights into different destinations, local cuisines, cultural practices, or lifestyle trends. These articles can help readers plan their trips, explore new experiences, and gain inspiration for their daily lives.

3.2 Diagrams:

3.2.1 DFD:

Data Flow Diagram are graphical representations used to depict system architecture and information flow. For the Online Blogging System, a

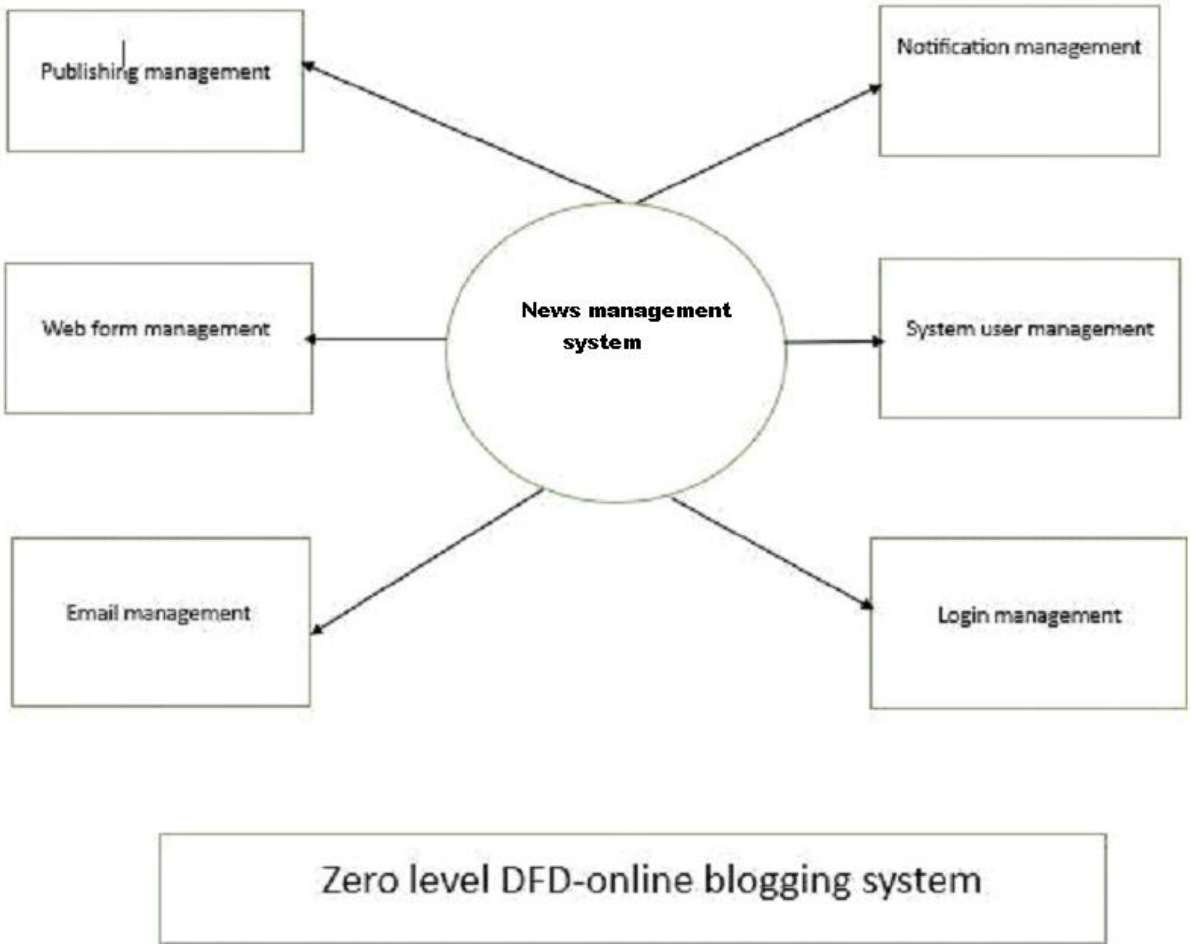


Fig.2

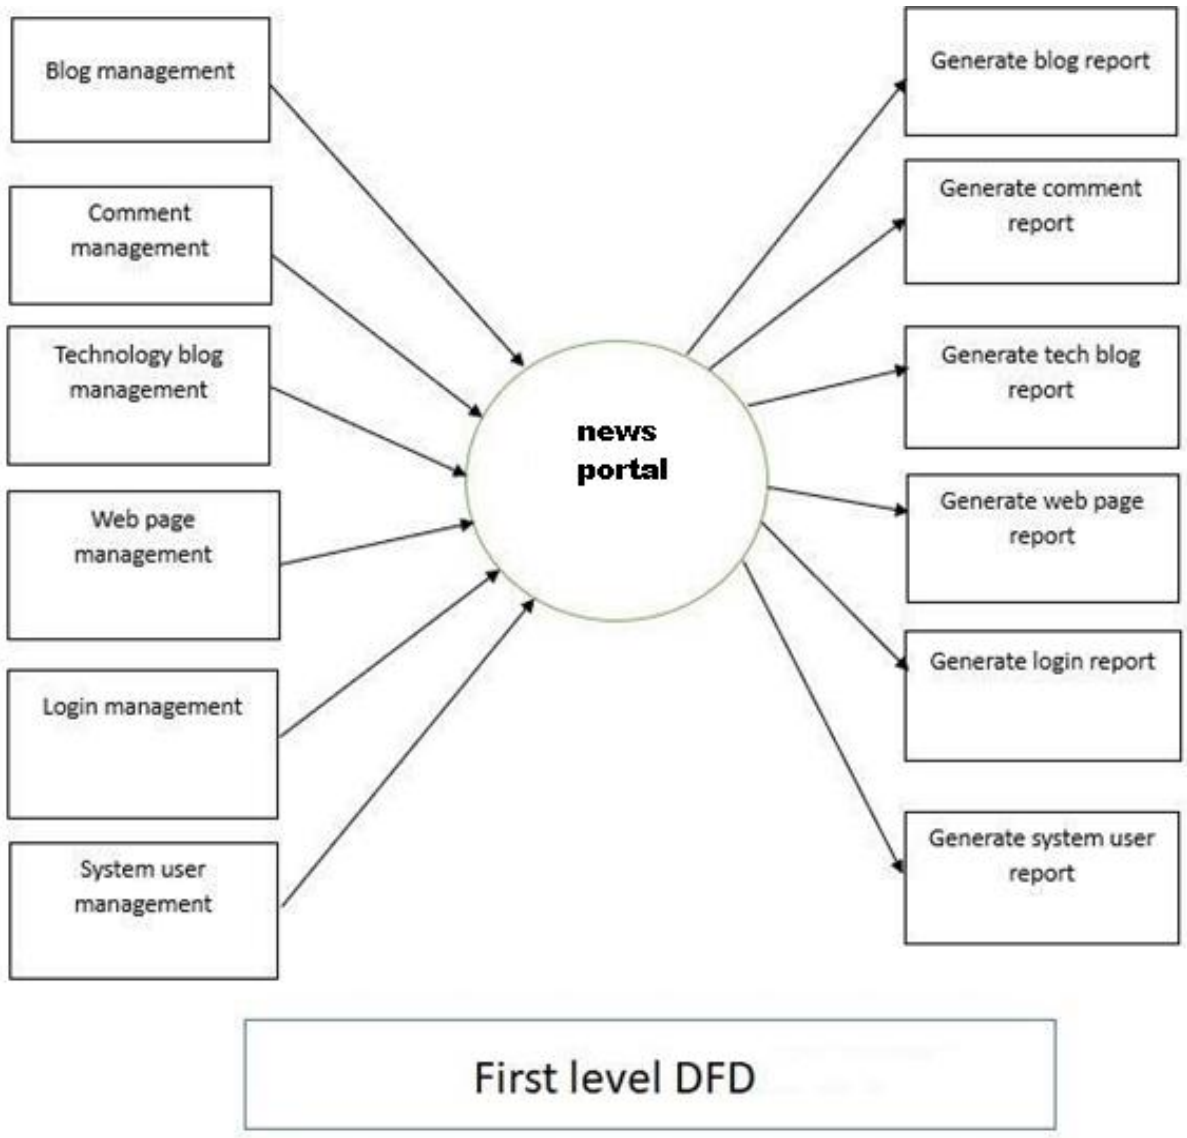

Blog management
Comment management
Technology blog management
Web page management
Login management
System user management
news portal
Generate blog report
Generate comment report
Generate tech blog report
Generate web page report
Generate login report
Generate system user report
First level DFD

Fig.3

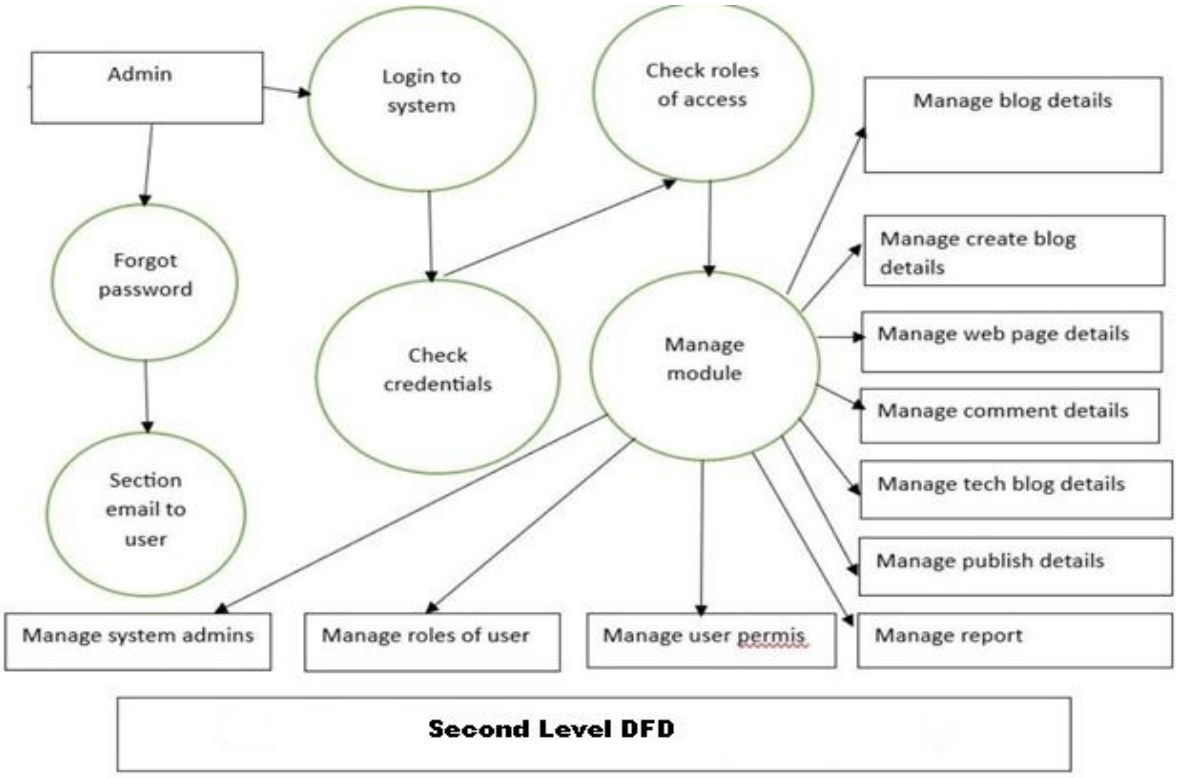

Admin
Login to system
Check roles of access
Manage blog details
Forgot password
Manage create blog details
Check credentials
Manage module
Manage web page details
Manage comment details
Section email to user
Manage tech blog details
Manage publish details
Manage system admins
Manage roles of user
Manage user permis
Manage report
Second Level DFD

Fig.4

3.2.2- Entity Relationship Diagram:

An Entity Relationship Diagram (ERD) represents the entities, relationships, and attributes in a system. It visualizes the structure of the database and how different entities are related to each other.

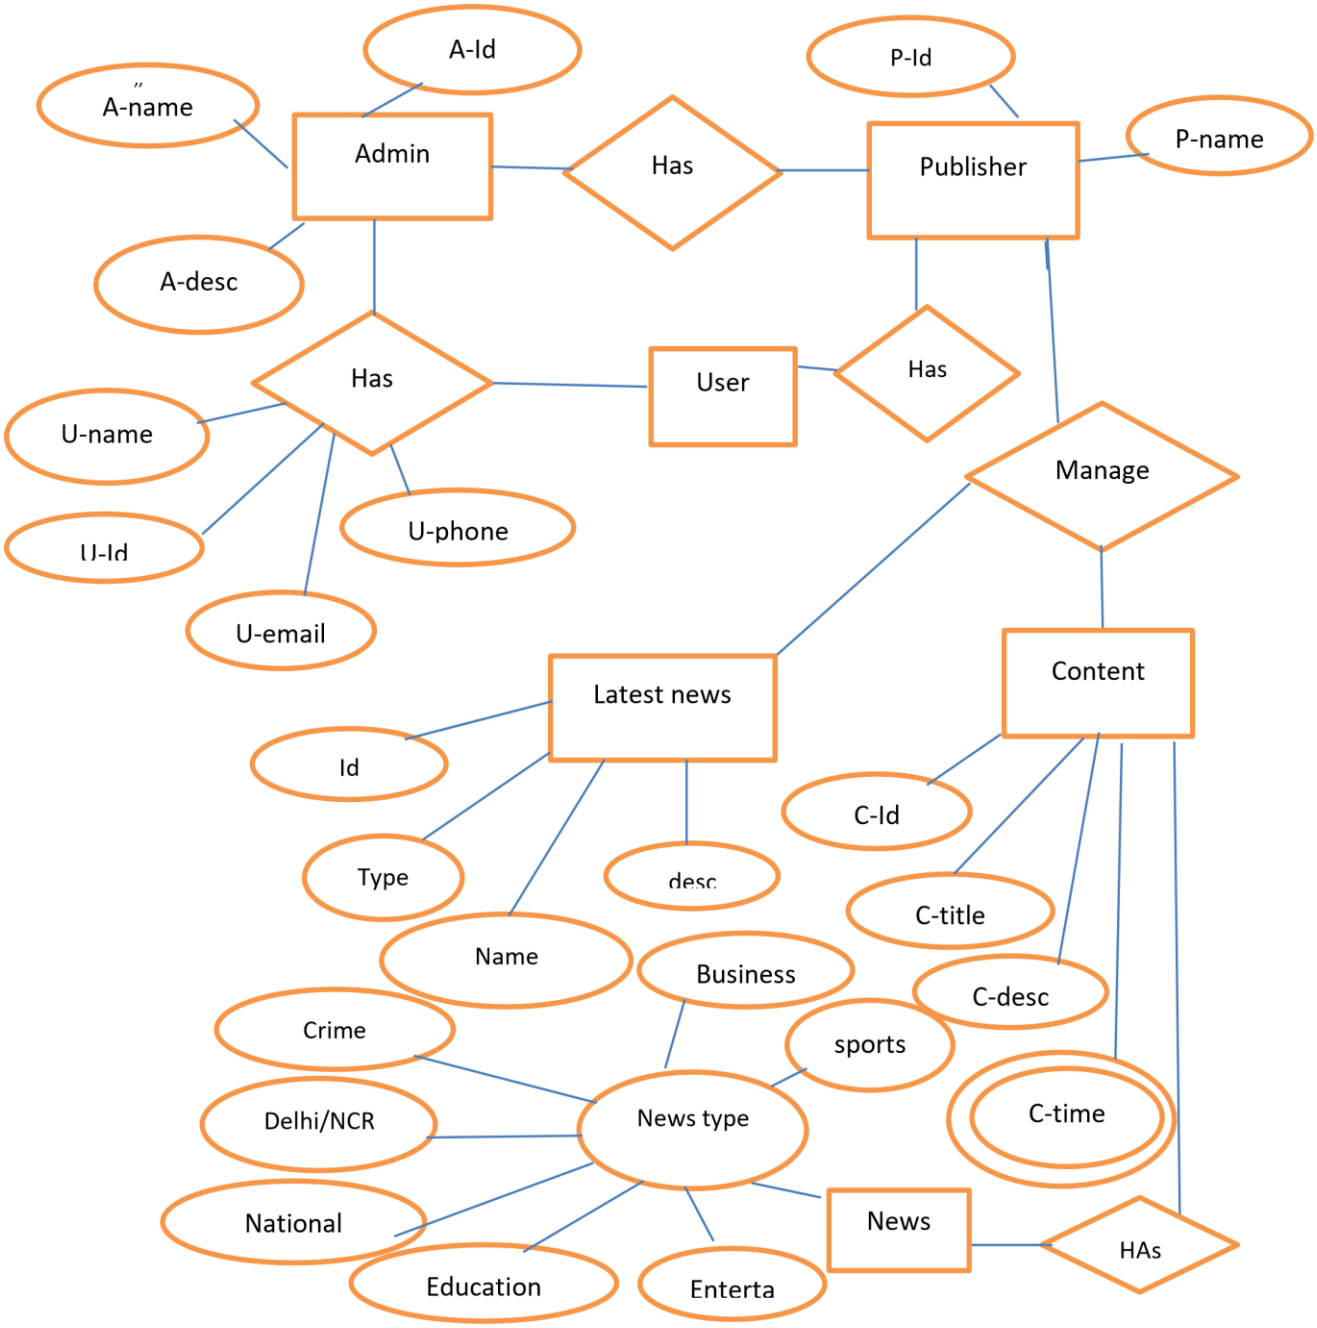


Fig.5 ERD

3.3 Data Dictionary

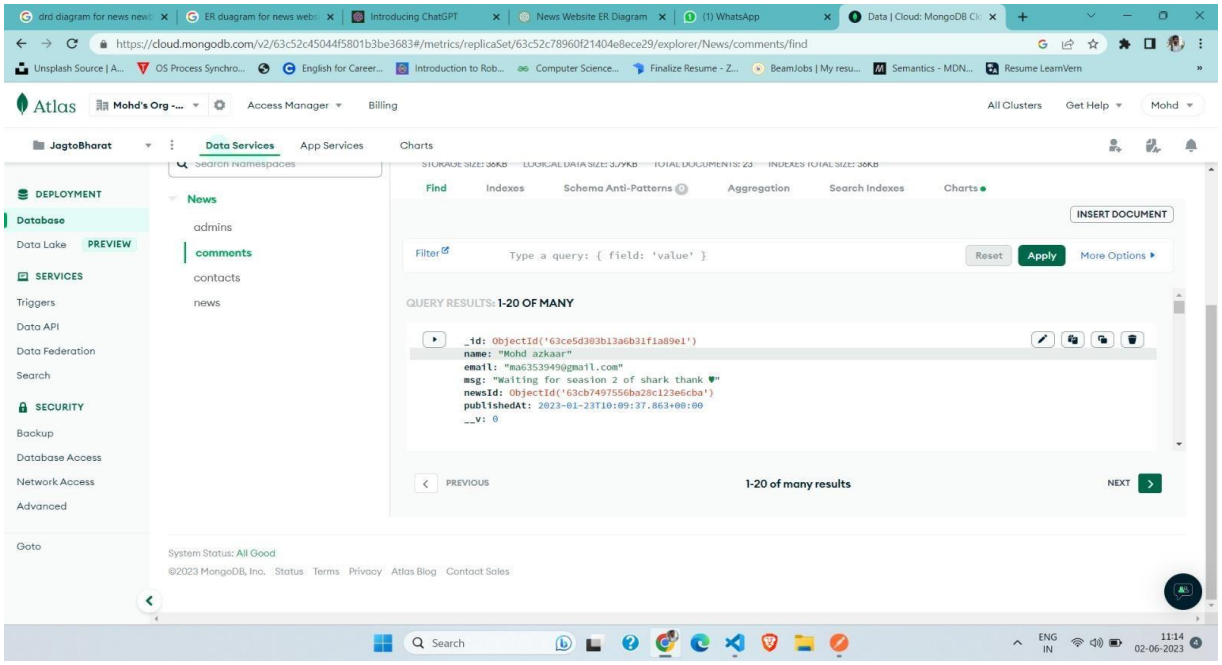


Fig.6

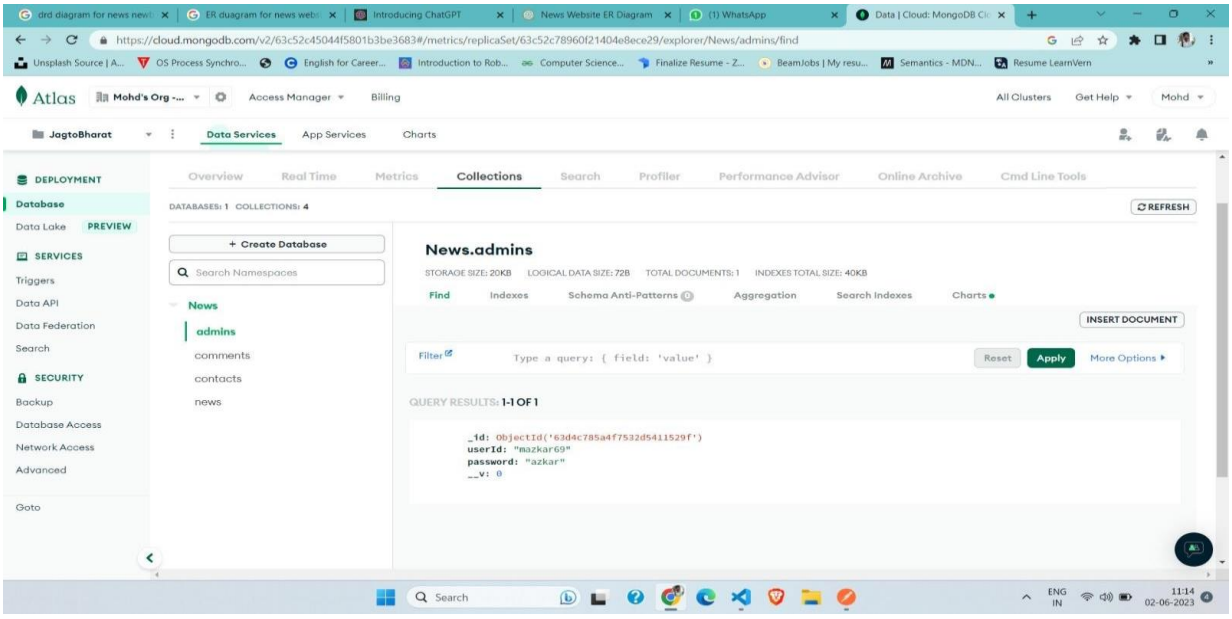


Fig.7

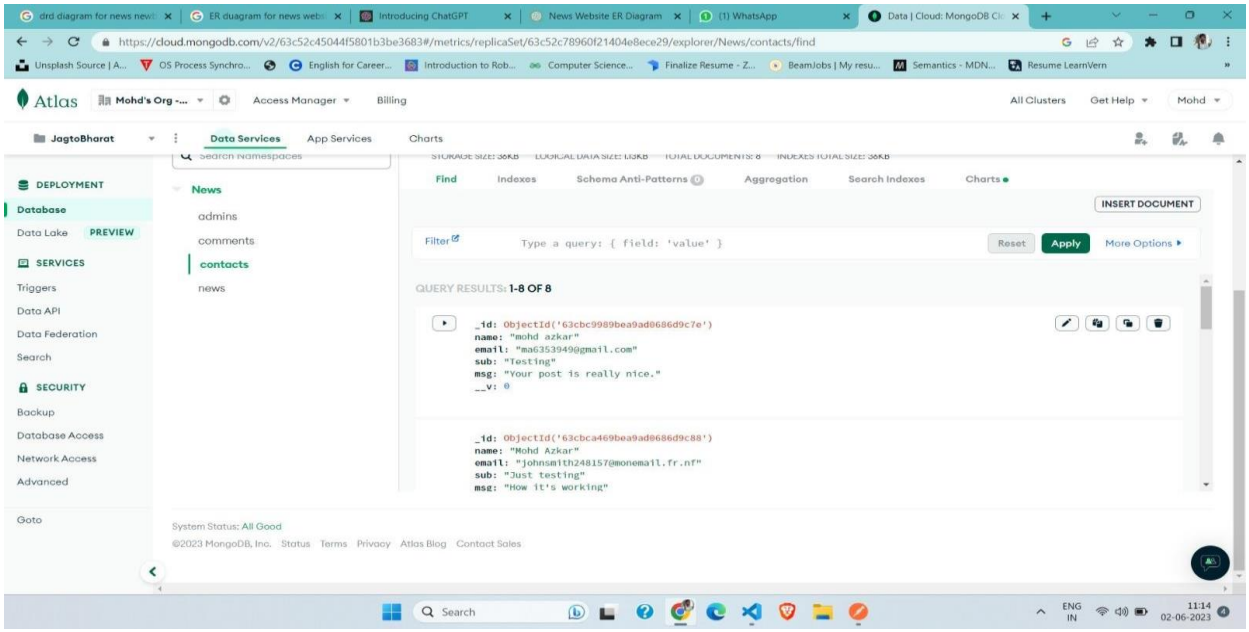

Atlas
Mohd's Org -...
Access Manager
Billing
All Clusters
Get Help
Mohd
JagtoBharat
Data Services
App Services
Charts
DEPLOYMENT
Database
Data Lake
PREVIEW
SERVICES
Triggers
Data API
Data Federation
Search
SECURITY
Backup
Database Access
Network Access
Advanced
Goto
News
admins
comments
contacts
news
Find
Indexes
Schema Anti-Patterns
Aggregation
Search Indexes
Charts
INSERT DOCUMENT
Filter
Type a query: { field: 'value' }
Reset
Apply
More Options
QUERY RESULTS: 1-8 OF 8
_id: ObjectId('63cbc9989bea9ad0686d9c7e')
name: "mohd azkar"
email: "ma6353949@gmail.com"
sub: "Testing"
msg: "Your post is really nice."
__v: 0
_id: ObjectId('63cbca469bea9ad0686d9c88')
name: "Mohd Azkar"
email: "johnsmith248157@monemail.fr.nf"
sub: "Just testing"
msg: "How it's working"
System Status: All Good
©2023 MongoDB, Inc. Status Terms Privacy Atlas Blog Contact Sales
Search
ENG
IN
11:14
02-06-2023

Fig.8

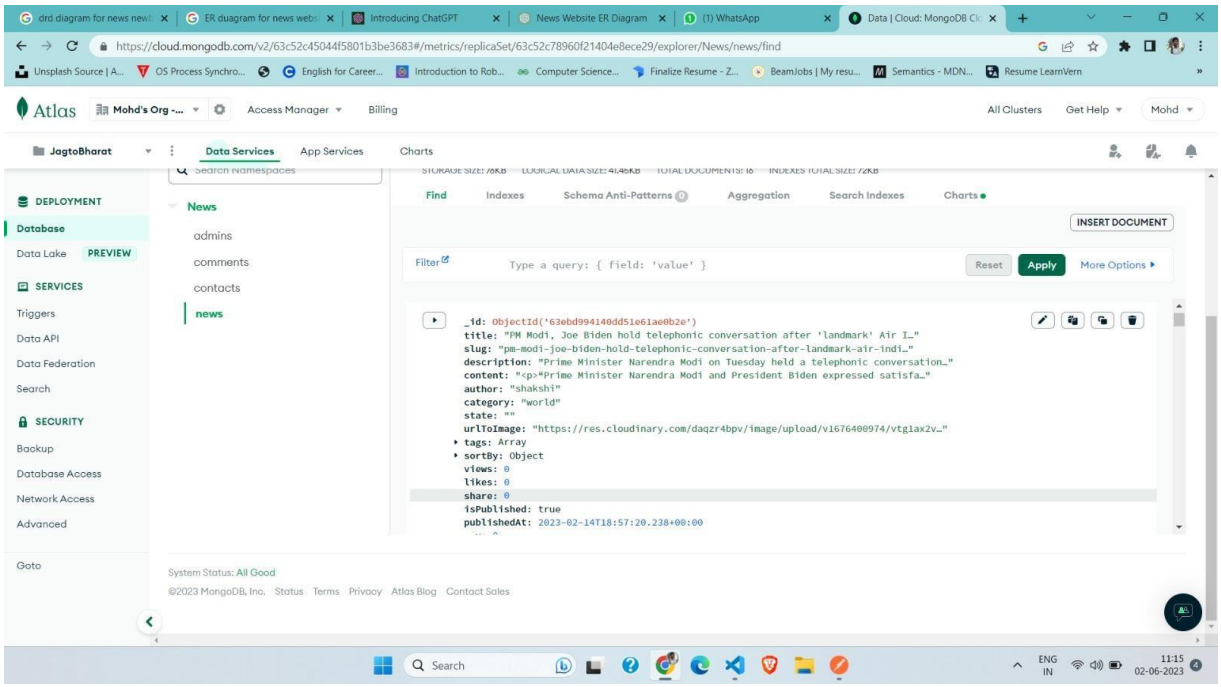

Atlas
Mohd's Org -...
Access Manager
Billing
All Clusters
Get Help
Mohd
JagtoBharat
Data Services
App Services
Charts
DEPLOYMENT
Database
Data Lake
PREVIEW
SERVICES
Triggers
Data API
Data Federation
Search
SECURITY
Backup
Database Access
Network Access
Advanced
Goto
News
admins
comments
contacts
news
Find
Indexes
Schema Anti-Patterns
Aggregation
Search Indexes
Charts
INSERT DOCUMENT
Filter
Type a query: { field: 'value' }
Reset
Apply
More Options
_id: ObjectId('63ebd994140dd51e61ae0b2e')
title: "PM Modi, Joe Biden hold telephonic conversation after 'landmark' Air I…"
slug: "pm-modi-joe-biden-hold-telephonic-conversation-after-landmark-air-indi…"
description: "Prime Minister Narendra Modi on Tuesday held a telephonic conversation…"
content: "<p>*Prime Minister Narendra Modi and President Biden expressed satisfa…"
author: "shakshi"
category: "world"
state: ""
urlToImage: "https://res.cloudinary.com/daqzr4bpv/image/upload/v1676400974/vtg1ax2v…"
tags: Array
sortBy: Object
views: 0
likes: 0
share: 0
isPublished: true
publishedAt: 2023-02-14T18:57:20.238+00:00
System Status: All Good
©2023 MongoDB, Inc. Status Terms Privacy Atlas Blog Contact Sales
Search
ENG
IN
11:15
02-06-2023

Fig.9

Chapter -4 Implementation

4.1 Form Layout

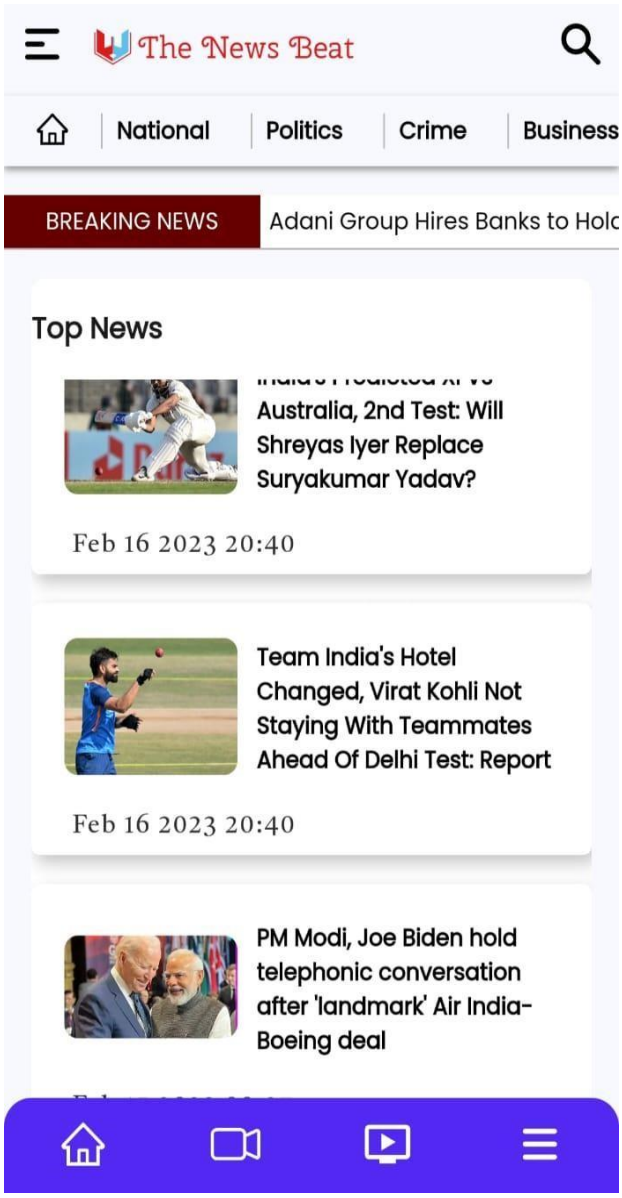


Fig.10 first page

Select language

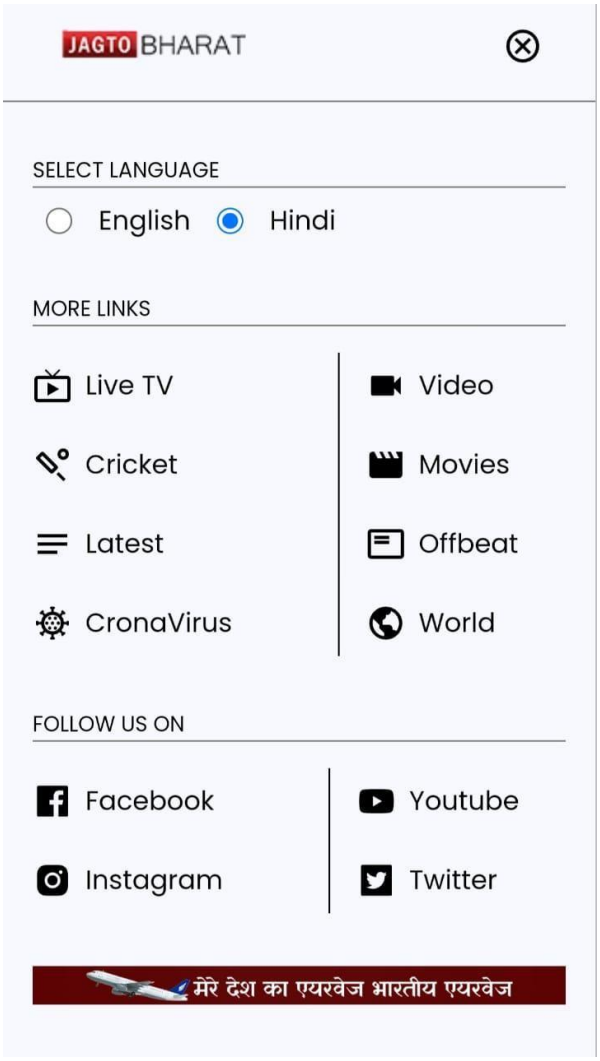


Fig.11

Tranding News

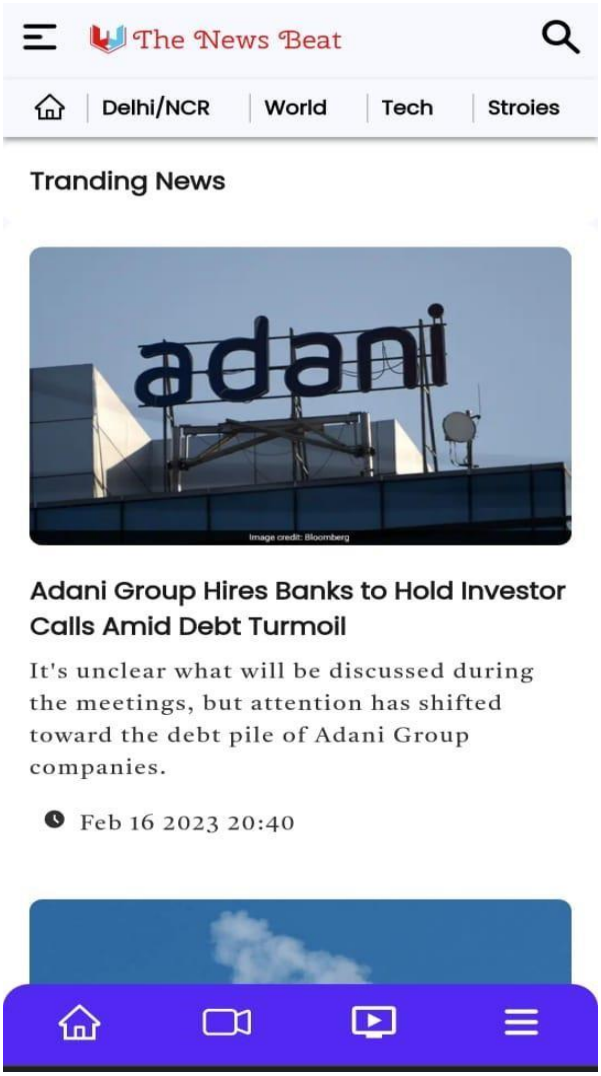


Fig.12

Search bar

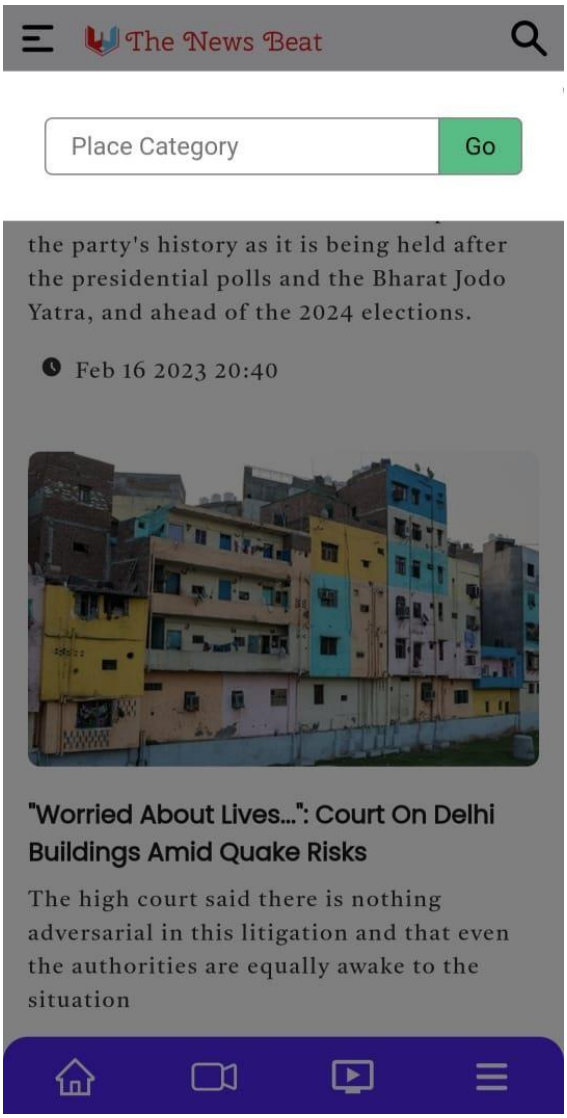


Fig.13

User Feedback

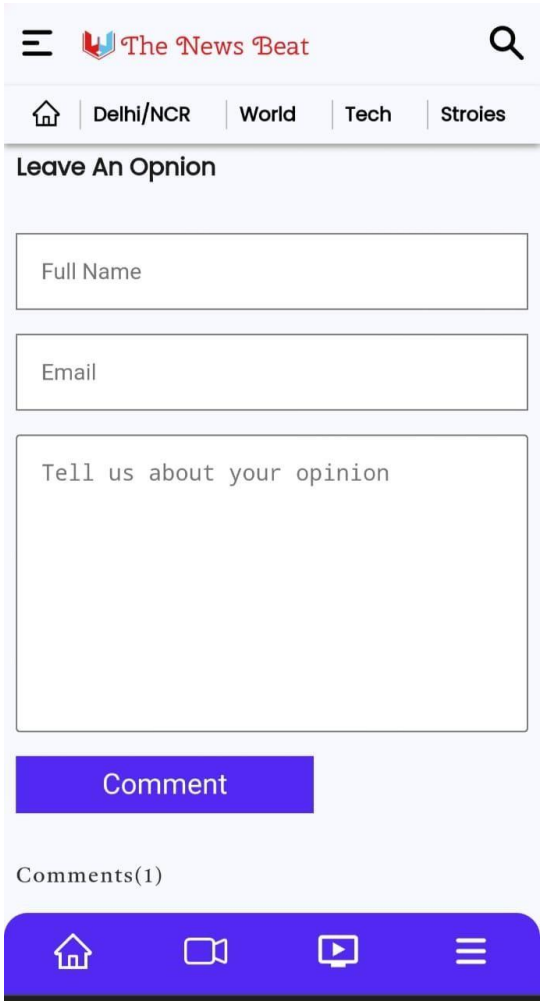


Fig.14

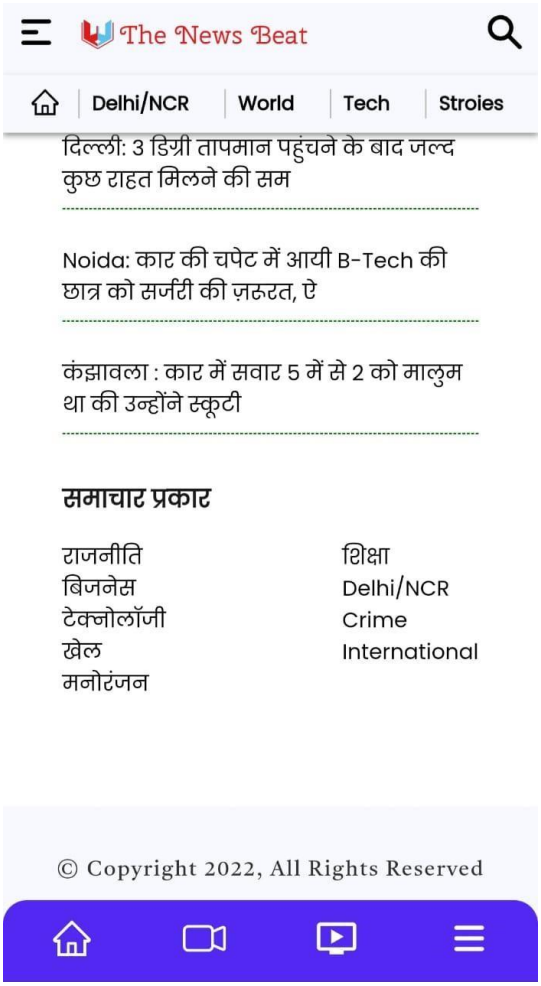


Fig.15

4.2:- Coding Convention

When it comes to coding conventions for a news article publishing system, it's important to maintain consistency and readability in the codebase. Here are some common coding conventions and best practices that you can follow:

Naming Conventions:

Use descriptive and meaningful names for variables, functions, and classes.

Follow a consistent naming style, such as camelCase or snake_case, throughout the codebase.

Use lowercase for variable and function names, and capitalize the first letter of class names.

Indentation and Formatting:

Use consistent indentation (usually 2 or 4 spaces) for improved readability.

Use whitespace effectively to separate code blocks, functions, and logical sections.

Follow a consistent code formatting style, such as placing opening braces on the same line or on a new line.

Comments:

Add comments to explain complex or non-obvious parts of the code.

Use inline comments sparingly, focusing on providing meaningful explanations.

Document functions and classes using proper documentation comments (e.g., JSDoc or Doxygen) to describe their purpose, parameters, and return values.

Modularity and Code Organization:

Divide the code into smaller, modular functions or classes to improve maintainability.

Follow the principles of SOLID design and separate concerns appropriately.

Group related files and folders together in a logical structure.

Error Handling:

Implement appropriate error handling mechanisms to handle exceptions and unexpected situations.

Use meaningful error messages and log error details for debugging purposes.

Version Control and Collaboration:

Utilize version control systems like Git to track changes and collaborate with other developers.

Follow best practices for branching, merging, and commit messages.

Use a .gitignore file to exclude unnecessary files from version control.

Testing and Documentation:

Write automated tests to ensure the correctness of the codebase. Document the codebase, including setup instructions, dependencies, and usage guidelines.

Maintain up-to-date documentation for future developers and users of the system.

Code Reviews:

Encourage code reviews within your development team to ensure code quality and adherence to conventions.

Incorporate feedback from code reviews to improve the codebase.

Remember that coding conventions can vary depending on the programming language and the specific requirements of your news article publishing system. It's essential to establish a clear set of conventions within your development team and follow them consistently throughout the project.

4.3 Code :-

```
<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="utf-8" />
  <link rel="icon" href="%PUBLIC_URL%/favicon.png" />
  <meta name="viewport" content="width=device-width, initial-scale=1" />
  <meta name="theme-color" content="#000000" />
  <meta name="author" content="Mohd Azkar ">

  <meta name="description"
    content="Get Latest Live Breaking News, Latest News in Hindi, Hindi News Headlines, Sports, Entertainment, Politics on Jagto Bharat. जगतो भारत पर पढ़ें ताजा समाचार देश और दुनिया से, जाि े बॉलीवुड, खेल और राजीनत की ख़बरें" />
  <meta name="keywords"
    content="Breaking News Live, Hindi News Live, Breaking News in Hindi, ताज़ा न ि ंदी समाचार, न ि ंदी समाचार, Hindi News, Latest News in Hindi, न ि ंदी न्यूज़, Hindi Samachar, ताजा ख़बरें, updated news, live news updates, news and media company" />

  <!--======= Title =======-->
  <title> Get Updated & Live News,Breaking News in Hindi | Jagto Bharat </title>   <link rel="apple-touch-icon" href="%PUBLIC_URL%/logo192.png" />

  <link rel="manifest" href="%PUBLIC_URL%/manifest.json" />
  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link href="https://fonts.googleapis.com/css2?family=Satisfy&display=swap" rel="stylesheet">
  <style>
    @import url('https://fonts.googleapis.com/css2?family=Poppins:wght@300;400&family=Tiro+Devanagari+Hindi&display=swap');
  </style>
  <title>React App</title>
</head>

<body>
  <noscript>You need to enable JavaScript to run this app.</noscript>

  <div id="root"></div>

</body>
```

```
</html> /* body{
    color: rgb(60, 60, 60);
} */ *{     margin: 0px;     padding: 0px;     box-sizing: border-box;     text-decoration:
none;     list-style: none;     outline: none;

}
@import url('https://fonts.googleapis.com/css2?family=Poppins&display=swap');

body{
    font-family: 'Poppins', sans-serif;


/* font-family: 'Tiro Devanagari Hindi', serif; */
}

/* font-family: 'Tiro Devanagari Hindi', serif; */ p{
font-family: 'Tiro Devanagari Hindi', serif;

color: rgb(49, 49, 49); font-size: 1rem; line-height: 1.5; letter-spacing: 1px; } h3{     font-size:
1.2rem;

    color: rgb(27, 27, 27);
}
@media (max-width:600px)
{     p{ font-size: .9rem;     }         h3{
        font-size: 1rem;
    }
} .tost{   font-size: 1rem;
   z-index: 99999999999999999999;
}
//js code…

import { Routes, Route, useLocation } from 'react-router-dom';

import Home from './pages/Home';
import NewsTemplate from './pages/NewsTemplate';
//Importing common file


import Footer from './components/footer/Footer'; import FooterNav from
'./components/footer/FooterNav' import NewsDescription from './pages/NewsDescription';
import Course from './pages/Course'; import ScrollToTop from './ScrollToTop'; import Header
from './components/header/Header'; import SideNav from './pages/SideNav'; import {
useGlobalContext } from './context'
```

```
import AdminLogin from './pages/protectedPage/AdminLogin'; import AdminDashboard from
'./pages/protectedPage/AdminDashboard'; import Contact from './pages/Contact';


import Protected from './protected/Protected';

// import UploadForm from './pages/protectedPage/UploadForm'; import AllPost from
'./pages/protectedPage/AllPost'; import AddPostForm from
'./pages/protectedPage/AddPostForm'; import UpdatePost from
'./pages/protectedPage/UpdatePost';

function App() {
  const { state } = useGlobalContext();

  const location = useLocation();   const { pathname } = location;


  return ( <>
     <ScrollToTop />

     {
       pathname.includes("admin") ? null : <Header />
     }


     {state ? <SideNav /> : null}

     {/* <Info /> */}
     {/* <Slogan /> */}
     {/* <Navbar /> */}

     <Routes>

       <Route path='/' element={<Home />} exact />
       <Route path='/:tag' element={<NewsTemplate />} exact />
       <Route path='/:tag/:slug' element={<NewsDescription exact />} />
       <Route path='/courses' element={<Course />} exact />
       <Route path='/contact' element={<Contact />} exact />
       <Route path='/admin/login' element={<AdminLogin />} />        //Private routes
       <Route path='/admin/dashboard' element={<Protected><AdminDashboard
/></Protected>}>
         {/* <Route path='createPost' element={<UploadForm />} /> */}
         <Route path='createPost' element={<AddPostForm />} />
         <Route path='updatePost' element={<UpdatePost />} />
         <Route path='allPost' element={<AllPost />} />
```

```
      </Route>


      <Route path="/admin/*" element={<h1>404 page not found</h1>} />
    </Routes>

    {
      pathname.includes("admin") ? null : <Footer />
    }
    <FooterNav />

  </>

 );
}

export default App;


const express = require('express'); const app = express(); const path = require('path');
const dotenv = require('dotenv').config();

console.log(process.env.NODE_ENV);

//Importing database require('./config/db');

//To read the data from the req body


app.use(express.json()); app.use(express.urlencoded());

// post at which Server is running. const port = process.env.PORT || 5000;

const newsRoutes = require('./routes/news')

const contactRoutes = require('./routes/contact');

const commentRoutes = require('./routes/comment')


// Routes here.....

//For Comment route
app.use('/api', commentRoutes)
```

```
// To get news.
app.use("/api", newsRoutes)

//For contact route
app.use('/api/contact', contactRoutes);

//Admin router
app.use('/admin', require('./routes/admin'))




// ======================Deployment====================== if
(process.env.NODE_ENV == 'production') {
   app.use(express.static(path.join(__dirname, "client","build")))     app.get('*',(req,res)=>{
      res.sendFile(path.join(__dirname, "client",  "build", "index.html"))
   }) } else {     app.get("/", (req, res) => {         res.send("Server is running.....")
   })
}




// Listing.....................

app.listen(port, () => {
   console.log(" Servier Running at port " + port);
})


//Package.json

{
  "name": "client",
  "version": "0.1.0",
  "private": true,
  "proxy": "http://localhost:5000",
  "dependencies": {
    "@ckeditor/ckeditor5-build-classic": "^36.0.0",
    "@ckeditor/ckeditor5-react": "^5.0.6",
    "@testing-library/jest-dom": "^5.16.5",
    "@testing-library/react": "^13.4.0",
    "@testing-library/user-event": "^13.5.0",
    "react": "^18.2.0",
    "react-dom": "^18.2.0",
```

```
    "react-icons": "^4.7.1",
    "react-router-dom": "^6.4.5",
    "react-scripts": "5.0.1",
    "react-toastify": "^9.1.1",
    "react-top-loading-bar": "^2.3.1",
    "styled-components": "^5.3.6",
    "swiper": "^9.0.5",
    "web-vitals": "^2.1.4"


  },
  "scripts": {
    "start": "react-scripts start",
    "build": "react-scripts build",
    "test": "react-scripts test",
    "eject": "react-scripts eject"
  },
  "eslintConfig": {
    "extends": [

"react-app",
      "react-app/jest"
    ]
  },
  "browserslist": {     "production": [
      ">0.2%",
      "not dead",
      "not op_mini all"
    ],
    "development": [
      "last 1 chrome version",
      "last 1 firefox version",
      "last 1 safari version"
    ]
  }
}



//manifest.json
{
  "short_name": "React App",
  "name": "Create React App Sample",
  "icons": [
    {
```

```
    "src": "favicon.ico",
    "sizes": "64x64 32x32 24x24 16x16",       "type": "image/x-icon"


   },
   {
    "src": "logo192.png",
    "type": "image/png",
    "sizes": "192x192"
   },
   {
    "src": "logo512.png",
    "type": "image/png",
    "sizes": "512x512"
   }
 ],
 "start_url": ".",
 "display": "standalone",
 "theme_color": "#000000",
 "background_color": "#ffffff"
}

//robots.txt
# https://www.robotstxt.org/robotstxt.html User-agent: * Disallow:

//scrolltotop.js import { useEffect } from "react"; import { useLocation } from "react-router-
dom";

export default function ScrollToTop() {
  const { pathname } = useLocation();

  useEffect(() => {     window.scrollTo(0, 0);
  }, [pathname]);

  return null;
}

//intertainment.js



import React, { useState,useEffect } from 'react' // import styled from 'styled-components' import
NewsBox from './NewsBox' import Slider from './miscellaneous/Slider' import styled from
'styled-components'
import Title from './Title'
```

```
const Entertainment = () => {

  const [News,setNews] = useState([])

  useEffect(()=>{

    const fetchData = async()=>{
      try{

       const url = "/api?category=entertainment";         const response = await
fetch(url);         const data = await response.json();
       // console.log(data)         setNews(data);       }catch(e){
       console.log("Error is" + e);
      }
    }
    fetchData();
  },[])


  return (     <Section>
     <Title title="Entertainment" />
     <Slider data={News} tag="entertainment" />
   </Section>
  ) } const Section = styled.section`
margin: 1rem 0rem;

`


export default Entertainment


//international.js

import React, { useEffect, useState } from 'react' import Slider from './miscellaneous/Slider';
import NewsBox from './NewsBox'; // import NewsInteam from './NewsIteam'; import Title from
'./Title';
import styled from 'styled-components';

const InternationalNews = () => {    const [News, setNews] = useState([])

  useEffect(() => {

    const fetchData = async () => {
      try {
```

```
      // const url = "api/national";        const url = "api?category=world";        const response =
await fetch(url);        const data = await response.json();
      // console.log(data)        setNews(data);      } catch (e) {
      console.log("Error is" + e);
    }
  }
  fetchData();


 }, [])


 return (    <Section>
    <Title title="International" />
    <Slider data={News} tag="international" />
  </Section>
 )
}

const Section = styled.section`

margin-top: 1rem 0rem;

`

export default InternationalNews;



//Newsbox.js

import React from 'react' import styled from 'styled-components' const NewsBox = ({children})
=> {
 return (
  <Box className="container">
    {children}
  </Box>
 )
}

//By default some style appy in NewsBox because it have container class. so max width is also
set const Box = styled.section` /* border: 1px solid red; */ position: relative;
```

```
background: white; border-radius: 8px; padding: 1rem; display: grid; grid-template-columns: 1fr
1fr 1fr; grid-gap: 2.5rem;
margin: 2rem auto;


@media (max-width:700px) {
  grid-template-columns: 1fr 1fr;

}

@media (max-width:450px) {    grid-template-columns: 1fr;

}



`

export default NewsBox;


//Newsiteam.js


import React from 'react' import styled from 'styled-components'; import { Link } from 'react-
router-dom';


import { MdAccessTimeFilled } from "react-icons/md"

const NewsInteam = ({ news, tag }) => {    // console.log("This is" + props)


  // console.log(data)

  const formatDate = (str)=>{      const d = new Date(str);
    // console.log(d)  //This is the object not string      return d.toString().slice(4,21);
  }
  return (
    <Box>
      <Link to={/${tag}/${news.slug}} className="item">
        <div className="news_img">
          <img src={news.urlToImage} alt="" />
        </div>
        <div className="new_data">
```

```
        <h3>{news.title}</h3>
        <p>{news.description}</p>
       </div>
       <div className="date_info">
        <p><span><MdAccessTimeFilled /> {formatDate(news.publishedAt)}</span></p>
       </div>

     </Link>

   </Box >
  )
}


const Box = styled.div`

.item{
  cursor: pointer;
  /* border: 1px solid black; */
  display: flex;   flex-direction: column;   gap: 1rem;




}

.news_img {   overflow: hidden;   /* width: 200px; */   img{     width: 100%;     border-
radius:8px;     transition: all .5s linear;
    &:hover{

    transform: scale(1.1);
    }
  }


}

.new_data{
  display: flex;   flex-direction: column;   gap: .5rem;
}

.date_info{   display: flex;
  align-items: center;

  span{     display: flex;     gap: .5rem;
```

```
    padding: 0rem .5rem;
  }
}


` export default NewsInteam;


//slidersmall.js



// Import Swiper React components
import { Swiper, SwiperSlide } from "swiper/react";

// Import Swiper styles import "swiper/css"; import "swiper/css/pagination"; import
"swiper/css/navigation";

import styled from "styled-components";

// import required modules
import { Autoplay, Pagination, Navigation } from "swiper";
import NewsInteam from "./NewsIteam";

 function SliderSmall() {
  return
(    <Box>      <Swiper          spaceBetween={30}        centeredSlides={true}        loop={true}
       autoplay={{          delay: 4000,
         disableOnInteraction: false,
       }}

       navigation={true}


       modules={[Autoplay, Pagination, Navigation]}        className="mySwiper"
      >
       <SwiperSlide className="slide"><iframe width="560" height="315"
src="https://www.youtube.com/embed/gEJGqb_zXIU" title="YouTube video player"
frameborder="0" allow="accelerometer; autoplay; clipboard-write; encrypted-media; gyroscope;
picture-in-picture; web-share" allowfullscreen></iframe></SwiperSlide>        <SwiperSlide
className="slide"><iframe width="560" height="315"
src="https://www.youtube.com/embed/ZjlDl7Vgj7M" title="YouTube video player"
frameborder="0" allow="accelerometer; autoplay; clipboard-write; encrypted-media; gyroscope;
picture-in-picture; web-share" allowfullscreen></iframe></SwiperSlide>        <SwiperSlide
className="slide"><iframe width="560" height="315"
```

```
src="https://www.youtube.com/embed/mdzBsAeI0AE" title="YouTube video player"
frameborder="0" allow="accelerometer; autoplay; clipboard-write; encrypted-media; gyroscope;
picture-in-picture; web-share" allowfullscreen></iframe></SwiperSlide>


      {/* <SwiperSlide className="slide"><NewsInteam/></SwiperSlide>
      <SwiperSlide className="slide"><NewsInteam/></SwiperSlide>
      <SwiperSlide className="slide"><NewsInteam/></SwiperSlide> */}


    </Swiper>
  </Box>
 );
}

const Box = styled.div`

/* border: 1px solid black; */
/* max-width: 100% !important; */

.mySwiper{
 /* max-width: 400px !important; */
 /* min-height: 350px !important; */
}
.slide{
 /* border: 1px solid chocolate; */


 /* min-width: 500px; */   height: 20rem;   display: flex;   justify-content: center;
 align-items: center ;



}

`


export default SliderSmall;


//title.js


import React from 'react' import styled from 'styled-components';
```

```
//imorting icon
// import { AiOutlineRight, AiOutlineLeft } from 'react-icons/ai'

const Title = ({title}) => {
   return (
      <Box className='container'>
         <h3>{title}</h3>
         {/* <div className="nav_btn">
            <div className="backword">
               <AiOutlineLeft />
            </div>
            <div className="forword">
               <AiOutlineRight />
            </div>
         </div> */}
      </Box>


   )
}

const Box = styled.section` background-color: white; border-radius: 8px; display: flex; justify-
content: space-between; align-items: center; padding: 1rem;
margin: 2rem auto;


.nav_btn{ display: flex; align-items: center; gap: .5rem;
justify-content: space-between;
}

.backword{     border: 1px solid gray;     padding: 5px;     cursor: pointer;
}

.forword{     border: 1px solid gray;     padding: 5px;
   cursor: pointer;


}
`
export default Title; //Trandingnews.js
```

```
import React, { useEffect, useState } from 'react' import NewsBox from './NewsBox'; import
NewsInteam from './NewsIteam'; import styled from 'styled-components' import Title from
'./Title';


const TrandingNews = () => {



  const [News,setNews] = useState([])

  useEffect(()=>{

    const fetchData = async()=>{

      try{
        // const url = "api/tags?name=tranding";         const url =
"/api?sortBy=tranding&lim=3";         const response = await fetch(url);         const data = await
response.json();
        // console.log(data)         setNews(data);       }catch(e){
        console.log("Error is" + e);
      }
    }
    fetchData();
  },[])

  // console.log(News);   return (     <Section>
      <Title title="Tranding News"/>


      <NewsBox>
        {
          News.map((elem)=>{
            return <NewsInteam key={elem._id} news={elem} tag="tranding"/>
          })
        }
      </NewsBox>
    </Section>

  )
}
const Section = styled.section`

margin: 1rem 0rem;
```

```
`
export default TrandingNews;



//Copyright.js


import React from 'react'
import styled from 'styled-components';

const Copyright = () => {
   return (
      <Box className='container'>

         <p>© Copyright 2022, All Rights Reserved</p>
         <span><strong>Designed By Bhartiya Tech It Solutions Ⓙ</strong></span>


      </Box>
   )


}

const Box = styled.div`
padding: 2rem 0rem 2rem 0rem; display: flex;

justify-content: space-between;

span{     font-size: .8rem;
}


@media (max-width:600px) {     flex-direction: column;     align-items: center;     justify-content:
cente;     gap: .8rem;

}

`

export default Copyright;
```

```
//Footer.js


import React from 'react' import styled from 'styled-components' import Copyright from
'./Copyright'; import logo from '../../images/logo.png'; import { Link } from 'react-router-dom';

const Footer = () => {     return (         <>


          <Section>
            <div className='container'>
              <div className="sort_disc footer_box">
                <img className='nav_logo' src={logo} alt="" />
                <p>
                   Jagto Bharat य  भारत का राष्ट्रीय पोर्टल ै नजसका नवकास भारत सरकार के
नवनभर्नसिंगठिोिं द्वारा दी जा र ी सेवाओं और सूचिाओं की जाि◌कारी एक  ी स्थाि◌ पर उपलब्ध
कराि◌े के उद्देश्य से नकया गया ै।। य  पोर्टल राष्ट्रीय ई-शासि योजिा के अंतगटत एक नमशि मोड
पररयोजिा  ै नजसका निमाटण एविं पररकल्पिा राष्ट्रीय सूचिा नवज्ञाि◌ केन्द्र (एिआईसी), इलेक्र्ॉनिकी और
सूचिा प्रौद्योनगकी मिंत्रालय , भारत सरकार द्वारा नकया गया  ै।
                </p>
              </div>
              <div className="sort_headline footer_box">
                <h3>अनधक समाचार</h3>
                <span><A>जोशीमठ: 723 घरो को भारी ि◌ुक्साि◌, पड़ चुकी  ै दरारे</A></span>
                <span><A>नदल्ली  ादसा मेंं आरोनपयोि◌ं को पता था Anjali फिंसी  ै, 'डर' के
मारे</A></span>
                <span><A>नदल्ली: 3 नडग्री तापमाि◌ पहिंचि के बाद जल्द कुछ रा त नमलि की
सम</A></span>
                <span><A>Noida: कार की चपेर् मेंं आयी B-Tech की छात्र को सजटरी की ज़रूरत,
ऐ</A></span>
                <span><A>किंझावला : कार मेंं सवार 5 मेंं से 2 को मालुम था की उन्ोि◌ि◌ं े
स्कूर्ी</A></span>

              </div>
              <div className="cate_link footer_box">
                <h3>समाचार प्रकार</h3>
                <div className="nav_list">

                  <ul>
                    <li><A to="/politics">राजीनत</A></li>
                    <li><A to="/business">नबजिस</A></li>
                    <li><A to="/tech">र्े क्नोलॉजी</A></li>
                    <li><A to="sport">खेल</A></li>
```

```
                    <li><A to="entertainment" >मिोरिंजि</A></li>



                </ul>
                <ul>
                    <li><A to="education">नशक्षा</A></li>
                    <li><A to="delhi/ncr">Delhi/NCR</A></li>
                    <li><A to="/crime">Crime</A></li>
                    <li><A to="/world"> International</A></li>

                </ul>

            </div>
        </div>
    </div>

    </Section>
    <Copyright />
  </>


  )
}

const A = styled(Link)`

font-size: .9rem;
color: black; &:hover{
  text-decoration: underline;
}

`


const Section = styled.section` max-width: 100%; margin-top: 5rem; background-color: white;
padding: 3rem 1rem; .container{   display: grid;   grid-template-columns: 1fr 1fr 1fr;   grid-
gap: 1rem;
}
.nav_logo{   display: inline-block;   width: 70%;   text-align: center;   margin: auto;
}
.footer_box{   /* border: 1px solid red; */   display: flex;   flex-direction: column;   gap:
1rem;
  padding: .5rem;
}

.sort_headline span{   font-size: 12px;   padding: .5rem 0rem;
```

```
   border-bottom: 1px dashed green;
}

.nav_list{     display: flex;
   justify-content: space-between;
}


//Media Queries

@media (max-width:900px) {
   .sort_disc{         grid-column: 1/-1;
      flex-direction: row;
   }


   .container{
      grid-template-columns: 1fr 1fr;
   }

}
@media (max-width:650px) {
   .nav_logo{

   width: 50%;

}    .sort_disc{         flex-direction: column;
   }
   .container{         padding: 1rem;
      grid-template-columns: 1fr ;
   }

}

`

export default Footer


//FooterNav.js


import React from 'react' import styled from 'styled-components'; import {AiOutlineHome,}
from 'react-icons/ai'; import {HiMenu} from 'react-icons/hi' import {MdOndemandVideo} from
'react-icons/md'
```

```
import {BsCameraVideo} from 'react-icons/bs';

import { Link } from 'react-router-dom';



const FooterNav = () => {
  return (     <Section>
          <ul className='nav-list'>
             <li className='nav-item'>
                <Link className='nav-link' to="/"><AiOutlineHome
className='nav_icon'/></Link>
             </li>
             <li className='nav-item'>
                <Link className='nav-link' to="/"><BsCameraVideo
className='nav_icon'/></Link>
             </li>
             <li className='nav-item'>
                <Link className='nav-link' hto="/"><MdOndemandVideo
className='nav_icon'/></Link>
             </li>

             <li className='nav-item'>

                <Link className='nav-link' to="/"><HiMenu className='nav_icon'/></Link>
             </li>


          </ul>

    </Section>
  )
}

const Section = styled.section` a{
    color: white;
}
background-color:rgb(81 41 243); padding: .5rem 1rem;
max-width: 100%; position: fixed; bottom: 0px; left: 0px;


right: 0px; z-index: 10000;
border-radius: 1rem 1rem 0rem 0rem;
display: none;

.nav-list{     display: flex;     justify-content: space-between;
```

```
    padding: .2rem 1rem;
}

.nav_icon{      font-size: 1.8rem;
}
@media (max-width:700px) {      display: block;

}
`



export default FooterNav;


//Breaking news.js


import React from 'react' import { useState } from 'react' import { useEffect } from 'react'
import { MdOutlineBorderHorizontal } from 'react-icons/md' import { Link } from 'react-router-
dom' import styled from 'styled-components' const BreakingNews = () => {
    const [breakingNews,setBreakingNews] = useState([{}]);


    useEffect(()=>{


        const fetchBreakingNews = async()=>{            const url = "/api?sortBy=breakingNews";

            const BreakingNews = await fetch(url);
            setBreakingNews(await BreakingNews.json());

        }
        fetchBreakingNews();

    },[])

    return (
        <Box className='container'>
            <span className="breaking-news-title delay-animated slidein">
                BREAKING NEWS
            </span>
            <marquee behavior="" direction=""><A
to={/breaking/${breakingNews[0].slug}}>{breakingNews[0].title}</A></marquee>
        </Box>
    )
```

```
}


const A = styled(Link)`

color:black; &:hover{
   text-decoration: underline;
}
`
const Box = styled.div`

display: flex;
justify-content: space-around; align-items: center; background-color: white; font-size:  1rem;
border-bottom:1px solid #b3b3b3;


.breaking-news-title{     background-color: #660000;     color: white;     width:
200px;     padding:.5rem ;
   text-align: center;

}

@media (max-width:600px) {

font-size:  13px;



.breaking-news-title{

   width: 250px;
   padding:.3rem ;


}

}


`



export default BreakingNews
```

```
//Header.js



import React from 'react' import Navbar2 from './Navbar2' import Slogan2 from './Slogan2'
import styled from 'styled-components' const Header = () => {
  return (
    <Box>
      <Slogan2/>
      <Navbar2/>
    </Box>
  )
}

const Box = styled.div`   background-color: rgb(248,248,255);
position: sticky; top: 0px; left: 0px;
right: 0px; width: 100%; z-index: 99999999;
`
export default Header


//Info.js


import React from 'react'
import styled from "styled-components";

//Importing icons
import { AiFillInstagram, AiFillLinkedin, AiFillTwitterCircle, AiFillYoutube, AiFillFacebook }
from 'react-icons/ai'
import {RiArrowDropDownLine} from 'react-icons/ri'



const Info = () => {

   return (        <Infoo>
          <div className="title">
             Breaking News
          </div>
          <div className="breking_news">
             <marquee>
```

```
                मेरी नपलर नगरि से ढाई साल के बच्चे और उसकी माँ की मौत
            </marquee>
          </div>
          <div className="social">
            <div className="icons">
              <AiFillFacebook className='icon' />
              <AiFillInstagram className='icon'/>
              <AiFillLinkedin className='icon'/>
              <AiFillYoutube className='icon'/>
              <AiFillTwitterCircle className='icon'/>
              <button className='btn_1'>Hindi <RiArrowDropDownLine
className='icon'/></button>
            </div>
          </div>
        </Infoo>
    )
}

const Infoo = styled.nav`

display: flex;
justify-content: space-between; padding: 0 5rem; background-color: black;
color: white; align-items: center;
height: 35px;




.title{
    background-color: red;     height: 100%;     background-color: rgb(179, 32, 32);
    display: flex;     align-items: center;     justify-content: center;     /* padding: 0rem 1rem;
*/     min-width: 150px;

}
.breking_news{     flex-basis:100%;     /* border: 1px solid red; */
}

.icons{     display: flex;     align-items: center;     justify-content: center;     gap: 1rem;
}


.btn_1{     background-color: white;     color: black;     border: none;     cursor:
pointer;     padding: .3rem 2rem;     margin: 15px 0px;
}
```

```
@media (max-width:700px) { padding: 0rem;

   .icons{


      display: none;

   }
   .title{        font-size: 1rem;
   }


}
`
export default Info;


//Navbar.js


import React, { useState } from 'react' import styled from "styled-components" import
Dropdown from '../miscellaneous/Dropdown' import { HiMenu } from 'react-icons/hi'
import { NavLink } from 'react-router-dom'




const Navbar = () => {     // console.log(toggle)
   const [toggle, setToggle] = useState(true)

   if (toggle) {
      var flag = " max-height: 30px;"
   }     else{
      flag = "";
   }

   const Nav = styled.nav`     background-color: black;     /* position: sticky;     top: 0%;     left:
0%;     right: 0%;     z-index: 9999999; */     color: white;
   padding: .5rem 0rem;

   transition: all 2s linear;

   .menu{        display: none;
   }
   .menu-icon{        font-size: 2rem;
```

```
  }
      ul{       display: flex;       align-items: center;       /* max-height: 30px; */       gap:
2rem;       flex-wrap: wrap;
     padding: 2px;

      }
  li{       list-style: none;       font-size: 1rem;       padding: 0.5rem rem;

  }    .link{       color: white;       &:hover{           text-decoration: underline;       }
  }
  .hide{
     max-height: 30px;

  }



  @media(max-width:700px)
  {
     overflow: hidden;
    ${flag}

     .menu{
        display: block;
     }       ul{
        flex-direction: column;          padding-left: 3rem;
       align-items: start;

     }
  }



  `

  return (       <Nav>
       <div className="container">
          <ul className="">
            <div className="menu">
              <HiMenu className='menu-icon' onClick={(e)=>setToggle(!toggle)} />
            </div>
            <li>
              <NavLink className="link" to="/" onClick={()=>setToggle(!toggle)}>
Home</NavLink>
```

```
                </li>
                <li>
                  <Dropdown text="National" />
                </li>
                <li>
                  <NavLink className="link" to="/polities" onClick={()=>setToggle(!toggle)}>
Politics</NavLink>
                </li>
                <li>
                <li>
                  <NavLink className="link" to="/international"
onClick={()=>setToggle(!toggle)}> International</NavLink>
                </li>
                </li>
                <li>
                  <NavLink className="link" to="/business" onClick={()=>setToggle(!toggle)}>
Business</NavLink>
                </li>
                <li>
                  <Dropdown text="Sport" />
                </li>
                <li>
                  <Dropdown text="Entertainment" />
                </li>
                <li>
                  <NavLink className="link" to="/technology"
onClick={()=>setToggle(!toggle)}> Technology</NavLink>
                </li>
                <li>
                  <NavLink className="link" to="/courses" onClick={()=>setToggle(!toggle)}>
Learn With Us</NavLink>
                </li>
                <li>
                  <NavLink className="link" to="/contact" onClick={()=>setToggle(!toggle)}>
Contact Us</NavLink>
                </li>
              </ul>


          </div>

        </Nav>
    )
}
```

```
export default Navbar;


//Navbar2.js


import React from 'react' import styled from 'styled-components' import { NavLink } from 'react-
router-dom' import { CommonLink } from
'../../styles/components' import { AiOutlineHome } from 'react-icons/ai' import LoadingBar from
'react-top-loading-bar' import { useGlobalContext } from '../../context'

const Navbar2 = () => {
  const { progress } = useGlobalContext();   return (     <Section>

     <nav className='container'>
       <LoadingBar          color='#f11946'          progress={progress}
        height={2}
       // onLoaderFinished={() => setProgress(0)}
       />
       <CommonLink to="/"><AiOutlineHome className='icon' /></CommonLink>
       <ul>
         <li><NavLink className="navlink" to="/national"> National</NavLink></li>
         <li><NavLink className="navlink" to="/politics"> Politics</NavLink></li>
         <li><NavLink className="navlink" to="/crime"> Crime</NavLink></li>

         <li><NavLink className="navlink" to="/business"> Business</NavLink></li>
         <li><NavLink className="navlink" to="/education"> Education</NavLink></li>
         <li><NavLink className="navlink" to="/entertainment">
Entertainment</NavLink></li>
         <li><NavLink className="navlink" to="/sport"> Sport</NavLink></li>
         <li><NavLink className="navlink" to="/cities"> Delhi/NCR</NavLink></li>
         <li><NavLink className="navlink" to="/world"> World</NavLink></li>
         <li><NavLink className="navlink" to="/tech">Tech</NavLink></li>
         <li><NavLink className="navlink" to="/stroies"> Stroies</NavLink></li>
         <li><NavLink className="navlink" to="/contact"> Contact</NavLink></li>
       </ul>
     </nav>


   </Section>
  )
}
```

```
const Section = styled.section` margin-bottom: 1rem;
background-color: rgb(248,248,255);

padding: 5px 0px;
/* -webkit-box-shadow: 0px 2px 5px 0px rgba(148,148,148,1); -moz-box-shadow: 0px 2px 5px
0px rgba(148,148,148,1); */ box-shadow: 0px 2px 4px 0px rgba(148,148,148,1);

.container{    padding-left: 10px;

  display: flex;    align-items: center;
  justify-content: center;
}

.icon{

  font-size: 2.3rem !important;    padding: 0rem 8px;
  cursor: pointer;

}

ul{    display: flex;    gap: 1rem;    padding:  0px 10px;
  overflow-x: scroll;

  &::-webkit-scrollbar {      display: none;
}
}
 li{
  font-size: 13px;    font-weight: bold;    padding: 0rem .5rem;    border-left: 1px solid rgb(189,
189, 189);
  .navlink{      color: black;      &:hover{        text-decoration: underline;
    }
  }

}


.active{
  /* text-decoration: underline; */
  color: blue !important;
}

@media (max-width:700px) {
```

```
  padding: 0rem 0rem;
  .icon{
    font-size:2rem;
  }

}

`

export default Navbar2

//Searchbar .js

//©Kṛṣṇa
import React from 'react' import styled from 'styled-components'; import {MdOutlineCancel}
from 'react-icons/md' import { IoMdRocket } from 'react-icons/io'; import { useGlobalContext }
from '../../context'; const SearchBar = () => {
   const {setShowSearch} = useGlobalContext();     return (        <Div>
          <div className="search-container">
            <MdOutlineCancel className='icon' onClick={()=>setShowSearch(false)}/>
            <input type="search"  placeholder='Place Category'
onBlur={()=>setShowSearch(false)}/>
            <button>Go</button>
          </div>
       </Div>
   )
}

export default SearchBar; const Div = styled.div` position: fixed; width: 100vw; height: 100vh;

top: 0px; left: 0px;
right: 0px;

display: flex; justify-content: center ;


.search-container{     position: relative;     background-color: white;     opacity: 11;     z-index:
123;     height: 5rem;     max-width: 25rem;     border-radius: .5rem;     display: flex;     justify-
content: center;     align-items: center;     transform: translateY(50px);     box-shadow: 0 0
10px  1000px rgba(0, 0, 0, .5);     padding:3rem;

   input{        outline: none;        border: 1px solid gray;        font-size: 1rem;        padding:
.5rem 1rem;        border-radius: 5px 0px 0px 5px ;
       /* width: 80%; */
   }
```

```
   button{        border: none;        background-color :#57bd84;        border: 1px solid
gray;        border-left: none;        font-size: 1rem;        padding: .5rem 1rem;        border-radius:
0px 5px 5px 0px;
   }
   .icon{        position:absolute;        color: black;        right: 2px;        top: 2px;        font-size:
20px;
   }


}



`
//Slogan2.js

import React from 'react' import styled from 'styled-components'
import { HiMenuAlt1, HiSearch } from 'react-icons/hi'


import { AiFillInstagram, AiFillLinkedin, AiFillTwitterCircle, AiFillYoutube } from
'reacticons/ai'
import { IoLogoFacebook } from 'react-icons/io' import logo from "../../images/logoo.png";
import SearchBar from './SearchBar' import { useGlobalContext } from '../../context'


const Slogan2 = () => {
   const { showSearch, setShowSearch, show } = useGlobalContext();

   return (
      <Box className='container'>

         {showSearch && <SearchBar />}
         <div className="logo">
            <HiMenuAlt1 className='icon menu' onClick={show} />

            <picture>
               <img src={logo} alt="Logo" />

            </picture>
         </div>

         <div className="search">
```

```
            <a href="https://www.facebook.com/people/Jagto-Bharat/100087329033299/"
target="_blank"><IoLogoFacebook className='icon social facebook' /></a>

            <a href="https://www.instagram.com/jagto.bharat//"
target="_blank"><AiFillInstagram className='icon social instagram' /></a>


            <a href='https://www.linkedin.com/company/jagtobharat/'
target="_blank"><AiFillLinkedin className='icon social linkedin' /></a>
            <a href='https://www.youtube.com/@jagtobharat'
target="_blank"><AiFillYoutube className='icon social youtube' /></a>
            <a href='https://twitter.com/JagtoB' target="_blank"><AiFillTwitterCircle
className='icon social twitter' /></a>
            <HiSearch className='icon search' onClick={() =>
{                   setShowSearch(true)
            }} />
          </div>
       </Box>

    )
}


const Box = styled.div`

display: flex; align-items: center; justify-content: space-between;
padding: 0rem .5rem;



.logo{     display: flex;     /* gap: 1rem; /     align-items: center;     / justify-content: center; */
}
.logo picture {     width: 20%;

}
.logo img{     width: 200%;     height: auto; } .icon{     font-size: 1.8rem;
} .search{     display: flex;     flex-direction: row;     justify-content: center;     align-items: center;
    gap: 1rem;

}
/* color on social media icon */

facebook{     color: #3b5998;
}
.instagram{     color:#C32AA3;
```

```
}
.linkedin{     color:#007bb6;
} .twitter{     color: #0084b4; }


.youtube{     color:#FF0000;
}



@media(max-width:700px) {

   .social{         display: none;
   }
}
@media(max-width:600px) {

   /* padding: 0.5rem; */     .logo picture{
      width: 35%;
   }
}
@media(max-width:450px) {

   padding: 0.5rem;     .logo picture{         width: 40%;
   }
}

`



export default Slogan2


//Hero.js

import React from 'react' import styled from 'styled-components'; import NewsIteam from
'../miscellaneous/NewsIteam'; import NewsGrid from './NewsGrid'; // import Slider from
'./Slider'; import SliderSmall from '../SliderSmall'
import Title from '../Title';

import { useState,useEffect } from 'react'; import { set } from 'mongoose'; const Hero = () => {

  const [topNews,setTopNews] = useState([]);

  useEffect(()=>{
```

```
   const fetchNews = async()=>{       const url = "/api?sortBy=top";       const response = await
fetch(url);
     setTopNews(await response.json());

   }
   fetchNews();
  },[])
  // console.log(topNews)
  return (     <Section>
     <div className="container">
       {/* <div className="video hero_box"> /}         {/ <iframe width="560" height="315"
src="https://www.youtube.com/embed/vqu4z34wENw" title="YouTube video player"
frameborder="0" allow="accelerometer; autoplay; clipboard-write; encrypted-media; gyroscope;
picture-in-picture; web-share" allowfullscreen></iframe> */}
       {/* <Slider/> */}
       {/* </div> */}
       <NewsGrid />
       <div className="top_news hero_box">
        <h3 className='title'>Top News</h3>
        <div className="marque">
         <ul>
          {


           topNews.map((news)=>{
            return <NewsIteam key={news._id} news={news}/>
           })
          }

         </ul>
        </div>

        {/* video */}
        <div className="video_container">
         <h3 className='title'>Videos</h3>
         <SliderSmall/>
        </div>
       </div>
     </div>

   </Section>
  )
}
```

```
const Section = styled.section`


max-width: 100%;
padding: 2rem;

.container{    display: grid;    grid-template-columns: 1fr 1fr;    grid-gap: 1rem;
}



.hero_box{
  /* border: 1px solid black; /    border-radius: 8px;    / min-height: 400px; */


  /* max-height: 400px; */    padding: 1rem;    background-color: white;    overflow: hidden;

}


.title{
  /* font-size: 1rem; */
  padding: 1rem 0rem;
}

.marque{
  /* min-height: 600px; */    max-height: 450px;
  overflow: hidden;

}

.top_news ul{    display: flex;    flex-direction: column;    gap: 1rem;    animation: scrolling 15s
linear infinite;    margin-top: 1rem;    overflow: hidden;    &:hover {      animation-play-state:
paused;
  }
}

.video_container{    /* border: 1px solid red; */    height: 25rem;    margin-top: 2rem;    padding:
.5rem;    color:black;



}

iframe{    /* border: 2px solid red; */    width: 100%;
  height: 100%;
```

```
}

/* Animation */
@keyframes scrolling {
  0%{

  }
  50%{
    transform: translateY(-400px);
  }
  100%{

  }

}


//media Queries

@media (max-width:900px)
{
  .container{   display: grid;   grid-template-columns: 1fr;
  grid-gap: 1rem;

  .top_news{     grid-row: 1/1;
  }
}

}


@media (max-width:600px)
{
  padding: 1rem;
  .hero_box{
  /* border: 1px solid black; */

  padding: 0rem;


}

}

`
```

```
export default Hero;



//Newsiteam.js

// This News item is used on the Home page in the marquee.

import React from 'react' import styled from 'styled-components' import {Link} from 'react-
router-dom'

const NewsInteam = ({news}) => {

   const formatDate = (str)=>{        const d = new Date(str);
      // console.log(d)  //This is the object not string        return d.toString().slice(4,21);
     }
   return (        <Div>
         <Link to={/latest/${news.slug}}>           <div className="uppar">


            <div className="title">
               <h6>{news.title}</h6>
            </div>
            <picture>
               <img src={news.urlToImage}/>
            </picture>
         </div>
         <div className="date">
            <p>{formatDate(news.publishedAt)}</p>
         </div>
         </Link>
      </Div>
   )
}

const Div = styled.div` padding: 5px 1rem; border-radius: 5px; /* border: 1px solid gray; */ box-
shadow: 3px 4px 9px 0px rgba(178,178,178,0.75); -webkit-box-shadow: 3px 4px 9px 0px
rgba(178,178,178,0.75);
-moz-box-shadow: 3px 4px 9px 0px rgba(178,178,178,0.75);

.uppar{
   display: flex;     flex-direction: row-reverse;     gap: .7rem;
   justify-content: space-between;     align-items: center;     padding: 0rem
.2rem;     h6{         font-size: 1rem;
```

```
      color: black;
   }

 }
picture{


   max-width: 25%;     img{         width: 100%;         height: auto;
      border-radius: 8px;
   }

}
.date{
   padding: 0rem .5rem;
}

@media (max-width:600px) {
   h6{
      font-size: .8rem !important;
   }
   picture{
   max-width: 35%;     img{         width: 100%;         height: auto;         border-radius: 8px;
   }

}

}

`

export default NewsInteam


//Slider2.js


// Import Swiper React components import { Swiper, SwiperSlide } from "swiper/react"; //
Import Swiper styles import "swiper/css"; import "swiper/css/pagination";
import "swiper/css/navigation";

// import "./styles.css";


import { Autoplay, Pagination, Navigation } from "swiper";
import NewsInteam from "../NewsIteam"; import styled from "styled-components";
```

```
export default function Slider({ data, tag }) {


  return (
    <Div className="container">
      <Swiper         slidesPerView={1}         spaceBetween={10}         loop={true}         loopFillG
roupWithBlank={true}
        navigation={true}         autoplay={{           delay: 2500,
          disableOnInteraction: false,
        }}
        modules={[Autoplay, Pagination, Navigation]}
        breakpoints={{           640: {             slidesPerView: 2,
            spaceBetween: 20,
          },
          768: {             slidesPerView: 3,
            spaceBetween: 40,
          },


          1024: {             slidesPerView: 3,
            spaceBetween: 50,
          },
        }}
        className="mySwiper slider"
      >
        {data.map((elem) => {
          return (<SwiperSlide key={elem._id}> <NewsInteam news={elem} tag={tag}  />
</SwiperSlide>)
        })}

      </Swiper>
    </Div>
  );
}


const Div  = styled.div`

.slider{
  /* border: 2px solid chocolate; */
  padding: 1rem;    max-width: 100%;
}

`
```

```
//Tabnav.js

import React, { useEffect } from 'react' import styled from 'styled-components' import NewsItem
from './NewsItem' import { useState } from 'react'
import ad_img from '../../images/ad.jpg'

const TabNav = () => {



  const [activeTab, setActiveTab] = useState([1, 0, 0])   const [popularNews, setPopularNews] =
useState([])   const [latestNews, setLatestNews] = useState([])   const [topNews, setTopNews] =
useState([])



  const tabHandler = (event) => {
    const flag = [0, 0, 0]     const index = Number(event.target.id);
    flag[index] = 1;     setActiveTab(flag);
    // console.log(flag)

  }

  useEffect(() => {

    const fetchData = async () => {       const url = '/api?sortBy=popular';       const result = await
fetch(url);       const newses = await result.json();       //
console.log(newses);       setPopularNews(newses);

    }
    fetchData();
  }, [])

  useEffect(() => {
    // console.log("use effecct in tab run")     const fetchData = async () => {       const url =
'/api/?lim=6';       const result = await fetch(url);       const newses = await
result.json();       setLatestNews(newses)

    }


    fetchData();
  }, [])
```

```
 useEffect(() => {
   // console.log("use effecct in tab run")     const fetchData = async () => {       const url =
'/api?sortBy=top';       const result = await fetch(url);       const newses = await result.json();
     setTopNews(newses);

   }
   fetchData();
 }, [])

 let news = [];
 const [p, l, t] = activeTab;

 if (p) {
   news = popularNews;
 }   if (l) {
   news = latestNews;

 }   if (t) {
   news = topNews;
 }



 // console.log(news);   return (
   <Div className="side-tab-nav box">
     <div className="tabs">
       <ul>
         <li className={activeTab[0] && "active"} id='0' onClick={tabHandler}>Popular
News</li>


         <li className={activeTab[1] && "active"} id='1' onClick={tabHandler}>Latest
News</li>
         <li className={activeTab[2] && "active"} id='2' onClick={tabHandler}>Top News</li>

       </ul>
     </div>
     <div className="news_boxs">
       {
         news.map((elem) => {
           return <NewsItem key={elem._id} data={elem} />
         })
       }
```

```
    </div>

    <div className="ad">
      <a href="https://www.bhartiyaairways.com/" target="_blank">
        <img src={ad_img} alt="" />
      </a>
    </div>
   </Div>
  )
}

const Div = styled.div`

.box{
  /* border: 1px solid tomato; */
  padding: 1rem;
}


.newsArea{   max-width: 100%;   min-height: 300px;   padding: 5px;   margin: 1rem
0rem;   border: 2px solid gray;
  overflow: hidden;
}

.news-box{   display: grid;   grid-template-columns: 1fr 1fr;   margin-top: 1rem;   gap: 2rem;
}

.ad{   width: 100%;   margin-top: 2rem;   /* border: 1px solid red; */   img{
    width: 100%;
  }
}



/* ---------------- */ .tabs{   background-color: #f2f2f2;
  /* height: 100%; */

  .active{     background-color: white;
  }

  ul{     display: flex;     gap: 5px;
    justify-content: space-between;

    border-bottom: 1px solid gray;      li{
      border: 1px solid grey;       padding: .5rem;       border-radius: 4px 4px 0px 0px;
```

```
    color: black;      font-size: .8rem;      cursor: pointer;



   }
  }
}

@media (max-width:800px) {   /* border: 2px solid green; */   max-width: 30rem;
  margin: auto;


}
`

export default TabNav

//Context.js


//Keep track of state.

import { useState } from "react";
import { createContext, useReducer,useContext } from "react"; const AppContext =
createContext();


const reducer = (state,action)=>{



   switch (action.type) {        case 'SHOW':            return (1);            break;        case
'HIDE':              return (0);        default:           return (state);           break;
   }
}

const initalState = 0;

const AppProvider = ({children})=>{

const [state,dispatch] = useReducer(reducer,initalState); const [progress,setProgress] =
useState(0); const [showSearch,setShowSearch] = useState(false);

const show = ()=>{     dispatch({type:"SHOW"})
}
```

```
const hide = ()=>{     dispatch({type:"HIDE"})
}

return <AppContext.Provider
value={{state,show,hide,progress,setProgress,showSearch,setShowSearch}}>{children}</A
ppContext.Provider>
}
export const useGlobalContext = ()=>{     return useContext(AppContext);
}

export default AppProvider;
```

Chapter-5 Testing

5.1 Test Strategy:

Developing a comprehensive test strategy for news article publishing projects involves several key considerations. Here's a general outline to help you get started:

1. **Define the testing objectives**: Determine the specific goals of your testing efforts. For example, you might want to ensure the accuracy of published information, verify the functionality of key features, assess performance and load handling, and validate compatibility across different devices and browsers.

2. **Identify testable components**: Break down your project into smaller testable components such as user registration, content creation, content editing, search functionality, commenting system, and so on. This will help you create a structured approach for testing.

3. **Determine testing types:** Consider various testing types to include in your strategy, such as functional testing, usability testing, performance testing, security testing, compatibility testing, and regression testing. Each type focuses on different aspects of the system and helps uncover specific issues.

4. **Design test cases**: Create detailed test cases for each component based on your objectives and testing types. Test cases should cover positive and negative scenarios, edge cases, and potential user interactions. Include steps to reproduce the expected behavior and define the expected outcomes.

5. **Prioritize test cases:** Determine the priority of your test cases based on factors like critical functionality, high-risk areas, user impact, and project timelines. This will help you allocate testing efforts efficiently.

6. **Set up test environments:** Prepare dedicated testing environments that closely resemble the production environment. This ensures that your tests closely mimic real-world conditions. Consider using test data or a representative subset of production data for more accurate testing.

7. **Execute test cases:** Run the identified test cases according to their priority and document the results. Ensure that you thoroughly record any defects or issues you encounter, including steps to reproduce them.

8. **Perform regression testing:** As changes are made to the project, conduct regression testing to ensure that modifications or fixes haven't introduced new issues or impacted existing functionality.

9. **Automate testing**: Explore the possibility of automating repetitive and time-consuming tests to streamline the testing process. Automation can help with tasks like regression testing, load testing, and compatibility testing.

10. **Collect and analyze test results**: Review the test results to identify trends, common issues, and areas that require improvement. Use this

feedback to refine your test strategy and address any identified gaps or weaknesses.

11. **Iterate and improve:** Continuously refine your test strategy throughout the project lifecycle. Learn from each testing cycle and incorporate feedback to enhance the effectiveness and efficiency of your testing efforts.

Remember that the specifics of your test strategy will depend on the unique requirements of your news article publishing project. Adapt the above steps to align with your project's scope, timelines, and available resources.

5.2 Test Cases

1. Article Creation and Editing:

- Confirm that users can create a new article with a title, content, and appropriate formatting.

- Test that the article content is saved correctly and displayed accurately.

- Check that users can edit an existing article and save the changes successfully.

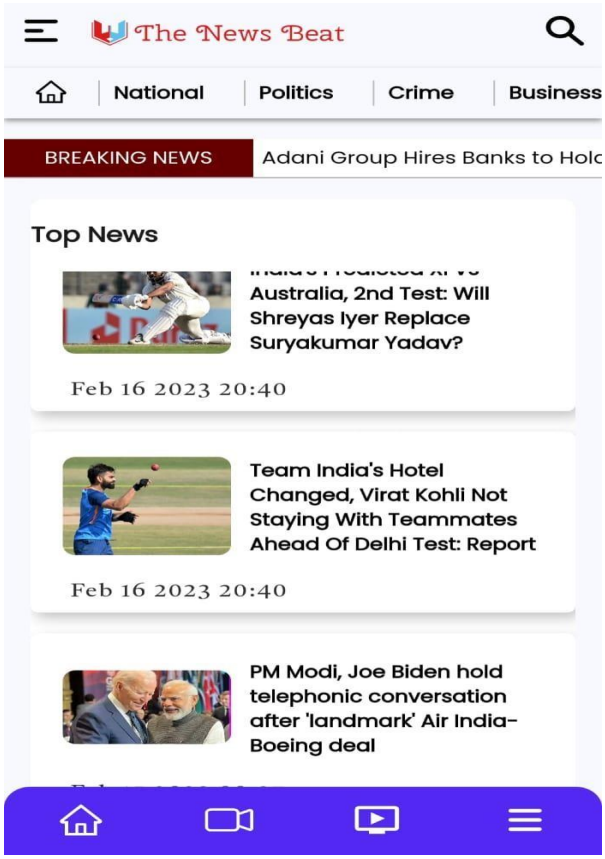


Fig.16

2. Publishing and Visibility:

- Ensure that articles marked as "draft" are not visible to the public.
- Test that published articles are displayed on the website or app's front page or relevant sections.
- Verify that articles can be published with future publication dates and automatically appear at the scheduled time.

3. Categorization and Tagging:

- Test the assignment of categories or tags to articles and confirm their proper display.
- Validate that articles can be filtered or searched based on categories or tags.
- Ensure that articles can be assigned to multiple categories or tags if applicable.

4. Commenting System:

- Verify that registered users can leave comments on articles.
- Test that comments are displayed correctly and sorted in the appropriate order (e.g., newest first).
- Ensure that comments can be edited or deleted by the commenter or authorized users.

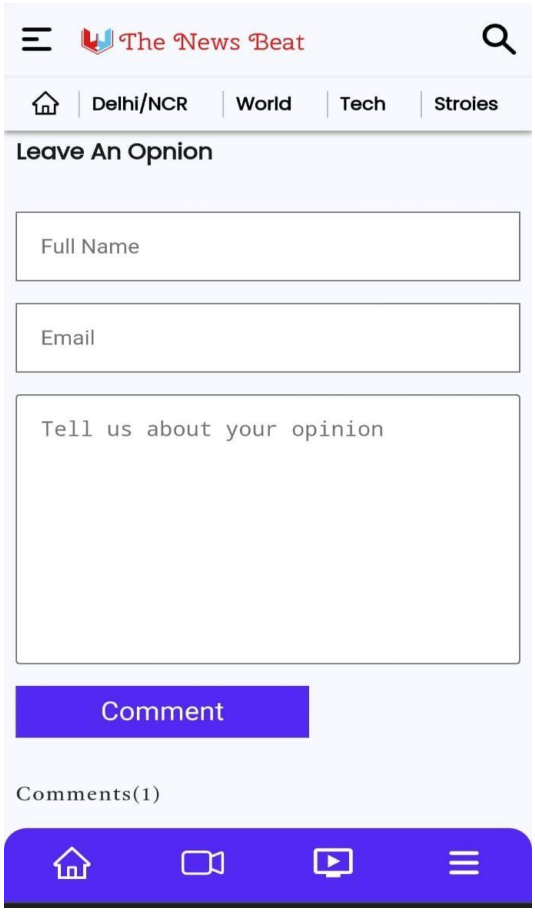


Fig.17

5. Search Functionality:

- Test the search functionality to ensure that articles can be found by relevant keywords.

- Validate that search results are accurate, displaying the most relevant articles first.

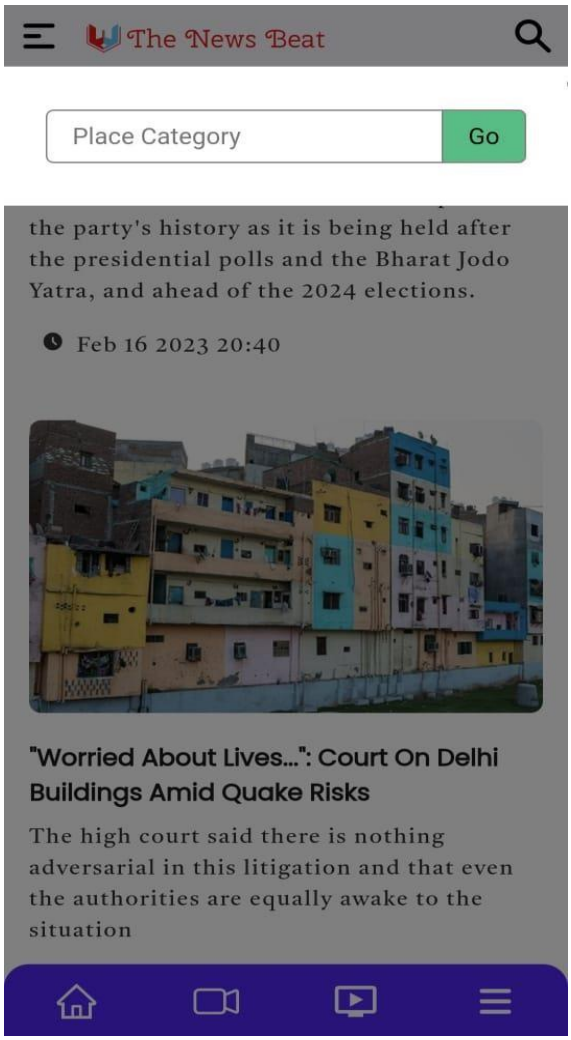


Fig.18

6. Performance and Load Testing:

- Test the system's performance by publishing a large number of articles simultaneously.
- Measure the response time of key actions like article creation, editing, and loading.
- Evaluate how the system handles peak loads and ensure it can scale appropriately.

7. Compatibility and Responsive Design:

- Test the website or app across different browsers (Chrome, Firefox, Safari, etc.) and versions.
- Validate the responsiveness and layout of the site on various devices (desktop, mobile, tablet).
- Confirm that all functionality works as expected on different platforms.

8. Security and Access Control:

- Test for vulnerabilities such as SQL injection, cross-site scripting (XSS), or unauthorized access attempts.
- Verify that user authentication and authorization are enforced correctly.
- Test user roles and permissions to ensure that different user types have appropriate access levels.

These are just a few examples, and you should tailor your test cases to match your project's specific requirements. Remember to cover both positive and negative scenarios, and consider edge cases and boundary conditions to ensure comprehensive testing.

Chapter-6 Future Enhancement

Here are some potential future enhancements you could consider for your news article publishing project:

1. User Profiles and Personalization: Implement user profiles where users can customize their preferences, follow specific authors or categories, and receive personalized recommendations based on their interests.

2. Social Media Integration: Allow users to share articles on social media platforms directly from your website or app. Implement social media login options for easier registration and engagement.

3. Multimedia Content: Expand beyond text-based articles by incorporating multimedia content such as images, videos, and audio files. Enhance the content creation and editing capabilities to support multimedia elements.

4. Content Voting and User Engagement: Enable users to upvote or downvote articles and comments, fostering user engagement and helping to surface the most popular content. Implement features like trending articles and user-generated content sections.

5. Advanced Search and Filtering: Enhance the search functionality by incorporating advanced filters, such as sorting by popularity, relevance, or publication date. Implement faceted search to allow users to refine search results based on different attributes.

6. Real-time Notifications: Implement a notification system to alert users about new articles, comments, or updates related to their preferred topics or followed authors. Offer email notifications, push notifications, or an in-app notification center.

7. Analytics and Insights: Integrate analytics tools to gather data on user behavior, article performance, and engagement metrics. Use this data to gain insights, improve content strategies, and make data-driven decisions.

8. Localization and Internationalization: Consider making your platform available in multiple languages to reach a broader audience. Implement localization features to adapt date formats, language settings, and regional preferences.

9. Advertising and Monetization: Explore options for incorporating advertising within your platform, such as banner ads, sponsored content, or native advertising. Implement tools to track ad impressions, click-through rates, and generate revenue.

10.Mobile Application Development: Extend your platform's reach by developing dedicated mobile applications for iOS and Android devices. Ensure a seamless user experience across different mobile platforms.

11.Accessibility Features: Ensure your website or app adheres to accessibility standards and guidelines, making it inclusive and usable for individuals with disabilities. Implement features like screen reader compatibility and keyboard navigation.

12.Content Syndication and APIs: Provide APIs to allow third-party websites or applications to access and display your articles,enabling content syndication and reaching a broader audience.

Remember to prioritize enhancements based on user feedback, market trends, and your project's goals. Continuously iterate and improve based on user needs and technological advancements to stay competitive in the evolving landscape of news article publishing.

Chapter-7Bibliography

Website Reference:

- Website and Forms Layouts
- https://getbootstrap.com/
- MySQL Connection and Backend
- https://www.youtube.com
- Java, Spring Boot
- https://www.geeksforgeeks.com https://www.tutorrialspoint.com
- https://www.javatpoint.com/
- Website and forms layouts
- https://templatemo.com/ https://freefrontend.com/bootstrap-login-foms/
- Flexboxes, grids and other CSS components https://www.geeksforgeeks.org