
a) Creating First Linux Instance

Step 1:

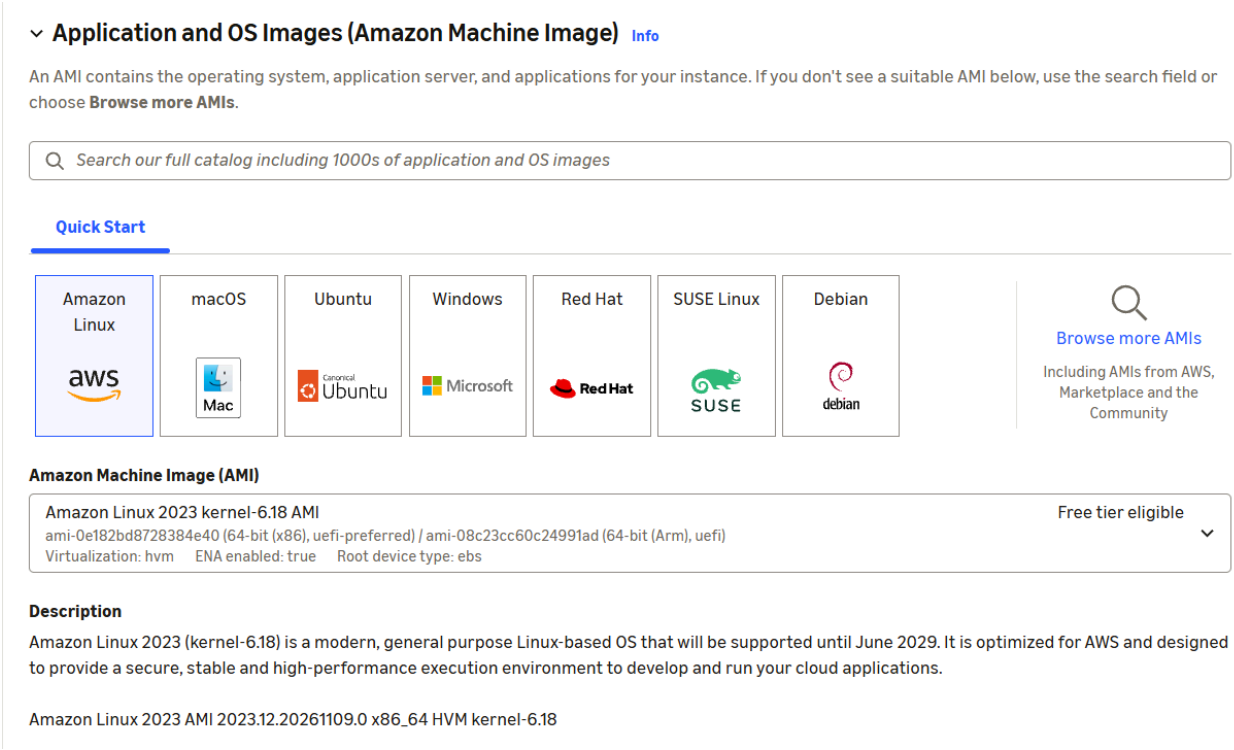

Step 2:

Create key pair

Key pair name

Key pairs allow you to connect to your instance securely.

ab123

The name can include up to 255 ASCII characters. It can't include leading or trailing spaces.

Key pair type

- (•) RSA
  RSA encrypted private and public key pair
- ( ) ED25519
  ED25519 encrypted private and public key pair

Private key file format

- (•) .pem
  For use with OpenSSH
- ( ) .ppk
  For use with PuTTY

⚠ When prompted, store the private key in a secure and accessible location on your computer. **You will need it later to connect to your instance.** Learn more

Cancel | Create key pair

Step 3:

Network settings Info

Network Info

vpc-0df9aabd2e3c6ffb0

Subnet Info

No preference (Default subnet in any availability zone)

Auto-assign public IP Info

Enable

Firewall (security groups) Info

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

(•) Create security group ( ) Select existing security group

We'll create a new security group called '**launch-wizard-1**' with the following rules:

[x] Allow SSH traffic from — My IP 103.125.161.178/32
Helps you connect to your instance

[x] Allow HTTPS traffic from the internet
To set up an endpoint, for example when creating a web server

[x] Allow HTTP traffic from the internet
To set up an endpoint, for example when creating a web server

Step 4:

Configure storage Info

Advanced

1x 8 GiB gp3 Root volume, 3000 IOPS, Not encrypted

Add new volume


Click refresh to view backup information
The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

File systems


( ) S3 Files - new ( ) EFS

( ) FSx (•) None


Step 5:

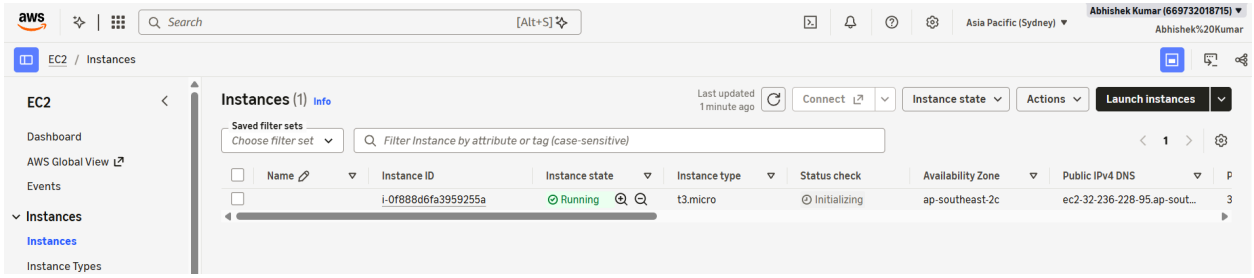

Step 6:

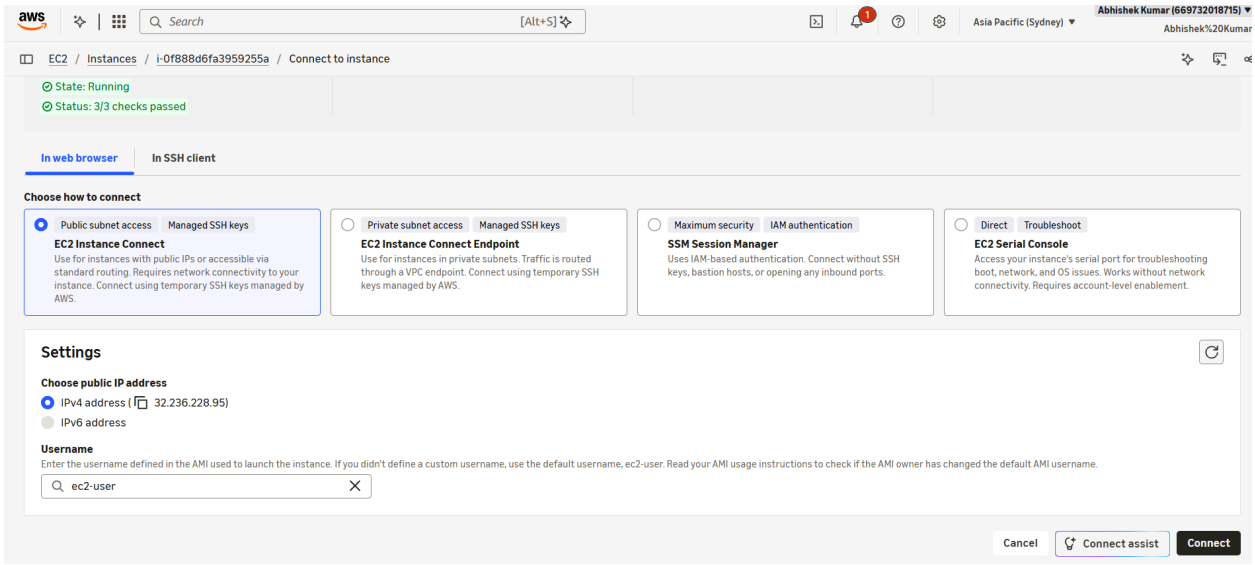


Step 7:

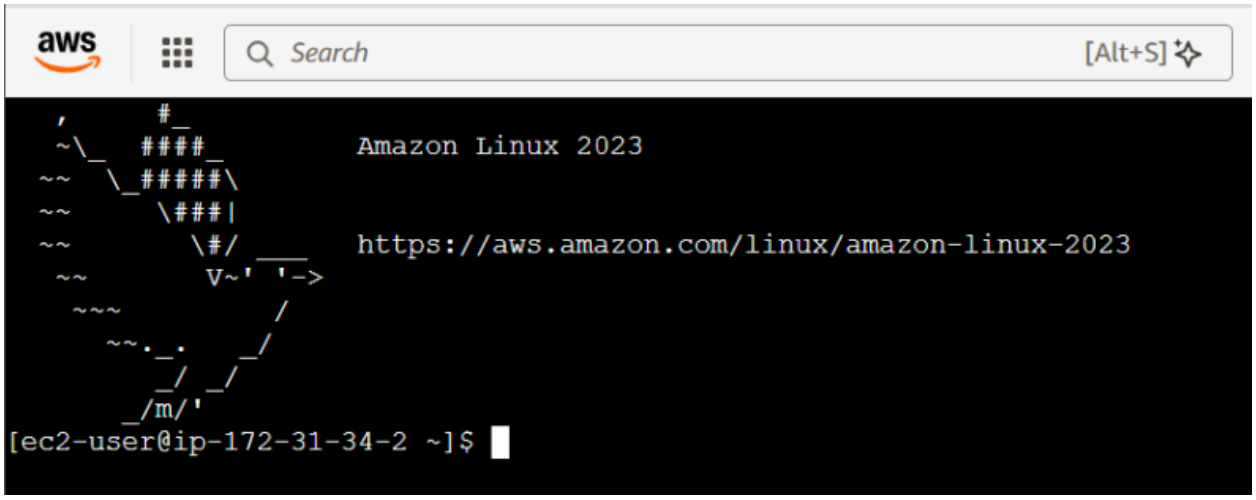




b) S3 Bucket Creation and Upload Objects

Step 1:

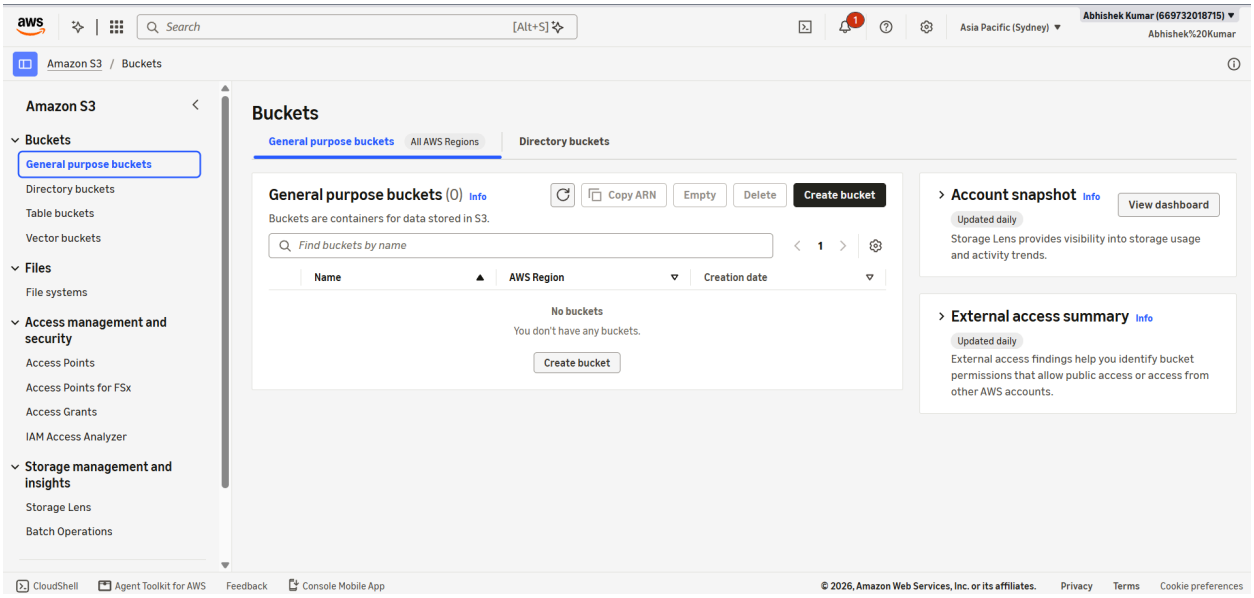
Search
[Alt+S]
Asia Pacific (Sydney)
Abhishek Kumar (669732018715)
Abhishek%20Kumar
Amazon S3 / Buckets
Amazon S3
Buckets
General purpose buckets
Directory buckets
Table buckets
Vector buckets
Files
File systems
Access management and security
Access Points
Access Points for FSx
Access Grants
IAM Access Analyzer
Storage management and insights
Storage Lens
Batch Operations
Buckets
General purpose buckets
All AWS Regions
Directory buckets
General purpose buckets (0) Info
Buckets are containers for data stored in S3.
Copy ARN
Empty
Delete
Create bucket
Find buckets by name
Name
AWS Region
Creation date
No buckets
You don't have any buckets.
Create bucket
Account snapshot Info
View dashboard
Updated daily
Storage Lens provides visibility into storage usage and activity trends.
External access summary Info
Updated daily
External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

Step 2:

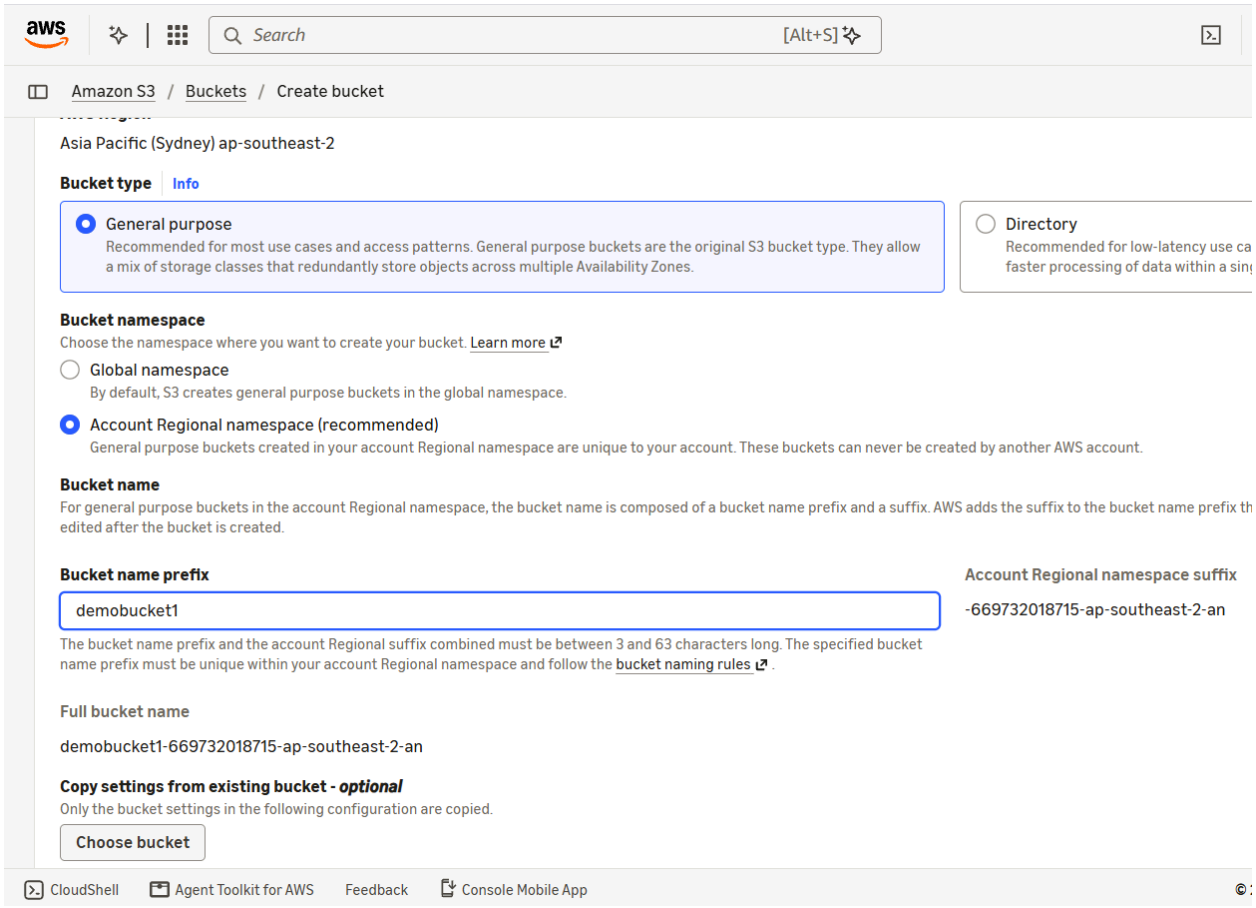
aws
Search
[Alt+S]
Amazon S3 / Buckets / Create bucket
Asia Pacific (Sydney) ap-southeast-2
Bucket type Info
General purpose
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
Directory
Recommended for low-latency use ca
faster processing of data within a sin
Bucket namespace
Choose the namespace where you want to create your bucket. Learn more
Global namespace
By default, S3 creates general purpose buckets in the global namespace.
Account Regional namespace (recommended)
General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.
Bucket name
For general purpose buckets in the account Regional namespace, the bucket name is composed of a bucket name prefix and a suffix. AWS adds the suffix to the bucket name prefix th
edited after the bucket is created.
Bucket name prefix
demobucket1
Account Regional namespace suffix
-669732018715-ap-southeast-2-an
The bucket name prefix and the account Regional suffix combined must be between 3 and 63 characters long. The specified bucket name prefix must be unique within your account Regional namespace and follow the bucket naming rules .
Full bucket name
demobucket1-669732018715-ap-southeast-2-an
Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.
Choose bucket
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App

Step 3:

Object Ownership Info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

- (•) **ACLs disabled (recommended)**
  All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
- ( ) **ACLs enabled**
  Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership
Bucket owner enforced

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work corre this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more

- [x] **Block *all* public access**
  Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
  - [ ] **Block public access to buckets and objects granted through *new* access control lists (ACLs)**
    S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existir
  - [ ] **Block public access to buckets and objects granted through *any* access control lists (ACLs)**
    S3 will ignore all ACLs that grant public access to buckets and objects.
  - [ ] **Block public access to buckets and objects granted through *new* public bucket or access point policies**
    S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
  - [ ] **Block public and cross-account access to buckets and objects through *any* public bucket or access point policies**
    S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Step 4:

Default encryption Info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type Info

Secure your objects with two separate layers of encryption. For details on pricing, see **DSSE-KMS pricing** on the **Storage** tab of the Amazon S3 pricing page.

- (•) Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ( ) Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ( ) Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. Learn more


- ( ) Disable
- (•) Enable

› **Advanced settings**


ⓘ After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel | **Create bucket**

Step 5:

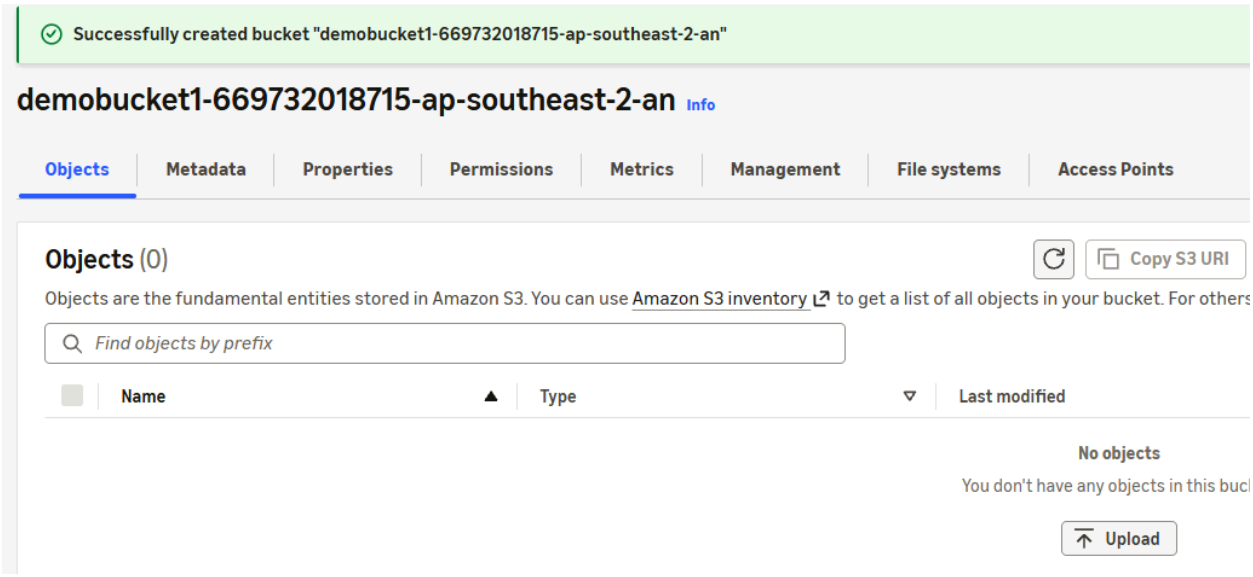
Successfully created bucket "demobucket1-669732018715-ap-southeast-2-an"
demobucket1-669732018715-ap-southeast-2-an Info
Objects
Metadata
Properties
Permissions
Metrics
Management
File systems
Access Points
Objects (0)
Copy S3 URI
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others
Find objects by prefix
Name
Type
Last modified
No objects
You don't have any objects in this bucl
Upload

Step 6:

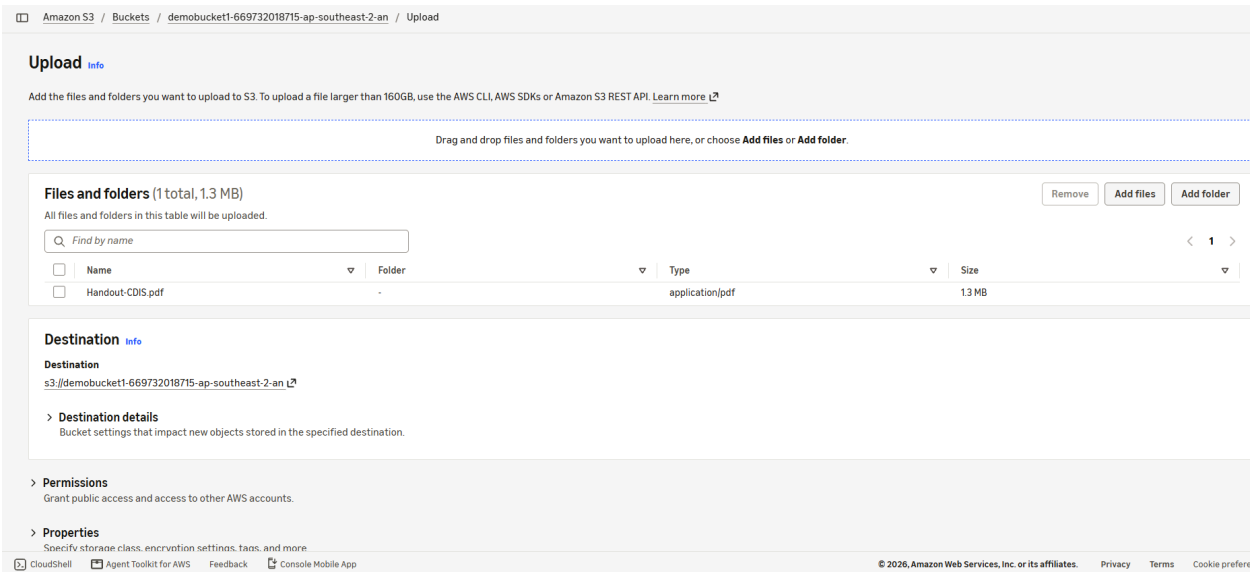
Amazon S3 / Buckets / demobucket1-669732018715-ap-southeast-2-an / Upload
Upload Info
Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. Learn more
Drag and drop files and folders you want to upload here, or choose Add files or Add folder.
Files and folders (1 total, 1.3 MB)
Remove
Add files
Add folder
All files and folders in this table will be uploaded.
Find by name
Name
Folder
Type
Size
Handout-CDIS.pdf
-
application/pdf
1.3 MB
Destination Info
Destination
s3://demobucket1-669732018715-ap-southeast-2-an
Destination details
Bucket settings that impact new objects stored in the specified destination.
Permissions
Grant public access and access to other AWS accounts.
Properties
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms

Step 7:

Upload succeeded
For more information, see the **Files and folders** table.

Upload: status

After you navigate away from this page, the following information is no longer available.

Summary

Destination	Succeeded	Failed
s3://demobucket1-669732018715-ap-southeast-2-an	1 file, 1.3 MB (100.00%)	0 files, 0 B (0%)


Files and folders | Configuration


Files and folders (1 total, 1.3 MB)

Find by name

Name	Folder	Type	Size	Status
Handout-CDIS.pdf	-	application/pdf	1.3 MB	Succeeded

Bucket with public access:

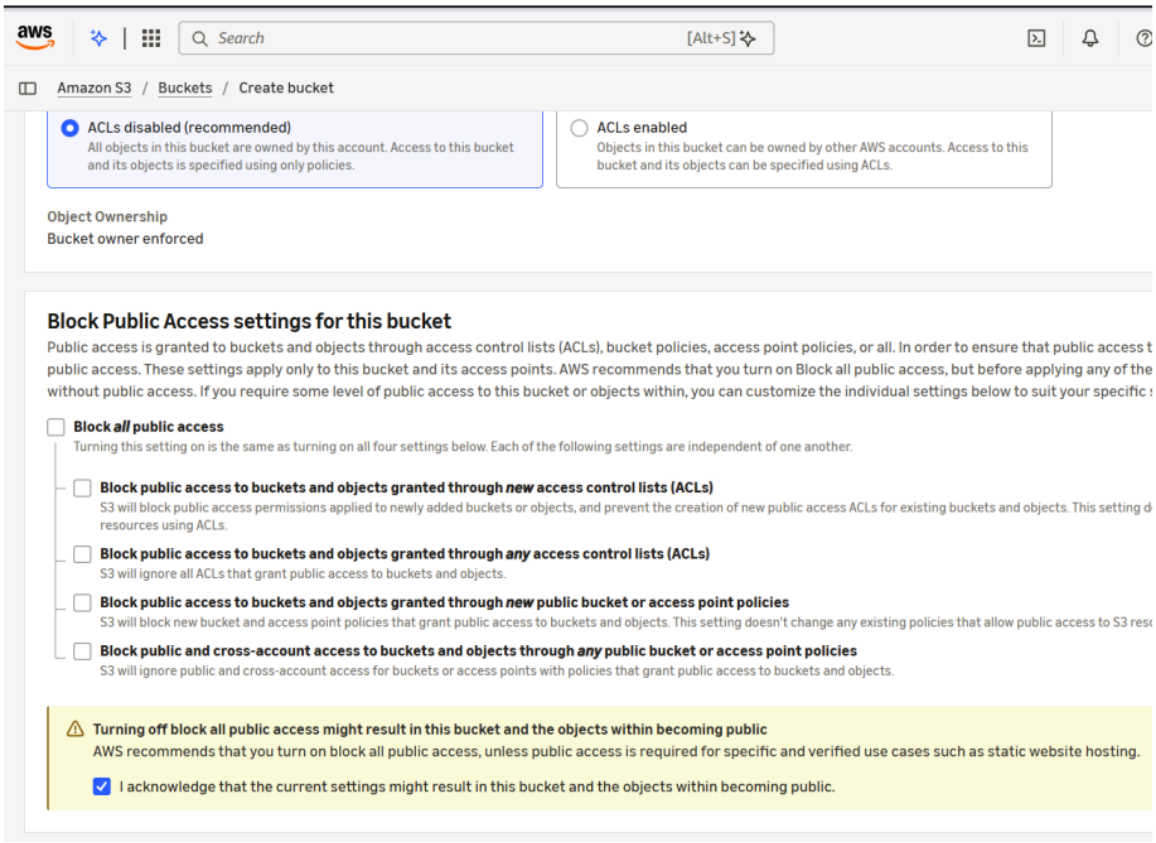

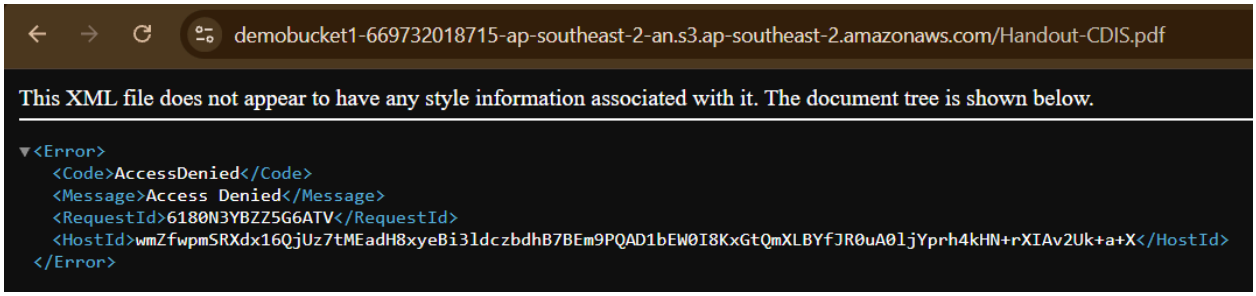
demobucket1-669732018715-ap-southeast-2-an.s3.ap-southeast-2.amazonaws.com/Handout-CDIS.pdf
This XML file does not appear to have any style information associated with it. The document tree is shown below.
<Error>
<Code>AccessDenied</Code>
<Message>Access Denied</Message>
<RequestId>6180N3YBZZ5G6ATV</RequestId>
<HostId>wmZfwpmSRXdx16QjUz7tMEadH8xyeBi3ldczbdhB7BEm9PQAD1bEW0I8KxGtQmXLBYfJR0uA0ljYprh4kHN+rXIAv2Uk+a+X</HostId>
</Error>