

INDEX

Exp.No	Date	Name of the Experiment	Page No.	Staff Signature
1.		CREATE A WEBPAGE WHICH INCLUDES THE FOLLOWING USING HTML	2	
2.		CREATE A WEBPAGE WHICH INCLUDES THE FOLLOWING USING HTML	5	
3.		GENERATE THE FIBONACCI SERIES USING PHP USER DEFINED FUNCTION	9	
4.		APPLY ANY TWO PHP SORT FUNCTION EACH ON AN INDEXED ARRAY AND AN ASSOCIATIVE ARRAY	12	
5.		CREATE A WEBPAGE WITH THE FOLLOWING USING HTML	16	
6.		Create a web page with all types of Cascading style sheets.	23	
7.		CLIENT SIDE SCRIPTS FOR VALIDATING WEB FORM CONTROLS USING DHTML	29	
8.		Form Handling in PHP- Create a recruitment website where a job seeker can upload his/her details	36	
9.		Create an Employee database with two fields Employer's Name, Employee's Name with MySql and insert two records into those fields using PHP code.	41	
10.		Develop a webpage using scripting languages with the help of CSS	45	

EXP.NO: 1

DATE:

CREATE A WEBPAGE WHICH INCLUDES THE FOLLOWING USING HTML

AIM:

To create a webpage which includes the following using HTML:

- Import an image.
- Include check box and radio box.
- Use href tag.

ALGORITHM:

1. Set Up Your HTML Document:

Create a new HTML file (e.g., index.html) and include the basic structure. This should start with the `<!DOCTYPE html>` declaration, followed the `<html>`, `<head>`, and `<body>` tags.

2. Import an Image:

Within the `<body>` section, use the `<img>` tag to import an image. Specify the `src` attribute with the image URL and include an `alt` attribute for accessibility.

3. Add a Checkbox:

Use the `<input>` tag with type `checkbox` to include a checkbox in your form. Wrap it in a `<label>` for better accessibility.

4. Include a Radio Button:

Similarly, add a radio button using the `<input>` tag with type `radio`. Ensure that all radio buttons in the same group share the same `name` attribute

5. Use the Href Tag:

To create a hyperlink, use the `<a>` tag with the `href` attribute pointing to the desired URL. This can be placed anywhere within the body.

PROGRAM:

```
<!DOCTYPE html>

<html lang="en">

<head>

    <title>Basic HTML Elements</title>

</head>

<body>

    <h1>Web Page with Image, Checkbox, Radio Button, and Link</h1>

    <!-- Import an Image -->

    <h2>Options:</h2>

    <!-- Checkboxes -->

    <input type="checkbox" id="option1" name="option1">

    <label for="option1">Option 1</label><br>

    <input type="checkbox" id="option2" name="option2">

    <label for="option2">Option 2</label><br>

    <!-- Radio Buttons -->

    <input type="radio" id="choice1" name="choices">

    <label for="choice1">Choice 1</label><br>

    <input type="radio" id="choice2" name="choices">

    <label for="choice2">Choice 2</label><br>


    <!-- Hyperlink -->

    <a href="https://www.example.com" target="_blank">Visit Example</a>

</body>

</html>
```

OUTPUT:

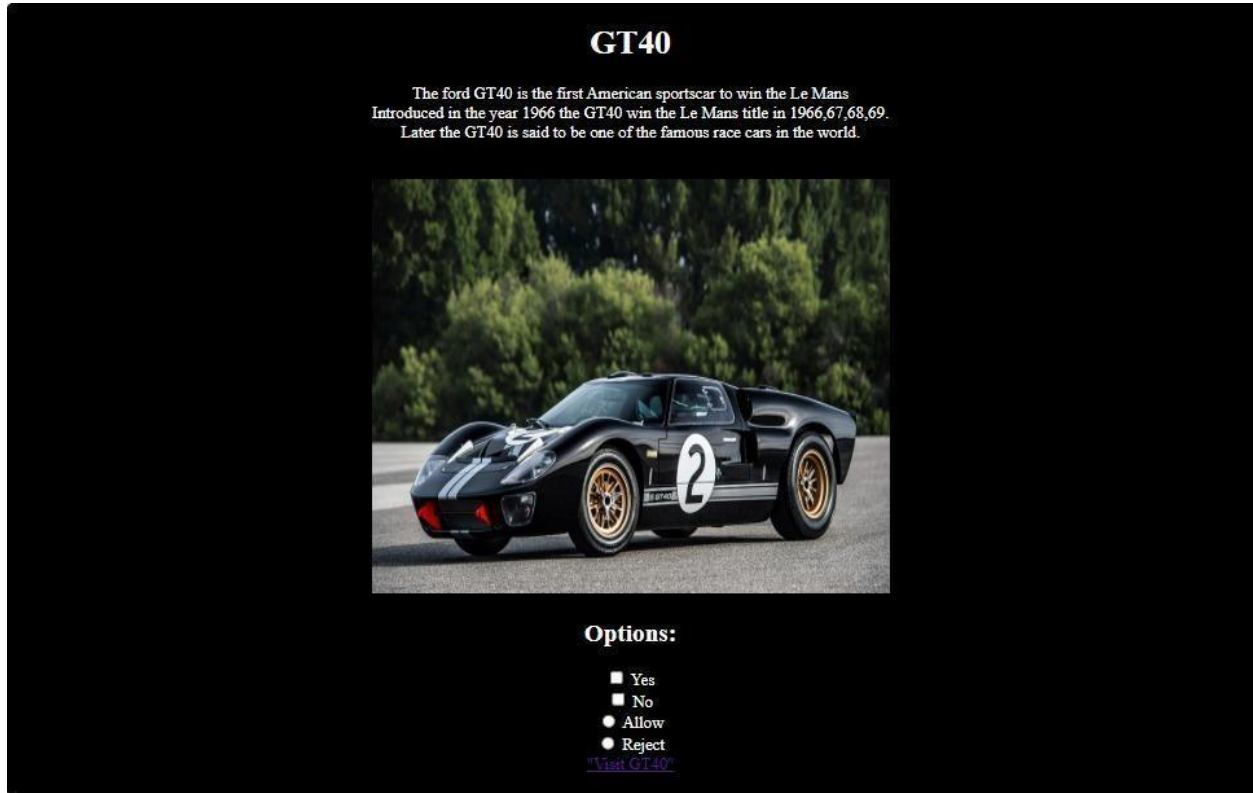

RESULT:

Thus the HTML program was executed successfully and output is verified.

EXP.NO: 2

DATE:

CREATE A WEBPAGE WHICH INCLUDES THE FOLLOWING USING HTML

AIM:

To create a webpage with:

- Tables
- Types of list
- Use hover tag

ALGORITHM:

1. Set Up Your HTML Document:

Create a new HTML file (e.g., index.html) and include the basic structure with the `<!DOCTYPE html>` declaration, followed by `<html>`, `<head>`, and `<body>` tags.

2. Create a Table:

Inside the `<body>` section, use the `<table>` tag to create a table. Include `<tr>` tags for rows and `<td>` tags for cells. Optionally, use `<th>` tags for headers.

3. Add Types of Lists:

Include different types of lists such as an unordered list (`<ul>`) and an ordered list (`<ol>`) within the body.

4. Implement Hover Effect:

Use CSS to create a hover effect for the table rows. This is done by adding a style rule in the `<style>` section that changes the background color when a row is hovered over.

5. Finalize Your HTML Document:

Ensure all elements are properly closed and formatted, then save your HTML file. Open it in a web browser to view your webpage with the table, lists, and hover effects.

PROGRAM:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <title>Table, Lists, and Hover</title>

  <style>

    td:hover {

      background-color: yellow;

    }

  </style>

</head>

<body>

  <h1>Table Example</h1>

  <!-- Create a Table -->

  <table border="1">

    <tr>

      <th>Name</th>

      <th>Age</th>

    </tr>

    <tr>

      <td>Aamir</td>

      <td>21</td>


    </tr>

    <tr>

      <td>parthiban</td>
```

```
        <td>20</td>
    </tr>
</table>
<h2>Types of Lists</h2>
<h3>Ordered List</h3>
<ol>
    <li>Item 1</li>
    <li>Item 2</li>
</ol>
<h3>Unordered List</h3>
<ul>
    <li>Item A</li>
    <li>Item B</li>
</ul>
<a href="https://nptel.ac.in/">Nptel</a>
</body>
</html>
```

OUTPUT:

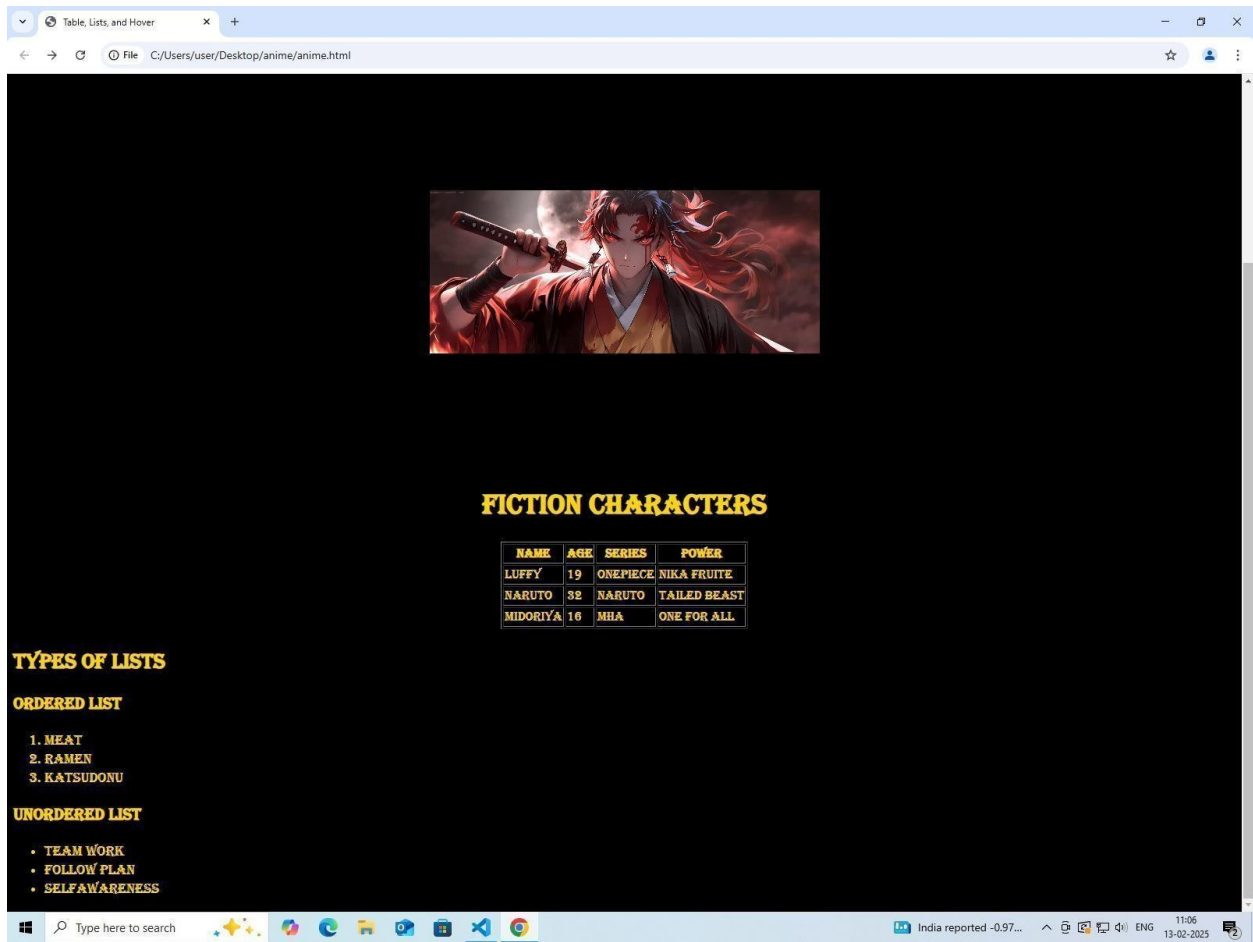

RESULT:

Thus the HTML program was executed successfully and output is verified.

EXP.NO:3

DATE:

GENERATE THE FIBONACCI SERIES USING PHP USER DEFINED FUNCTION

AIM:

To generate the Fibonacci series using PHP user defined function.

ALGORITHM:

1. Initialization:
Start with two initial Fibonacci series.
2. Input the value of N:
Give or specify the number of terms you need to generate for the Fibonacci series.
3. Check for edge case:
If $n=0$, return empty.
If $n=1$, return only first number.
If $n=2$, return first two numbers.
4. Generate Fibonacci Series:
 $F(i)=f(i-1)+f(i-2)$
5. Repeat until N terms are generated.

PROGRAM:

```
<?php

// Number of terms in the Fibonacci series

$terms = 10;


// First two terms of Fibonacci series

$a = 0;

$b = 1;


// Print the Fibonacci series

echo "Fibonacci Series of $terms terms:\n";

echo "$a, $b";


for ($i = 3; $i <= $terms; $i++) {

    $next = $a + $b;

    echo ", $next";


    $a = $b;

    $b = $next;

}

?>
```

OUTPUT:

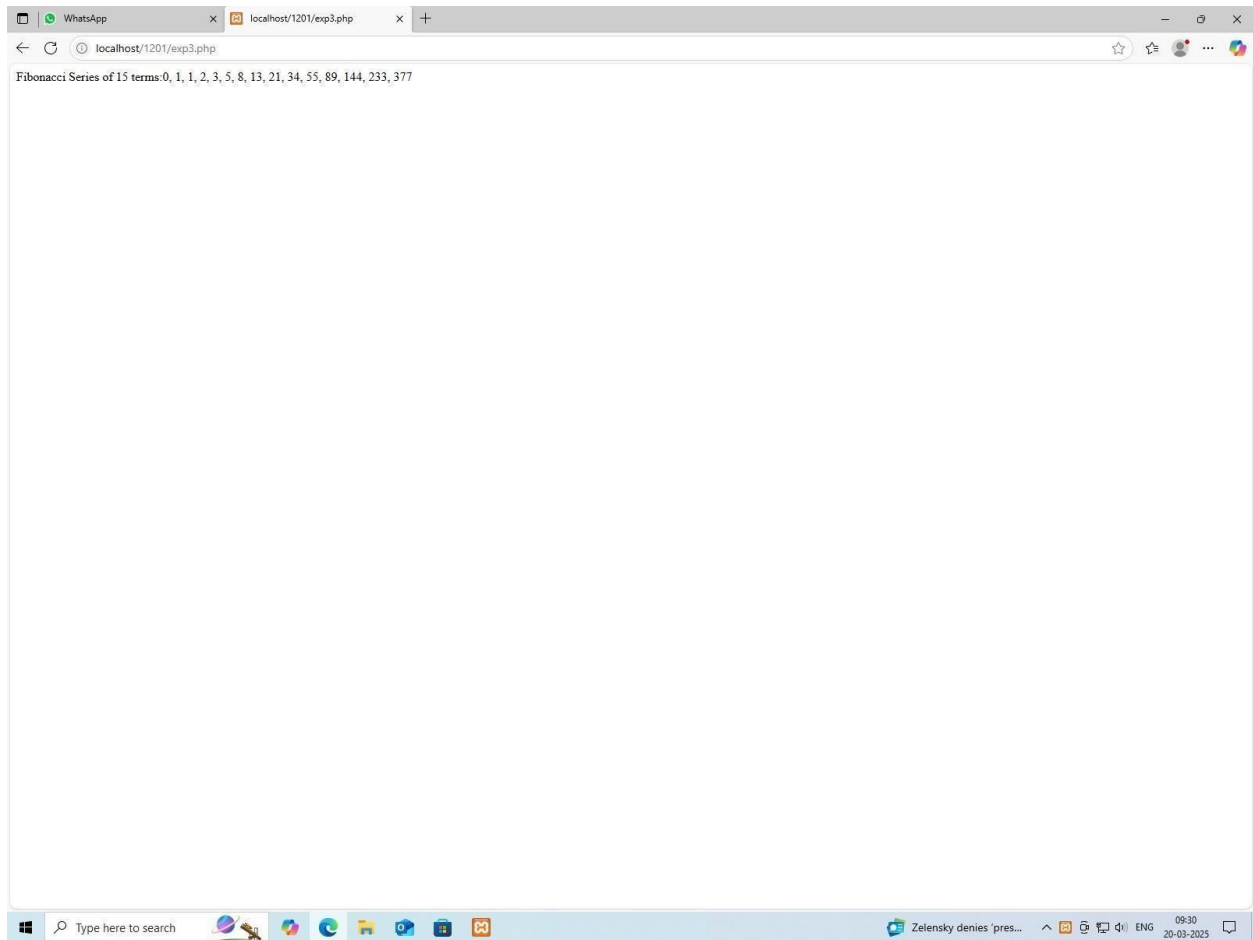

RESULT:

Thus the PHP program to generate Fibonacci series of N terms was generated successfully and output was verified.

EXP.NO: 4

DATE:

**APPLY ANY TWO PHP SORT FUNCTION EACH ON AN INDEXED ARRAY
AND AN ASSOCIATIVE ARRAY**

AIM:

To apply any PHP sort function each on an indexed array and an associative array.

ALGORITHM:

Indexed Array:

- 1.Start
- 2.Initialize an empty array available.
- 3.Add elements to the array in the desired order
- 4.End

Associative Array:

- 1.Start
- 2.Initialize an empty array available.
- 3.Define the key value pairs where each key will point to a corresponding value.
- 4.End.

PROGRAM:

```
<?php
```

// Indexed Array

```
$indexedArray = array(5, 3, 8, 1, 2);
```

```
echo "Original Indexed Array:\n";
```

```
foreach ($indexedArray as $value) {
```

```
    echo $value . "\n";
```

```
}
```

// Sorting indexed array in ascending order

```
sort($indexedArray);
```

```
echo "\nIndexed Array sorted with sort():\n";
```

```
foreach ($indexedArray as $value) {
```

```
    echo $value . "\n";
```

```
}
```

// Sorting indexed array in reverse order

```
rsort($indexedArray);
```

```
echo "\nIndexed Array sorted with rsort():\n";
```

```
foreach ($indexedArray as $value) {
```

```
    echo $value . "\n";
```

```
}
```

// Associative Array

```
$assocArray = array("Rajesh" => 25, "Parthi" => 18, "Vijay" => 30);
```


```
echo "Original Associative Array:\n";
```

```
foreach ($assocArray as $key => $value) {
```

```
    echo $key . " => " . $value . "\n";
```

```
}  
  
// Sorting associative array by values (ascending)  
  
asort($assocArray);  
  
echo "\nAssociative Array sorted with asort() (by value):\n";  
  
foreach ($assocArray as $key => $value) {  
    echo $key . " => " . $value . "\n";  
}  
  
// Sorting associative array by keys (ascending)  
  
ksort($assocArray);  
  
echo "\nAssociative Array sorted with ksort() (by key):\n";  
  
foreach ($assocArray as $key => $value) {  
    echo $key . " => " . $value . "\n";  
}  
  
?>
```

OUTPUT:

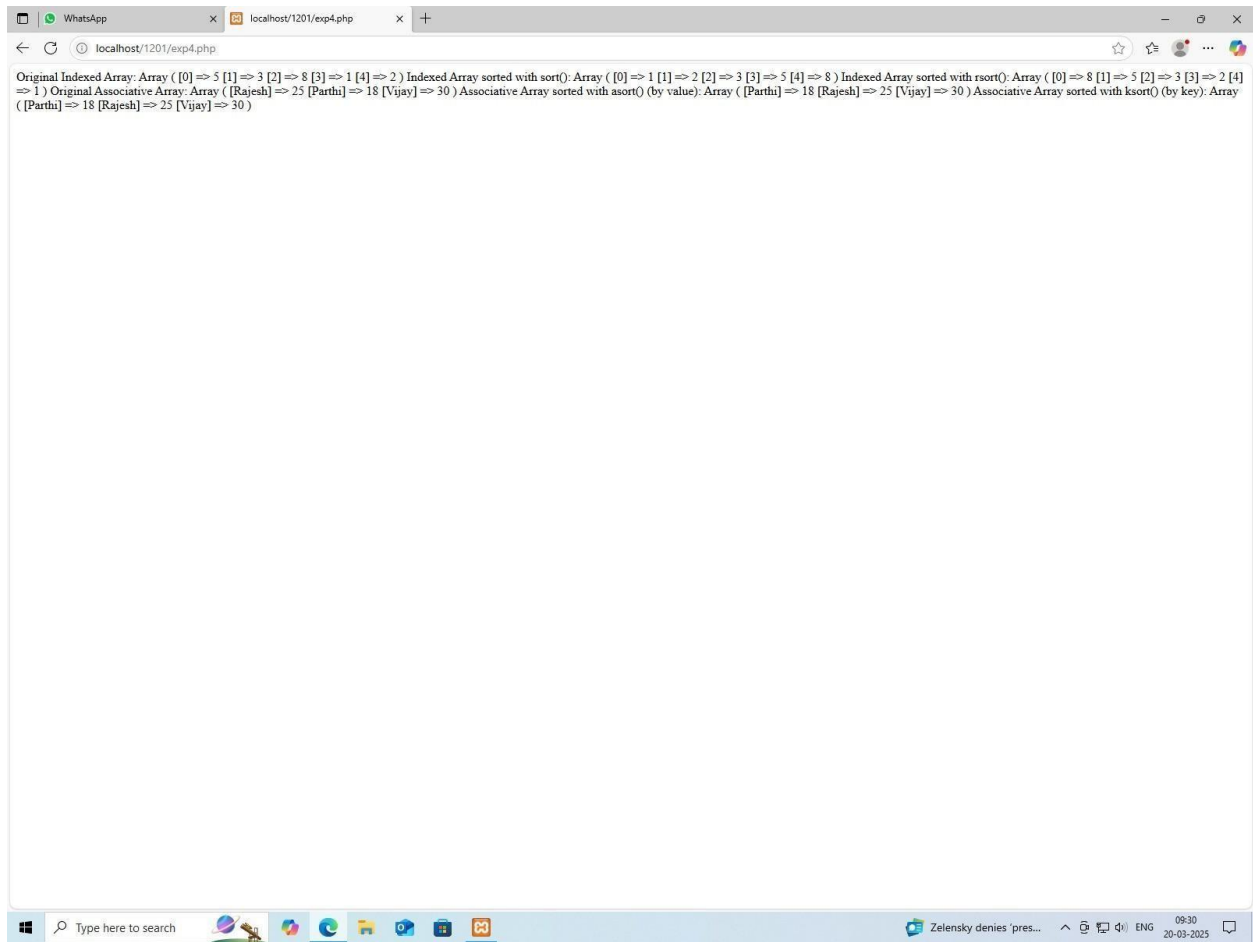

```
Original Indexed Array: Array ( [0] => 5 [1] => 3 [2] => 8 [3] => 1 [4] => 2 ) Indexed Array sorted with sort(): Array ( [0] => 1 [1] => 2 [2] => 3 [3] => 5 [4] => 8 ) Indexed Array sorted with rsort(): Array ( [0] => 8 [1] => 5 [2] => 3 [3] => 2 [4] => 1 ) Original Associative Array: Array ( [Rajesh] => 25 [Parthi] => 18 [Vijay] => 30 ) Associative Array sorted with asort() (by value): Array ( [Parthi] => 18 [Rajesh] => 25 [Vijay] => 30 ) Associative Array sorted with ksort() (by key): Array ( [Parthi] => 18 [Rajesh] => 25 [Vijay] => 30 )
```

RESULT:

Thus the PHP program to generate Fibonacci series of N terms was generated successfully and output was verified.

EXP.NO:5

DATE:

CREATE A WEBPAGE WITH THE FOLLOWING USING HTML

AIM:

To create a webpage in HTML to embed an image map to fix all hotspots, show all related info when clicked.

ALGORITHM:

1. Create the image map in HTML.
2. Add an image of a map with all the place required.
3. Now add a hotspot to the location required.
4. Now add the information of the location using a href tag.
5. Repeat step 3 and 4 for the number required.
6. Now add a href tag to show all info when clicked.

PROGRAM:

ImageMap.html

```
<HTML>
<HEAD>
<TITLE>Image Map</TITLE> </HEAD>
<BODY>
 <map name="metroid"
id="metroid">
<area href="TamilNadu.html" shape="circle" coords="208,606,50" title="TamilNadu"/>
<area href="Karnataka.html" shape="rect" coords = "130,531,164,535" title ="Karnataka" />
<area href="AndhraPradesh.html" shape="poly" coords =
"227,490,238,511,230,536,198,535,202,503" title ="Andhra Pradesh" />
<area href="Kerala.html" shape="rect" coords = "154,606,166,621" title ="Kerala" /> </map>
</BODY>
</HTML>
```

TamilNadu.html

```
<HTML><HEAD>
<TITLE>About Tamil Nadu</TITLE>
</HEAD>
<BODY>
<CENTER><H1>Tamil Nadu</H1></CENTER> <HR>
<UL>
<LI>Area : 1,30,058 Sq. Kms.</LI>
<LI>Capital : Chennai</LI>
<LI>Language : Tamil</LI>
```

```
<LI>Population : 6,21,10,839</LI> </UL><hr>
<a href='ImageMap.html'>India Map</a>
</BODY>
</HTML>
```

Karnataka.html

```
<HTML>
<HEAD>
<TITLE>About Karnataka</TITLE> </HEAD>
<BODY>
<CENTER><H1>Karnataka</H1></CENTER>
<HR>
<UL>
<LI>Area : 1,91,791 Sq. Kms</LI>
<LI>Capital : Bangalore</LI>
<LI>Language : Kannada</LI>
<LI>Population : 5,27,33,958</LI>
</UL>
<hr>
<a href='ImageMap.html'>India Map</a>
</BODY>
</HTML>
```

AndhraPradesh.html

```
<HTML>
<HEAD>
```

```
<TITLE>About Andhra Pradesh</TITLE> </HEAD>

<BODY>

<CENTER><H1>Andhra Pradesh</H1></CENTER> <HR>

<UL>

<LI>Area : 2,75,068 Sq. Kms</LI>

<LI>Capital : Hyderabad</LI>

<LI>Language : Telugu</LI>

<LI>Population : 7,57,27,541</LI>

</UL>

<hr>

<a href='ImageMap.html'>India Map</a>

</BODY>

</HTML>
```

Kerala.html

```
<HTML>

<HEAD>

<TITLE>About Kerala</TITLE>

</HEAD>

<BODY>

<CENTER>

<H1>Kerala</H1></CENTER>

<HR>

<UL>

<LI>Area : 38,863 Sq. Kms.</LI>

<LI>Capital : Thiruvananthapuram</LI>
```

Language : Malayalam

Population : 3,18,38,619

<hr>

India Map

</BODY></HTML>

OUTPUT:



TamilNadu:

About Tamil Nadu

C:/Users/user/Desktop/anime/tamilnadu.html

Tamil Nadu

- Area : 1,30,058 Sq. Kms.
- Capital : Chennai
- Language : Tamil
- Population : 6,21,10,839

[India Map](#)

Karnataka:

About Karnataka

C:/Users/user/Desktop/anime/Karnataka.html

Karnataka

- Area : 1,91,791 Sq. Kms
- Capital : Bangalore
- Language : Kannada
- Population : 5,27,33,958

[India Map](#)

Andhra Pradesh:

About Andhra Pradesh

C:/Users/user/Desktop/anime/AndhraPradesh.html

Andhra Pradesh

- Area : 2,75,068 Sq. Kms
- Capital : Hyderabad
- Language : Telugu
- Population : 7,57,27,541

[India Map](#)

Kerala:

About Kerala

C:/Users/user/Desktop/anime/Kerala.html

Kerala

- Area : 38,863 Sq. Kms.
- Capital : Thiruvananthapuram
- Language : Malayalam
- Population : 3,18,38,619

[India Map](#)

RESULT:

Thus the HTML program was executed successfully and output is verified.

EXP.NO:6

DATE:

Create a web page with all types of Cascading style sheets.

AIM:

To create a web page that displays college information using various style sheets.

ALGORITHM:

Step 1: Create a web page with frame sets consisting two frames

Step 2: In the first frame include the links

Step 3: In the second frame set display the web page of the link

Step 4: create a external style sheets

Step 5: create an inline and internal style sheets and make it link to the external style sheets.

PROGRAM:**XYZ.CSS:**

h3{font-family:arial;font-size:20;color:cyan}

table{border-color:green}

td{font-size:20pt;color:magenta}

HTML CODE:

<html>

<head><h1><center>ALL STYLE SHEETS</center></h1>

<title>USE of INTERNAL and EXTERNAL STYLESHEETS

</title>

<link rel="stylesheet" href="xyz.css" type="text/css">

<style type="text/css">

.vid{font-family:verdana;fontstyle:italic;color:red;text-align:center}

.ani{font-family:tahoma;font-style:italic;fontsize: 20;text-align:center;}

font{font-family:georgia;color:blue;font-size:20}

ul{list-style-type:circle}

</style>

</head>

<body>

<ol style="list-style-type:lower-alpha">

MEENAKSHI GROUP OF COLLEGES

Arulmigu Meenakshi Amman College of Engineering

Meenakshi College of Engineering

Sri Muthukumaran Institute of Technology

<p style="font-size:20pt;color:purple">MEENAKSHI GROUP OF COLLEGES</p>

<p class="ani">Meenakshi Group of colleges is owned by Radhakrishnan.
It is approved by

AICTE(All India Council for Technical Education).It is affiliated to Anna University.
</p>

<h2 class="vid">Arulmigu Meenakshi Amman College of Engineering</h2>

It is an ISO certified Institution

<h2>List of Courses offered</h2>

IT

CSE

ECE

Mech

EEEICE

BioTech

Chem

ME-CSE

ME_AE

MBA

MCA

<h3>Results of IT Students</h3>

<table width="100%" cellspacing="2" cellpadding="2" border="5">

<tr>

<th>STUDENT NAMES</th>

<th>MARKS</th>

<th>RESULT</th>

</tr>

<tr>

<td align="center">Ram</td>

<td align="center">100</td>

<td align="center">pass</td>

</tr>

<tr>

<td align="center">Bala</td>

<td align="center">99</td>

<td align="center">pass</td>

</tr>

<tr>

<td align="center">Ramu</td>

<td align="center">98</td>

```
<td align="center">pass</td>
```

```
</tr>
```

```
</table>
```

```
</body>
```

```
</html>
```

OUTPUT:

USE of INTERNAL and EXTERN: x +

File C:/Users/user/Desktop/anime/exp6.html Google Lens ☆

ALL STYLE SHEETS

DR.MGR EDUCATIONAL AND RESEARCH INSTITUTE
a. DR.MGR LAW COLLEGE
b. DR.MGR DENTAL COLLEGE

DR.MGR EDUCATIONAL AND RESEARCH INSTITUTE

DR.MGR EDUCATIONAL AND RESEARCH INSTITUTE is owned by NONE
It is approved by AICTE(All India Council for Technical Education).It is affiliated to Anna University.

DR.MGR EDUCATIONAL AND RESEARCH INSTITUTE

It is an ISO certified Institution

List of Courses offered

- IT
- CSE
- Ece
- Mech
- EEE
- ICE
- BioTech
- Chem
- ME-CSE
- ME_AE
- MBA
- MCA

Results of IT Students

STUDENT NAMES	MARKS	RESULT
Prem	100	pass
Berlin	99	pass
Rajesh	98	pass

Type here to search Air quality forecast 11:11 24-04-2025

RESULT:

Thus the program was executed successfully and output is verified sucessfully.

EXP.NO: 7

DATE:

CLIENT SIDE SCRIPTS FOR VALIDATING WEB FORM CONTROLS

USING DHTML

AIM:

Dynamic HTML, or DHTML, is an umbrella term for a collection of technologies used together to create interactive and animated web sites. by using a combination of a static markup language (such as HTML), a client-side scripting language (such as JavaScript), a presentation definition language (such as CSS), and the Document Object Model.

ALGORITHM:

The form will include one text field called "Your Name", and a submit button.

- Validation script will ensure that the user enters their name before the form is sent to the server.
- Open this page to see it in action.
- Try pressing the **Send Details** button without filling anything in the "Your Name" field.
- You might like to open the source code for this form in a separate window
- The page consists of a JavaScript function called `validate_form()` that performs the form validation, followed by the form itself.

PROGRAM CODE: FORM VALIDATION

```
<html>

<head>

<title>Student Registration Form</title> <script type="text/javascript">

Function validate()

{

if(document.signup.fname.value=="")

{

alert("Please Enter First Name!");

return false;

}

if(document.signup.lname.value=="")

{

alert("Please Enter Last Name!");

return false;

}

if(document.signup.uname.value=="")

{

alert("Please Enter User Name!");

return false;

}

if(document.signup.pword1.value=="")

{
```

```
    alert("Please Enter Password!");
    return false;
}
if(document.signup.pword1.value<6)
{
    alert("Please Enter min 6 characters!");
    return false;
}
if(document.signup.pword2.value=="")
{
    alert("Please Enter Password Again!");
    return false;
}
if(document.signup.pword2.value!=document.signup.pword1.value)
{
    alert("Password Mismatch Reenter Password!");
    return false;}
    alert("Details Entered Successfully");
    display();
}
function display()
{
    document.writeln('<h2>'+ "Details Entered:" + '</h2>');
```

```

document.writeln('<br/><fontcolor="#0066ff">'+ "FirstName:"+'</font>'+document
t.signup.fnam
e.value);

document.writeln('<br/><fontcolor="#0066ff">'+ "LastName:"+'</font>'+document
t.signup.lnam
e.value);

document.writeln('<br/><fontcolor="#0066ff">'+ "UserName:"+'</font>'+document
t.signup.unam
e.value);

document.writeln('<br/><fontcolor="#0066ff">'+ "Country:"+'</font>'+document.s
ignup.country
.value);

document.writeln('<br/><fontcolor="#0066ff">'+ "AlternateEmail"+'</font>'+docu
ment.signup.a
email.value);
}
</script>
</head>
<body align="center" bgcolor="green"> <table width="100%" height="100%"> <td
colspan="2"
width="15%">

</td> <td colspan="1" bgcolor="#ffffff" width="70%" height="100%"> <h1
align="center">

<font color="#0066ff">smail</font></h1>

<h2 align="center"><font color="#0066ff">New User Signup Form</font></h2>

```

```

<form name="signup"
onsubmit="return validate()">
<fontface="verdana,arial,Helvetica,sans-serif" color="#660000" size="2">
<p> *First Name:<input type="text" name="fname" size="20">
    *Last Name:<input type="text" name="lname" size="20"></p>
<p style="border"> *User Name:<input type="text" name="uname"
size="20">@smaill.com</p>
<p style="border"> *Password:<input type="password" name="pword1"
size="20"></p>
<p style="border"> *Confirm Password:<input type="password" name="pword2"
size="20"></p>
<p> Gender:<input type="radio" name="gen" value="male">Male<input
type="radio" name="gen" value="female">Female</p>
<p> Country:<select name="country">
<option selected>Select Country</option><option name="country"
value="India">India</option>
<option name="country" value="Russia">Russia</option> <option
name="country"
value="France">France</option>
<option name="country" value="Italy">Italy</option>
</select>
</p>
<p> Language Known:<br>
    <input type="checkbox" name="lang" value="English">English<br>

```

```

<input type="checkbox" name="lang" value="Tamil">Tamil<br>
<input type="checkbox" name="lang" value="Hindi">Hindi<br>
<input type="checkbox" name="lang" value="Malayalam">Malayalam<br>
</p>
<p style="border"> Alternate Email:<input type="text" name="aemail"
size="20"></p>
<p align="center"><input type="checkbox" name="agree">I Agree The Terms &
onditions</p>
<p align="center"><input type="submit" value="submit"> <input type="reset"
value="reset"></p>
</font> </form>
</td>
<td colspan="2" width="15%"> </td>
</table></body>
</html>

```

OUTPUT:

mail

New User Signup Form

*First Name:

*Last Name:

*User Name:

@mail.com

*Password:

*Confirm Password:

Gender:

☐ Male ☐ Female

Country:

Select Country ▾

Language Known:

☐ English

☐ Tamil

☐ Hindi

☐ Malayalam

Alternate Email:

☐ I Agree The Terms & Conditions

submit

reset

RESULT:

Thus the HTML program was executed successfully and output is verified.

EXP.NO: 8

DATE:

Form Handling in PHP- Create a recruitment website where a job seeker can upload his/her details

AIM:

To create the Form Handling in PHP- Create a recruitment website where a job seeker can upload his/her details.

ALGORITHM:

1. Display HTML Form
2. Check Request Method
3. Collect and Sanitize Form Data
4. Handle File Upload
5. Validate File Type
6. Store the File
7. Confirm Submission
8. If No File Uploaded
Display error message prompting the user to upload a file.
9. End

PROGRAM:

SQL

```
CREATE TABLE job_seekers (  
  
    id INT AUTO_INCREMENT PRIMARY KEY,  
    name VARCHAR(100),  
    email VARCHAR(100),  
    phone VARCHAR(20),  
    resume_path VARCHAR(255),  
    uploaded_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP  
);
```

DATABASE

```
<?php  
$host = "localhost";  
$user = "root";  
$password = ""; // Default password for XAMPP  
$dbname = "recruitment";  
$conn = new mysqli($host, $user, $password, $dbname);  
if ($conn->connect_error) {  
    die("Connection failed: " . $conn->connect_error);  
}  
?>
```

INDEX

```
<!DOCTYPE html>

<html>

<head>

  <title>Job Seeker Registration</title>

</head>

<body>

  <h2>Upload Your Details</h2>

  <form action="upload.php" method="post" enctype="multipart/form-data">

    <label>Name:</label><br>

    <input type="text" name="name" required><br><br>

    <label>Email:</label><br>

    <input type="email" name="email" required><br><br>

    <label>Phone:</label><br>

    <input type="text" name="phone" required><br><br>

    <label>Upload Resume (PDF only):</label><br>

    <input type="file" name="resume" accept=".pdf" required><br><br>

    <input type="submit" value="Submit">

  </form>

</body>

</html>
```


UPLOAD:

```
<?php
include 'db.php';

$name = $_POST['name'];
$email = $_POST['email'];
$phone = $_POST['phone'];
$targetDir = "uploads/";
$resumeName = basename($_FILES["resume"]["name"]);
$targetFile = $targetDir . time() . "_" . $resumeName;
$fileType = strtolower(pathinfo($targetFile, PATHINFO_EXTENSION));
if($fileType != "pdf") {
    echo "Only PDF files are allowed.";
    exit;
}
if (move_uploaded_file($_FILES["resume"]["tmp_name"], $targetFile)) {
    $stmt = $conn->prepare("INSERT INTO job_seekers (name, email, phone,
resume_path) VALUES (?, ?, ?, ?)");
    $stmt->bind_param("ssss", $name, $email, $phone, $targetFile);
    if ($stmt->execute()) {
        echo "Your details have been submitted successfully!";
    } else {
        echo "Database error: " . $stmt->error;
    }
}
```

```
$stmt->close();  
  
} else {  
    echo "There was an error uploading your resume."  
}  
  
$conn->close();  
  
?>
```

OUTPUT:

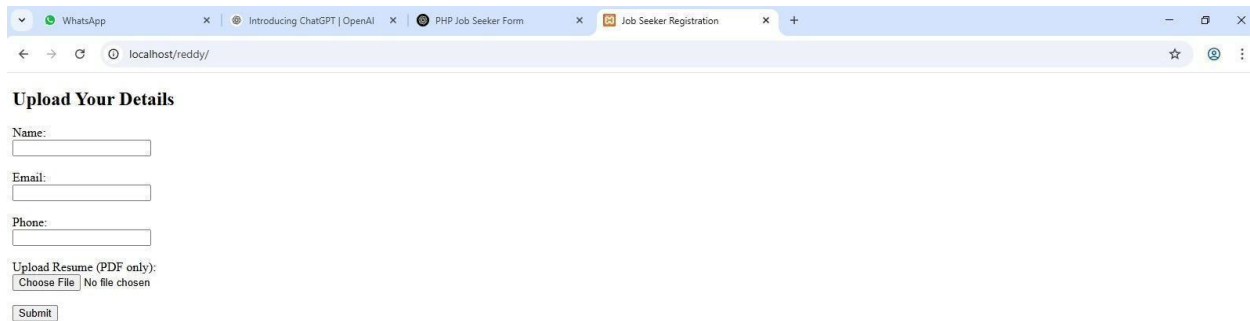

The screenshot shows a web browser window with the address bar displaying 'localhost/reddy/'. The page title is 'Upload Your Details'. The form contains the following fields and elements:

- Name:
- Email:
- Phone:
- Upload Resume (PDF only):
 - Choose File
 - No file chosen
- Submit

RESULT:

Thus the PHP program was executed successfully and output is verified.

EXP.NO: 9

DATE:

Create an Employee database with two fields Employer's Name, Employee's Name with MySql and insert two records into those fields using PHP code.

AIM:

To Create an Employee database with two fields Employer's Name, Employee's Name with MySql and insert two records into those fields using PHP code.

ALGORITHM:

1. Start
2. Create Database and Table
3. Set database server name, username, password, and database name. Create a connection to MySQL using these credentials.
4. If the connection fails, display an error message and stop the program.
5. Insert Data
 - Write an SQL `INSERT` query to add multiple employee records:
 - ('ABC Corp', 'John Doe')
 - ('XYZ Ltd', 'Jane Smith')
 - Execute the query.
6. If insertion is successful, print Records inserted successfully
7. Close the connection to the database.
8. End

PROGRAM:

```
CREATE DATABASE employee_db;

USE employee_db;

CREATE TABLE employees (
    id INT AUTO_INCREMENT PRIMARY KEY,
    employer_name VARCHAR(255),
    employee_name VARCHAR(255)
);

<?php

$servername = "localhost";

$username = "root"; // Change this based on your MySQL credentials

$password = ""; // Change this based on your MySQL credentials

$dbname = "employee_db";

// Create connection

$conn = new mysqli($servername, $username, $password, $dbname);

// Check connection

if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Insert records

$sql = "INSERT INTO employees (employer_name, employee_name) VALUES
    ('ABC Corp', 'John Doe'),
    ('XYZ Ltd', 'Jane Smith')";
```

```


if ($conn->query($sql) === TRUE) {
    echo "Records inserted successfully";
} else {
    echo "Error inserting records: " . $conn->error;
}

// Close connection
$conn->close();

?>

```

OUTPUT:

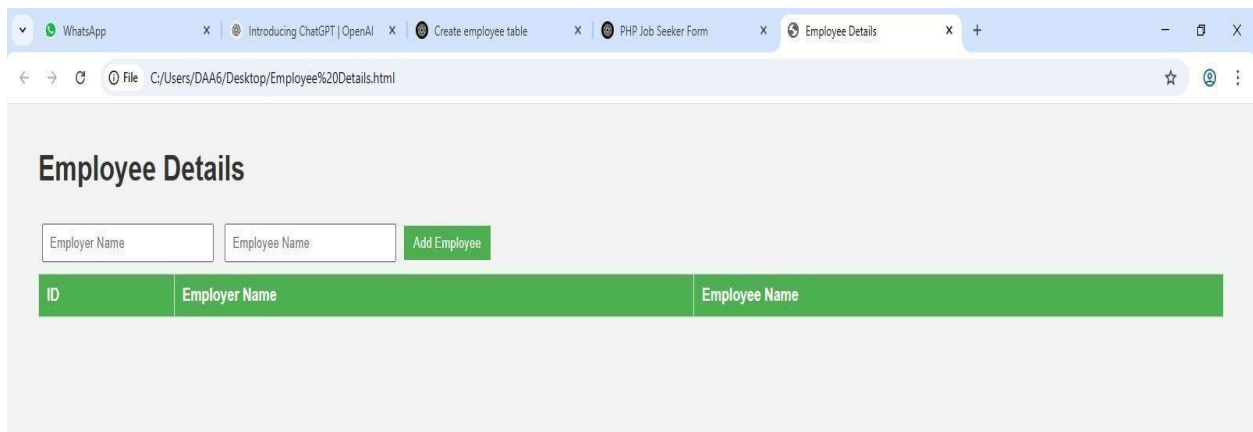

RESULT:

Thus the PHP program was executed successfully and output is verified.

EXP:NO: 10

DATE:

Develop a webpage using scripting languages with the help of CSS

AIM:

To Develop a webpage using scripting languages with the help of CSS.

ALGORITHM:

1. Start
2. On button click, call the function `toggleBackground()
3. Inside toggleBackground
4. Set the background size to cover
5. End

PROGRAM:

```
<!DOCTYPE html>

<html>

<head>

  <title>Interactive Webpage</title>

  <style>

    body {

      font-family: Arial, sans-serif;

      text-align: center;
```

```
background-image: url('https://thumbs.dreamstime.com/b/silhouette-person-silhouette-person-sunset-anime-k-wallpaper-silhouette-person-sunset-serene-silhouette-349888736.jpg');
```

```
transition: background 0.5s;
```

```
}
```

```
.container {
```

```
max-width: 600px;
```

```
margin: 50px auto;
```

```
padding: 20px;
```

```
background: white;
```

```
box-shadow: 0 0 10px rgba(0, 0, 0, 0.1);
```

```
border-radius: 8px;
```

```
}
```

```
button {
```

```
padding: 10px 20px;
```

```
font-size: 16px;
```

```
cursor: pointer;
```

```
background: #007bff;
```

```
color: white;
```

```
border: none;
```

```
border-radius: 5px;
```

```
transition: background 0.3s;
```


```
}
```

```
button:hover {
```

```
        background: #0056b3;
    }
</style>
</head>
<body>
    <div class="container">
        <h1>Welcome to My Webpage</h1>
        <p>Click the button below to change the background.</p>
        <button onclick="toggleBackground()">Change Background</button>
    </div>

    <script>
        function toggleBackground() {
            document.body.style.backgroundImage =
document.body.style.backgroundImage ? " :
"url('https://thumbs.dreamstime.com/b/anime-landscape-vivid-color-nice-
wallpaper-anime-landscape-vivid-color-338948064.jpg')";
            document.body.style.backgroundColor = "cover";
        }
    </script>
</body>
</html>
```

OUTPUT:

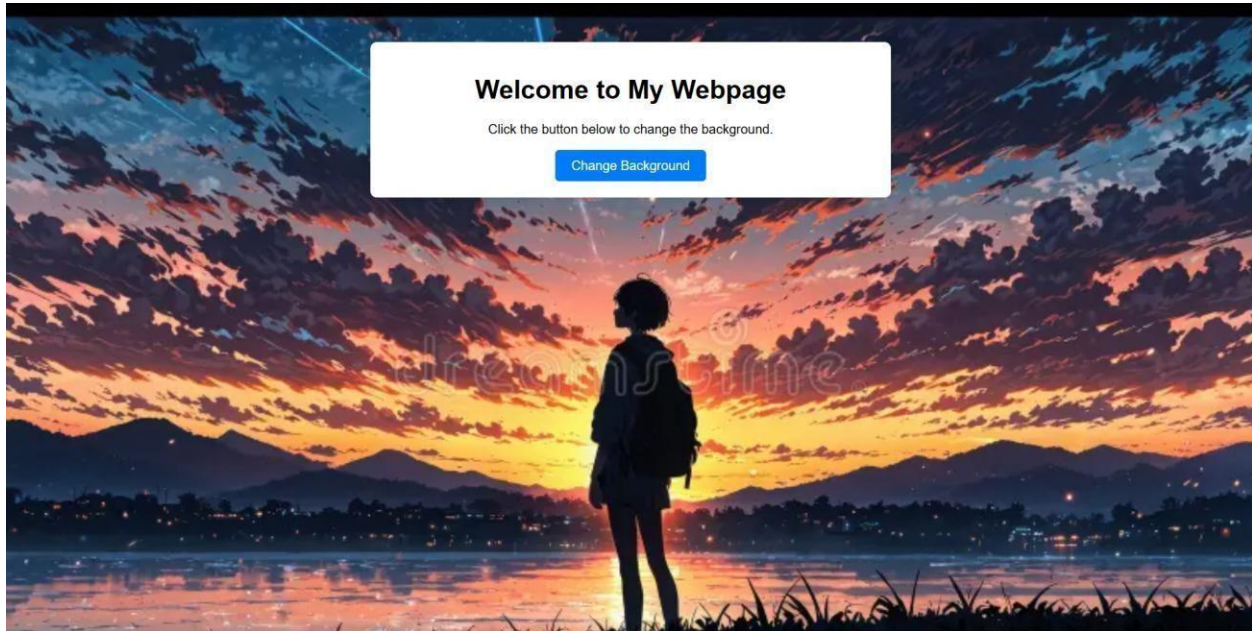

RESULT:

Thus the html program was executed successfully and output is verified.