


Assignment- Create a Process as below to initiate BPA workflow as an API trigger and send email to the GMAIL account/OUTLOOK account

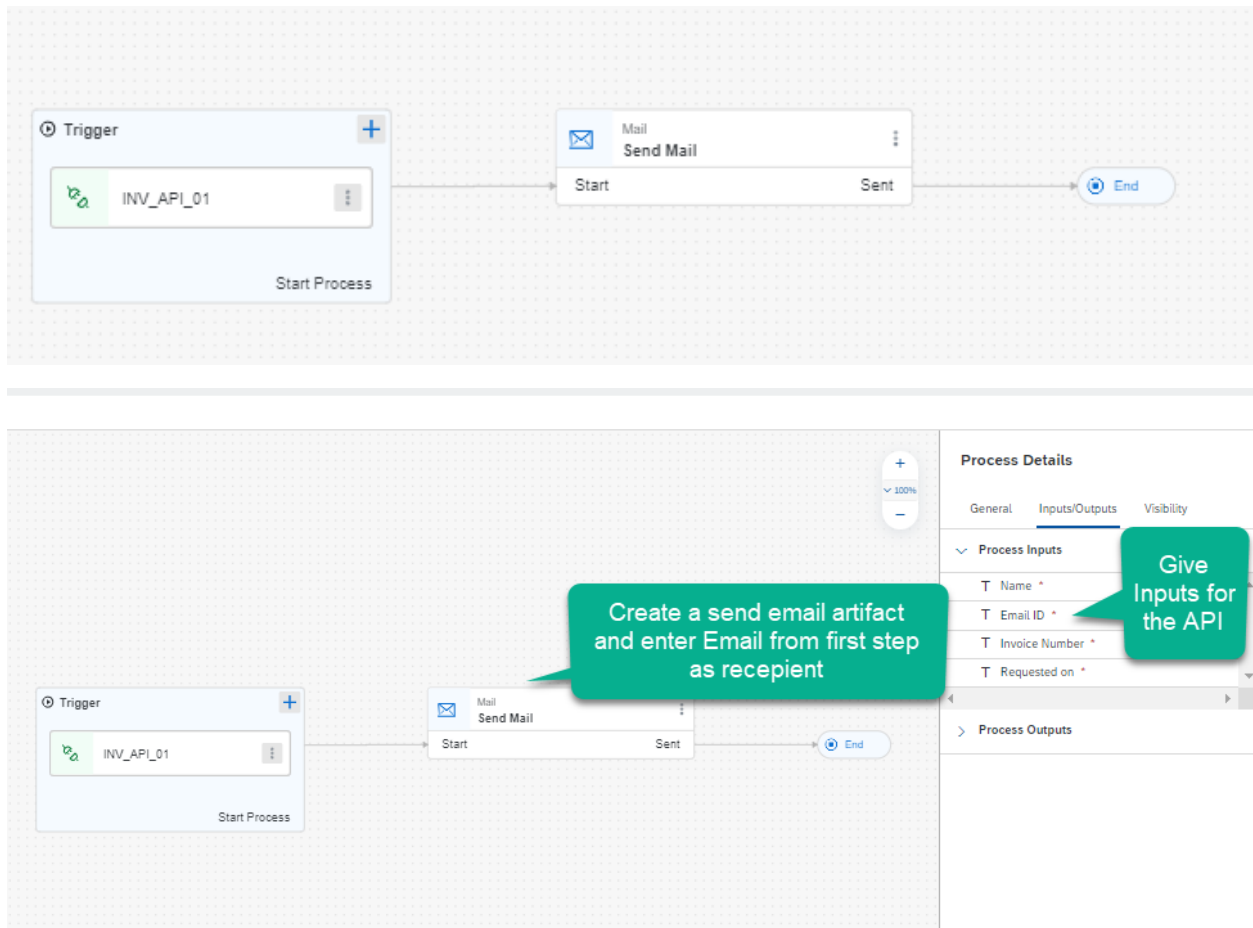

Create Save and Deploy and add trigger

Overview API_Trigger_Approval X

Invoice Approval

API to Email Deployed Active

Last updated on: August 2, 2023 By: You Created on: August 2, 2023 By: You Project Size: 4.77 KB Agent version: No value Collaborator: You

Artifacts **Triggers (1)** Dependencies (0)

Triggers

Name	Executing
INV_API_01	API_Trigger_Approval

Get payload of the deployed project from BPA - Triggers

Monitoring / Triggers

Triggers ⓘ

Type: Search... Time range validity: Search... Project: Search... Attributes: Search...

Items (5) Search...

Trigger	Executing	Project & Version
INV_API_01		
API_Trigger_IF		
Attended_SO_01		
Create_PR		
Process_API_Trig		

View INV_API_01 Details

Connect your API
Now that your API Trigger is created, you can use the information below to connect your API.

General

Name: INV_API_01

Execute: API_Trigger_Approval

Description: e.g. called from service X

URL: https://spa-api-gateway-bpi-us-prod.cfapps.us10.hana.ondemand.com/workflow/rest/v1/workflow-instances

Payload / Input Example Input Schema

```
{
  "definitionId": "us10.0a1cfad6trial.invoic",
  "context": {
    "invoiceNumber": "",
    "name": "",
    "emailId": "",
    "requestedOn": ""
  }
}
```

Definition ID

Use this payload in POSTMAN BODY

Step 1: Add destination in SAP BTP cockpit at below path

SAP BTP Cockpit

- Overview
- Services ▼
 - Service Marketplace
 - Instances and Subscriptions
- Cloud Foundry >
- HTML5 Applications
- Connectivity ▼
 - Destinations**
 - Cloud Connectors
- Security ▼
 - Users

Destination Configuration

Name:
Type:
Description:
Proxy Type:
Authentication:
Password:

Additional Properties

mail.bpm.send...	false
mail.smtp.auth	true
mail.smtp.from	
mail.smtp.host	smtp.gmail.com
mail.smtp.port	587
mail.smtp.ssl.c...	false
mail.smtp.ssl.e...	false
mail.smtp.ssl.tr...	*
mail.smtp.start...	true
mail.smtp.start...	true
mail.transport...	smtp

Destination name - sap_process_automation_mail

Additional Properties - Field Name	Additional Properties - Field Value
mail.smtp.auth	true
mail.smtp.host	smtp.gmail.com
mail.smtp.port	587
mail.smtp.ssl.checkserveridentity	false
mail.smtp.ssl.enable	false
mail.smtp.ssl.trust	*
mail.smtp.starttls.required	true
mail.transport.protocol	smtp
mail.smtp.starttls.enable	true
mail.bpm.send.disabled	false
mail.smtp.from	<USE YOUR EMAIL ID>

Once you set these, same will appear in SAP Build>Settings as below


SAP Build
Lobby
Store
Monitor
Settings

Governance
Tenant Configuration
Agents
Agent Groups
Agent Management
Agent Attributes
Mass Registrations
Agent Update
External Ip Safelist
Backend Configura...
Mail Server
SAP Cloud ALM


Mail Server ⓘ
Name*
Description
Port*
Sender Address*
Host Address*

****NOTE – We need to use App password for google account instead of Gmail id password**


Setup 2-step verification. Post that click on details of it

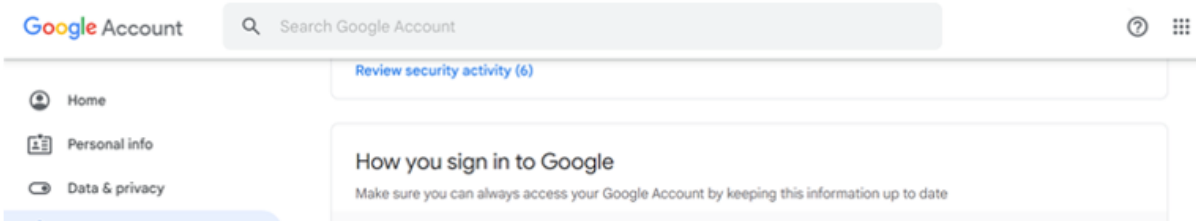

Scroll down till App Password and setup app password (Select MAIL as app and any device, note down the app password)

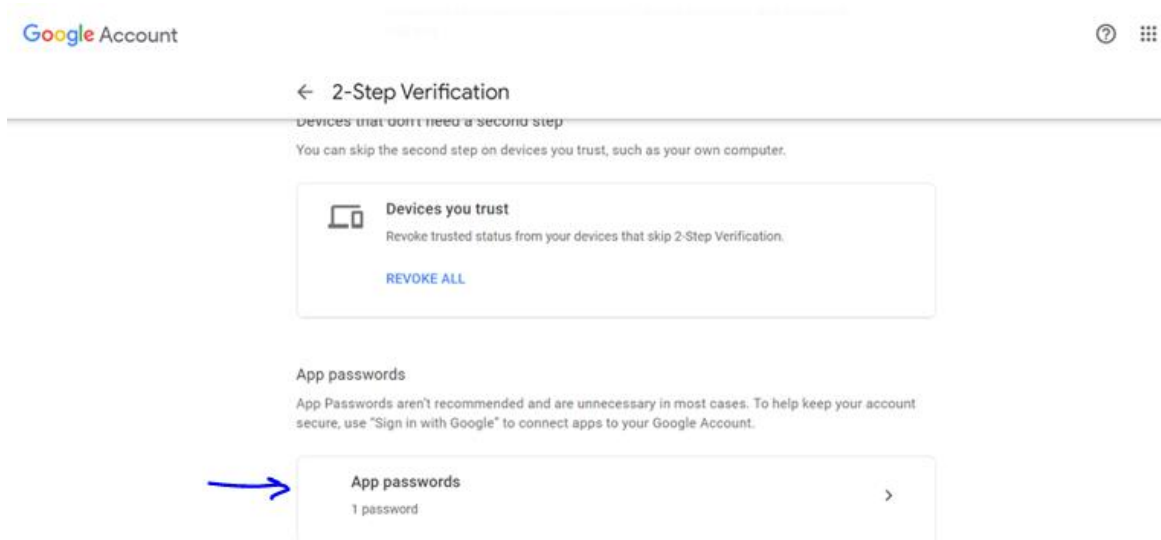

Get details to be used in Postman

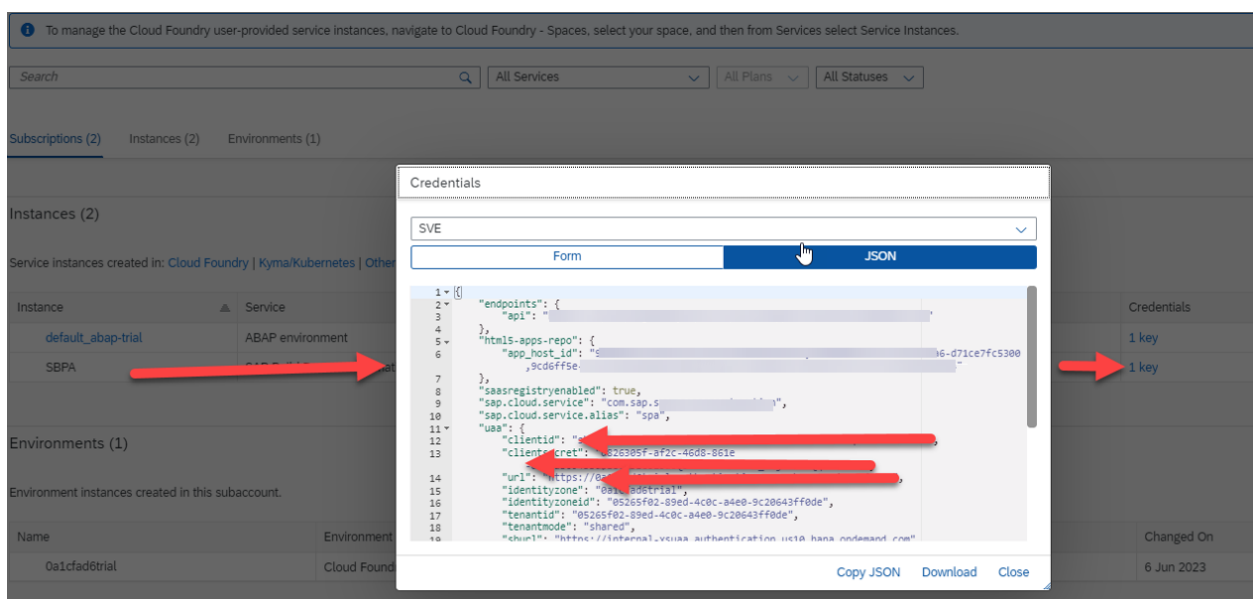

Open POSTMAN and start GET call

The screenshot shows a GET request in Postman to the endpoint `https://0a1cfad6trial.auth0.com/oauth/token?grant_type=client_credentials`. The URL bar has a callout: "Initial URL should be the URL from service key (till /oauth)". The "Authorization" tab is selected, showing "Basic Auth" with a username `sb-74ce37` (callout: "Enter this from service key CLIENTID") and a password `d826305f-s` (callout: "Enter this from service key CLIENSECRET"). The "Body" tab shows a JSON response with an `access_token` (callout: "This will be used as TOKEN for POST call") and other metadata. A callout points to the `access_token` value: "Copy this token, it will then be used in POST call". The status bar at the bottom indicates "Status: 200 OK, Time: 1150 ms, Size: 2.2 KB".

POST CALL

The screenshot shows a POST request in Postman to the endpoint `https://spa-api-gateway-bpi-us-prod.cfapps.us10.hana.ondemand.com/workflow/rest/v1/workflow-instances`. The "Authorization" tab is selected, showing "Bearer Token" (callout: "Bearer token"). The "Body" tab is selected, with a callout: "Provide payload here". The "Body" tab shows a JSON response (callout: "Response") with fields like `id`, `definitionId`, `definitionVersion`, `status`, `businessKey`, `parentInstanceId`, `rootInstanceId`, `applicationScope`, `projectId`, `projectVersion`, `startedAt`, `startedBy`, and `completedAt`. The status bar at the bottom indicates "Status: 200 OK, Time: 1150 ms, Size: 2.2 KB".

Result

The screenshot shows an email client interface. At the top, there are tabs for 'All' and 'Unread', with 'Unread' being the active tab. A mouse cursor is pointing at the 'Unread' tab. To the right of the tabs is a 'By Date' dropdown menu and an upward arrow icon. Below the tabs, there is a list of email items. The first item is highlighted in blue and contains the text 'Dear Approver. Please find below'. To the right of this text are icons for a flag, a trash can, and a square icon. The time '11:46 AM' is displayed next to the trash can icon. To the right of the email list, there is a vertical sidebar with a search icon and a square icon. The main content area of the email client shows the details of the selected email. The title is '[EXT] Approval Request for Invoice'. Below the title is a circular profile picture with the letter 'S' and a horizontal bar. To the right of the profile picture is the text 'To Verma, Sandeep'. The body of the email contains the text: 'Dear Approver.', 'Please find below details.', 'Sandeep', '123456789', '02.08.2023', and 'Thanks'.