- module-info.java
- Project_2
  - JRE System Library [JavaSE-21]
  - src
    - com.example
    - com.example1
      - Abstraction_Concept.java
      - Array_List_Program.java
      - Array_Program.java
      - Constructor_Concept.java
      - Date_Example_Program.java
      - Encapsulation_Concept.java
      - Exception_Handling_Program.
      - FileHandlingExample.java
      - Functions.java
      - Hash_Set_Program.java
      - Inheritance_Concept.java
      - Inner_Class_Program.java
      - JDBC_Insert_Program.java
      - JDBC_Program.java
      - Linked_List_Program.java
      - Map_Program.java
      - Method.java
      - Multithreading_Program.java
      - OOPS_Concept.java
      - Polymorphism_Concept.java
      - Stack_Program.java
      - String_Buffer_Program.java
      - String_Builder_Program.java
      - String_Tokenizer_Program.java

JDBC_Insert_Program.java

```java
package com.example1;
import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.Statement;

public class JDBC_Insert_Program {

    public static void main(String[] args) {
        // TODO Auto-generated method stub
        try {
            Class.forName("com.mysql.cj.jdbc.Driver");
            Connection connect = DriverManager.getConnection(
                    "jdbc:mysql://localhost:3306/hoteldb",
                    "root",
                    "Kumudhab2004"
                    );
            System.out.println("Connected Successfully");
```

Problems Javadoc Declaration Console

<terminated> JDBC_Insert_Program [Java Application] C:\Users\kumud\.p2\pool\plugins\org.eclipse.justj.openjdk.hotspot.jre.full.win32.x86_64_21.0.10.v20260205-0638\jre\bin\javaw.exe

```
Connected Successfully
Data inserted
```

module-info.java
Project_2
JRE System Library [JavaSE-21]
src
com.example
com.example1
Abstraction_Concept.java
Array_List_Program.java
Array_Program.java
Constructor_Concept.java
Date_Example_Program.java
Encapsulation_Concept.java
Exception_Handling_Program.
FileHandlingExample.java
Functions.java
Hash_Set_Program.java
Inheritance_Concept.java
Inner_Class_Program.java
JDBC_Insert_Program.java
JDBC_Program.java
Linked_List_Program.java
Map_Program.java
Method.java
Multithreading_Program.java
OOPS_Concept.java
Polymorphism_Concept.java
Stack_Program.java
String_Buffer_Program.java
String_Builder_Program.java
String_Tokenizer_Program.java

JDBC_Insert_Program.java

```
11            Class.forName("com.mysql.cj.jdbc.Driver");
12            Connection connect = DriverManager.getConnection(
13                    "jdbc:mysql://localhost:3306/hoteldb",
14                    "root",
15                    "Kumudhab2004"
16                    );
17            System.out.println("Connected Successfully");
18            Statement stmp = connect.createStatement();
19            String query = "insert into customer values "+"(1,'Chicken Biryani','Brownie'),'
20            stmp.executeUpdate(query);
21            System.out.println("Data inserted");
22            connect.close();
23        }catch(Exception e) {
24            System.out.println(e);
25        }
26    }
27 }
```

Problems Javadoc Declaration Console

<terminated> JDBC_Insert_Program [Java Application] C:\Users\kumud\.p2\pool\plugins\org.eclipse.justj.openjdk.hotspot.jre.full.win32.x86_64_21.0.10.v20260205-0638\jre\bin\javaw.exe (

```
Connected Successfully
Data inserted
```

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1 | SQL File 3* | SQL File 4* | SQL File 5* | SQL File 6* | SQL File 7* | SQL File 8* | SQL File 9* | SQL File 10*

Limit to 1000 rows

```
1 • create database hoteldb;
2 • use hoteldb;
3 • create table customer(orderid int primary key,maindish varchar(50),dessert varchar(50));
4 • select * from customer;
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

orderid	maindish	dessert
1	Chicken Biryani	Brownie
2	Curd Rice	Rasgulla
3	Veg Fried Rice	Ice Cream
NULL	NULL	NULL

Result Grid

customer 2 | Apply | Revert

SQLAdditions

Jump to

Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or tc toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
9	16:40:01	show databases	16 row(s) returned	0.015 sec / 0.000 sec
10	16:43:36	create database hoteldb	1 row(s) affected	0.046 sec
11	16:43:42	use hoteldb	0 row(s) affected	0.000 sec
12	16:43:52	create table customer(orderid int primary key,maindish varchar(50),dessert varchar(5...	0 row(s) affected	0.094 sec
13	16:43:57	select * from customer LIMIT 0, 1000	0 row(s) returned	0.000 sec / 0.000 sec
14	17:00:01	select * from customer LIMIT 0, 1000	3 row(s) returned	0.000 sec / 0.000 sec

Query Completed

module-info.java
Project_2
JRE System Library [JavaSE-21]
src
com.example
com.example1
Abstraction_Concept.java
Array_List_Program.java
Array_Program.java
Constructor_Concept.java
Date_Example_Program.java
Encapsulation_Concept.java
Exception_Handling_Program.
FileHandlingExample.java
Functions.java
Hash_Set_Program.java
Inheritance_Concept.java
Inner_Class_Program.java
JDBC_Delete_Program.java
JDBC_Insert_Program.java
JDBC_Program.java
Linked_List_Program.java
Map_Program.java
Method.java
Multithreading_Program.java
OOPS_Concept.java
Polymorphism_Concept.java
Stack_Program.java
String_Buffer_Program.java
String_Builder_Program.java


```java
package com.example1;
import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.Statement;

public class JDBC_Delete_Program {

    public static void main(String[] args) {
        // TODO Auto-generated method stub
        try {
            Class.forName("com.mysql.cj.jdbc.Driver");
            Connection connect = DriverManager.getConnection(
                    "jdbc:mysql://localhost:3306/hoteldb",
                    "root",
                    "Kumudhab2004"
                    );
            System.out.println("Connected Successfully");
```


<terminated> JDBC_Delete_Program [Java Application] C:\Users\kumud\.p2\pool\plugins\org.eclipse.justj.openjdk.hotspot.jre.full.win32.x86_64_21.0.10.v20260205-0638\jre\bin\javaw.exe
Connected Successfully
Data deleted

```
11          Class.forName("com.mysql.cj.jdbc.Driver");
12          Connection connect = DriverManager.getConnection(
13                  "jdbc:mysql://localhost:3306/hoteldb",
14                  "root",
15                  "Kumudhab2004"
16                  );
17          System.out.println("Connected Successfully");
18          Statement stmp = connect.createStatement();
19          String query = "delete from customer where orderid=3";
20          stmp.executeUpdate(query);
21          System.out.println("Data deleted");
22          connect.close();
23      }catch(Exception e) {
24          System.out.println(e);
25      }
26  }
27  }
```



```
Connected Successfully
Data deleted
```

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1 SQL File 3* SQL File 4* SQL File 5* SQL File 6* SQL File 7* SQL File 8* SQL File 9* SQL File 10*

Limit to 1000 rows

```
1 • create database hoteldb;
2 • use hoteldb;
3 • create table customer(orderid int primary key,maindish varchar(50),dessert varchar(50));
4 • select * from customer;
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

orderid	maindish	dessert
1	Chicken Biryani	Brownie
2	Curd Rice	Rasgulla
NULL	NULL	NULL

Result Grid

customer 3

Apply Revert

SQLAdditions

Jump to

Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or tc toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
10	16:43:36	create database hoteldb	1 row(s) affected	0.046 sec
11	16:43:42	use hoteldb	0 row(s) affected	0.000 sec
12	16:43:52	create table customer(orderid int primary key,maindish varchar(50),dessert varchar(5...	0 row(s) affected	0.094 sec
13	16:43:57	select * from customer LIMIT 0, 1000	0 row(s) returned	0.000 sec / 0.000 sec
14	17:00:01	select * from customer LIMIT 0, 1000	3 row(s) returned	0.000 sec / 0.000 sec
15	17:09:40	select * from customer LIMIT 0, 1000	2 row(s) returned	0.000 sec / 0.000 sec

Query Completed

module-info.java
Project_2
JRE System Library [JavaSE-21]
src
com.example
com.example1
Abstraction_Concept.java
Array_List_Program.java
Array_Program.java
Constructor_Concept.java
Date_Example_Program.java
Encapsulation_Concept.java
Exception_Handling_Program.
FileHandlingExample.java
Functions.java
Hash_Set_Program.java
Inheritance_Concept.java
Inner_Class_Program.java
JDBC_Delete_Program.java
JDBC_Insert_Program.java
JDBC_Program.java
JDBC_Update_Program.java
Linked_List_Program.java
Map_Program.java
Method.java
Multithreading_Program.java
OOPS_Concept.java
Polymorphism_Concept.java
Stack_Program.java
String_Buffer_Program.java

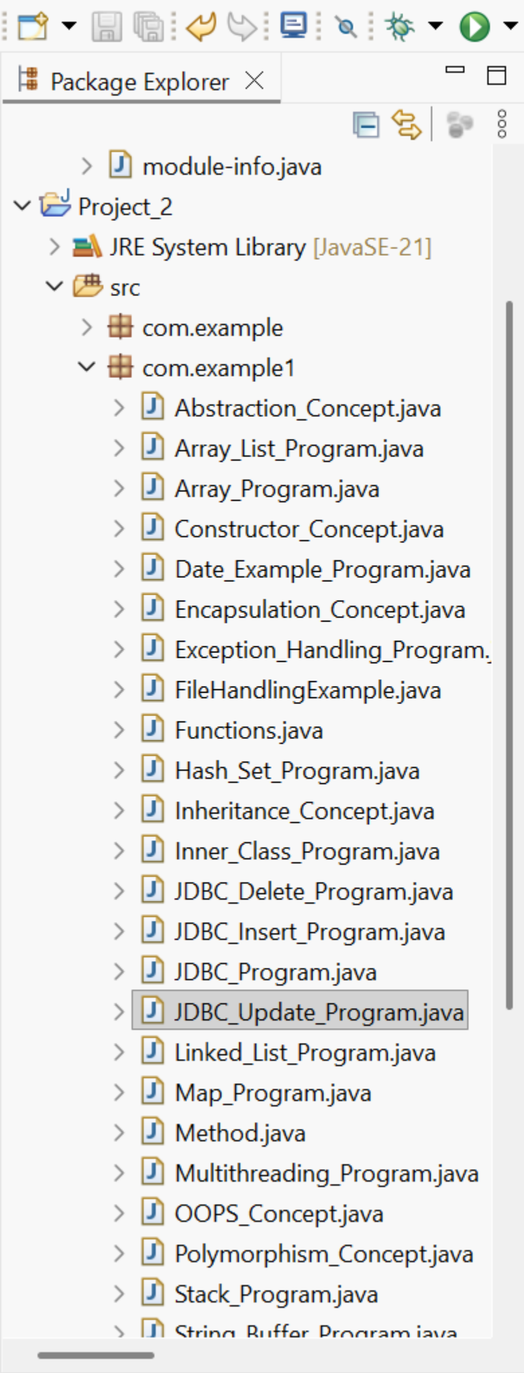

```java
package com.example1;
import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.Statement;

public class JDBC_Update_Program {

    public static void main(String[] args) {
        // TODO Auto-generated method stub
        try {
            Class.forName("com.mysql.cj.jdbc.Driver");
            Connection connect = DriverManager.getConnection(
                    "jdbc:mysql://localhost:3306/hoteldb",
                    "root",
                    "Kumudhab2004"
                    );
            System.out.println("Connected Successfully");
```



```
Connected Successfully
Data updated
```



JDBC_Insert_Program.java | JDBC_Delete_Program.java | JDBC_Update_Program.java

```
11            Class.forName("com.mysql.cj.jdbc.Driver");
12            Connection connect = DriverManager.getConnection(
13                    "jdbc:mysql://localhost:3306/hoteldb",
14                    "root",
15                    "Kumudhab2004"
16                    );
17            System.out.println("Connected Successfully");
18            Statement stmp = connect.createStatement();
19            String query = "update customer set maindish='Sambar Rice',dessert='Gulab Jamun'
20            stmp.executeUpdate(query);
21            System.out.println("Data updated");
22            connect.close();
23        }catch(Exception e) {
24            System.out.println(e);
25        }
26    }
27 }
```

Problems | Javadoc | Declaration | Console

<terminated> JDBC_Update_Program [Java Application] C:\Users\kumud\.p2\pool\plugins\org.eclipse.justj.openjdk.hotspot.jre.full.win32.x86_64_21.0.10.v20260205-0638\jre\bin\javaw.exe

```
Connected Successfully
Data updated
```

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator:

MANAGEMENT
- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE
- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE
- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

Query 1 SQL File 3* SQL File 4* SQL File 5* SQL File 6* SQL File 7* SQL File 8* SQL File 9* SQL File 10*

Limit to 1000 rows

```
1 • create database hoteldb;
2 • use hoteldb;
3 • create table customer(orderid int primary key,maindish varchar(50),dessert varchar(50));
4 • select * from customer;
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content:

orderid	maindish	dessert
1	Chicken Biryani	Brownie
2	Sambar Rice	Gulab Jamun
NULL	NULL	NULL

customer 4 Apply Revert

SQLAdditions

Jump to

Automatic context help is disabled. Use the toolbar t manually get help for the current caret position or tc toggle automatic help.

Context Help Snippets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
11	16:43:42	use hoteldb	0 row(s) affected	0.000 sec
12	16:43:52	create table customer(orderid int primary key,maindish varchar(50),dessert varchar(5...	0 row(s) affected	0.094 sec
13	16:43:57	select * from customer LIMIT 0, 1000	0 row(s) returned	0.000 sec / 0.000 sec
14	17:00:01	select * from customer LIMIT 0, 1000	3 row(s) returned	0.000 sec / 0.000 sec
15	17:09:40	select * from customer LIMIT 0, 1000	2 row(s) returned	0.000 sec / 0.000 sec
16	17:21:50	select * from customer LIMIT 0, 1000	2 row(s) returned	0.016 sec / 0.000 sec

Query Completed