


Project Design Phase-II

Data Flow Diagram & User Stories

Team ID	SWTID-2026-9038_____	Project Name	Script-Controlled ACL – Restrict Record Access Based on Field Value
Maximum Marks	4 Marks	Date	__28-09-2026_____

Data Flow Diagrams:

A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. For the Script-Controlled ACL project, the DFD shows how the administrator creates users, roles, tables and ACL rules, and how a user request is evaluated before record access is granted or denied.

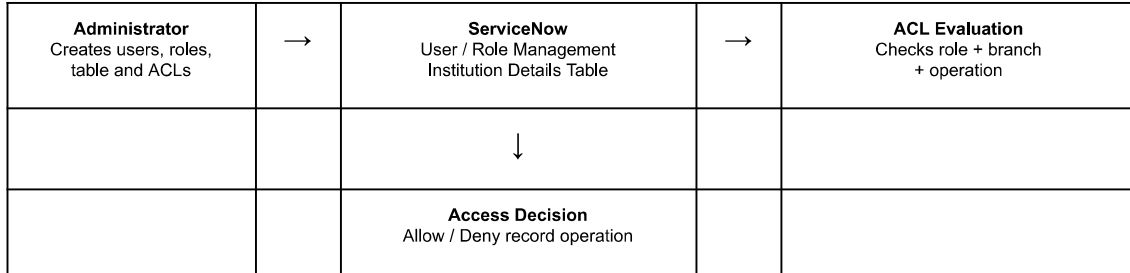

Data involved: User, Roles (bb1–bb4), Institution Details, Branch (ECE/EEE/CSE), and ACL operation (Read/Create/Write/Delete).

User Stories

Use the below template to list all the user stories for the product.

	User Type Requirement		User Story / Task	Acceptance criteria	Priority	Release
Administrator	User & Role Creation	USN-1	As an administrator, I can create the EEE test user and assign custom roles bb1, bb2, bb3 and bb4.	User is created and required roles are assigned.	High	Sprint-1

Administrator	Table Creation	USN-2	As an administrator, I can create the Institution Details table with the required fields.	u_institution_details table exists with the specified fields.	High	Sprint-1
Administrator	Record Creation	USN-3	As an administrator, I can create student records with ECE, EEE and CSE branch values.	Records with different branch values are available.	High	Sprint-1
EEE User	Read Access	USN-4	As a user with the bb1 role, I can view records according to the EEE branch access rule.	User can view EEE branch records; unauthorized users cannot view records.	High	Sprint-1
Administrator	Create Access	USN-5	As a user with the bb2 role, I can create Institution Details records.	New button/create operation is available to the permitted user.	High	Sprint-1
Administrator	Write Access	USN-6	As a user with the bb3 role, I can edit permitted Institution Details records.	Permitted user can modify the records.	High	Sprint-1
Administrator	Delete Access	USN-7	As a user with the bb4 role, I can delete permitted Institution Details records.	Permitted user can delete records.	High	Sprint-1
Administrator	Full Access	USN-8	As an administrator, I can access the records regardless of branch.	Admin can view all records regardless of branch.	High	Sprint-1
EEE User	ACL Verification	USN-9	As an administrator, I can impersonate users and verify READ, CREATE, WRITE and DELETE ACL behavior.	Each ACL operation produces the expected allow/deny result.	High	Sprint-1

Outcome: Script-controlled READ, WRITE, CREATE and DELETE ACLs enforce record-level security by evaluating user roles and record access rules. Administrators retain full access, while access for other users is controlled by the configured ACLs.