

PUNE INSTITUTE OF COMPUTER TECHNOLOGY  
Information technology Department  
OSL Assignment 4A:

Name: - Prathamesh Paraswar

Roll no: - 33155

Batch: - L9

---

**TITLE:** Thread synchronization using counting semaphores.

**AIM:** Application to demonstrate producer-consumer problem with counting semaphores and mutex.

**OBJECTIVE:** Implement C program to demonstrate producer-consumer problem with counting semaphores and mutex.

**THEORY:**

**Semaphores:**

An integer value used for signaling among processes. Only three operations may be performed on a semaphore, all of which are atomic: initialize, decrement, and increment.

The decrement operation may result in the blocking of a process, and the increment operation may result in the unblocking of a process. Also known as a **counting semaphore** or a **general semaphore**.

Semaphores are the **OS tools** for **synchronization**. Two types:

1. **Binary Semaphore.**
2. **Counting Semaphore.**

**Counting semaphore**

The counting semaphores are free of the limitations of the binary semaphores. A counting semaphore comprises:

An integer variable, initialized to a value  $K$  ( $K \geq 0$ ). During operation it can assume any value  $\leq K$ , a pointer to a process queue. The queue will hold the PCBs of all those processes, waiting to enter their critical sections. The queue is implemented as a FCFS, so that the waiting processes are served in a FCFS order.

**A counting semaphore can be implemented as follows:**

```

typedef struct Process
{
    int ProcessID;
    -----
    -----
    Process *Next; /* Pointer to the next PCB in the queue */
};

typedef struct Semaphore
{
    int count;
    Process *head /* Pointer to the head of the queue */
    Process *tail; /* Pointer to the tail of the queue */
};

Semaphore S;

```


### Operation of a counting semaphore:

1. Let the initial value of the semaphore count be 1.
2. When semaphore count = 1, it implies that no process is executing in its critical section and no process is waiting in the semaphore queue.
3. When semaphore count = 0, it implies that one process is executing in its critical section but no process is waiting in the semaphore queue.
4. When semaphore count = N, it implies that one process is executing in its critical section and N processes are waiting in the semaphore queue.
5. When a process is waiting in semaphore queue, it is not performing any busy waiting. It is rather in a “waiting” or “blocked” state.
6. When a waiting process is selected for entry into its critical section, it is transferred from “Blocked” state to “ready” state.

### The Producer/Consumer Problem

We now examine one of the most common problems faced in concurrent processing: the producer/consumer problem. The general statement is this: there are one or more producers generating some type of data (records, characters) and placing these in a buffer. There is a single consumer that is taking items out of the buffer one at a time. The system is to be constrained to prevent the overlap of buffer operations. That is, only one agent (producer or consumer) may access the buffer at any one time. The problem is to make sure that the producer won't try to add data into the buffer if it's full and that the consumer won't try to remove data from an empty buffer. We will look at a number of solutions to this problem to illustrate both the power and the pitfalls of semaphores. To begin, let us assume that the buffer is infinite and consists of a linear array of elements. In abstract terms, we can define the producer and consumer functions as follows:

Figure illustrates the structure of buffer b. The producer can generate items and store them in the buffer at its own pace. Each time, an index (in) into the buffer is incremented. The consumer proceeds in a similar fashion but must make sure that it does not attempt to read from an empty buffer. Hence, the

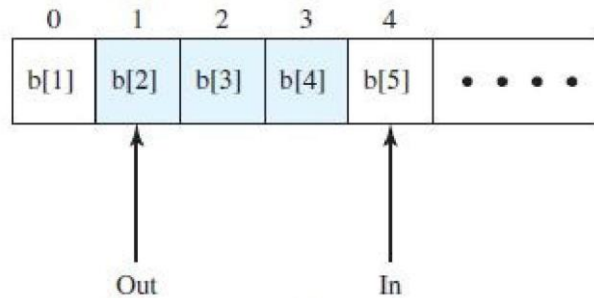

*Note: Shaded area indicates portion of buffer that is occupied*

**Figure: Infinite buffer for producer/consumer problem**

### CODE:

```
#include <pthread.h>
#include <stdio.h>
#include <stdlib.h>
#include <semaphore.h>
#include <unistd.h>
#define buffer_size 5
sem_t empty;
sem_t full;
pthread_mutex_t lock;
void * consumer(void * threadid)
{
    sem_wait(&full);
    pthread_mutex_lock(&lock);
    printf("Consumed Item %d\n",*((int *)threadid));
    pthread_mutex_unlock(&lock);
    sem_post(&empty);
    return NULL;
}
void * producer(void * threadid)
{
    sem_wait(&empty);
    pthread_mutex_lock(&lock);
    printf("Produced Item %d\n",*((int *)threadid));
    pthread_mutex_unlock(&lock);
    sem_post(&full);
    return NULL;
}
int main (int argc, char *argv[])
{
    int i,j;
    printf("Enter the number of Producer\n");
    scanf("%d",&i);
    printf("Enter the number of Consumer\n");
    scanf("%d",&j);
    pthread_t th1[i];
    pthread_t th2[j];
    sem_init(&empty,0,buffer_size);
    sem_init(&full,0,0);
    int f=0;
    int p[5]={1,2,3,4,5};
    int x=0,z=0;
    while(f==0)
```

```

{
    printf("1 Producer\n 2 Consumer \n 3 Exit\n");
    int y;
    scanf("%d",&y);
    if(y==1 )
    {
        pthread_create(&th1[x], NULL, (void *)producer, (void *)&p[x]);
        x++;
    }
    else if(y==2)
    {
        pthread_create(&th2[z], NULL, (void *)consumer, (void*)&p[z]);
        z++;
    }
    else{
        break;
    }
}
pthread_mutex_destroy(&lock);
sem_destroy(&empty);
sem_destroy(&full);
return 0;
}

```

## Output:

```

ubuntu@ubuntu-vbox:~/Documents/0s$ gcc Pthread.c -lpthread
ubuntu@ubuntu-vbox:~/Documents/0s$ ./a.out
Enter the number of Producer
4
Enter the number of Consumer
4
1 Producer
2 Consumer
3 Exit
1
1 Producer
2 Consumer
3 Exit
Produced Item 1
1
1 Producer
2 Consumer
3 Exit
Produced Item 2
2
1 Producer
2 Consumer
3 Exit
Consumed Item 1
2
1 Producer
2 Consumer
3 Exit
Consumed Item 2
2
1 Producer
2 Consumer
3 Exit
1
1 Producer
2 Consumer
3 Exit
Produced Item 3
Consumed Item 3
2
1 Producer
2 Consumer
3 Exit

```

```
1
1 Producer
2 Consumer
3 Exit
Produced Item 4
Consumed Item 4
86
```

**CONCLUSION:** Implemented producer-consumer problem using 'C' in Linux.

