

Module 3: Classification

Faculty Name: Bhavana C

Index -

Lecture 12 – Basic Concepts	4
Lecture 13 –Decision Tree Induction	12
Lecture 14 –Attributes Selection Measures and Pruning	23
Lecture 15 - Measuring similarity and dissimilarity.	35

Basic Concepts



Supervised vs. Unsupervised Learning

- Supervised learning (classification)
 - Supervision: The training data (observations, measurements, etc.) are accompanied by **labels** indicating the class of the observations
 - New data is classified based on the training set
- Unsupervised learning (clustering)
 - The class labels of training data is unknown
 - Given a set of measurements, observations, etc. with the aim of establishing the existence of classes or clusters in the data
 - **Training set** is the one on which we train and fit our model basically to fit the parameters whereas **test data** is used only to assess the performance **of** model. **Training data's** output is available to model whereas **testing data** is the unseen **data for** which predictions have to be made.

Prediction Problems: Classification vs. Numeric Prediction

- Classification
 - predicts categorical class labels (discrete or nominal)
 - classifies data (constructs a model) based on the training set and the values (class labels) in a classifying attribute and uses it in classifying new data
- Numeric Prediction
 - models continuous-valued functions, i.e., predicts unknown or missing values
- Typical applications
 - Credit/loan approval:
 - Medical diagnosis: if a tumor is cancerous or benign
 - Fraud detection: if a transaction is fraudulent
 - Web page categorization: which category it is

Attribute types

Provides:	Nominal	Ordinal	Interval	Ratio
The “order” of values is known		✓	✓	✓
“Counts,” aka “Frequency of Distribution”	✓	✓	✓	✓
Mode	✓	✓	✓	✓
Median		✓	✓	✓
Mean			✓	✓
Can quantify the difference between each value			✓	✓
Can add or subtract values			✓	✓
Can multiple and divide values				✓
Has “true zero”				✓

Nominal and ordinal

Nominal Data

What is your gender?

- ☒ M – Male
- ☐ F – Female

What is your hair color?

- ☒ 1 – Brown
- ☐ 2 – Black
- ☐ 3 – Blonde
- ☐ 4 – Gray

Where do you live?

- ☒ A – North of the equator
- ☐ B – South of the equator
- ☐ C – Neither: In the international space station

Ordinal Data

How do you feel today?

- ☒ 1 – Very Unhappy
- ☐ 2 – Unhappy
- ☐ 3 – OK
- ☐ 4 – Happy
- ☐ 5 – Very Happy


How satisfied are you with our service?

- ☒ 1 – Very Unsatisfied
- ☐ 2 – Somewhat Unsatisfied
- ☐ 3 – Neutral
- ☐ 4 – Somewhat Satisfied
- ☐ 5 – Very Satisfied


Classification—A Two-Step Process

- Model construction: describing a set of predetermined classes
 - Each tuple/sample is assumed to belong to a predefined class, as determined by the class label attribute
 - The set of tuples used for model construction is training set
 - The model is represented as classification rules, decision trees, or mathematical formulae
- Model usage: for classifying future or unknown objects
 - Estimate accuracy of the model
 - The known label of test sample is compared with the classified result from the model
 - Accuracy rate is the percentage of test set samples that are correctly classified by the model
 - Test set is independent of training set (otherwise overfitting)
 - If the accuracy is acceptable, use the model to classify new data
- Note: If *the test set* is used to select models, it is called validation (test) set

Process (1): Model Construction

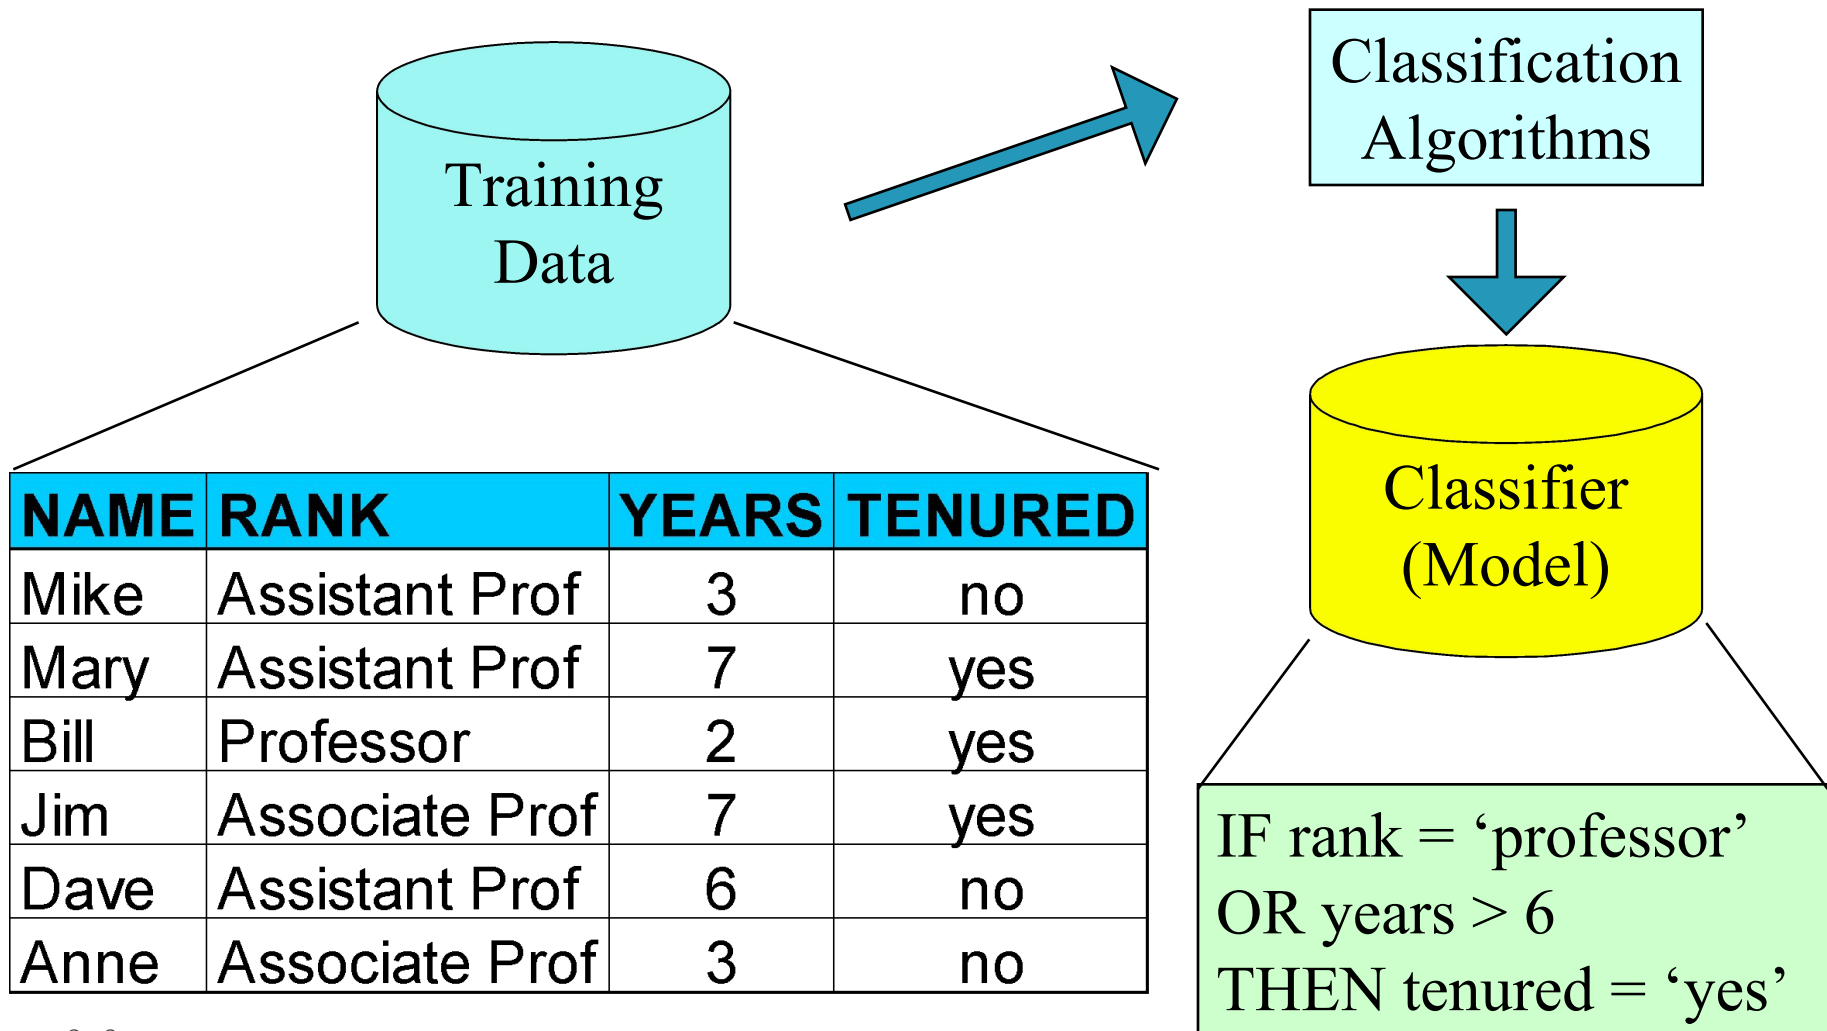

Process (2): Using the Model in Prediction

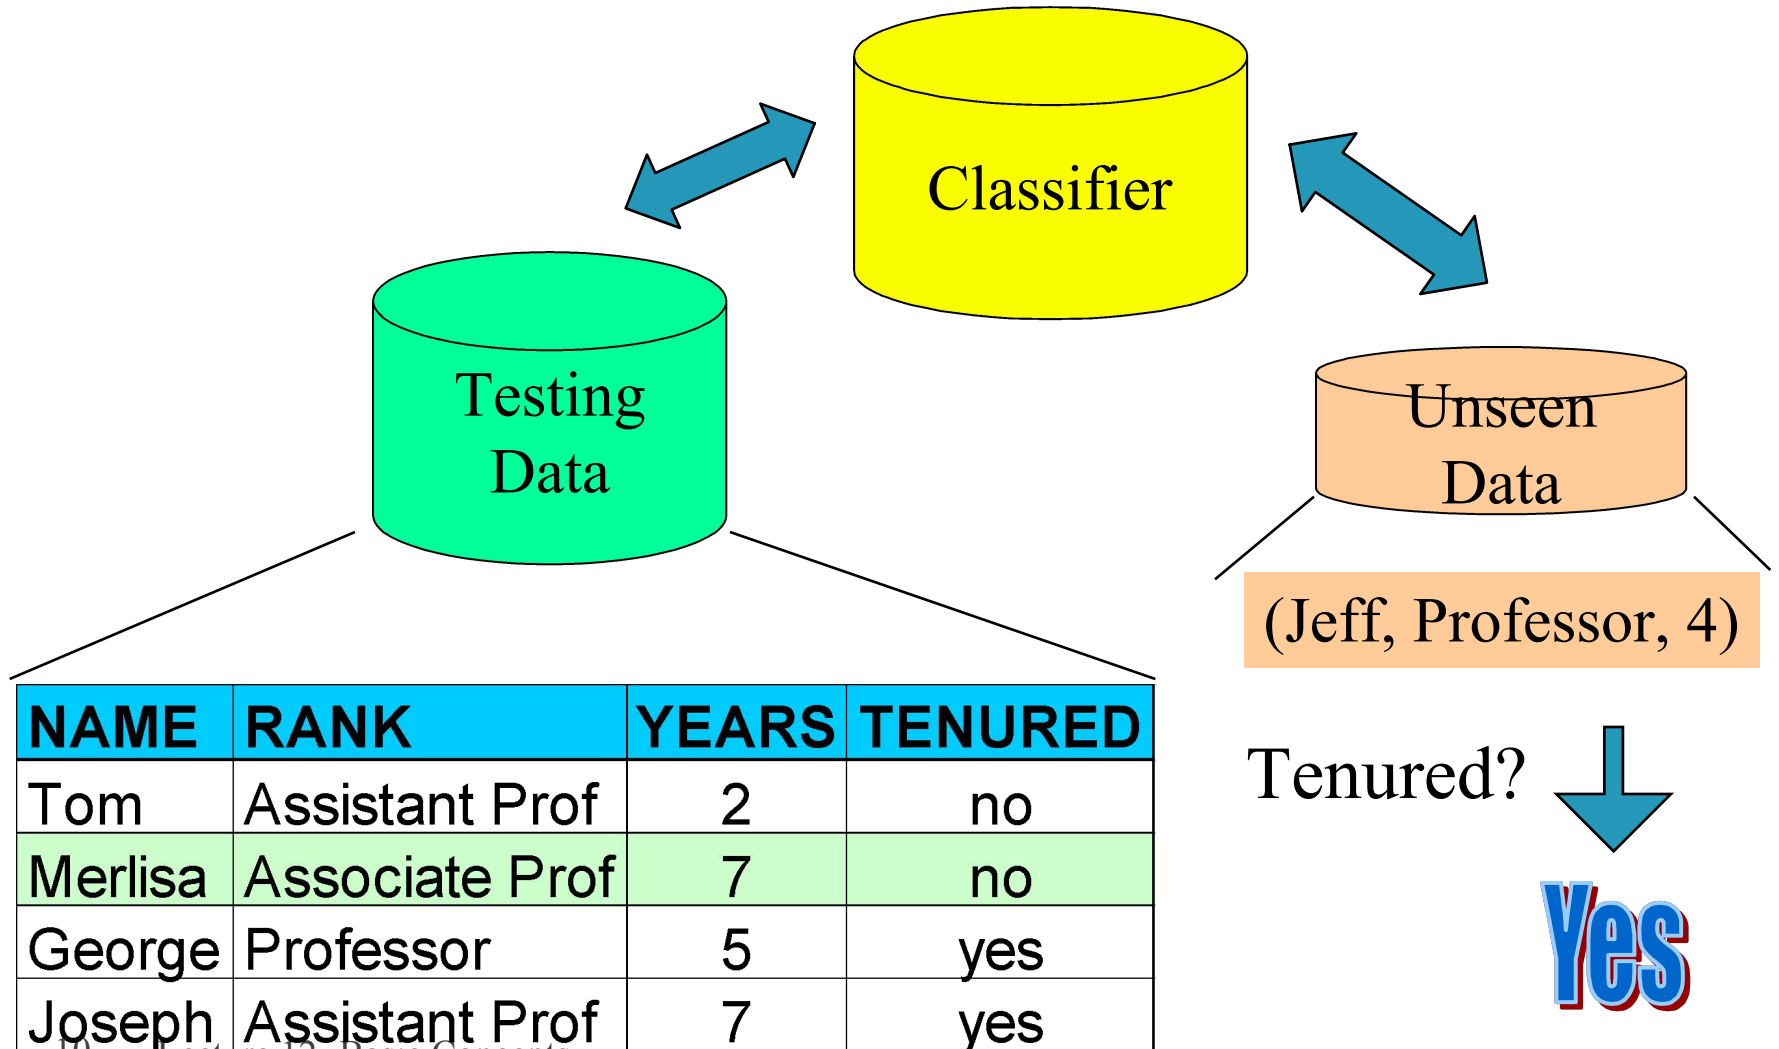


Decision Tree Induction



Decision Tree Induction: An Example

- Training data set: Buys_computer
- The data set follows an example of Quinlan's ID3 (Playing Tennis)
- Resulting tree:

age	income	student	credit rating	buys_computer
<=30	high	no	fair	no
<=30	high	no	excellent	no
31...40	high	no	fair	yes
>40	medium	no	fair	yes
>40	low	yes	fair	yes
>40	low	yes	excellent	no
31...40	low	yes	excellent	yes
<=30	medium	no	fair	no
<=30	low	yes	fair	yes
>40	medium	yes	fair	yes
<=30	medium	yes	excellent	yes
31...40	medium	no	excellent	yes
31...40	high	yes	fair	yes
>40	medium	no	excellent	no

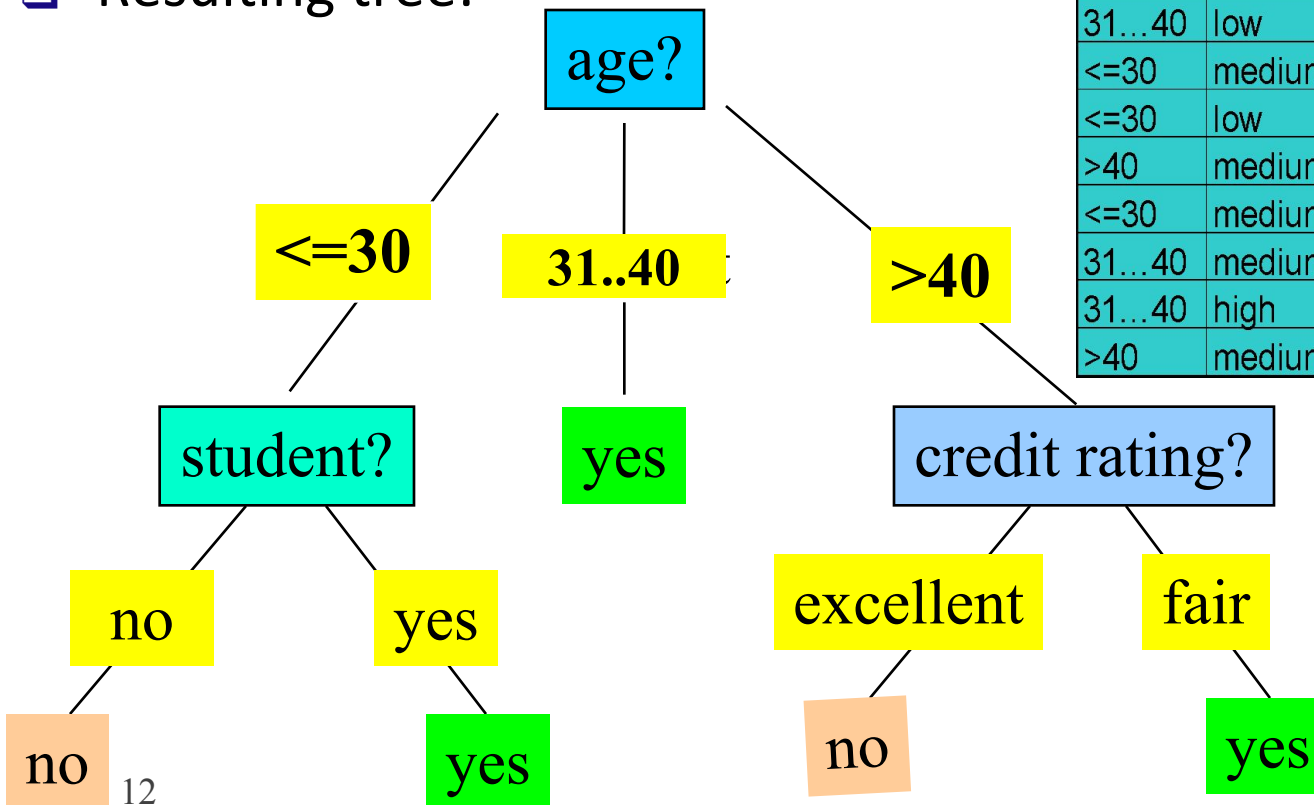

Algorithm for Decision Tree Induction

- Basic algorithm (a greedy algorithm)
 - Tree is constructed in a **top-down recursive divide-and-conquer manner**
 - At start, all the training examples are at the root
 - Attributes are categorical (if continuous-valued, they are discretized in advance)
 - Examples are partitioned recursively based on selected attributes
 - Test attributes are selected on the basis of a heuristic or statistical measure (e.g., **information gain**)
- Conditions for stopping partitioning
 - All samples for a given node belong to the same class
 - There are no remaining attributes for further partitioning – **majority voting** is employed for classifying the leaf
 - There are no samples left


Brief Review of Entropy

■ Entropy (Information Theory)

- A measure of uncertainty associated with a random variable
- Calculation: For a discrete random variable Y taking m distinct values $\{y_1, \dots, y_m\}$,
 - $H(Y) = -\sum_{i=1}^m p_i \log(p_i)$, where $p_i = P(Y = y_i)$
- Interpretation:
 - Higher entropy \Rightarrow higher uncertainty
 - Lower entropy \Rightarrow lower uncertainty

■ Conditional Entropy

- $H(Y|X) = \sum_x p(x)H(Y|X = x)$

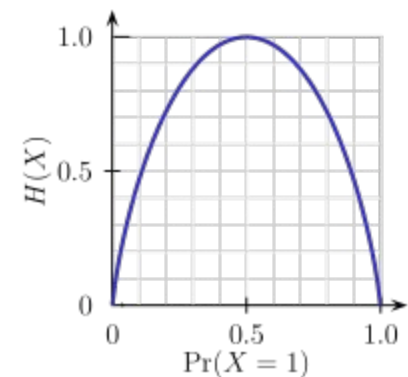

m = 2

Attribute Selection Measure: Information Gain (ID3/C4.5)

- Select the attribute with the highest information gain
- Let p_i be the probability that an arbitrary tuple in D belongs to class C_i , estimated by $|C_{i,D}|/|D|$
- **Expected information** (entropy) needed to classify a tuple in D :

$$Info(D) = -\sum_{i=1}^m p_i \log_2(p_i)$$

- **Information** needed (after using A to split D into v partitions) to classify D :

$$Info_A(D) = \sum_{j=1}^v \frac{|D_j|}{|D|} \times Info(D_j)$$

- **Information gained** by branching on attribute A

$$Gain(A) = Info(D) - Info_A(D)$$

Attribute Selection: Information Gain

g Class P: buys_computer = “yes”

g Class N: buys_computer = “no”

$$Info(D) = I(9,5) = -\frac{9}{14} \log_2\left(\frac{9}{14}\right) - \frac{5}{14} \log_2\left(\frac{5}{14}\right) = 0.940$$

age	p_i	n_i	$I(p_i, n_i)$
≤ 30	2	3	0.971
31...40	4	0	0
> 40	3	2	0.971

$$Info_{age}(D) = \frac{5}{14} I(2,3) + \frac{4}{14} I(4,0) + \frac{5}{14} I(3,2) = 0.694$$

$\frac{5}{14} I(2,3)$ means “age ≤ 30 ” has 5 out of 14 samples, with 2 yes’es and 3 no’s. Hence

age	income	student	credit rating	buys computer
≤ 30	high	no	fair	no
≤ 30	high	no	excellent	no
31...40	high	no	fair	yes
> 40	medium	no	fair	yes
> 40	low	yes	fair	yes
> 40	low	yes	excellent	no
31...40	low	yes	excellent	yes
≤ 30	medium	no	fair	no
≤ 30	low	yes	fair	yes
> 40	medium	yes	fair	yes
≤ 30	medium	yes	excellent	yes
31...40	medium	no	excellent	yes
31...40	high	yes	fair	yes
> 40	medium	no	excellent	no

$$Gain(age) = Info(D) - Info_{age}(D) = 0.246$$

Similarly,

$$Gain(income) = 0.029$$

$$Gain(student) = 0.151$$

$$Gain(credit_rating) = 0.048$$

Computing Information-Gain for Continuous-Valued Attributes

- Let attribute A be a continuous-valued attribute
- Must determine the *best split point* for A
 - Sort the value A in increasing order
 - Typically, the midpoint between each pair of adjacent values is considered as a possible *split point*
 - $(a_i + a_{i+1})/2$ is the midpoint between the values of a_i and a_{i+1}
 - The point with the *minimum expected information requirement* for A is selected as the split-point for A
- Split:
 - D1 is the set of tuples in D satisfying $A \leq \text{split-point}$, and D2 is the set of tuples in D satisfying $A > \text{split-point}$

Gain Ratio for Attribute Selection (C4.5)

- Information gain measure is biased towards attributes with a large number of values
- C4.5 (a successor of ID3) uses gain ratio to overcome the problem (normalization to information gain)

$$SplitInfo_A(D) = - \sum_{j=1}^v \frac{|D_j|}{|D|} \times \log_2 \left(\frac{|D_j|}{|D|} \right)$$

– $GainRatio(A) = Gain(A)/SplitInfo(A)$

• Ex.

$$SplitInfo_{income}(D) = -\frac{4}{14} \times \log_2 \left(\frac{4}{14} \right) - \frac{6}{14} \times \log_2 \left(\frac{6}{14} \right) - \frac{4}{14} \times \log_2 \left(\frac{4}{14} \right) = 1.557$$

– $gain_ratio(income) = 0.029/1.557 = 0.019$

- The attribute with the maximum gain ratio is selected as the splitting attribute

Gini Index (CART, IBM IntelligentMiner)

- If a data set D contains examples from n classes, gini index, $gini(D)$ is defined as

$$gini(D) = 1 - \sum_{j=1}^n p_j^2$$

where p_j is the relative frequency of class j in D

- If a data set D is split on A into two subsets D_1 and D_2 , the $gini$ index $gini(D)$ is defined as

$$gini_A(D) = \frac{|D_1|}{|D|} gini(D_1) + \frac{|D_2|}{|D|} gini(D_2)$$

- Reduction in Impurity:
- The attribute provides the smallest $gini_{split}(D)$ (or the largest reduction in impurity) is chosen to split the node (*need to enumerate all the possible splitting points for each attribute*)

Computation of Gini Index

- Ex. D has 9 tuples in buys_computer = “yes” and 5 in “no”
- Suppose the attribute income partitions D into 10 in D_1 : {low, medium} and 4 in D_2
$$gini_{income \in \{low, medium\}}(D) = \left(\frac{10}{14}\right)Gini(D_1) + \left(\frac{4}{14}\right)Gini(D_2)$$
$$gini(D) = 1 - \frac{10}{14} \left(1 - \left(\frac{7}{10}\right)^2 - \left(\frac{3}{10}\right)^2\right) - \frac{4}{14} \left(1 - \left(\frac{2}{4}\right)^2 - \left(\frac{2}{4}\right)^2\right)$$
$$= 0.443$$
$$= Gini_{income \in \{high\}}(D).$$

Gini_{low,high} is 0.458; Gini_{medium,high} is 0.450. Thus, split on the {low,medium} (and {high}) since it has the lowest Gini index

- All attributes are assumed continuous-valued
- May need other tools, e.g., clustering, to get the possible split values
- 20 Can be modified for categorical attributes

Comparing Attribute Selection Measures

- The three measures, in general, return good results but
 - **Information gain:**
 - biased towards multivalued attributes
 - **Gain ratio:**
 - tends to prefer unbalanced splits in which one partition is much smaller than the others
 - **Gini index:**
 - biased to multivalued attributes
 - has difficulty when # of classes is large
 - tends to favor tests that result in equal-sized partitions and purity in both partitions

Attribute Selection Measures and Pruning




Other Attribute Selection Measures

- CHAID: a popular decision tree algorithm, measure based on χ^2 test for independence
- C-SEP: performs better than info. gain and gini index in certain cases
- G-statistic: has a close approximation to χ^2 distribution
- MDL (Minimal Description Length) principle (i.e., the simplest solution is preferred):
 - The best tree as the one that requires the fewest # of bits to both (1) encode the tree, and (2) encode the exceptions to the tree
- Multivariate splits (partition based on multiple variable combinations)
 - CART: finds multivariate splits based on a linear comb. of attrs.
- Which attribute selection measure is the best?
 - Most give good results, none is significantly superior than others

Pruning

- **Pruning** is a technique in machine learning that reduces the size of decision trees by removing sections of the tree that provide little power to classify instances. Pruning reduces the complexity of the final classifier, and hence improves predictive accuracy by the reduction of Overfitting
- Two approaches to avoid overfitting
 - Prepruning: *Halt tree construction early*-do not split a node if this would result in the goodness measure falling below a threshold
 - Difficult to choose an appropriate threshold
 - Postpruning: *Remove branches* from a “fully grown” tree—get a sequence of progressively pruned trees
 - Use a set of data different from the training data to decide which is the “best pruned tree”

Pruning Example

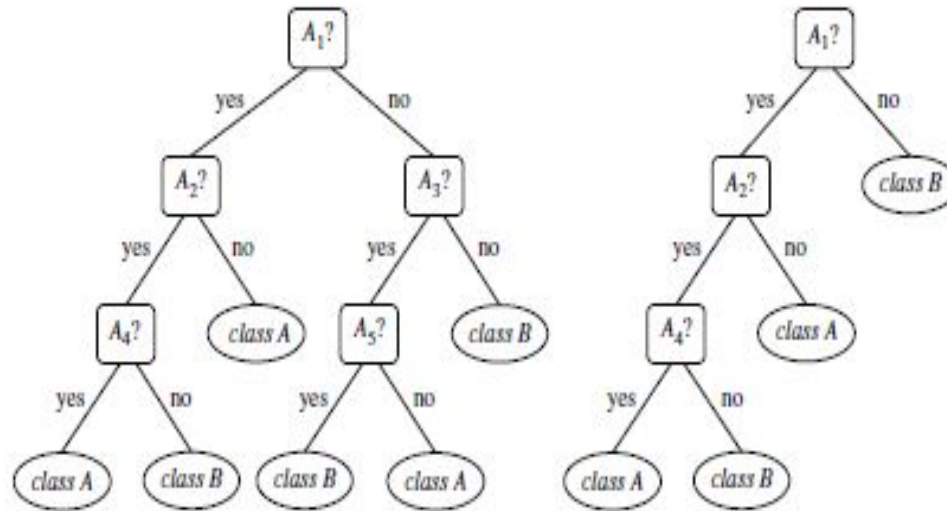

Unpruned Tree

Pruned Tree

Enhancements to Basic Decision Tree Induction

- Allow for **continuous-valued attributes**
 - Dynamically define new discrete-valued attributes that partition the continuous attribute value into a discrete set of intervals
- Handle **missing attribute values**
 - Assign the most common value of the attribute
 - Assign probability to each of the possible values
- **Attribute construction**
 - Create new attributes based on existing ones that are sparsely represented
 - This reduces fragmentation, repetition, and replication

Classification in Large Databases

- Classification—a classical problem extensively studied by statisticians and machine learning researchers
- Scalability: Classifying data sets with millions of examples and hundreds of attributes with reasonable speed
- Why is decision tree induction popular?
 - relatively faster learning speed (than other classification methods)
 - convertible to simple and easy to understand classification rules
 - can use SQL queries for accessing databases
 - comparable classification accuracy with other methods
- **RainForest** (VLDB'98 — Gehrke, Ramakrishnan & Ganti)
 - Builds an AVC-list (attribute, value, class label)

Scalability Framework for RainForest

- Separates the scalability aspects from the criteria that determine the quality of the tree
- Builds an AVC-list: **AVC (Attribute, Value, Class_label)**
- **AVC-set** (of an attribute X)
 - Projection of training dataset onto the attribute X and class label where counts of individual class label are aggregated
- **AVC-group** (of a node n)
 - Set of AVC-sets of all predictor attributes at the node n

Rainforest: Training Set and Its AVC Sets

Training Examples					AVC-set on <i>Age</i>		AVC-set on <i>Income</i>		
age	income	student	credit rating	computer	yes	no	income	Buy_Computer	
<=30	high	no	fair	no	6	1	high	yes	no
<=30	high	no	excellent	no	3	4	high	yes	no
31...40	high	no	fair	yes			low	2	3
>40	medium	no	fair	yes			medium	4	2
>40	low	yes	fair	yes			low	3	1
>40	low	yes	excellent	no					
31...40	low	yes	excellent	yes					
<=30	medium	no	fair	no					
<=30	low	yes	fair	yes					
>40	medium	yes	fair	yes					
<=30	medium	yes	excellent	yes					
31...40	medium	no	excellent	yes					
31...40	high	yes	fair	yes					
>40	medium	no	excellent	no					


AVC-set on <i>Student</i>		AVC-set on <i>credit_rating</i>	
yes	no	yes	no
6	1	6	2
3	4	3	3

AVC-set on <i>Age</i>		AVC-set on <i>Income</i>	
Age	Buy_Computer	Income	Buy_Computer
<=30	yes	high	yes
<=30	no	high	no
31...40	yes	medium	yes
31...40	no	medium	no
>40	yes	low	yes
>40	no	low	no


BOAT (Bootstrapped Optimistic Algorithm for Tree Construction)

- Use a statistical technique called *bootstrapping* to create several smaller samples (subsets), each fits in memory
- Each subset is used to create a tree, resulting in several trees
- These trees are examined and used to construct a new tree T'
 - It turns out that T' is very close to the tree that would be generated using the whole data set together
- Adv: requires only two scans of DB, an incremental alg.


Presentation of Classification Results

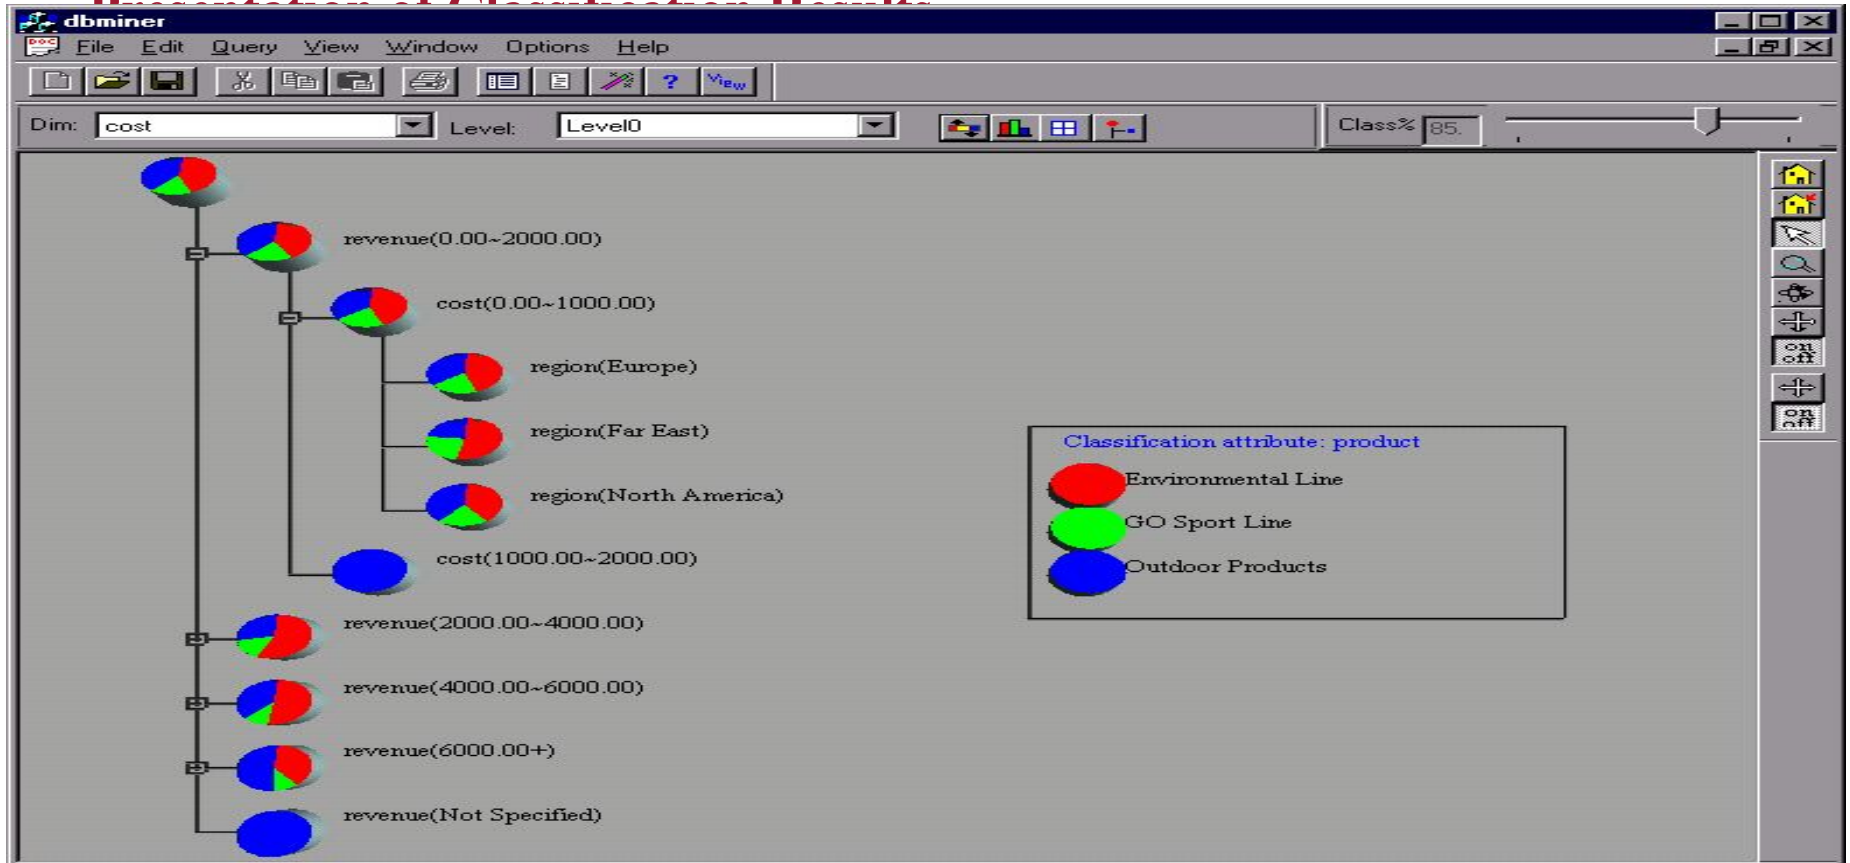

Visualization of a Decision Tree in SGI/MineSet

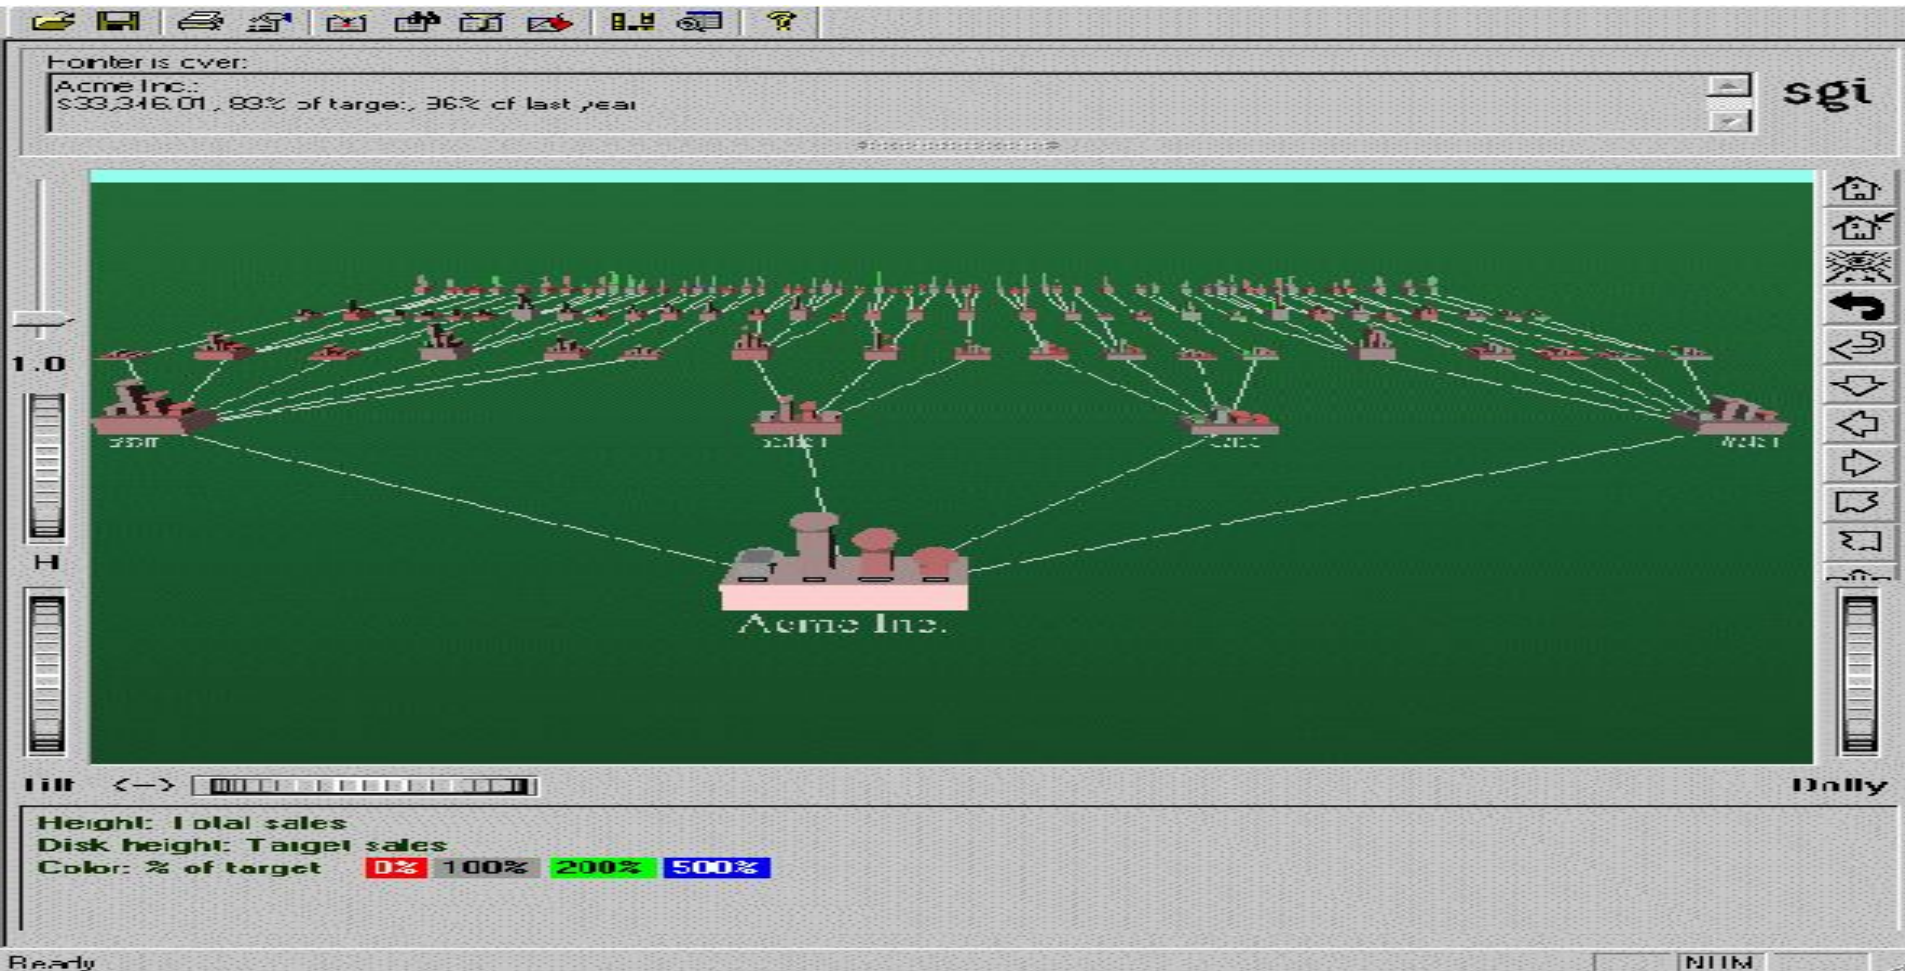

Interactive Visual Mining by Perception-Based Classification (PBC)

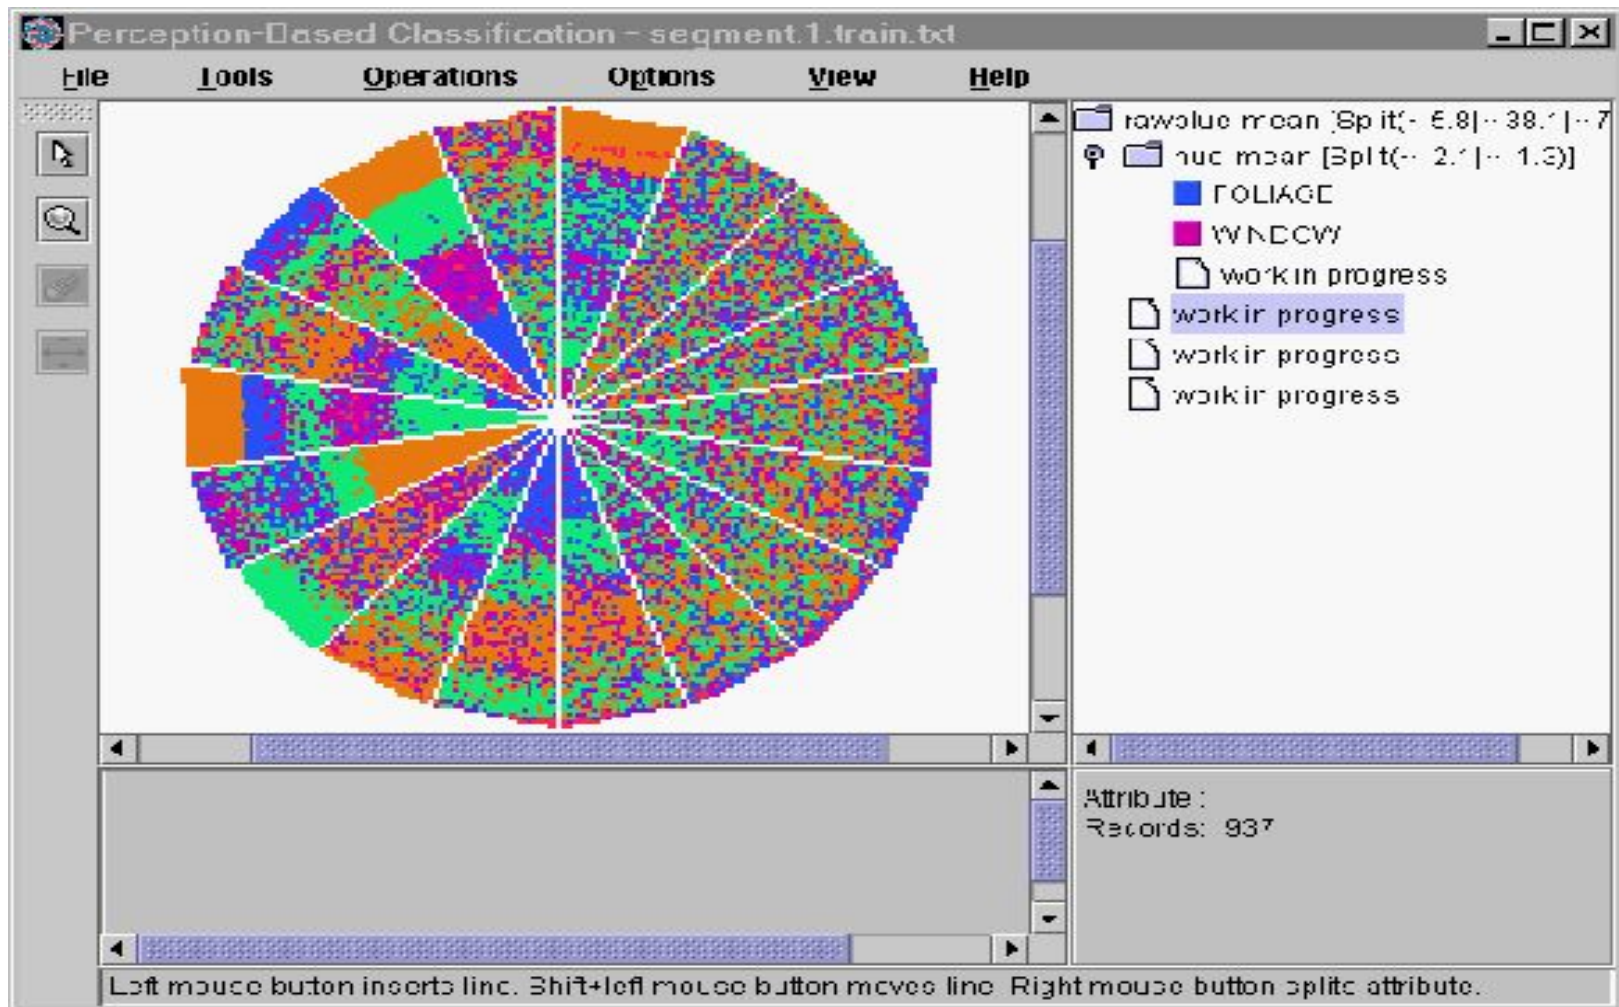

Bayesian Classification



Bayesian Classification: Why?

- A statistical classifier: performs *probabilistic prediction*, i.e., predicts class membership probabilities
- Foundation: Based on Bayes' Theorem.
- Performance: A simple Bayesian classifier, *naïve Bayesian classifier*, has comparable performance with decision tree and selected neural network classifiers
- Incremental: Each training example can incrementally increase/decrease the probability that a hypothesis is correct — prior knowledge can be combined with observed data
- Standard: Even when Bayesian methods are computationally intractable, they can provide a standard of optimal decision making against which other methods can be measured

Bayes' Theorem: Basics

- Total probability Theorem:
$$P(B) = \sum_{i=1}^M P(B|A_i)P(A_i)$$
- Bayes' Theorem:
$$P(H|\mathbf{X}) = \frac{P(\mathbf{X}|H)P(H)}{P(\mathbf{X})} = P(\mathbf{X}|H) \times P(H) / P(\mathbf{X})$$
 - Let \mathbf{X} be a data sample (“evidence”): class label is unknown
 - Let H be a *hypothesis* that \mathbf{X} belongs to class C
 - Classification is to determine $P(H|\mathbf{X})$, (i.e., *posteriori probability*): the probability that the hypothesis holds given the observed data sample \mathbf{X}
 - $P(H)$ (*prior probability*): the initial probability
 - E.g., \mathbf{X} will buy computer, regardless of age, income, ...
 - $P(\mathbf{X})$: probability that sample data is observed
 - $P(\mathbf{X}|H)$ (likelihood): the probability of observing the sample \mathbf{X} , given that the hypothesis holds
 - E.g., Given that \mathbf{X} will buy computer, the prob. that \mathbf{X} is 31..40, medium income

Prediction Based on Bayes' Theorem

- Given training data \mathbf{X} , *posteriori probability of a hypothesis* H , $P(H|\mathbf{X})$, follows the Bayes' theorem

$$P(H|\mathbf{X}) = \frac{P(\mathbf{X}|H)P(H)}{P(\mathbf{X})} = P(\mathbf{X}|H) \times P(H) / P(\mathbf{X})$$

- Informally, this can be viewed as
posteriori = likelihood x prior/evidence
- Predicts \mathbf{X} belongs to C_i iff the probability $P(C_i|\mathbf{X})$ is the highest among all the $P(C_k|\mathbf{X})$ for all the k classes
- Practical difficulty: It requires initial knowledge of many probabilities, involving significant computational cost

Classification Is to Derive the Maximum Posteriori

- Let D be a training set of tuples and their associated class labels, and each tuple is represented by an n -D attribute vector $\mathbf{X} = (x_1, x_2, \dots, x_n)$
- Suppose there are m classes C_1, C_2, \dots, C_m .
- Classification is to derive the maximum posteriori, i.e., the maximal $P(C_i | \mathbf{X})$
- This can be derived from Bayes' theorem
$$P(C_i | \mathbf{X}) = \frac{P(\mathbf{X} | C_i)P(C_i)}{P(\mathbf{X})}$$
- Since $P(\mathbf{X})$ is constant for all classes, only
$$P(C_i | \mathbf{X}) = P(\mathbf{X} | C_i)P(C_i)$$
needs to be maximized

Naïve Bayes Classifier

- A simplified assumption: attributes are conditionally independent (i.e., no dependence relation between attributes):
- This greatly reduces the computation cost: Only counts the class distribution
$$P(\mathbf{X} | C_i) = \prod_{k=1}^n P(x_k | C_i) = P(x_1 | C_i) \times P(x_2 | C_i) \times \dots \times P(x_n | C_i)$$
- If A_k is categorical, $P(x_k | C_i)$ is the # of tuples in C_i having value x_k for A_k divided by $|C_{i,D}|$ (# of tuples of C_i in D)
- If A_k is continuous-valued, $P(x_k | C_i)$ is usually computed based on **Gaussian distribution** with a mean μ and standard deviation σ

and $P(x_k | C_i)$ is
$$g(x, \mu, \sigma) = \frac{1}{\sqrt{2\pi}\sigma} e^{-\frac{(x-\mu)^2}{2\sigma^2}}$$

$$P(\mathbf{X} | C_i) = g(x_k, \mu_{C_i}, \sigma_{C_i})$$

Naïve Bayes Classifier: Training Dataset

Class:

C1:buys_computer = yes

C2:buys_computer = no

Data to be classified:

X = (age <=30,

Income = medium,

Student = yes

Credit_rating = Fair)

age	income	student	credit rating	com
<=30	high	no	fair	no
<=30	high	no	excellent	no
31...40	high	no	fair	yes
>40	medium	no	fair	yes
>40	low	yes	fair	yes
>40	low	yes	excellent	no
31...40	low	yes	excellent	yes
<=30	medium	no	fair	no
<=30	low	yes	fair	yes
>40	medium	yes	fair	yes
<=30	medium	yes	excellent	yes
31...40	medium	no	excellent	yes
31...40	high	yes	fair	yes
>40	medium	no	excellent	no

Naïve Bayes Classifier: An Example

- $P(C_i)$: $P(\text{buys_computer} = \text{"yes"}) = 9/14 = 0.643$
- $P(\text{buys_computer} = \text{"no"}) = 5/14 = 0.357$
- Compute $P(X|C_i)$ for each class
 - $P(\text{age} = \text{"<=30"} | \text{buys_computer} = \text{"yes"}) = 2/9 = 0.222$
 - $P(\text{age} = \text{"<= 30"} | \text{buys_computer} = \text{"no"}) = 3/5 = 0.6$
 - $P(\text{income} = \text{"medium"} | \text{buys_computer} = \text{"yes"}) = 4/9 = 0.444$
 - $P(\text{income} = \text{"medium"} | \text{buys_computer} = \text{"no"}) = 2/5 = 0.4$
 - $P(\text{student} = \text{"yes"} | \text{buys_computer} = \text{"yes"}) = 6/9 = 0.667$
 - $P(\text{student} = \text{"yes"} | \text{buys_computer} = \text{"no"}) = 1/5 = 0.2$
 - $P(\text{credit_rating} = \text{"fair"} | \text{buys_computer} = \text{"yes"}) = 6/9 = 0.667$
 - $P(\text{credit_rating} = \text{"fair"} | \text{buys_computer} = \text{"no"}) = 2/5 = 0.4$
- **X = (age <= 30 , income = medium, student = yes, credit_rating = fair)**
- $P(X|C_i)$: $P(X|\text{buys_computer} = \text{"yes"}) = 0.222 \times 0.444 \times 0.667 \times 0.667 = 0.044$
- $P(X|\text{buys_computer} = \text{"no"}) = 0.6 \times 0.4 \times 0.2 \times 0.4 = 0.019$
- $P(X|C_i) \cdot P(C_i)$: $P(X|\text{buys_computer} = \text{"yes"}) \cdot P(\text{buys_computer} = \text{"yes"}) = 0.028$
- $P(X|\text{buys_computer} = \text{"no"}) \cdot P(\text{buys_computer} = \text{"no"}) = 0.007$
- **Therefore, X belongs to class ("buys_computer = yes")**

age	income	student	credit_rating	com
<=30	high	no	fair	no
<=30	high	no	excellent	no
31...40	high	no	fair	yes
>40	medium	no	fair	yes
>40	low	yes	fair	yes
>40	low	yes	excellent	no
31...40	low	yes	excellent	yes
<=30	medium	no	fair	no
<=30	low	yes	fair	yes
>40	medium	yes	fair	yes
<=30	medium	yes	excellent	yes
31...40	medium	no	excellent	yes
31...40	high	yes	fair	yes
>40	medium	no	excellent	no

Avoiding the Zero-Probability Problem

- Naïve Bayesian prediction requires each conditional prob. be **non-zero**. Otherwise, the predicted prob. will be zero
- Ex. Suppose a dataset with 1000 tuples, income=low (0), income= medium (990), and income = high (10)
- Use **Laplacian correction** (or Laplacian estimator)
$$P(x_i) = \frac{n_i + 1}{n + K}$$
 - *Adding 1 to each case*
Prob(income = low) = 1/1003
Prob(income = medium) = 991/1003
Prob(income = high) = 11/1003
 - The “corrected” prob. estimates are close to their “uncorrected” counterparts

Naïve Bayes Classifier: Comments

- Advantages
 - Easy to implement
 - Good results obtained in most of the cases
- Disadvantages
 - Assumption: class conditional independence, therefore loss of accuracy
 - Practically, dependencies exist among variables
 - E.g., hospitals: patients: Profile: age, family history, etc.
Symptoms: fever, cough etc., Disease: lung cancer, diabetes, etc.
 - Dependencies among these cannot be modeled by Naïve Bayes Classifier
- How to deal with these dependencies? Bayesian Belief Networks (Chapter 9)

- Thank You



D Y PATIL
— RAMRAO ADIK —
INSTITUTE OF
TECHNOLOGY
NAVI MUMBAI