



# What are backends servers?



You might've used `express` to create a Backend server.


The way to run it usually is `node index.js` which starts a process on a certain port (3000 for example)

When you have to deploy it on the internet, there are a few ways -

1. Go to aws, GCP, Azure, Cloudflare
  1. Rent a VM (Virtual Machine) and deploy your app
  2. Put it in an Auto scaling group
  3. Deploy it in a Kubernetes cluster

There are a few downsides to doing this -

1. Taking care of how/when to scale

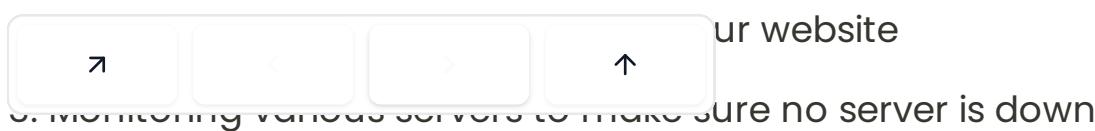

≡ if Serverless Backends 1 of 12 e code and someone else could take care of all of these problems?

# What are serverless Backends

"Serverless" is a backend deployment in which the **cloud provider** dynamically manages the allocation and provisioning of servers. The term "serverless" doesn't mean there are no servers involved. Instead, it means that developers and operators do not have to worry about the servers.

## Easier definition

What if you could just write your **express routes** and run a command. The app would automatically

1. Deploy
2. Autoscale
3. Charge you on a **per request** basis (rather than you paying for VMs)

ch

1 More expensive at scale



Serverless Backends 1 of 12

# Famous serverless providers

There are many famous backend serverless providers -

▼ AWS Lambda

[https://aws.amazon.com/pm/lambda/?trk=5cc83e4b-8a6e-4976-92ff-7a6198f2fe76&sc\\_channel=ps&ef\\_id=CjwKCAiAt5euBhB9EiwAdkXWO-i-th4J3onX9ji-tPt\\_JmsBAQJLWYN4hzTF0Zxb084EkUBxSCK5vhoC-1wQAvD\\_BwE:G:s&s\\_kwcid=AL!4422!3!651612776783!e!!g!!awslambda!19828229697!143940519541](https://aws.amazon.com/pm/lambda/?trk=5cc83e4b-8a6e-4976-92ff-7a6198f2fe76&sc_channel=ps&ef_id=CjwKCAiAt5euBhB9EiwAdkXWO-i-th4J3onX9ji-tPt_JmsBAQJLWYN4hzTF0Zxb084EkUBxSCK5vhoC-1wQAvD_BwE:G:s&s_kwcid=AL!4422!3!651612776783!e!!g!!awslambda!19828229697!143940519541)

▼ Google Cloud Functions

<https://firebase.google.com/docs/functions>

▼ Cloudflare Workers

<https://workers.cloudflare.com/>



# When should you use a serverless architecture?

1. When you have to get off the ground fast and don't want to worry about deployments
2. When you can't anticipate the traffic and don't want to worry about autoscaling
3. If you have very low traffic and want to optimise for costs



# Cloudflare workers setup

We'll be understanding cloudflare workers today.

Reason – No credit card required to deploy one

Please sign up on <https://cloudflare.com/>

Try creating a test worker from the UI (Common worker examples) and try hitting the URL at which it is deployed



# How cloudflare workers work?

Detailed blog post -

<https://developers.cloudflare.com/workers/reference/how-workers-work/#:~:text=Though%20Cloudflare%20Workers%20behave%20similarly,used%20by%20Chromium%20and%20Node.>



Cloudflare workers DONT use the Node.js runtime. They have created their own runtime. There are a lot of things that Node.js has

## Isolates vs containers



# Initializing a worker

To create and deploy your application, you can take the following steps -

▼ Initialize a worker

```
npm create cloudfire -- my-app
```



Select `no` for `Do you want to deploy your application`

▼ Explore package.json dependencies

```
"wrangler": "^3.0.0"
```



Notice `express` is not a dependency there

▼ Start the worker locally

```
npm run dev
```



▼ How to return json?

```
export default {
  async fetch(request: Request, env: Env, ctx: ExecutionContext): Promise<Response> {
    return Response.json({
      message: "Hello"
    })
  }
}
```





},

Serverless Backends 1 of 12

## Question – Where is the express code? HTTP Server?

Cloudflare

Creating an HTTP server on top is handled by cloudflare

## Question – How can I do routing ?

In express, routing is done as follows –

```
import express from "express"
const app = express();

app.get("/route", (req, res) => {
  // handles a get request to /route
});
```

How can you do the same in the Cloudflare environment?

```
export default {
  async fetch(request: Request, env: Env, ctx: ExecutionContext): Promise<Response> {
    console.log(request.body);
    console.log(request.headers);

    if (request.method === "GET") {
      return Response.json({
        message: "you sent a get request"
      });
    } else {
      return Response.json({
        message: "you did not send a get request"
      });
    }
}
```

},



How to get query params -

<https://community.cloudflare.com/t/parse-url-query-strings-with-cloudflare-workers/90286>

Cloudflare does not expect a routing library/http server out of the box. You can write a full application with just the constructs available above.

We will eventually see how you can use other HTTP frameworks (like express) in cloudflare workers.



# Deploying a worker

Now that you have written a basic HTTP server, let's get to the most interesting bit — [Deploying it on the internet](#)

We use [wrangler](#) for this (Ref

<https://developers.cloudflare.com/workers/wrangler/>)

▼ Step 1 - Login to cloudflare via the [wrangler cli](#)



Serverless Backends 1 of 12



▼ Step 2 - Deploy your worker

`npm run deploy`



If all goes well, you should see the app up and running

## Assigning a custom domain

You have to buy a plan to be able to do this


You also need to buy the domain on cloudflare/transfer the domain to cloudflare

## Adding express to it

Why can't we use express? Why does it cloudflare doesn't start off with a simple express boiler plate?

### Reason 1 - Express heavily relies on Node.js

<https://community.cloudflare.com/t/express-support-for-workers/390844>

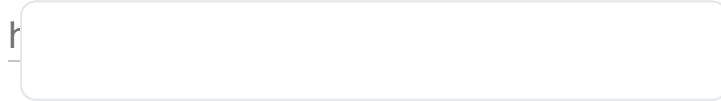



## Handlers in a file

Create a generic `handler` that you can forward requests to from either `express` or `hono` or `native cloudflare handler`

# Using hono

## What is Hono

<https://hono.dev/concepts/motivation>

port?



## Working with cloudflare workers -

### 1. Initialize a new app

```
npm create hono@latest my-app
```



### 1. Move to `my-app` and install the dependencies.

```
cd my-app  
npm i
```



### 1. Hello World

```
import { Hono } from 'hono'  
const app = new Hono()  
  
app.get('/', (c) => c.text('Hello Cloudflare Workers!'))  
  
export default app
```



## Getting inputs from user

```
import { Hono } from 'hono'  
  
const app = new Hono()  
  
app.get('/', async (c) => {  
  const body = await c.req.json()  
  console.log(body);  
  console.log(c.req.header("Authorization"));
```



```
return c.text('Hello Hono!')
```



Serverless Backends 1 of 12

```
export default app
```



More detail - <https://hono.dev/getting-started/cloudflare-workers>

## Deploying

Make sure you're logged into cloudflare ( [wrangler login](#) )

```
npm run deploy
```



## Middlewares



<https://hono.dev/guides/middleware>

## Creating a simple auth middleware

```
import { Hono, Next } from 'hono'  
import { Context } from 'hono/jsx';
```



```
const app = new Hono()
```

```
app.use(async (c, next) => {
```

```
    await next()
```

```
} else {  
    re  
})  
acces");  
})
```

```
app.get('/', async (c) => {  
    const body = await c.req.parseBody()  
    console.log(body);  
    console.log(c.req.header("Authorization"));  
    console.log(c.req.query("param"));  
  
    return c.json({msg: "as"})  
})  
  
export default app
```



Notice you have to return the `c.text` value

# Connecting to DB



<https://www.prisma.io/docs/orm/prisma-client/deployment/edge/deploy-to-cloudflare-workers>

Serverless environments have one big problem when dealing with databases.

1. There can be many connections open to the DB since there can be  
ons



## Serverless Backends 1 of 12

...  
the library has dependencies that the `cloudflare runtime` doesn't understand.

## Connection pooling in prisma for serverless env



<https://www.prisma.io/docs/accelerate>  
<https://www.prisma.io/docs/orm/prisma-client/deployment/edge/deploy-to-cloudflare-workers>

### 1. Install prisma in your project

npm install --save-dev prisma



### 2. Init Prisma

npx prisma init




### 3. Create a basic schema

```
generator client {  
  provider = "prisma-client-js"  
}
```



```
datasource db {  
  provider = "postgresql"  
  url    = env("DATABASE_URL")  
}
```

)()

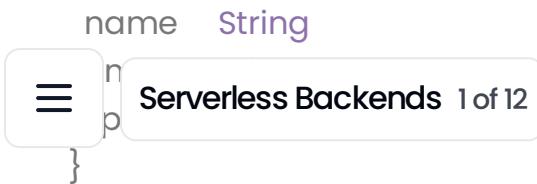

## 4. Create migrations

npx prisma migrate dev --name init



## 5. Signup to Prisma accelerate

<https://console.prisma.io/login>



Enable accelerate

Generate an API key

Replace it in .env

DATABASE\_URL="prisma://accelerate.prisma-data.net/?api\_key=your\_key"



## 5. Add accelerate as a dependency

npm install @prisma/extension-accelerate



## 6. Generate the prisma client

npx prisma generate --no-engine



## 7. Setup your code



```
import { Hono, Next } from 'hono'
import { prisma } from '@prisma/client/edge'
import { withAccelerate } from '@prisma/extension-accelerate'
import { env } from 'hono/adapter'

const app = new Hono()

app.post('/', async (c) => {
  // Todo add zod validation here
  const body: {
    name: string;
    email: string;
    password: string
  } = await c.req.json()
  const { DATABASE_URL } = env<{ DATABASE_URL: string }>(c)

  const prisma = new PrismaClient({
    datasourceUrl: DATABASE_URL,
  }).$extends(withAccelerate())

  console.log(body)

  await prisma.user.create({
    data: {
      name: body.name,
      email: body.email,
      password: body.password
    }
  })

  return c.json({msg: "as"})
})

export default app
```