

ReactJS HOL 7

Using Props in React

In this exercise, I developed a React application named **shoppingapp** to understand the concept of Props in React. I created two class components, **OnlineShopping** and **Cart**. The shopping item details were stored in an array and passed from the parent component to the child component using Props. The items were displayed in a table format by iterating through the array. The application was executed successfully and produced the expected output.

Source Code

Cart.js

```
import React, { Component } from "react";

export default class Cart extends Component {

  render() {

    return (

      <table>

        <thead>

          <tr>

            <th>Name</th>

            <th>Price</th>

          </tr>

        </thead>

        <tbody>

          {this.props.item.map((item) => {

            return (

              <tr key={item.itemname}>

                <td>{item.itemname}</td>

                <td>{item.price}</td>

              </tr>

            )

          })}

        </tbody>

      </table>

    )

  }

}
```

```

        );
    }}}
</tbody>
</table>

);
}
}

```

OnlineShopping.js

```

import React from "react";
import Cart from "./Cart";
export class OnlineShopping extends React.Component {
    render() {
        const CartInfo = [
            { itemname: "Laptop", price: 80000 },
            { itemname: "TV", price: 120000 },
            { itemname: "Washing Machine", price: 50000 },
            { itemname: "Mobile", price: 30000 },
            { itemname: "Fridge", price: 70000 }
        ];
        return (
            <div className="mydiv">
                <h1>Items Ordered :</h1>
                <Cart item={CartInfo} />
            </div>
        );
    }
}

```

```
}
```

App.js

```
import './App.css';

import { OnlineShopping } from './OnlineShopping';

function App() {

  return (

    <div>

      <OnlineShopping />

    </div>

  );

}

export default App;
```

App.css

```
.mydiv {

  text-align: center;

  margin-top: 30px;

}

h1 {

  color: #3CB371;

  font-size: 32px;

  font-family: Arial, Helvetica, sans-serif;

  margin-bottom: 15px;

}

table {

  margin: auto;

  border-collapse: collapse;
```

```

        color: #3CB371;

        font-size: 18px;
    }
    th,
    td {
        border: 1px solid #3CB371;

        padding: 3px 15px;

        text-align: center;
    }
    th {
        font-weight: bold;
    }
}

```

Figure 1: Project Structure

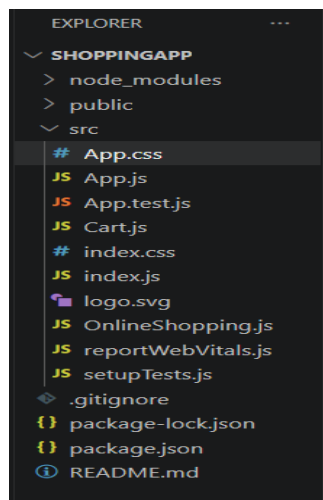



Figure 2: Browser Output

The screenshot shows a web browser at localhost:3000 displaying the following content:

Items Ordered :

Name	Price
Laptop	80000
TV	120000
Washing Machine	50000
Mobile	30000
Fridge	70000

Figure 3: Terminal Output

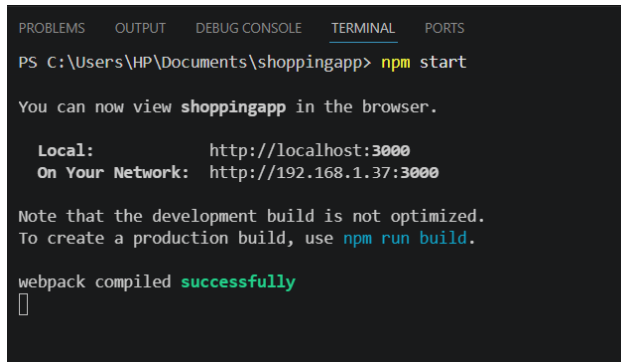

```
PROBLEMS  OUTPUT  DEBUG CONSOLE  TERMINAL  PORTS
PS C:\Users\HP\Documents\shoppingapp> npm start

You can now view shoppingapp in the browser.

  Local:            http://localhost:3000
  On Your Network:  http://192.168.1.37:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
█
```

Result

The React application was implemented successfully using Props. The shopping item details were passed from the parent component to the child component through Props and displayed in a table format. The application executed successfully and produced the expected output.