

ReactJS HOL 8

Using React State

In this exercise, I developed a React application named **counterapp** to understand the concept of React State. I created a class component named **CountPeople** and used a constructor to initialize the state variables for entry count and exit count. Two buttons, **Login** and **Exit**, were implemented to increment the respective counts whenever they were clicked. The application was executed successfully and displayed the updated count values using React State.

Source Code

CountPeople.js

```
import React, { Component } from "react";

class CountPeople extends Component {
  constructor() {
    super();
    this.state = {
      entrycount: 0,
      exitcount: 0
    };
  }

  updateEntry = () => {
    this.setState((prevState) => ({
      entrycount: prevState.entrycount + 1
    }));
  }

  updateExit = () => {
    this.setState((prevState) => ({
      exitcount: prevState.exitcount + 1
    }));
  }
}
```

```

    });
  }
  render() {
    return (
      <div className="container">
        <div className="box">
          <button onClick={this.updateEntry}>Login</button>
          <span>{this.state.entrycount} People Entered!!!</span>
        </div>
        <div className="box">
          <button onClick={this.updateExit}>Exit</button>
          <span>{this.state.exitcount} People Left!!!</span>
        </div>
      </div>
    );
  }
}

export default CountPeople;

```

App.js

```

import './App.css';
import CountPeople from './CountPeople';

function App() {
  return (
    <div>
      <CountPeople />
    </div>
  );
}

```

```
    );  
  }  
  export default App;
```

App.css

```
.container {  
  display: flex;  
  justify-content: space-around;  
  align-items: center;  
  margin-top: 250px;  
}  
  
.box {  
  display: flex;  
  align-items: center;  
  gap: 10px;  
}  
  
button {  
  background-color: lightgreen;  
  border: 1px solid green;  
  padding: 5px 15px;  
  font-weight: bold;  
  cursor: pointer;  
}
```

Figure 1: Project Structure


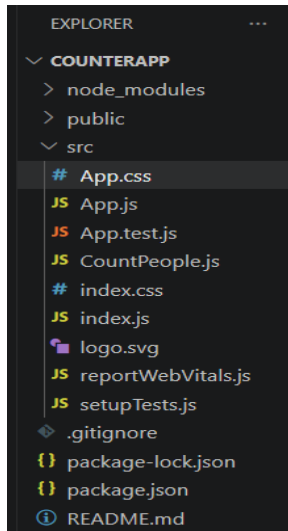


Figure 2: Browser Output



Figure 3: Terminal Output

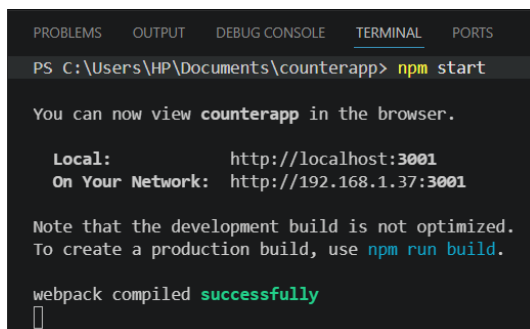

Result

The React application was implemented successfully using React State. The Login and Exit buttons updated the entry and exit counts dynamically using the state object. The application executed successfully and displayed the expected output.