

ReactJS HOL 9 – Blogger Application

In this exercise, I created a React application named **bloggerapp**. The application consists of three components: **Course Details**, **Book Details**, and **Blog Details**. The details are stored in arrays and displayed using the React `map()` function. CSS styling was applied to arrange the components side by side. The application was executed successfully and produced the expected output.

Source Code

App.js

```
import './App.css';

import BookDetails from './BookDetails';
import BlogDetails from './BlogDetails';
import CourseDetails from './CourseDetails';

function App() {
  return (
    <div className="container">
      <CourseDetails />
      <BookDetails />
      <BlogDetails />
    </div>
  );
}

export default App;
```

BookDetails.js

```
const books = [
  { id: 101, bname: "Master React", price: 670 },
  { id: 102, bname: "Deep Dive into Angular 11", price: 800 },
  { id: 103, bname: "Mongo Essentials", price: 450 }
```

```
];  
  
function BookDetails() {  
  const bookdet = (  
    <ul>  
      {books.map((book) => (  
        <div key={book.id}>  
          <h3>{book.bname}</h3>  
          <h4>{book.price}</h4>  
        </div>  
      ))}  
    </ul>  
  );  
  
  return (  
    <div className="st2">  
      <h1>Book Details</h1>  
      {bookdet}  
    </div>  
  );  
}
```

export default BookDetails;

BlogDetails.js

```
const blogs = [  
  {  
    id: 1,  
    title: "React Learning",  
    author: "Stephen Biz",
```

```

    content: "Welcome to learning React!"
  },
  {
    id: 2,
    title: "Installation",
    author: "Schewzdenier",
    content: "You can install React from npm."
  }
];

function BlogDetails() {
  const content = (
    <ul>
      {blogs.map((blog) => (
        <div key={blog.id}>
          <h2>{blog.title}</h2>
          <h4>{blog.author}</h4>
          <p>{blog.content}</p>
        </div>
      ))}
    </ul>
  );

  return (
    <div className="v1">
      <h1>Blog Details</h1>
      {content}
    </div>
  );
}

```

```
);  
}  
  
export default BlogDetails;
```

CourseDetails.js

```
const courses = [  
  {  
    id: 1,  
    cname: "Angular",  
    date: "4/5/2021"  
  },  
  {  
    id: 2,  
    cname: "React",  
    date: "6/3/2021"  
  }  
];  
  
function CourseDetails() {  
  const coursedet = (  
    <ul>  
      {courses.map((course) => (  
        <div key={course.id}>  
          <h2>{course.cname}</h2>  
          <h4>{course.date}</h4>  
        </div>  
      ))}  
    </ul>  
  )  
}
```

```
);  
return (  
  <div className="mystyle1">  
    <h1>Course Details</h1>  
    {coursedet}  
  </div>  
);  
}  
export default CourseDetails;
```

App.css

```
.container{  
  display: flex;  
  justify-content: space-around;  
  margin-top: 60px;  
}  
.st2{  
  border-left: 4px solid green;  
  padding-left: 30px;  
}  
.v1{  
  border-left: 4px solid green;  
  padding-left: 30px;  
}  
.mystyle1{  
  border-right: 4px solid green;  
  padding-right: 30px;
```

```

}
ul{
  list-style: none;
  padding: 0;
}

```

Figure 1: Browser Output


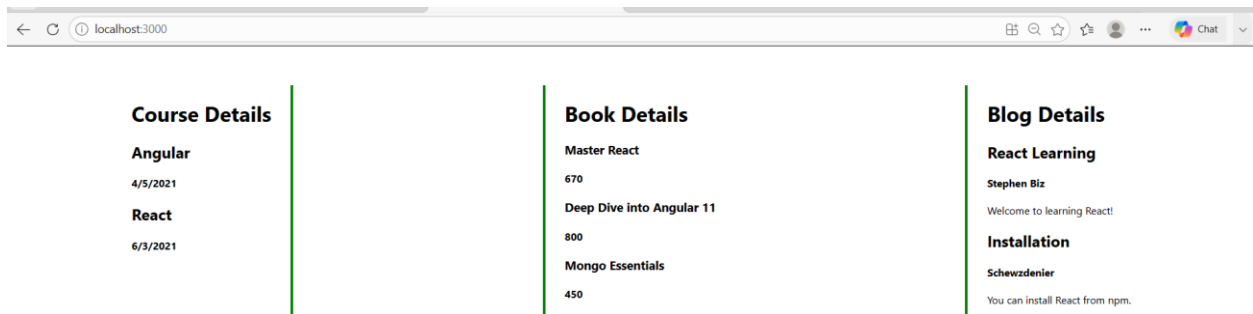


Figure 2: Terminal output

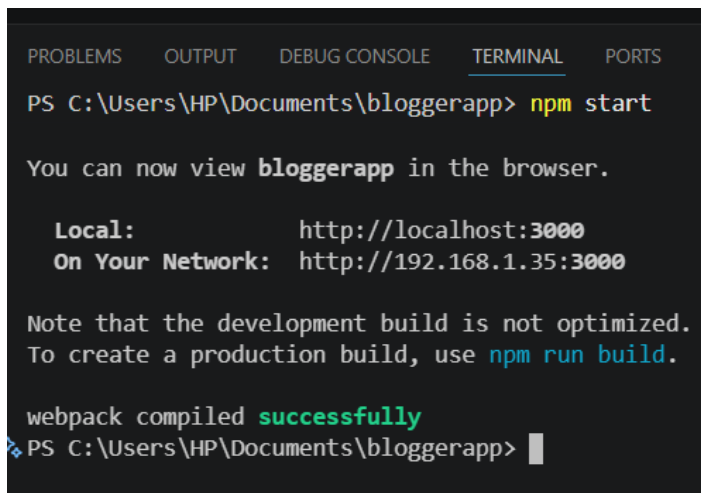

Result

The **bloggerapp** React application was created successfully. The Course Details, Book Details, and Blog Details components displayed the required information using the React map() function. The application executed successfully and produced the expected output.