

ReactJS HOL 15 – Ticket Raising Application

In this hands-on exercise, I created a React application to register employee complaints. The application accepts the employee name and complaint details through a form. When the Submit button is clicked, a random transaction ID is generated and displayed in an alert along with a success message.

Source Code

1. App.js

```
import './App.css';

import ComplaintRegister from './ComplaintRegister';

function App() {

  return (

    <div>

      <ComplaintRegister />

    </div>

  );

}

export default App;
```

2. ComplaintRegister.js

```
import { useState } from 'react';

function ComplaintRegister() {

  const [employeeName, setEmployeeName] = useState('');

  const [complaint, setComplaint] = useState('');

  const handleSubmit = (event) => {

    event.preventDefault();

    const referenceNumber = Math.floor(Math.random() * 1000);

    alert(

      `Thanks ${employeeName}
```

Your Complaint was Submitted.

Transaction ID is: \${referenceNumber}`

);

};

return (

<div style={{ margin: "30px" }}>

<h2 style={{ color: "red" }}>Register your complaints here!!!</h2>

<form onSubmit={handleSubmit}>

<div style={{ marginBottom: "15px" }}>

<label>Employee Name:</label>

<input

type="text"

value={employeeName}

onChange={(e) => setEmployeeName(e.target.value)}

required

/>

</div>

<div style={{ marginBottom: "15px" }}>

<label>Complaint:</label>

<textarea

rows="5"

cols="40"

value={complaint}

onChange={(e) => setComplaint(e.target.value)}

required

></textarea>

```

    </div>

    <button type="submit">Submit</button>

  </form>

</div>

);
}

```

```
export default ComplaintRegister;
```

Figure 1: Project Structure showing ComplaintRegister.js and project files.

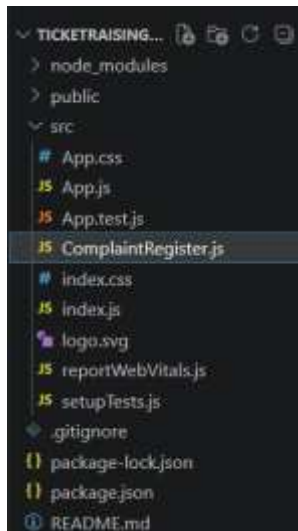


Figure 2: Browser output

Figure 3: Browser output

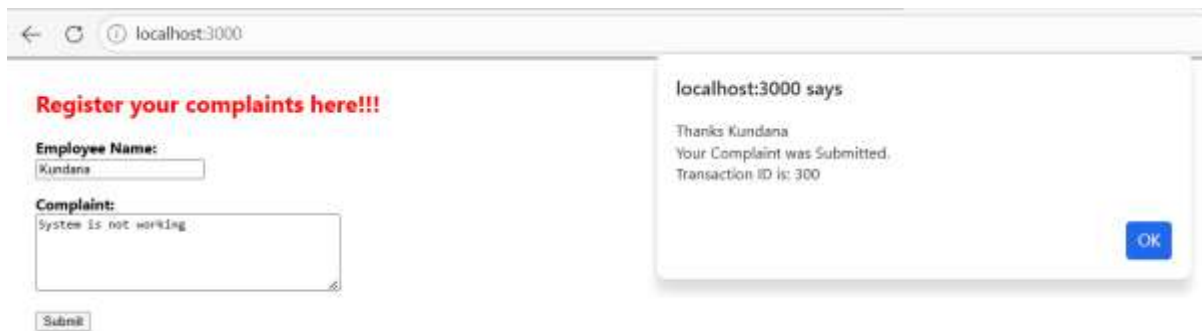


Figure 4: Terminal showing successful execution using npm start.

```
PS C:\Users\HP\OneDrive\Documents\employeesapp\ticketraisingapp\ticketraisingapp> npm start

You can now view ticketraisingapp in the browser.

Local:      http://localhost:3000
On Your Network: http://10.1.46.55:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```

Result

The Ticket Raising application was implemented successfully. The application accepted the employee name and complaint details, generated a random transaction ID, and displayed a confirmation alert after the complaint was submitted.