

REC-CIS

## GE23131-Programming Using C-2024





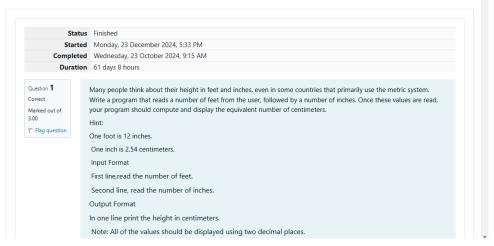




REC-CIS

# GE23131-Programming Using C-2024



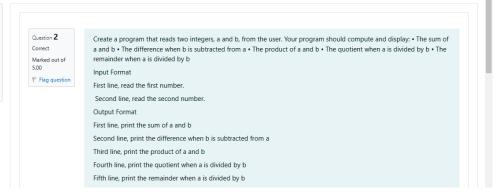


REC-CIS



# GE23131-Programming Using C-2024



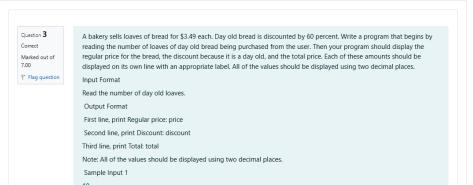




# GE23131-Programming Using C-2024






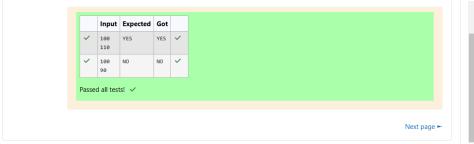


REC-CIS

# GE23131-Programming Using C-2024



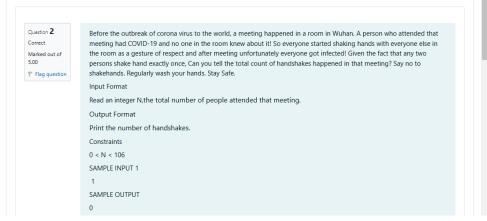



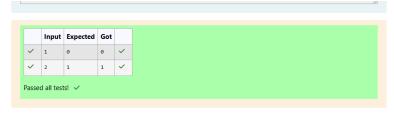

→ Previous page


Next page -

# GE23131-Programming Using C-2024

Question 3

Correct



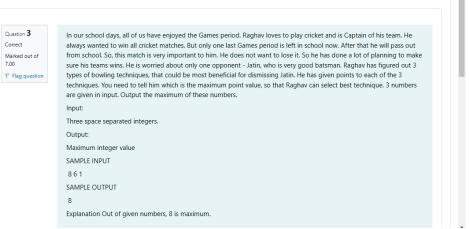

```
Answer: (penalty regime: 0 %)
            nt main.,
int a,b,c;
scanf("%d %d %d",&a,&b,&c);
if(a)c && a>b)
{
    printf("%d",a);
}
else
{
    if(b>c)
{
        printf("%d",b);
}
}
                             printf("%d",c);
```

