
Maisha Ahmed - Deployment 2


Jenkinsfile pipeline script

```
32 lines (32 sloc) 483 Bytes
 1 pipeline
 2 {
        agent any
       triggers
 4
 5
 6
           cron('*/10 * * * *')
 7
 8
       stages
10
          stage('Build')
11
           {
               steps
12
              {
14
                  echo 'Hello world!'
15
           }
16
           stage('Test')
17
18
              steps
19
20
              {
21
               echo 'Hello KuraLabs!'
22
23
          stage('Deployment')
24
25
26
              steps
27
28
                 echo 'Goodbye World!'
29
              }
            }
31
        }
32 }
```

Jenkins pipeline configuration

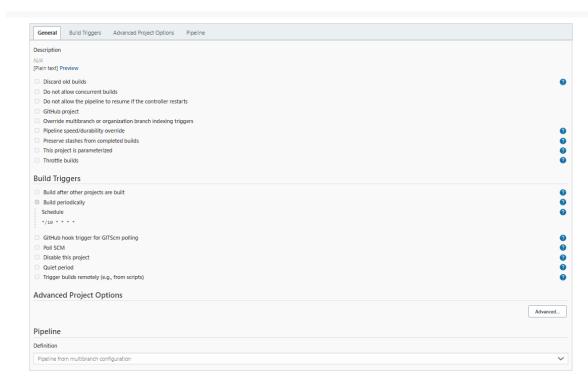

Successful deployments

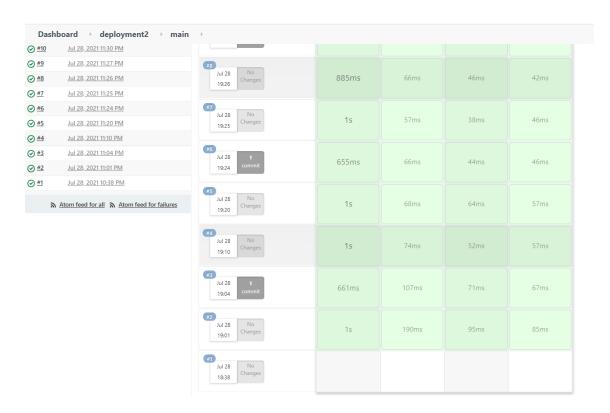

Commenting out the 10 minute trigger

```
32 lines (32 sloc) 491 Bytes
 1 pipeline
 2
 3
         agent any
         //triggers
 4
         //{
         // cron('*/10 * * * *')
        //}
        stages
 8
 9
10
             stage('Build')
11
             {
                 steps
12
13
                     echo 'Hello world!'
14
15
16
             stage('Test')
17
18
19
                steps
20
                  echo 'Hello KuraLabs!'
21
22
23
             stage('Deployment')
24
25
26
                steps
27
                {
28
                   echo 'Goodbye World!'
29
30
31
         }
32
     }
```

Schedule the EC2 to shutdown at 9 PM: FAILED MISERABLY