

Chapter 6: Database Design Using the E-R Model

Database System Concepts, 7th Ed.

©Silberschatz, Korth and Sudarshan
See www.db-book.com for conditions on re-use



Outline

- Overview of the Design Process
- The Entity-Relationship Model
- Complex Attributes
- Mapping Cardinalities
- Primary Key
- Removing Redundant Attributes in Entity Sets
- Reducing ER Diagrams to Relational Schemas
- Extended E-R Features
- Entity-Relationship Design Issues
- Alternative Notations for Modeling Data
- Other Aspects of Database Design



Outline

- Extended E-R Features
- Entity-Relationship Design Issues
- Alternative Notations for Modeling Data
- Other Aspects of Database Design




Revision

- Level of Abstraction
  - Physical Level
  - Logical Level
  - View Level
- Data Modelling
  - High level Modelling or Conceptual modelling [Using Diagrams- ER Diagrams]
  - Representational Level or Implementation [Using Queries- Relational Model]
  - Low Level or Physical data model



Database Design Process

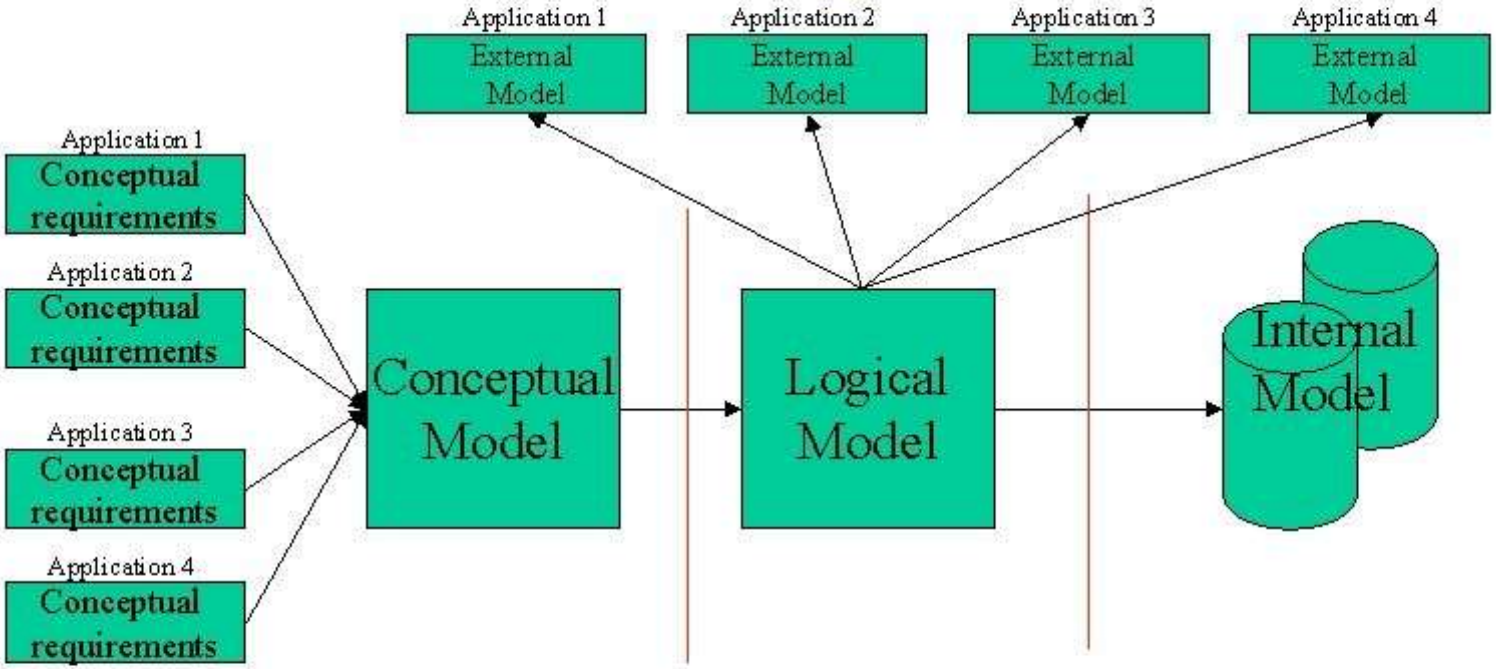



Design Phases

- Initial phase -- characterize fully the data needs of the prospective database users.
- Second phase -- choosing a data model
  - Applying the concepts of the chosen data model
  - Translating these requirements into a conceptual schema of the database.
  - A fully developed conceptual schema indicates the functional requirements of the enterprise.
    - Describe the kinds of operations (or transactions) that will be performed on the data.



Design Phases (Cont.)

- Final Phase -- Moving from an abstract data model to the implementation of the database
  - Logical Design – Deciding on the database schema.
    - Database design requires that we find a “good” collection of relation schemas.
    - Business decision – What attributes should we record in the database?
    - Computer Science decision – What relation schemas should we have and how should the attributes be distributed among the various relation schemas?
  - Physical Design – Deciding on the physical layout of the database



Design Alternatives

- In designing a database schema, we must ensure that we avoid two major pitfalls:
  - Redundancy: a bad design may result in repeat information.
    - Redundant representation of information may lead to data inconsistency among the various copies of information
  - Incompleteness: a bad design may make certain aspects of the enterprise difficult or impossible to model.
- Avoiding bad designs is not enough. There may be a large number of good designs from which we must choose.



Design Approaches

- Entity Relationship Model (covered in this chapter)
  - Models an enterprise as a collection of *entities* and *relationships*
    - Entity: a “thing” or “object” in the enterprise that is distinguishable from other objects
      - Described by a set of *attributes*
    - Relationship: an association among several entities
  - Represented diagrammatically by an *entity-relationship diagram:*
- Normalization Theory (Chapter 7)
  - Formalize what designs are bad, and test for them



Outline of the ER Model



ER model -- Database Modeling

- The ER data model was developed to facilitate database design by allowing specification of an **enterprise schema** that represents the overall logical structure of a database.
- The ER data model employs three basic concepts:
  - entity sets,
  - relationship sets,
  - attributes.
- The ER model also has an associated diagrammatic representation, the **ER diagram**, which can express the overall logical structure of a database graphically.



Entity Sets

- An **entity** is an object that exists and is distinguishable from other objects.
  - Example: specific person, company, event, plant
- An **entity set** is a set of entities of the same type that share the same properties.
  - Example: set of all persons, companies, trees, holidays
- An entity is represented by a set of attributes; i.e., descriptive properties possessed by all members of an entity set.
  - Example:

    instructor = (*ID, name, salary*)
    course= (*course_id, title, credits*)
- A subset of the attributes form a **primary key** of the entity set; i.e., uniquely identifying each member of the set.



Entity Sets -- *instructor* and *student*

76766	Crick
45565	Katz
10101	Srinivasan
98345	Kim
76543	Singh
22222	Einstein

instructor


98988	Tanaka
12345	Shankar
00128	Zhang
76543	Brown
76653	Aoi
23121	Chavez
44553	Peltier


student



Representing Entity sets in ER Diagram

- Entity sets can be represented graphically as follows:
  - Rectangles represent entity sets.
  - Attributes listed inside entity rectangle
  - Underline indicates primary key attributes

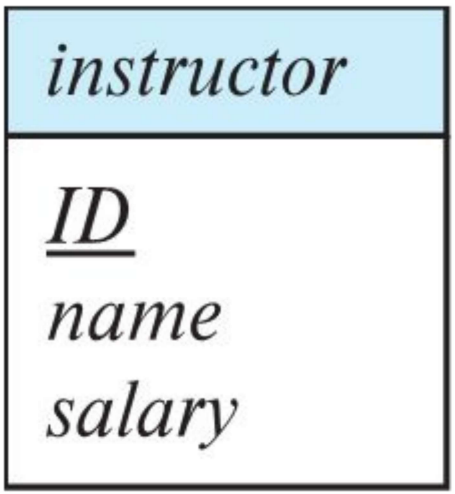

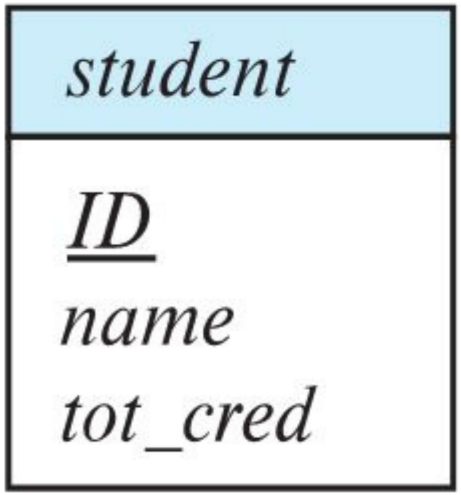



Relationship Sets

- A **relationship** is an association among several entities

  Example:

  44553 (Peltier) *advisor* 22222 (Einstein)

  student entityrelationship set *instructor* entity

- A **relationship set** is a mathematical relation among $n \geq 2$ entities, each taken from entity sets

  $$\{(e_1, e_2, \ldots e_n) \mid e_1 \in E_1, e_2 \in E_2, \ldots, e_n \in E_n\}$$

  where $(e_1, e_2, \ldots, e_n)$ is a relationship


  - Example:

    $$(44553,22222) \in advisor$$



Relationship Sets (Cont.)


- Example: we define the relationship set *advisor* to denote the associations between students and the instructors who act as their advisors.
- Pictorially, we draw a line between related entities.

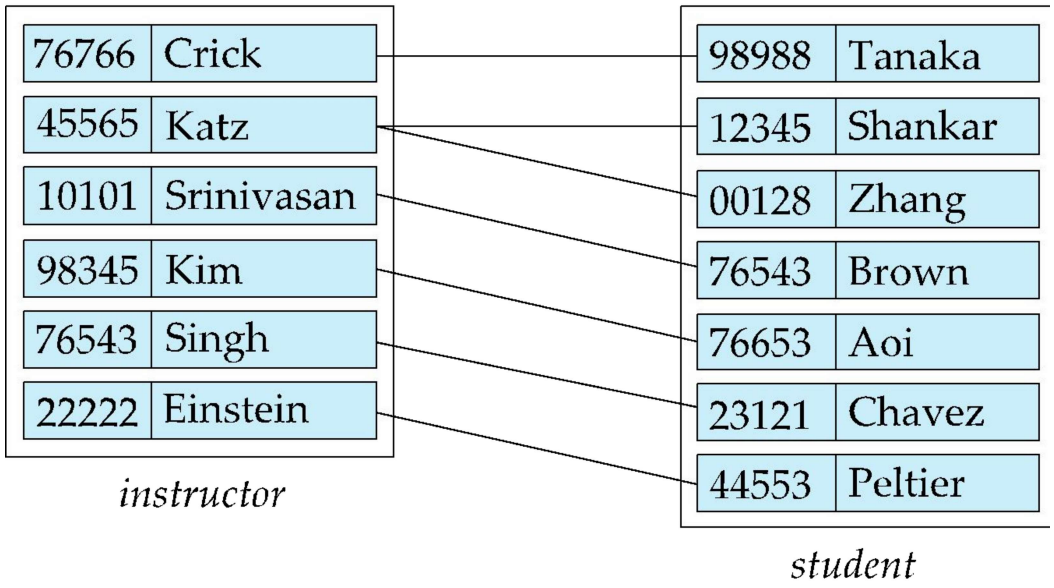



Representing Relationship Sets via ER Diagrams


- Diamonds represent relationship sets.

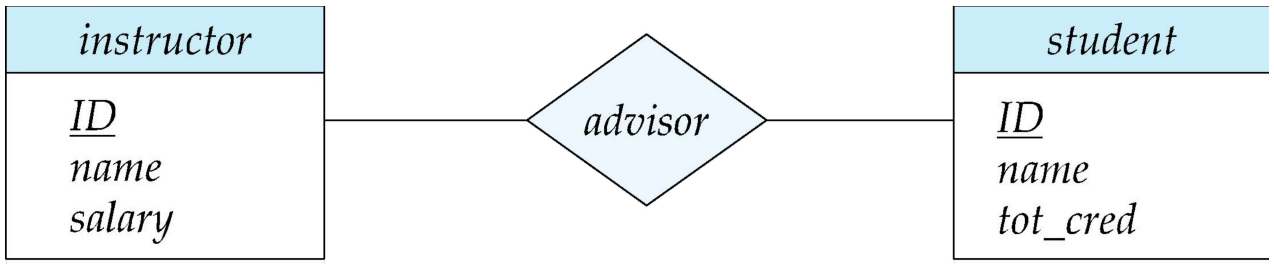




Relationship Sets (Cont.)

- An attribute can also be associated with a relationship set.
- For instance, the *advisor* relationship set between entity sets *instructor* and *student* may have the attribute *date* which tracks when the student started being associated with the advisor

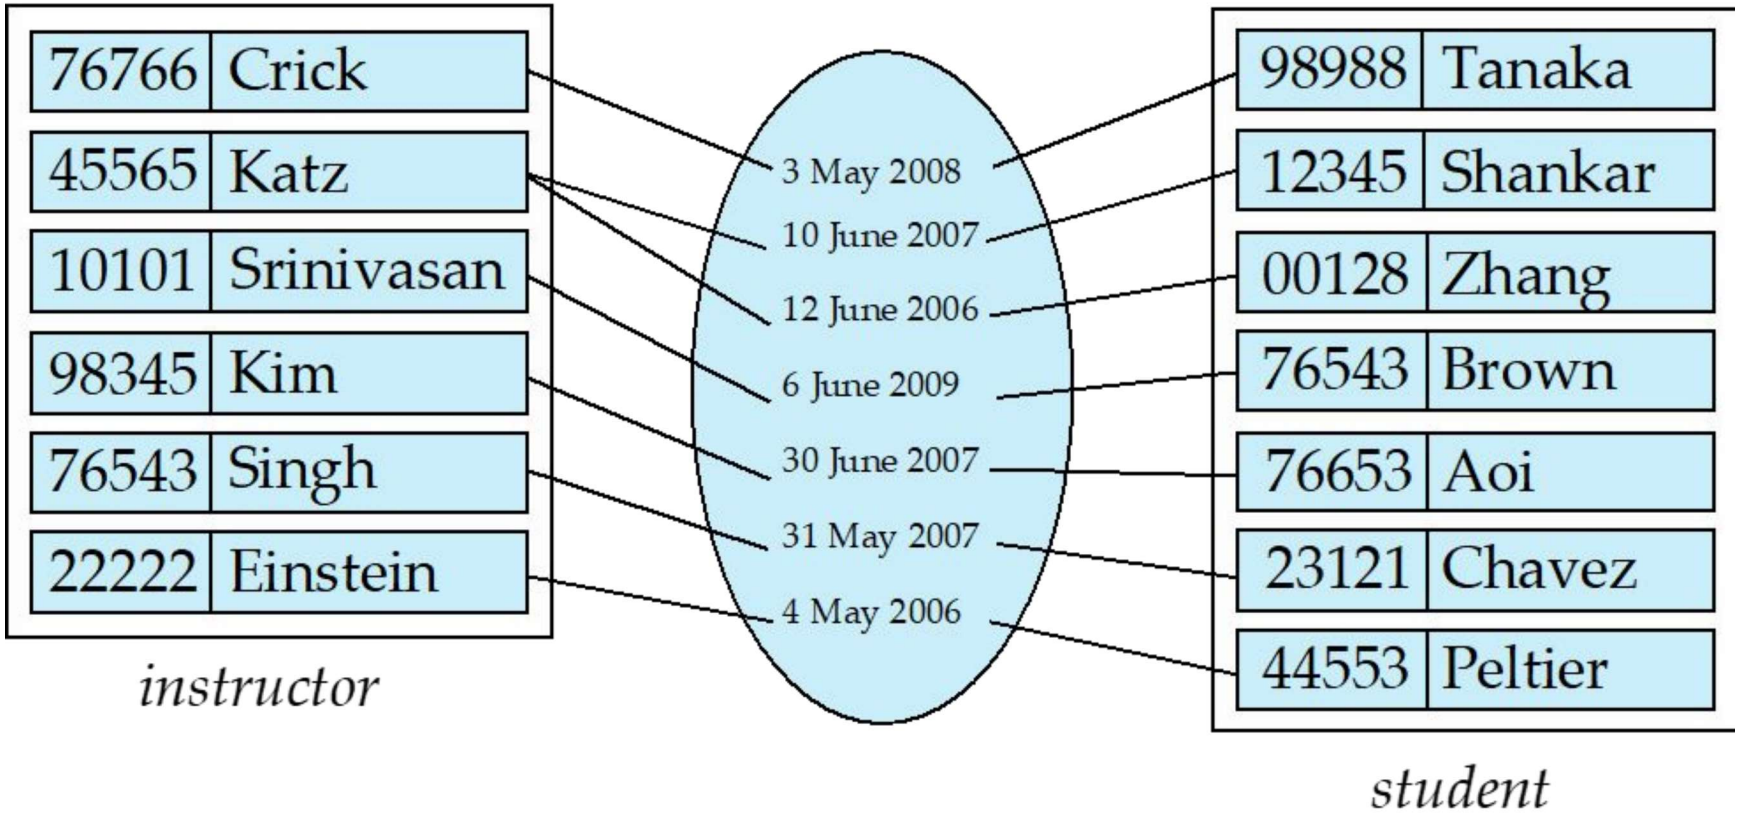




Relationship Sets with Attributes

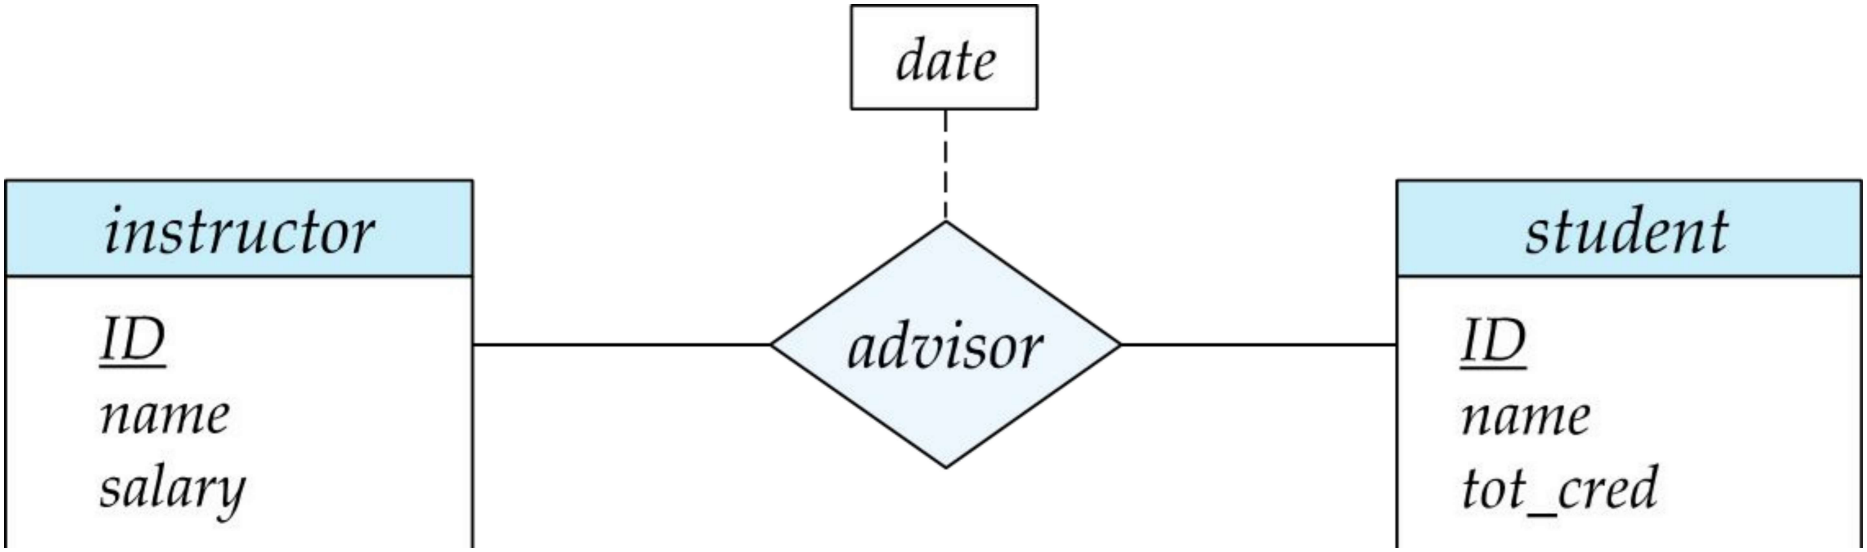



Roles

- Entity sets of a relationship need not be distinct
  - Each occurrence of an entity set plays a “role” in the relationship
- The labels “*course_id*” and “*prereq_id*” are called **roles**.

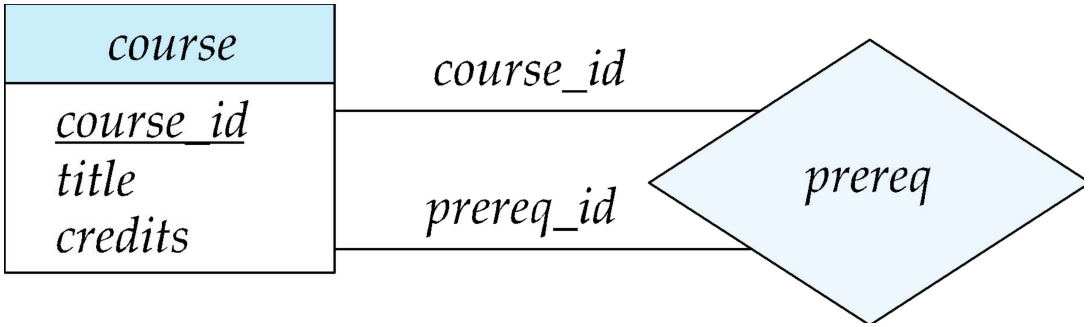




Degree of a Relationship Set

- Binary relationship
  - involve two entity sets (or degree two).
  - most relationship sets in a database system are binary.
- Relationships between more than two entity sets are rare. Most relationships are binary. (More on this later.)
  - Example: *students* work on research *projects* under the guidance of an *instructor*.
  - relationship *proj_guide* is a ternary relationship between *instructor, student,* and *project*



Non-binary Relationship Sets

- Most relationship sets are binary
- There are occasions when it is more convenient to represent relationships as non-binary.
- E-R Diagram with a Ternary Relationship

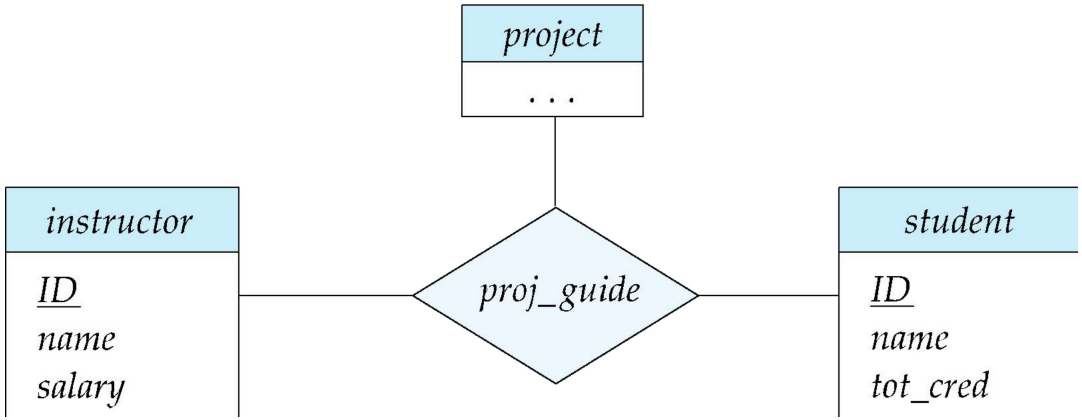




Attributes

- Attributes are the features of the entity. For ex: Person entity has attributes like name, address, phone number etc.
- Attribute types:
  - **Simple** and **composite** attributes.
    - Composite attributes are collection of simple attributes adding more variability to an attribute. Ex: Name is composite attribute as it can be divided into First Name, Middle Name, and Last Name.
    - First Name is a Simple attribute which can not be further divided.
  - **Single-valued** and **multivalued** attributes
    - Multivalued attributes have more than one values Example: multivalued attribute: *phone_numbers.*



Composite Attributes

- Composite attributes allow us to divided attributes into subparts (other attributes).

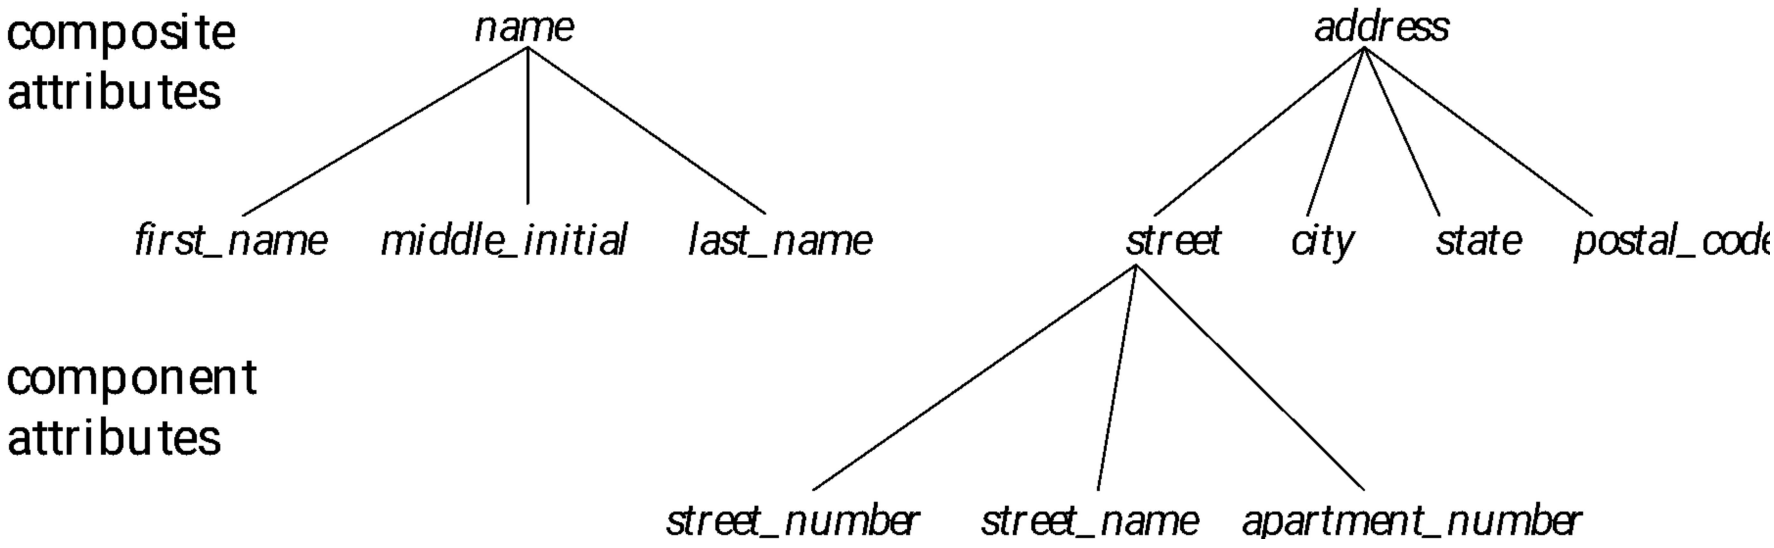




Attributes

- **Complex attributes.**
  - Combination of one or more attributes. For example: Address is a multivalued attribute as well as a composite attribute, hence it is a complex attribute.
- **Derived attributes**
  - Can be computed from other attributes
  - Example: age, given date_of_birth

- **Domain** – the set of permitted values for each attribute



Representing Complex Attributes in ER Diagram

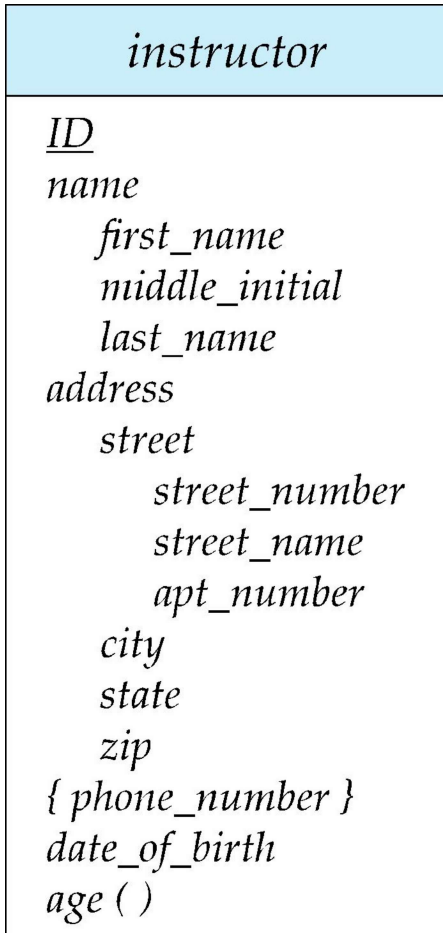





Mapping Cardinality Constraints

- Express the number of entities to which another entity can be associated via a relationship set.
- Most useful in describing binary relationship sets.
- For a binary relationship set the mapping cardinality must be one of the following types:
  - One to one
  - One to many
  - Many to one
  - Many to many



Mapping Cardinalities

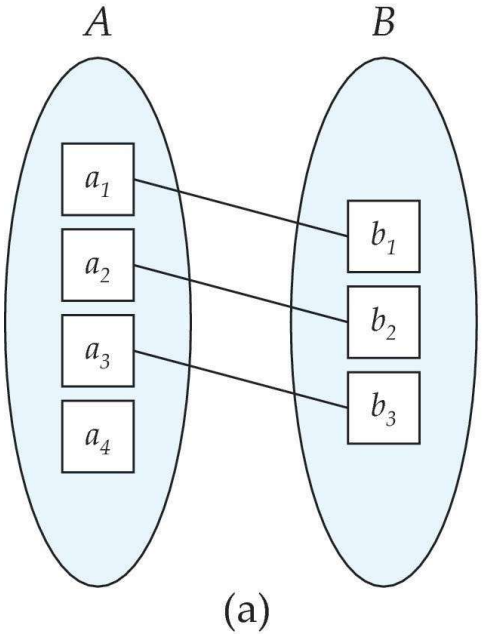

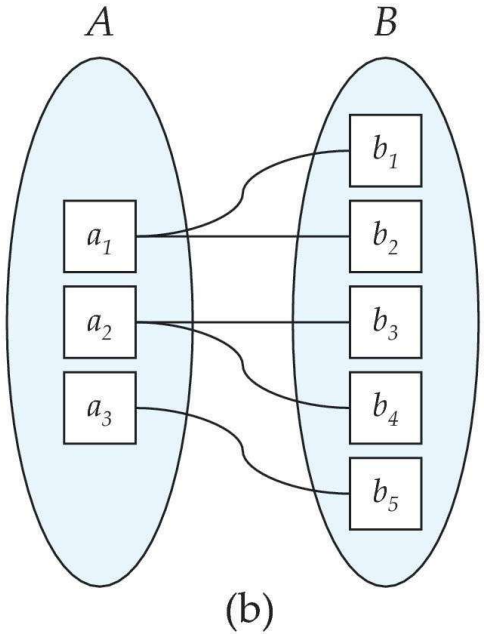

One to one


One to many


Note: Some elements in *A* and *B* may not be mapped to any elements in the other set

©Silberschatz, Korth and Sudarshan



Mapping Cardinalities

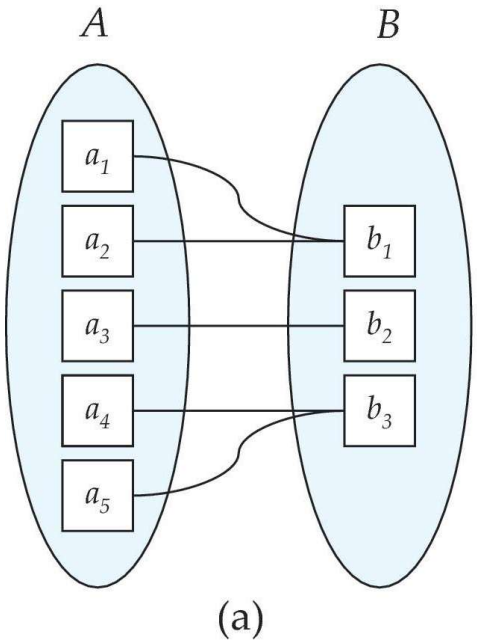

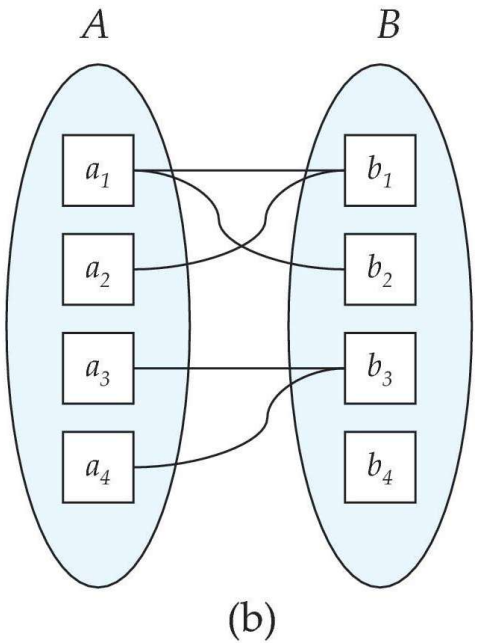

Many to one

Many to many

Note: Some elements in A and B may not be mapped to any elements in the other set



Representing Cardinality Constraints in ER Diagram

- We express cardinality constraints by drawing either a directed line (→), signifying "one," or an undirected line (—), signifying "many," between the relationship set and the entity set.
- One-to-one relationship between an *instructor* and a *student* :
  - A student is associated with at most one *instructor* via the relationship *advisor*
  - A *student* is associated with at most one *department* via *stud_dept*





One-to-Many Relationship

- one-to-many relationship between an *instructor* and a *student*
  - an instructor is associated with several (including 0) students via *advisor*
  - a student is associated with at most one instructor via advisor,





Many-to-One Relationships


- In a many-to-one relationship between an *instructor* and a *student,*
  - an instructor is associated with at most one student via *advisor*,
  - and a student is associated with several (including 0) instructors via *advisor*





Many-to-Many Relationship


- An instructor is associated with several (possibly 0) students via *advisor*
- A student is associated with several (possibly 0) instructors via *advisor*

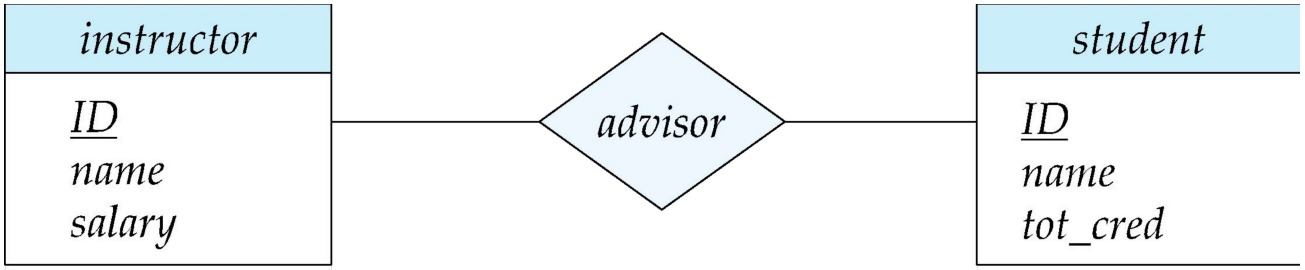



Total and Partial Participation

- **Total participation** (indicated by double line): every entity in the entity set participates in at least one relationship in the relationship set

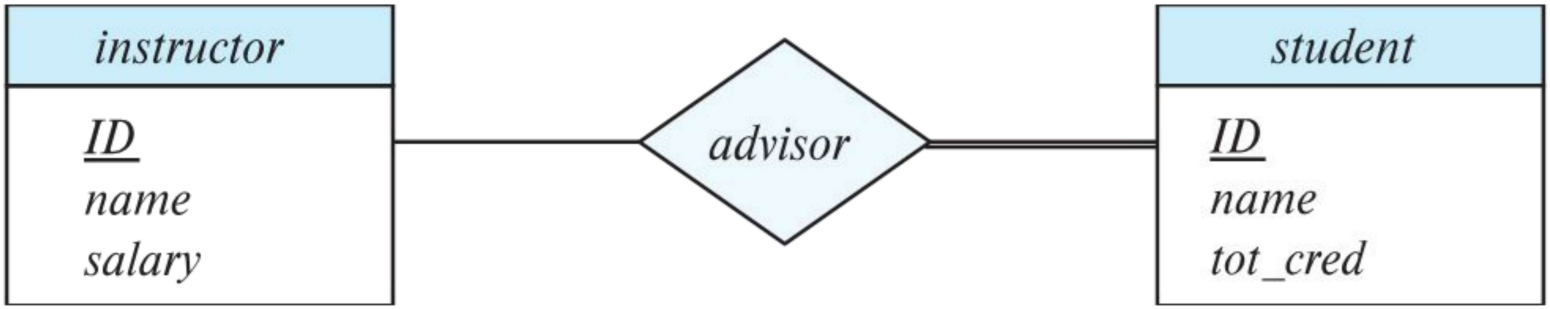

participation of *student* in *advisor* relation is total


  - every *student* must have an associated instructor

- **Partial participation**: some entities may not participate in any relationship in the relationship set
  - Example: participation of *instructor* in *advisor* is partial



Notation for Expressing More Complex Constraints

- A line may have an associated minimum and maximum cardinality, shown in the form *l..h*, where *l* is the minimum and *h* the maximum cardinality
  - A minimum value of 1 indicates total participation.
  - A maximum value of 1 indicates that the entity participates in at most one relationship
  - A maximum value of * indicates no limit.
- Example

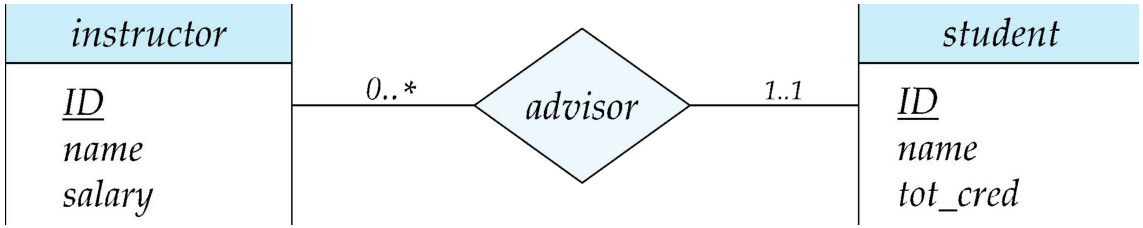


  - Instructor can advise 0 or more students. A student must have 1 advisor; cannot have multiple advisors

©Silberschatz, Korth and Sudarshan



Cardinality Constraints on Ternary Relationship

- A ternary relationship is a relationship of degree three. That is, a relationship that contains three participating entities.
- Cardinalities for ternary relationships can take the form of 1:1:1, 1:1:M, 1:M:N or M:N:P.
- The cardinality constraint of an entity in a ternary relationship is defined by a pair of two entity instances associated with the other single entity
- instance.
- For example, in a ternary relationship R(X, Y, Z) of cardinality M:N:1, for each pair of (X, Y) there is only one instance of Z; for each pair of (X, Z) there are N instances of Y; for each pair of (Y, Z) there are M instances of X.

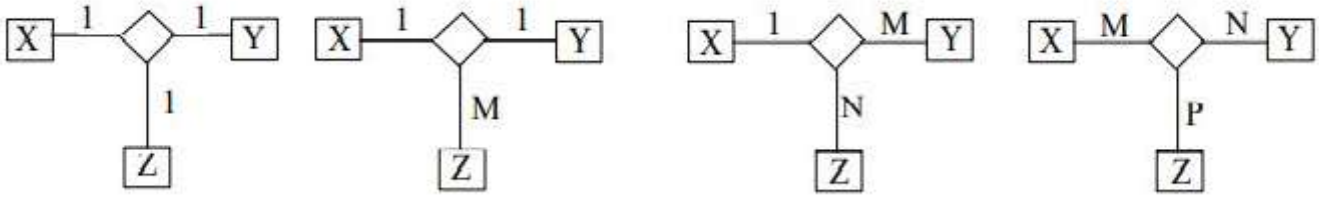



Primary Key

- Primary keys provide a way to specify how entities and relations are distinguished. We will consider:
  - Entity sets
  - Relationship sets.
  - Weak entity sets



Primary key for Entity Sets

- By definition, individual entities are distinct.
- From database perspective, the differences among them must be expressed in terms of their attributes.
- The values of the attribute values of an entity must be such that they can uniquely identify the entity.
  - No two entities in an entity set are allowed to have exactly the same value for all attributes.
- A key for an entity is a set of attributes that suffice to distinguish entities from each other



Primary Key for Relationship Sets

- To distinguish among the various relationships of a relationship set we use the individual primary keys of the entities in the relationship set.
  - Let *R* be a relationship set involving entity sets E1, E2, .. En
  - The primary key for R is consists of the union of the primary keys of entity sets E1, E2, ..En
  - If the relationship set *R* has attributes a1, a2, .., am associated with it, then the primary key of *R* also includes the attributes a1, a2, .., am
- Example: relationship set “advisor”.
  - The primary key consists of *instructor.ID* and *student.ID*
- The choice of the primary key for a relationship set depends on the mapping cardinality of the relationship set.



Choice of Primary key for Binary Relationship

- Many-to-Many relationships. The preceding union of the primary keys is a minimal superkey and is chosen as the primary key.
- One-to-Many relationships . The primary key of the “Many” side is a minimal superkey and is used as the primary key.
- Many-to-one relationships. The primary key of the “Many” side is a minimal superkey and is used as the primary key.
- One-to-one relationships. The primary key of either one of the participating entity sets forms a minimal superkey, and either one can be chosen as the primary key.



Choice of Primary key for Binary Relationship


Rule of Thumb

- **M:N (many-to-many):** Primary Key = union of participating entity keys.
- **1:N (one-to-many):** Primary Key = primary key of the “many” side.
- **1:1 (one-to-one):** Primary Key = primary key of either entity set.



Weak Entity Sets

- Consider a *section* entity, which is uniquely identified by a *course_id*, *semester, year*, and *sec_id*.
- Clearly, section entities are related to course entities. Suppose we create a relationship set *sec_course* between entity sets *section* and *course*.
- Note that the information in *sec_course* is redundant, since *section* already has an attribute *course_id*, which identifies the course with which the section is related.
- One option to deal with this redundancy is to get rid of the relationship *sec_course*; however, by doing so the relationship between *section* and *course* becomes implicit in an attribute, which is not desirable.

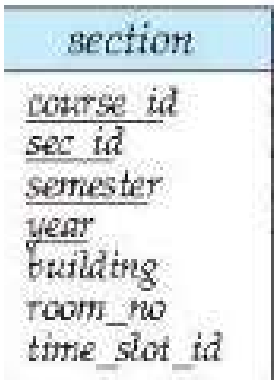



Weak Entity Sets (Cont.)

- An alternative way to deal with this redundancy is to not store the attribute *course_id* in the *section* entity and to only store the remaining attributes *section_id*, *year*, and *semester.*
  - However, the entity set *section* then does not have enough attributes to identify a particular *section* entity uniquely
- To deal with this problem, we treat the relationship *sec_course* as a special relationship that provides extra information, in this case, the *course_id*, required to identify *section* entities uniquely.
- A **weak entity set** is one whose existence is dependent on another entity, called its **identifying entity**
- Instead of associating a primary key with a weak entity, we use the identifying entity, along with extra attributes called **discriminator** to uniquely identify a weak entity.




Weak Entity Sets (Cont.)

- An entity set that is not a weak entity set is termed a **strong entity set.**
- Every weak entity must be associated with an identifying entity; that is, the weak entity set is said to be **existence dependent** on the identifying entity set.
- The identifying entity set is said to **own** the weak entity set that it identifies.
- The relationship associating the weak entity set with the identifying entity set is called the **identifying relationship**.
- Note that the relational schema we eventually create from the entity set *section* does have the attribute *course_id*, for reasons that will become clear later, even though we have dropped the attribute *course_id* from the entity set *section.*



Expressing Weak Entity Sets

- In E-R diagrams, a weak entity set is depicted via a double rectangle.
- We underline the discriminator of a weak entity set with a dashed line.
- The relationship set connecting the weak entity set to the identifying strong entity set is depicted by a double diamond.
- Primary key for *section* – (*course_id, sec_id, semester, year*)

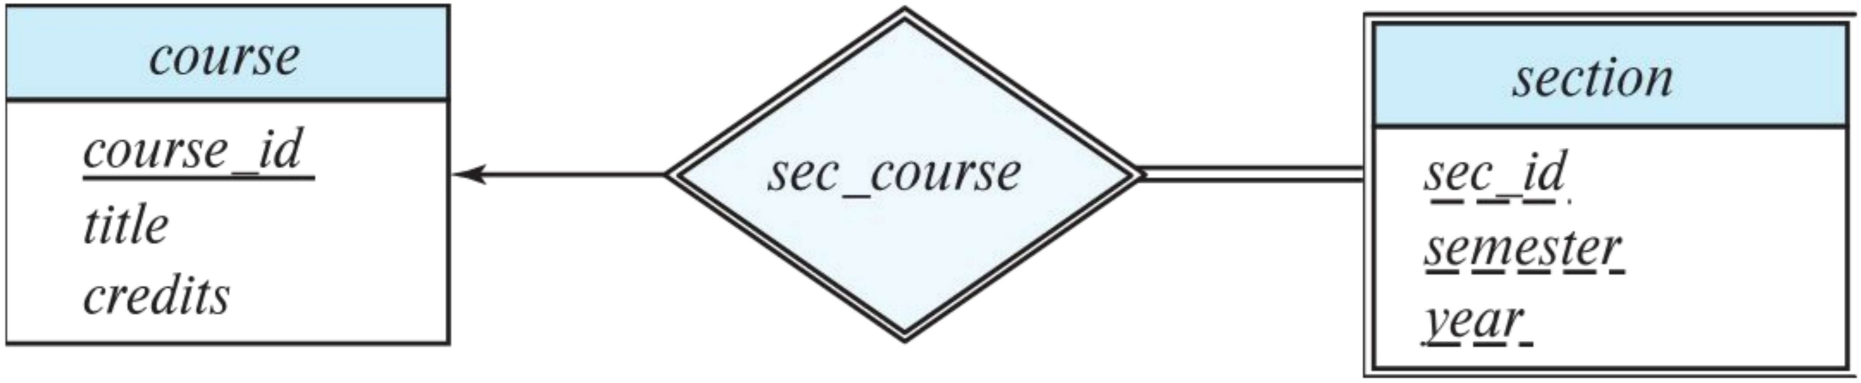


©Silberschatz, Korth and Sudarshan



Redundant Attributes


- Suppose we have entity sets:
  - *student*, with attributes: *ID*, *name, tot_cred*, *dept_name*
  - *department,* with attributes: *dept_name, building, budget*
- We model the fact that each student has an associated department using a relationship set *stud_dept*
- The attribute *dept_name* in *student* below replicates information present in the relationship and is therefore redundant
  - and needs to be removed.
- BUT: when converting back to tables, in some cases the attribute gets reintroduced, as we will see later.

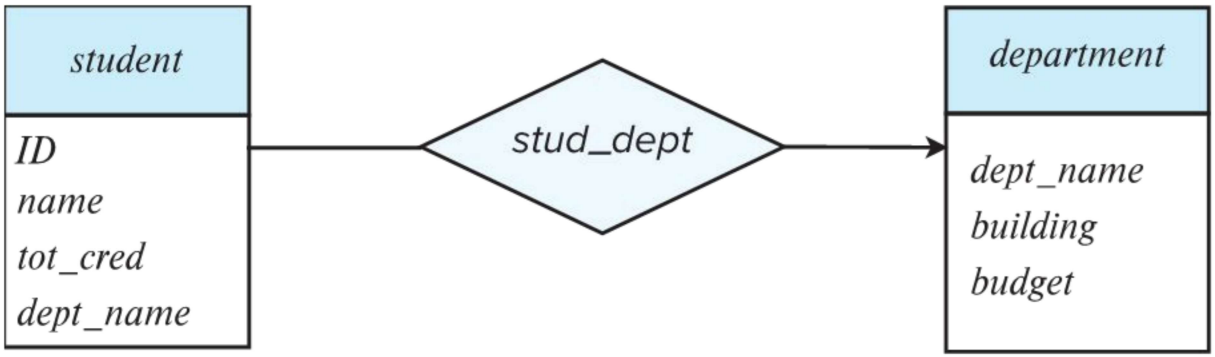

(a) Incorrect use of attribute




Schema Diagram for University Database (Relational Model)

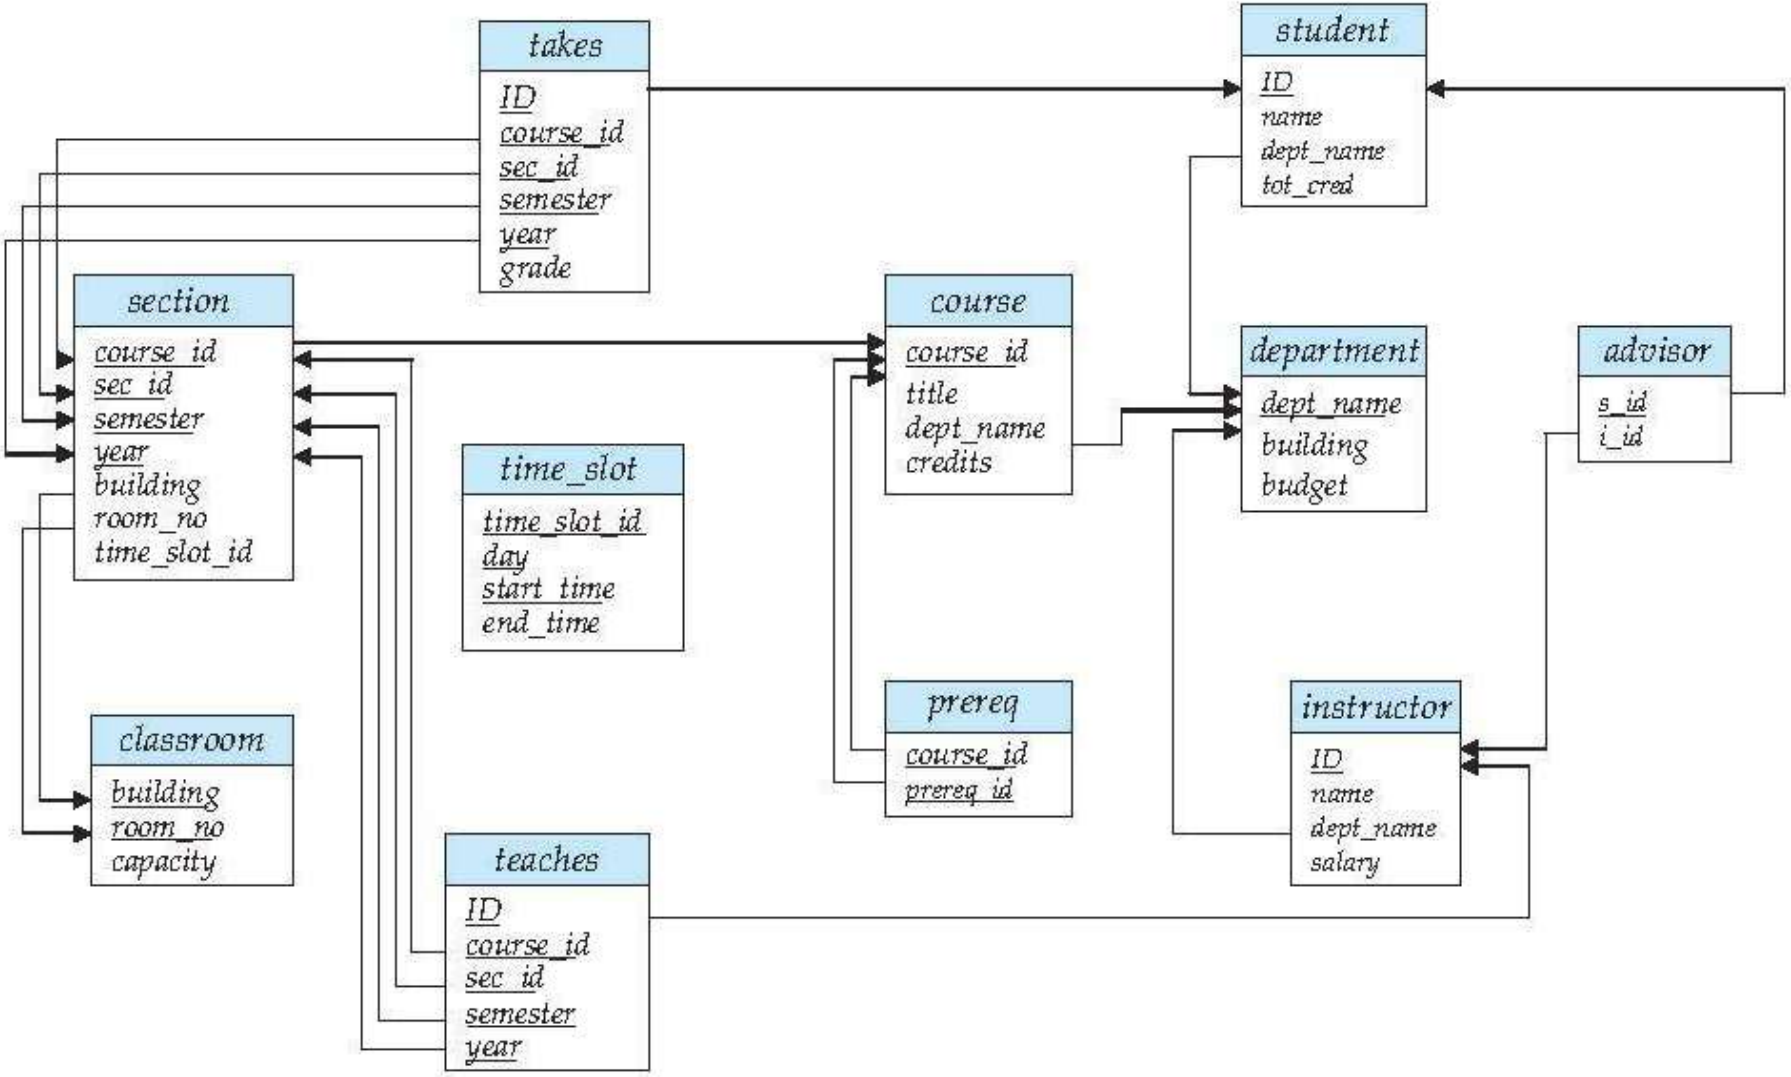



E-R Diagram for a University Enterprise

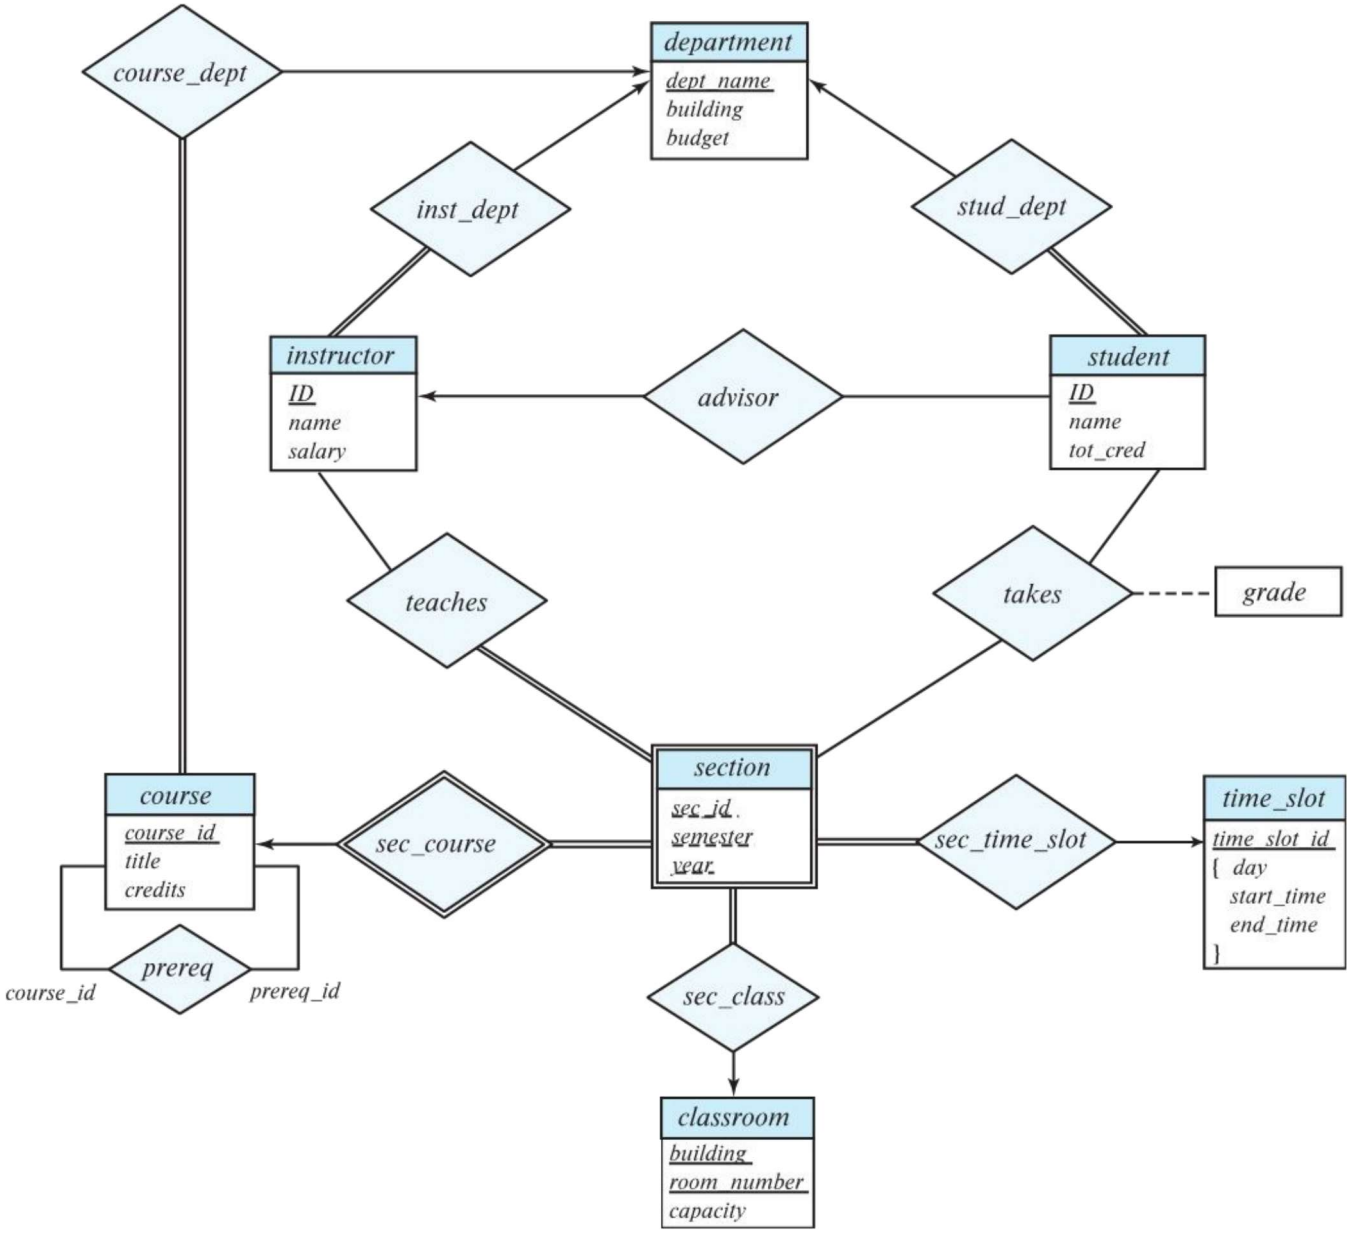



Case Study-1

The COMPANY database keeps track of a company's employees, departments, and projects. Suppose that after the requirements collection and analysis phase, the database designers provided the following description of the "miniworld"-the part of the company to be represented in the database:

1. The company is organized into departments. Each department has a unique name, a unique number, and a particular employee who manages the department. We keep track of the start date when that employee began managing the department. A department may have several locations.

2. A department controls a number of projects, each of which has a unique name, a unique number, and a single location.

3. We store each employee's name, social security number, address, salary, sex, and birth date. An employee is assigned to one department but may work on several projects, which are not necessarily controlled by the same department. We keep track of the number of hours per week that an employee works on each project. We also keep track of the direct supervisor of each employee.

4. We want to keep track of the dependents of each employee for insurance purposes. We keep each dependent's first name, sex, birth date, and relationship to the employee.



Designing the ER diagram

Step-1: Identify the entity sets and attributes

1. Department – dname, dnumber, locations
2. Project – pname, pnumber, location
3. Employee – ename, SSN, address, salary, sex, birth_date
4. Dependent (Weak entity set)– fname, sex, birth_date, relationship



Step-2: Identify the relationships, participation constraints and cardinality ratio

1. Manages – Employee and Department with attribute start_date, 1:1, Employee- partial, Department- total

2. Controls – Department and Project, 1:N, department-partial, Project-total


3. Works for – Employee and Department, N:1, Employee-total, Department-total

4. Works_on – Employee and Project with attribute hours_per_week, M:N, Employee –total, Project-total

5. Supervisor – Employee and Employee (supervised and supervise), M:1, supervised-total, supervise-partial

6. Dependent_of (identifying relationship) – Dependent and Employee, M:1, Dependent –total, Employee -partial

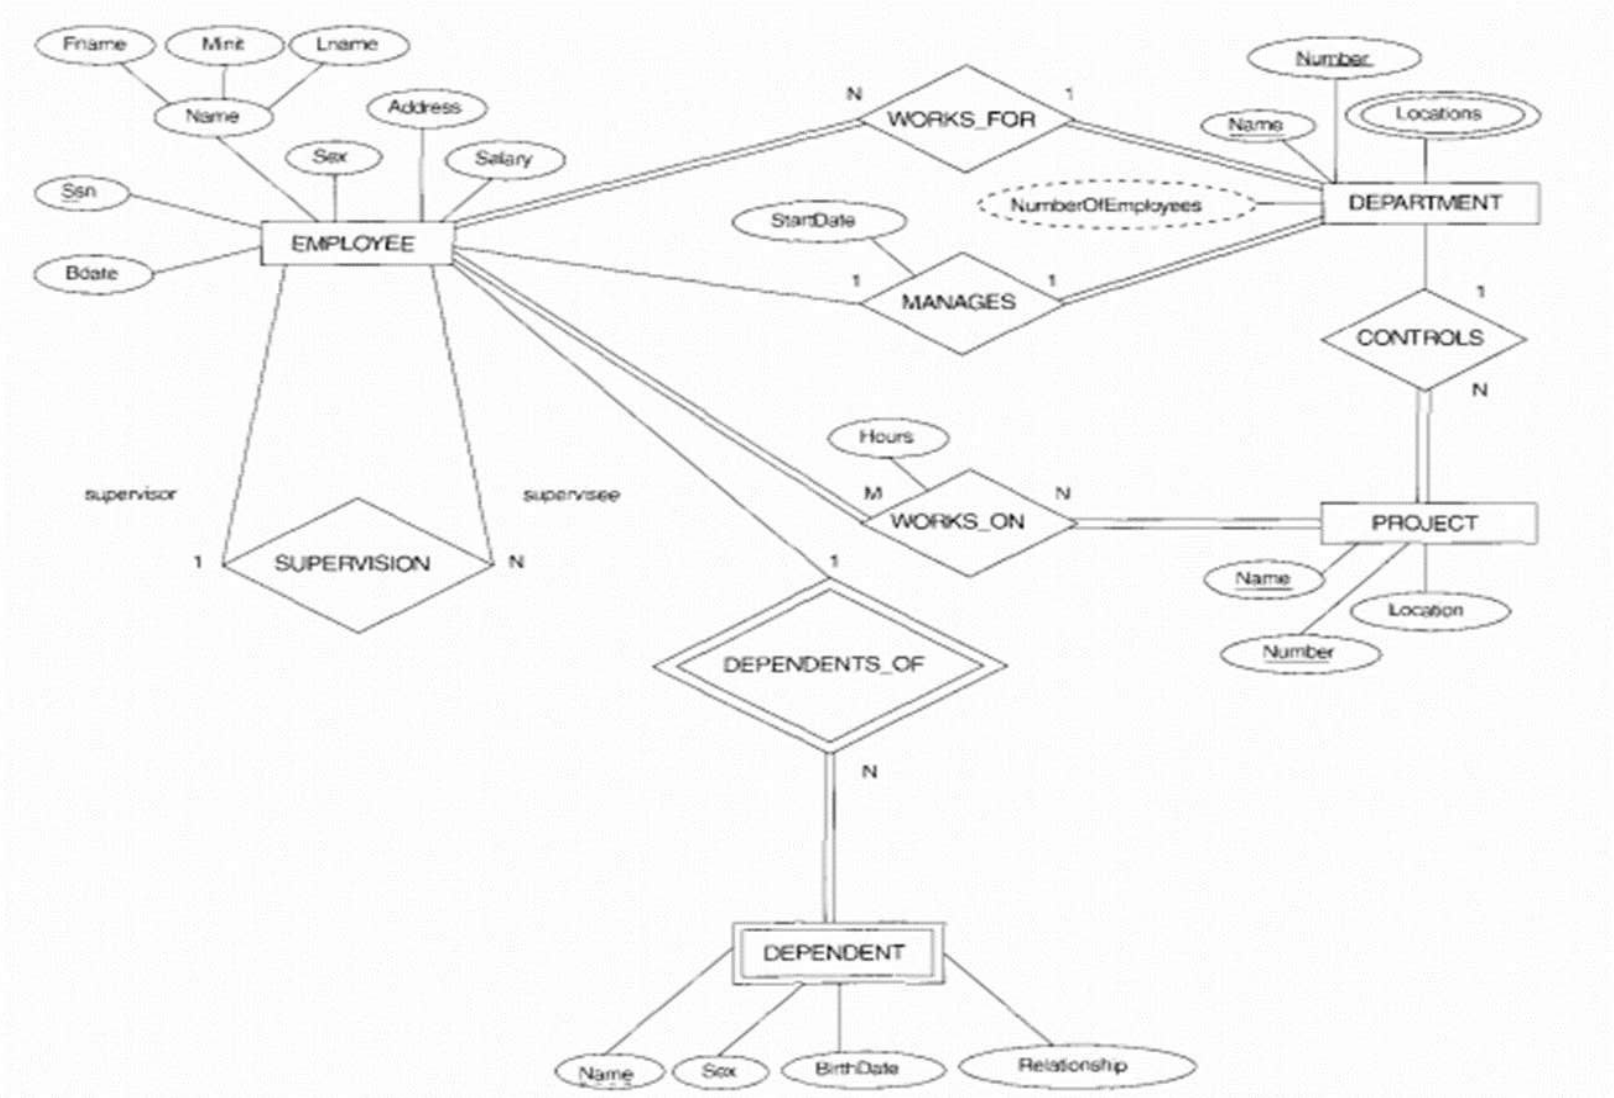


Fname
Minit
Lname
Name
Address
Sex
Salary
Ssn
Bdate
EMPLOYEE
N
WORKS_FOR
1
Number
Name
Locations
DEPARTMENT
StartDate
NumberOfEmployees
1
MANAGES
1
1
CONTROLS
N
Hours
M
N
WORKS_ON
PROJECT
supervisor
supervisee
1
SUPERVISION
N
1
Name
Location
Number
DEPENDENTS_OF
N
DEPENDENT
Name
Sex
BirthDate
Relationship



Extended E-R Features




Specialization (ISA)

- Top-down design process; we designate sub-groupings within an entity set that are distinctive from other entities in the set.
- These sub-groupings become lower-level entity sets that have attributes or participate in relationships that do not apply to the higher-level entity set.
- Depicted by a *triangle* component labeled ISA (e.g., *instructor* “is a” *person*).
- **Attribute inheritance** – a lower-level entity set inherits all the attributes and relationship participation of the higher-level entity set to which it is linked.



Specialization Example

- **Overlapping** – *employee* and *student*
- **Disjoint** – *instructor* and *secretary*
- Total and partial

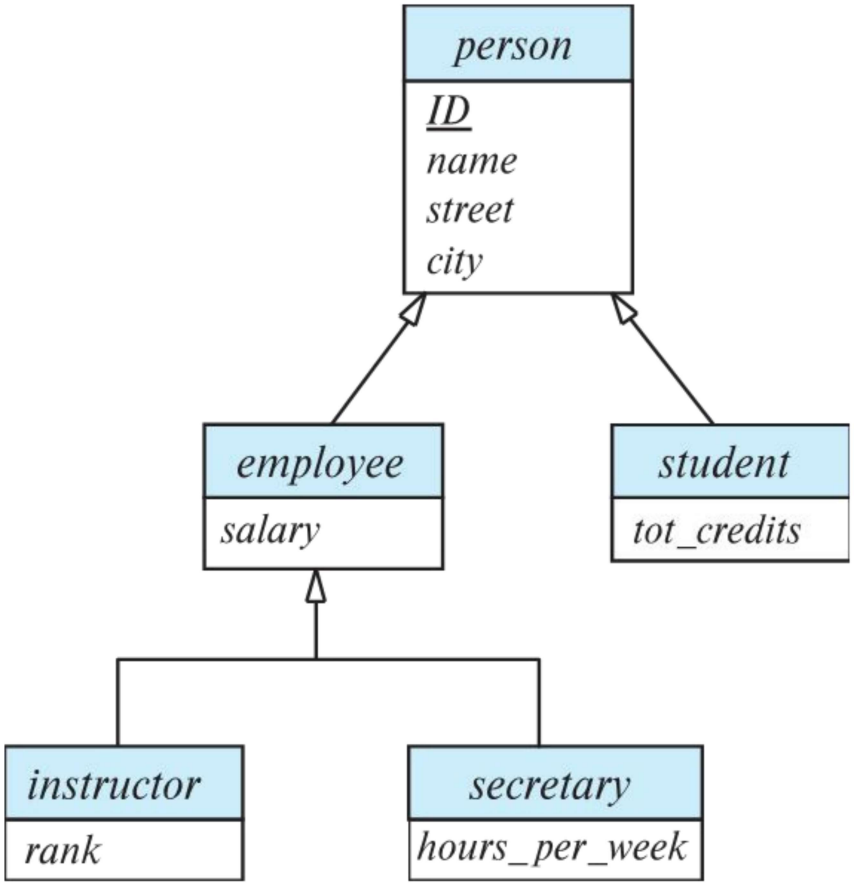



Representing Specialization via Schemas

- Method 1:
  - Form a schema for the higher-level entity
  - Form a schema for each lower-level entity set, include primary key of higher-level entity set and local attributes

schema	attributes
person	ID, name, street, city
student	ID, tot_cred
employee	ID, salary

  - Drawback: getting information about, an *employee* requires accessing two relations, the one corresponding to the low-level schema and the one corresponding to the high-level schema



Representing Specialization as Schemas (Cont.)

- Method 2:
  - Form a schema for each entity set with all local and inherited attributes

schema	attributes
person	ID, name, street, city
student	ID, name, street, city, tot_cred
employee	ID, name, street, city, salary

  - Drawback: *name, street* and *city* may be stored redundantly for people who are both students and employees

©Silberschatz, Korth and Sudarshan




Generalization


- **A bottom-up design process** – combine a number of entity sets that share the same features into a higher-level entity set.
- Specialization and generalization are simple inversions of each other; they are represented in an E-R diagram in the same way.
- The terms specialization and generalization are used interchangeably.



Specialization (Top-Down)

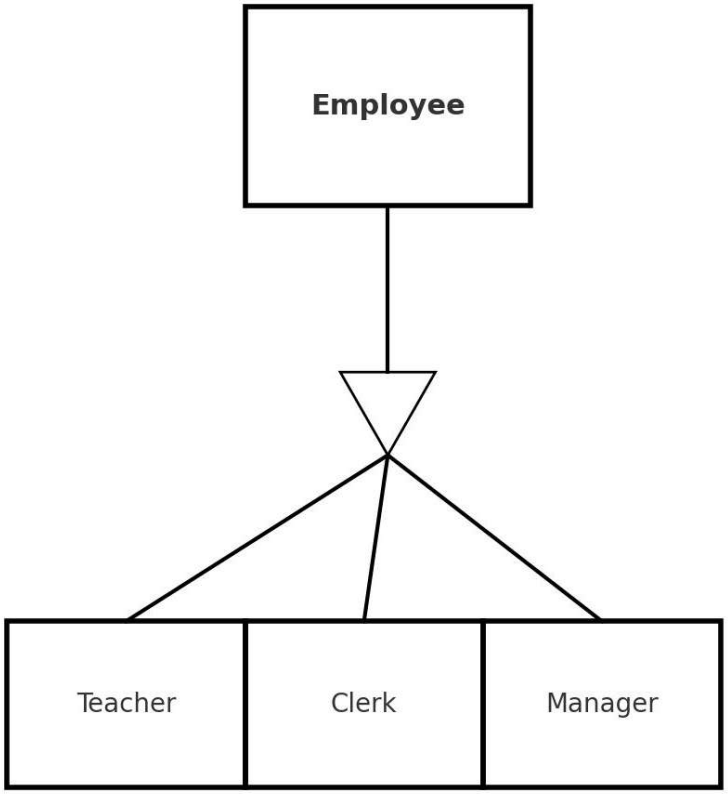

Generalization (Bottom-Up)

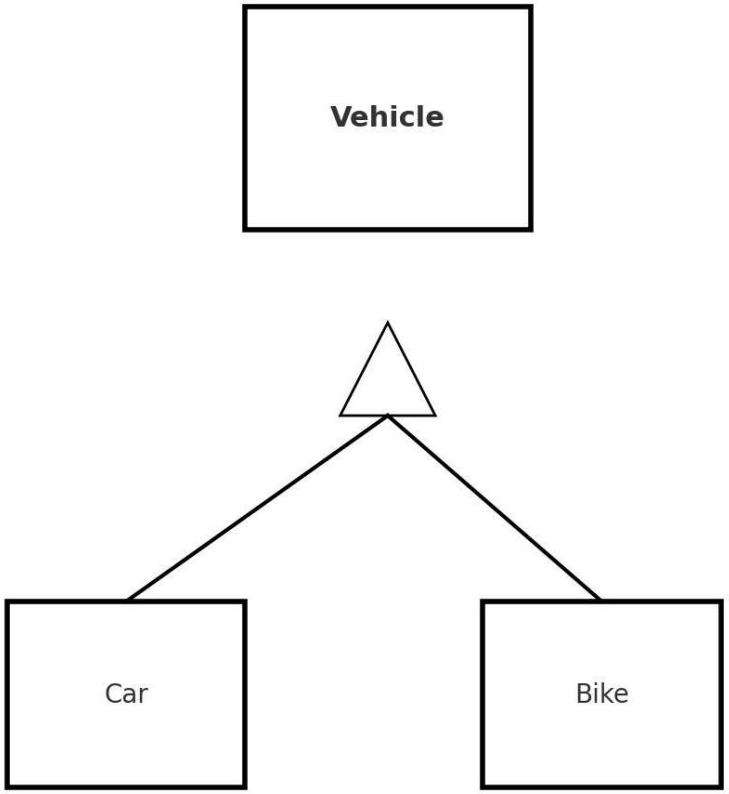



Aspect	Specialization	Generalization
Approach	Top-Down	Bottom-Up
Meaning	Dividing a broad entity into more specific sub-entities	Combining specific entities into a general entity
Direction	One → Many	Many → One
Focus	Distinguishing differences among entities	Finding common features among entities
Example	Employee → Teacher, Clerk, Manager	Car, Bike → Vehicle
Diagram symbol	Triangle pointing down to subclasses	Triangle pointing up to superclass
Usage	When entities need extra attributes beyond the general ones	When different entities share similar attributes



Completeness constraint

- **Completeness constraint** -- specifies whether or not an entity in the higher-level entity set must belong to at least one of the lower-level entity sets within a generalization.
  - **total**: an entity must belong to one of the lower-level entity sets
  - **partial**: an entity need not belong to one of the lower-level entity sets




Completeness constraint (Cont.)

- Partial generalization is the default.
- We can specify total generalization in an ER diagram by adding the keyword **total** in the diagram and drawing a dashed line from the keyword to the corresponding hollow arrow-head to which it applies (for a total generalization), or to the set of hollow arrow-heads to which it applies (for an overlapping generalization).
- The *student* generalization is total: All student entities must be either graduate or undergraduate. Because the higher-level entity set arrived at through generalization is generally composed of only those entities in the lower-level entity sets, the completeness constraint for a generalized higher-level entity set is usually total



Aggregation

- Consider the ternary relationship *proj_guide*, which we saw earlier
- Suppose we want to record evaluations of a student by a guide on a project

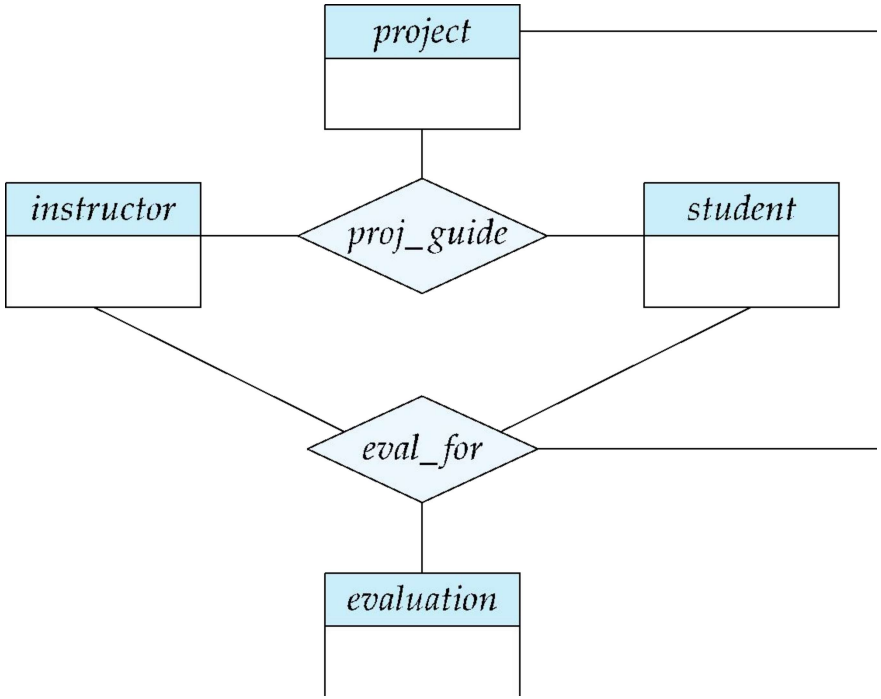


©Silberschatz, Korth and Sudarshan



Aggregation (Cont.)

- Relationship sets *eval_for* and *proj_guide* represent overlapping information
  - Every *eval_for* relationship corresponds to a *proj_guide* relationship
  - However, some *proj_guide* relationships may not correspond to any *eval_for* relationships
    - So we can't discard the *proj_guide* relationship
- Eliminate this redundancy via *aggregation*
  - Treat relationship as an abstract entity
  - Allows relationships between relationships
  - Abstraction of relationship into new entity



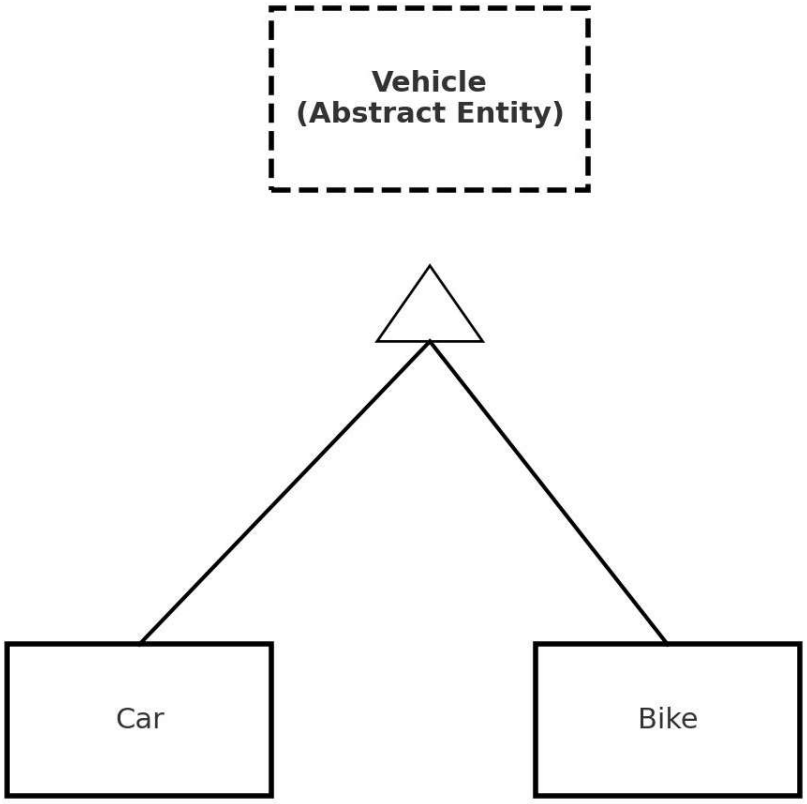


- Car and Bike are real-world entities (subclasses).
- Vehicle is an abstract entity (shown with dashed rectangle to highlight it's conceptual).
- The ISA triangle shows that Car *is a* Vehicle, Bike *is a* Vehicle.

This makes it clear: "Vehicle" doesn't exist on its own in reality, but it helps us group Car and Bike in the ER model.



Aggregation (Cont.)

- Eliminate this redundancy via *aggregation* without introducing redundancy, the following diagram represents:
  - A student is guided by a particular instructor on a particular project
  - A student, instructor, project combination may have an associated evaluation

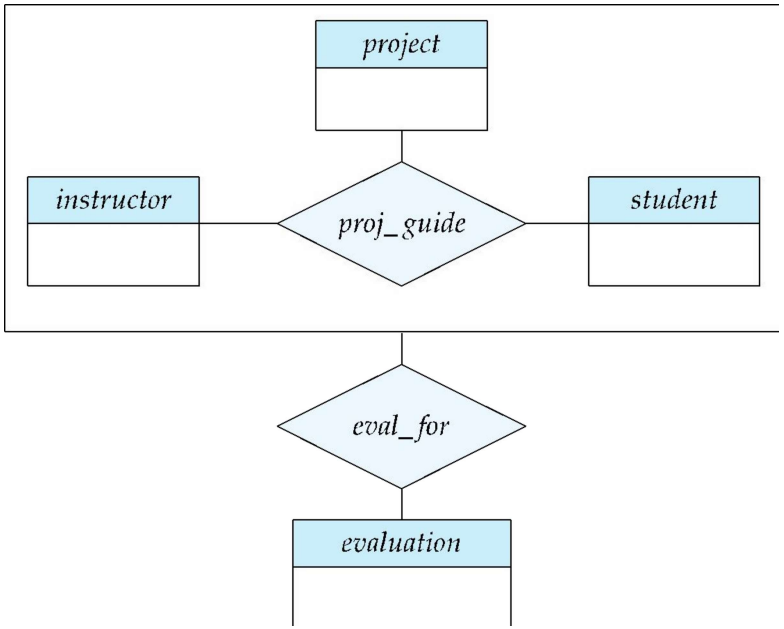



Reduction to Relation Schemas



Reduction to Relation Schemas

- Entity sets and relationship sets can be expressed uniformly as *relation schemas* that represent the contents of the database.
- A database which conforms to an E-R diagram can be represented by a collection of schemas.
- For each entity set and relationship set there is a unique schema that is assigned the name of the corresponding entity set or relationship set.
- Each schema has a number of columns (generally corresponding to attributes), which have unique names.



Representing Entity Sets

- A strong entity set with simple attributes reduces to a schema with the same attributes

  student(ID, name, tot_cred)

- A weak entity set becomes a table that includes a column for the primary key of the identifying strong entity set


  section (course_id, sec_id, sem, year)

- Example






Representation of Entity Sets with Composite Attributes

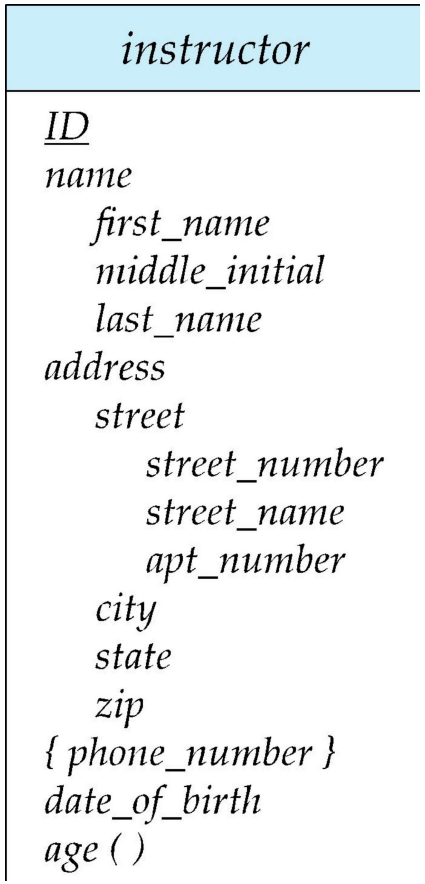

- Composite attributes are flattened out by creating a separate attribute for each component attribute
  - Example: given entity set *instructor* with composite attribute *name* with component attributes *first_name* and *last_name* the schema corresponding to the entity set has two attributes *name_first_name* and *name_last_name*
    - Prefix omitted if there is no ambiguity (*name_first_name* could be *first_name)*
- Ignoring multivalued attributes, extended instructor schema is
  - *instructor(ID, first_name, middle_initial, last_name, street_number, street_name, apt_number, city, state, zip_code, date_of_birth)*

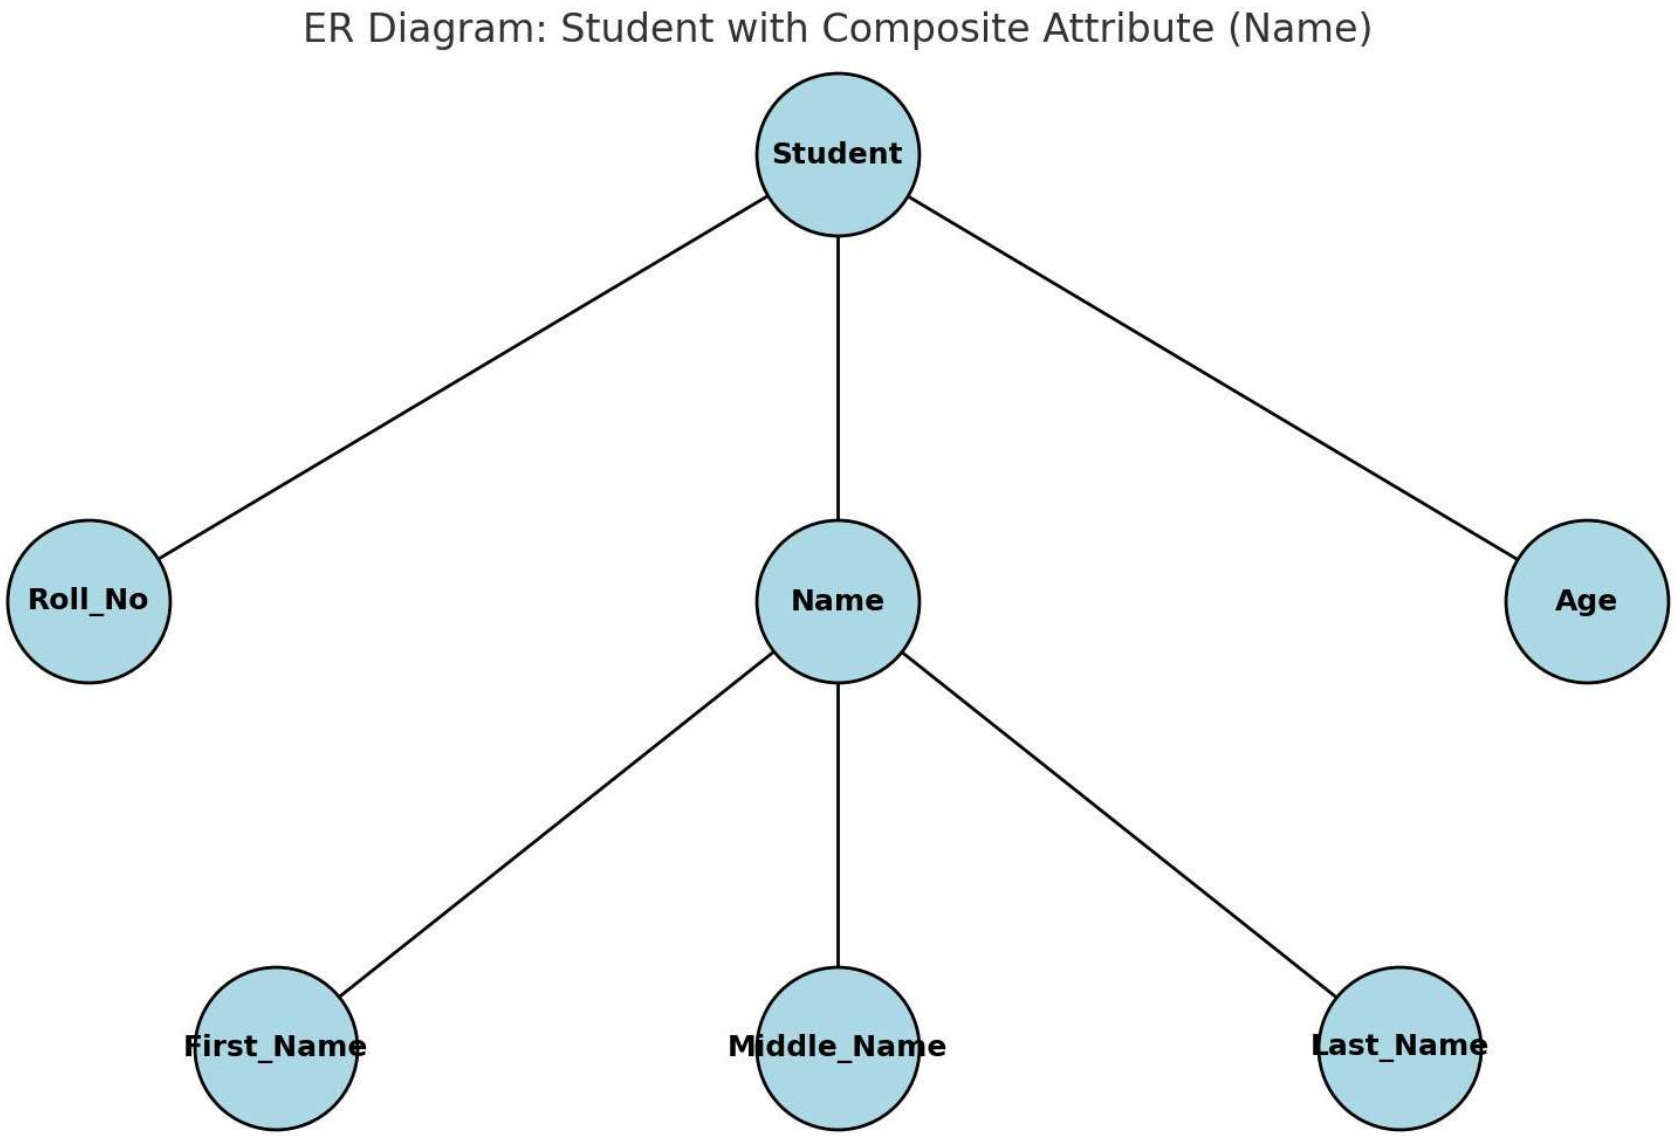
ER Diagram: Student with Composite Attribute (Name)
Student
Roll_No
Name
Age
First_Name
Middle_Name
Last_Name




Representation of Entity Sets with Multivalued Attributes

- A multivalued attribute *M* of an entity *E* is represented by a separate schema *EM*
- Schema *EM* has attributes corresponding to the primary key of *E* and an attribute corresponding to multivalued attribute *M*
- Example: Multivalued attribute *phone_number* of *instructor* is represented by a schema:
  inst_phone= (*ID*, *phone_number*)
- Each value of the multivalued attribute maps to a separate tuple of the relation on schema *EM*
  - For example, an *instructor* entity with primary key 22222 and phone numbers 456-7890 and 123-4567 maps to two tuples:
    (22222, 456-7890) and (22222, 123-4567)

©Silberschatz, Korth and Sudarshan

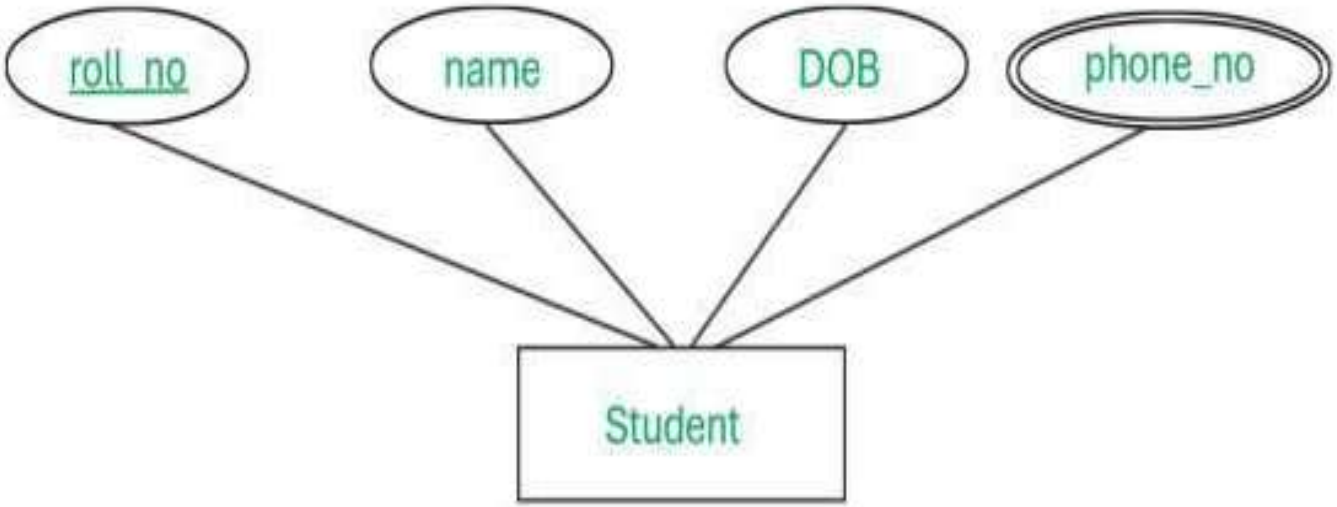



roll_no
name
DOB
phone_no
Student



Representing Relationship Sets

- A many-to-many relationship set is represented as a schema with attributes for the primary keys of the two participating entity sets, and any descriptive attributes of the relationship set.
- Example: schema for relationship set *advisor*

advisor = (*s_id*, *i_id*)

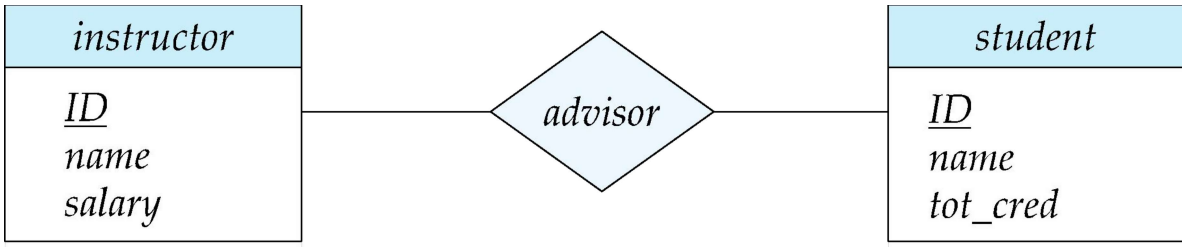



Case 1: Many-to-Many (M:N) Relationship

- Create a **new relation** for the relationship set.
- This new table includes:
  - The **primary keys** of the participating entity sets (as foreign keys).
  - Any **attributes** of the relationship set.

    Ex

    Student(Roll_No [PK], Name)

    Course(Course_Id [PK], Title)

    Enrolled(Roll_No [FK], Course_Id [FK], Grade)



Case 2: One-to-Many (1:N) Relationship

- Add the **primary key** of the "one-side" entity to the relation of the "many-side" entity as a **foreign key.**

Example:

- One `Instructor` teaches many `Courses`:

```
Instructor(Instr_Id [PK], Name)
Course(Course_Id [PK], Title, Instr_Id [FK])
```



Case 3: One-to-One (1:1) Relationship

- You can merge into one table or place the primary key of one entity as a **foreign key** in the other.

Example:

- Each `Student` has one `ID_Card`:

```
Student(Roll_No [PK], Name, Card_No [FK])
ID_Card(Card_No [PK], Issue_Date)
```


General Rule

- **M:N → New table**
- **1:N → Foreign key in many side**
- **1:1 → Foreign key in either side (or merge tables)**



Redundancy of Schemas

- Many-to-one and one-to-many relationship sets that are total on the many-side can be represented by adding an extra attribute to the “many” side, containing the primary key of the “one” side
- Example: Instead of creating a schema for relationship set *inst_dept*, add an attribute *dept_name* to the schema arising from entity set *instructor*
- Example

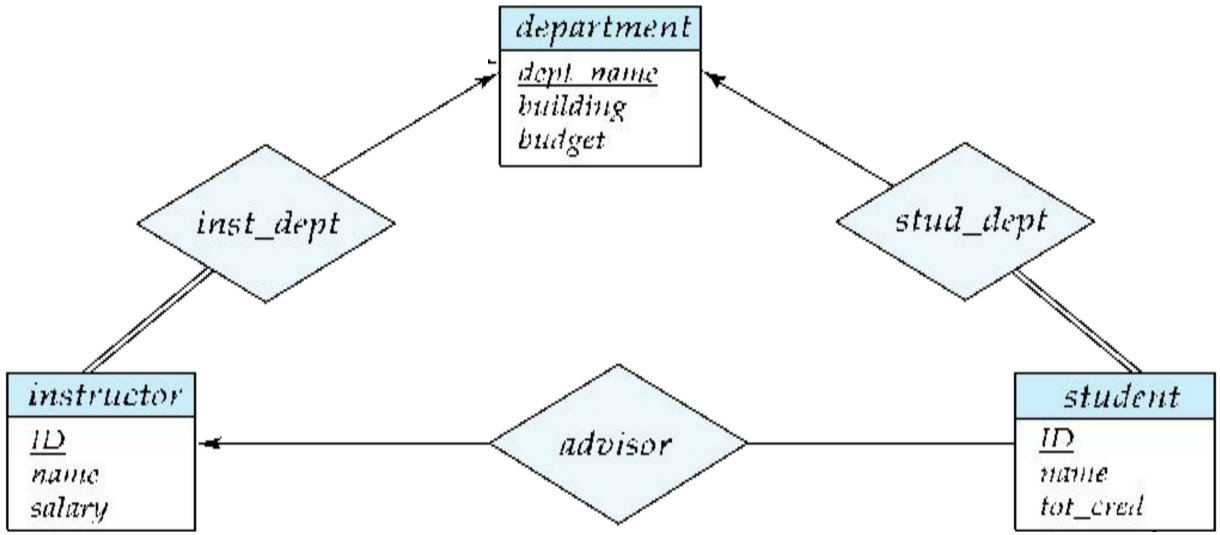



Redundancy of Schemas (Cont.)

- For one-to-one relationship sets, either side can be chosen to act as the "many" side
  - That is, an extra attribute can be added to either of the tables corresponding to the two entity sets
- If participation is *partial* on the "many" side, replacing a schema by an extra attribute in the schema corresponding to the "many" side could result in null values



Redundancy of Schemas (Cont.)

- The schema corresponding to a relationship set linking a weak entity set to its identifying strong entity set is redundant.
- Example: The *section* schema already contains the attributes that would appear in the *sec_course* schema





Reduction to Relational Schemas

- To represent aggregation, create a schema containing
  - Primary key of the aggregated relationship,
  - The primary key of the associated entity set
  - Any descriptive attributes
- In our example:
  - The schema *eval_for* is:

    eval_for (*s_ID, project_id, i_ID, evaluation_id*)
  - The schema *proj_guide* is redundant.



End of Chapter 6