


```
update profiles set name = '吉田 茂' where profilesID = 2;  
select * from profiles where profilesID = 2;
```



The screenshot shows a terminal window titled "XAMPP for Windows - mysql -u kurikura -p". The prompt is "MariaDB [challenge_db]>". The user has entered an update query: "update profiles set name = '吉田 茂' where profilesID = 2;". The output is "Query OK, 1 row affected (0.09 sec)" and "Rows matched: 1 Changed: 1 Warnings: 0". The user then enters a select query: "select * from profiles where profileID = 2;". This results in an error: "ERROR 1054 (42S22): Unknown column 'profileID' in 'where clause'". The user corrects the query to "select * from profiles where profilesID = 2;". The output shows a table with 5 columns: profilesID, name, tell, age, and birthday. The table contains one row with the values: 2, 吉田 茂, 090-1122-3344, 37, and 1987-08-12. The output also shows "1 row in set (0.02 sec)".

```
XAMPP for Windows - mysql -u kurikura -p  
Query OK, 1 row affected (0.09 sec)  
Rows matched: 1  Changed: 1  Warnings: 0  
  
MariaDB [challenge_db]> select * from profiles where profileID = 2  
;  
ERROR 1054 (42S22): Unknown column 'profileID' in 'where clause'  
MariaDB [challenge_db]> select * from profiles where profilesID =  
2;  
+-----+-----+-----+-----+-----+  
| profilesID | name      | tell          | age  | birthday |  
+-----+-----+-----+-----+-----+  
|          2 | 吉田 茂   | 090-1122-3344 | 37   | 1987-08-12 |  
+-----+-----+-----+-----+-----+  
1 row in set (0.02 sec)  
  
MariaDB [challenge_db]>
```

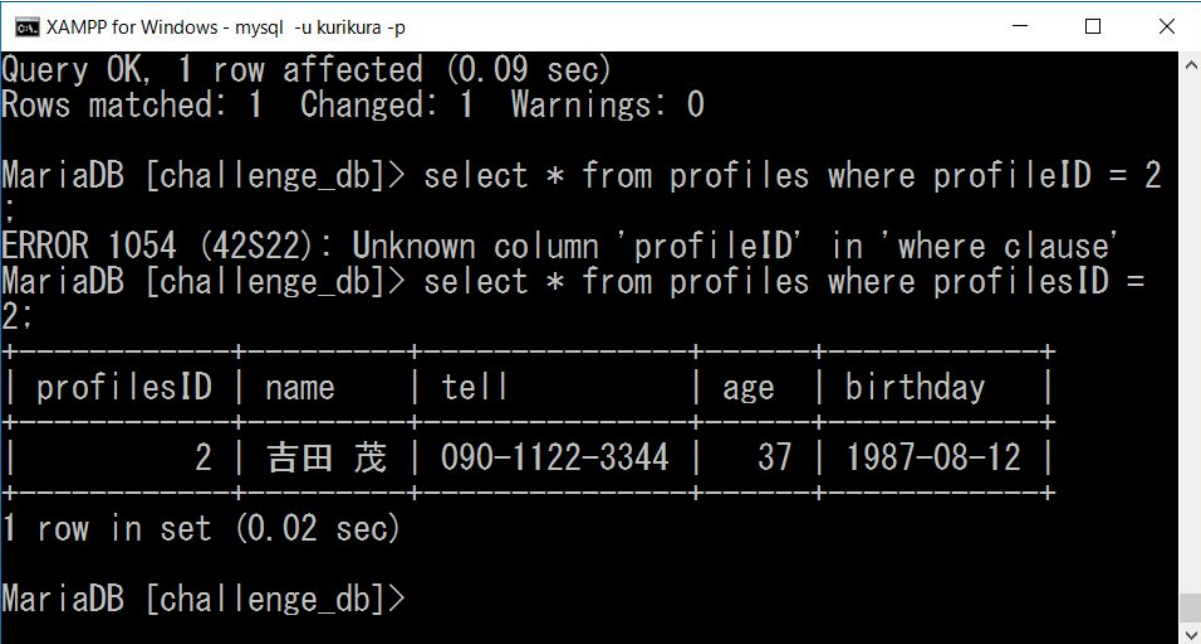